


Item Code	Description	Ref	Qty	Weight	Structure ID: MH C2 Station: 6+70.00 Type: Sanitary Size: 48`` Dia SAWS Sanitary MH Rim: 575.6' Lowest Invert: 567.53' Design Height: 8'-3/4" Overall Height: 8'-8 1/4" Slack: 3 3/4"Steps: D0/0 N/A
7040004	MH Boot - PSX ND 11-06 - Nylo Drive		1	0	
7040008	MH Boot - PSX ND 11-08 Nylo Drive		2	0	
7045011	48" Dia. Gasket-Non-Lubed (HK: 822467)		3	0	
1015050	Sanitary Manhole Invert 48"		1	1809	
7011022	ERGO 30 DI CAM SAWS SS LO ASY 4.5	H	1	293	
1012413	Grade Ring 34``x2``	G	1	0	
1012413	Grade Ring 34``x2``	F	1	0	
1012413	Grade Ring 34``x2``	E	1	0	
1015082	48 Dia x 24 Cone w/35`` OP CONC (Q7R Joint)	D	1	2390	N/A
1015020	48 Dia x 12 Riser (Q7R Joint)	C	1	1215	
1015019	48 Dia x 18 Riser (Q7R Joint)	B	1	1394	
1014003	48 Dia x 30`` Yield Base (6F) MS	A	1	3525	
Structure Total				8817	



#	Elev	Angle	Ext (cw)	Hole	Pipe	Upt	Connector
1	567.53	0	0	11	8 PVC SDR 26/3	0	MH Boot - PSX ND 11-08 Nylo Driv
2	567.63	180	91	11	8 PVC SDR 26/3	1	MH Boot - PSX ND 11-08 Nylo Driv
3	568.45	270	136.5	11	6 PVC SDR 26/3	10	MH Boot - PSX ND 11-06 - Nylo Dri

Shop Note: Concrete strength of 2,000 psi minimum must be obtained for stripping/lifting structure

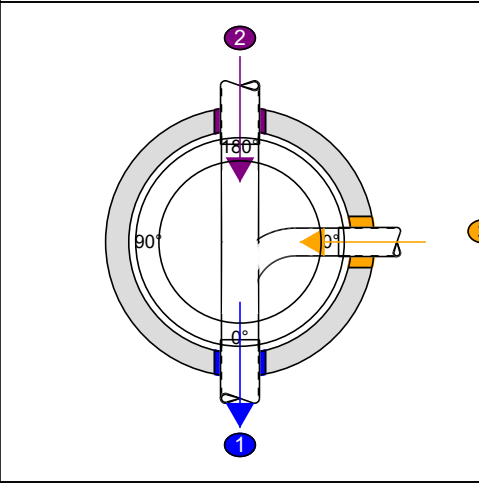