

Contractor: V. K. KNOWLTON PAVING

Salesperson: PaulVarga

Delivery Date: N/A

Item Code	Description	Ref	Qty	Weight
7040008	MH Boot - PSX ND 11-08 Nylo Drive		3	0
7045011	48" Dia. Gasket-Non-Lubed (HK: 822467)		4	0
1015050	Sanitary Manhole Invert 48"		1	1809
7011022	ERGO 30 DI CAM SAWS SS LO ASY 4.5	H	1	293
1012413	Grade Ring 34``x2``	G	1	0
1012413	Grade Ring 34``x2``	F	1	0
1015082	48 Dia x 24 Cone w/35`` OP CONC (Q7R Joint)	E	1	2390
1015019	48 Dia x 18 Riser (Q7R Joint)	D	1	1394
1015032	48 Dia x 24 Riser (Q7R Joint)	C	1	1992
1015035	48 Dia x 48 Riser (Q7R Joint)	B	1	3413
1014006	48 Dia x 36`` Yield Base (6F) MS	A	1	3786
Structure Total				13268

Structure ID: MH D1

Station: 1+00.00

Type: Sanitary

Size: 48`` Dia SAWS Sanitary MH

Rim: 556.1'

Lowest Invert: 543.01'

Design Height: 13'-1"


Overall Height: 13'-8½"

Slack: "

Steps: D0/0

N/A

DM 4/22

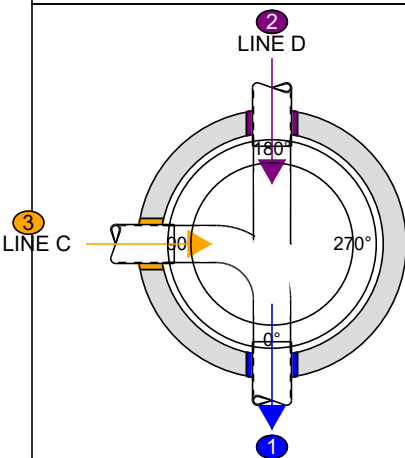

#	Elev	Angle	Ext (cw)	Hole	Pipe	Upt	Connector
1	543.01	0	0	11	8 PVC SDR 26/3	0	MH Boot - PSX ND 11-08 Nylo Driv
2	543.11	180	91	11	8 PVC SDR 26/3	1	MH Boot - PSX ND 11-08 Nylo Driv
3	544.73	90	45.5	11	8 PVC SDR 26/3	20.	MH Boot - PSX ND 11-08 Nylo Driv

Shop Note: Concrete strength of 2,000 psi minimum must be obtained for stripping/lifting structure

