

A close-up, low-angle shot of several large, black, corrugated pipes stacked on top of each other. The pipes are arranged in a way that creates a strong sense of depth and perspective, with the ridges of the corrugations running diagonally across the frame. The lighting is dramatic, highlighting the texture of the pipes against a dark background.

HDPE CORRUGATED PIPE.

TDR™ Ultra WT



SCOPE

This fact sheet describes 4" through 60" TDR™ Ultra WT pipe and fittings for use in gravity flow drainage.

PIPE

TDR™ Ultra WT is a product with exceptional strength, water-tightness security and advance technology.

- Dual wall - Corrugated exterior with reinforced double-arch corrugations and smooth interior liner.
- Dual layer co-extruded integrated bell.
- Manning's n value for use in design shall be 0.010

APPLICATIONS

- Agriculture
- Airports
- Industrial and Mining
- Railroads
- Road and Highway
- Golf and recreation
- Retention/Detention
- Waste management/Landfills
- Storm Drainage

STANDARDS

Pipe and Fittings: ASTM F2648 , ASTM F2306, AASHTO M252/M294

Pipe compound: 435420 C/E ASTM D3350


Installation: ASTM D2321

JOINTS & SEALS

100% Watertight joint ASTM D3212

Elastomeric seal ASTM F477

Integrated Bell-Spigot

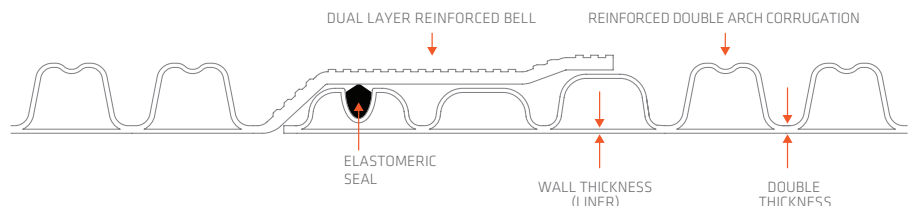

Nominal ID	Typical Internal Diameter		Min. Wall Thickness		Min. Pipe Stiffness @ 5% Deflection	
in (mm)	in	mm	in	mm	psi	kPa
4" (100mm)	4.09	104	0.02	0.60	50	345
6" (150mm)	6.02	153	0.04	1.00	50	345
8" (200mm)	8.00	203	0.04	1.10	50	345
10" (250mm)	10.04	255	0.06	1.50	50	345
12" (300mm)	12.28	312	0.07	1.70	50	345
15" (375mm)	15.04	382	0.08	2.00	42	290
18" (450mm)	18.11	460	0.09	2.20	40	275
24" (600mm)	24.25	616	0.10	2.50	34	235
30" (750mm)	30.04	763	0.10	2.50	29	200
36" (900mm)	36.02	915	0.12	3.00	22	155
42" (1050mm)	42.05	1068	0.13	3.20	21	145
48" (1200mm)	48.74	1238	0.14	3.50	20	135
60" (1500mm)	60.04	1525	0.16	4.00	15	105

Note: Values provided for references purposes only. Contact a technical representative for additional information.