

Project Control Points				
Point #	Raw Description	Elevation	Northing	Easting
1	CP IPSC	649.50	13806910.1041'	2297166.1145'
2	CP IPSC	636.16	13806177.9450'	2297174.4322'

# JARO NORTH SUBDIVISION


## NEW BRAUNFELS, TEXAS

### TXDOT PLANS - DRAINAGE, RESTRIPING, AND TRAFFIC SIGNAL OF SH 123

OWNER/DEVELOPER:  
NB DEAN, LLC  
1286 RIVER RD  
NEW BRAUNFELS, TX 78132

ENGINEER/SURVEYOR:  
INK CIVIL  
MELANIE NORRIS, P.E. - ENGINEER  
2021 SH 46 W. STE 105  
NEW BRAUNFELS, TX. 78130  
(830) 358-7127

D.A. MAWYER LAND SURVEYING, INC.  
DREW MAWYER, R.P.L.S. - SURVEYOR  
5151 W. SH46  
NEW BRAUNFELS, TEXAS 78132  
(210) 325-0858

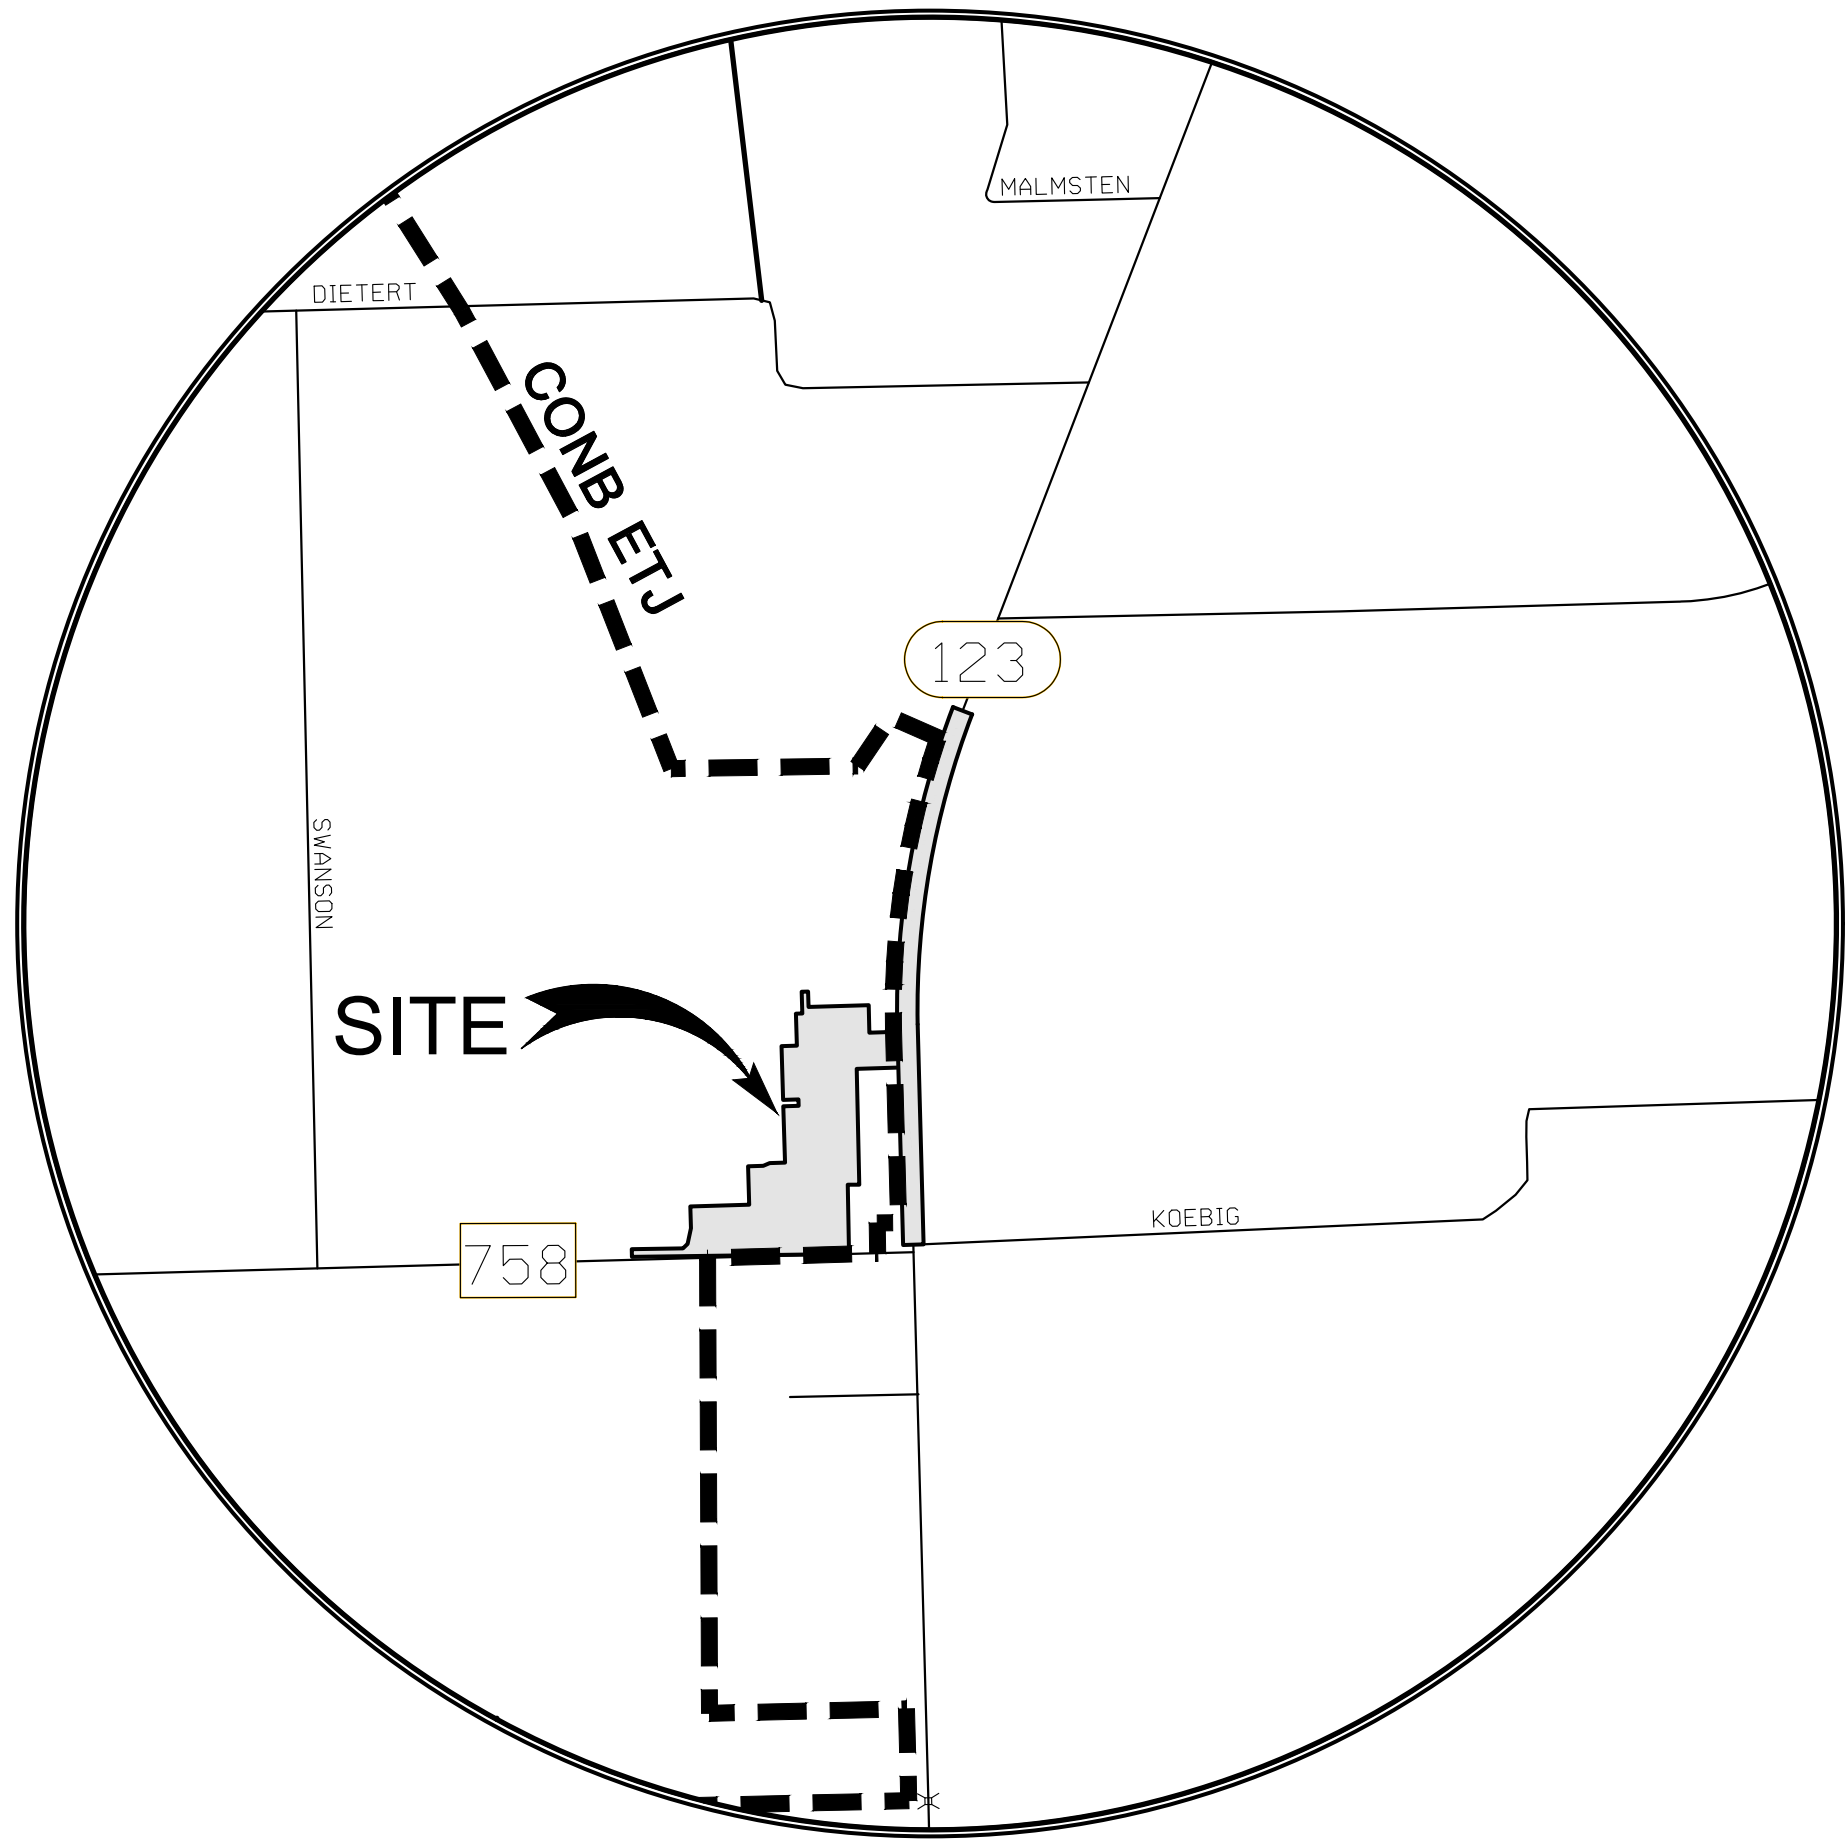


#### GENERAL NOTES:

- IF CONSTRUCTION HAS NOT COMMENCED WITHIN ONE-YEAR OF CITY OF NEW BRAUNFELS, CITY OF SEGUIN, AND CRYSTAL CLEAR SPECIAL UTILITY DISTRICT (CCSUD) APPROVAL FOR CONSTRUCTION INSPECTION, THAT APPROVAL IS NO LONGER VALID.
- ALL RESPONSIBILITY FOR THE ADEQUACY OF THESE PLANS REMAINS WITH THE ENGINEER OF RECORD. IN ACCEPTING THESE PLANS, THE CITY OF NEW BRAUNFELS MUST RELY UPON THE ADEQUACY OF THE WORK OF THE ENGINEER OF RECORD.
- NO PORTION OF THE PROJECT IS LOCATED WITHIN THE EXISTING SPECIAL FLOOD HAZARD ZONE A, 100-YEAR FLOOD BOUNDARY, AS DEFINED BY THE COMAL COUNTY, TEXAS MAP NUMBER 48187C0130F, AS PREPARED BY THE FEDERAL EMERGENCY MANAGEMENT AGENCY, EFFECTIVE DATE NOVEMBER 2, 2007.
- THIS PROJECT IS NOT LOCATED WITHIN THE EAA JURISDICTIONAL BOUNDARY AND IS NOT LOCATED WITHIN ANY EDWARDS AQUIFER RECHARGE ZONES.
- THIS PROJECT IS A RESIDENTIAL SUBDIVISION, DEVELOPMENT TYPE 3.
- PRIOR TO THE START OF CONSTRUCTION, CONTRACTOR SHALL CONTACT THE CITY OF NEW BRAUNFELS (CONB), CITY OF SEGUIN, AND CRYSTAL CLEAR SPECIAL UTILITY DISTRICT (CCSUD) TO SET A PRE-CONSTRUCTION MEETING. A 48-HOUR ADVANCED NOTIFICATION IS REQUIRED.
  - ALL CONB INSPECTIONS ARE TO BE CALLED IN AT 830-221-4068 (PHONE)
  - FAXED IN AT 830-608-2117 (FAX)
  - EMAILED AT inspections@nbtexas.com (EMAIL).
- THE MOST CURRENT EDITIONS OF THE CITY OF SAN ANTONIO STANDARD SPECIFICATIONS AND THE TEXAS DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR CONSTRUCTION OF HIGHWAYS, STREETS AND BRIDGES SHALL FOLLOWED FOR ALL CONSTRUCTION EXCEPT AS AMENDED BY THE CITY OF NEW BRAUNFELS STANDARD DETAILS.
- GAS UTILITIES ARE NOT INCLUDED IN THE CIVIL CONSTRUCTION PLANS. FINAL GAS UTILITY DESIGN SHALL BE APPROVED BY THE CITY FOR ANY WORK WITHIN PUBLIC RIGHT-OF-WAY.

#### NOTE TO CONTRACTOR:

BY THE ACT OF SUBMITTING A BID FOR THIS PROPOSED CONTRACT, THE BIDDER WARRANTS THAT THE BIDDER, AND ALL SUBCONTRACTORS AND MATERIAL SUPPLIERS HE INTENDS TO USE HAVE CAREFULLY AND THOROUGHLY REVIEWED THE DRAWINGS, SPECIFICATIONS AND ALL OTHER CONTRACT DOCUMENTS AND HAVE FOUND THEM COMPLETE AND FREE FROM ANY AMBIGUITIES AND SUFFICIENT FOR THE PURPOSE INTENDED. THE BIDDER FURTHER WARRANTS THAT TO THE BEST OF HIS OR HIS SUBCONTRACTORS' AND MATERIAL SUPPLIERS' KNOWLEDGE, ALL MATERIALS AND PRODUCTS SPECIFIED OR INDICATED HEREIN ARE ACCEPTABLE FOR ALL APPLICABLE CODES AND AUTHORITIES.

THE LOCATION OF ALL EXISTING UTILITIES SHOWN ON THESE PLANS HAS BEEN BASED UPON RECORD INFORMATION ONLY AND MAY NOT MATCH LOCATIONS AND/OR DEPTHS AS CONSTRUCTED. THE CONTRACTOR SHALL CONTACT EACH OF THE INDIVIDUAL UTILITIES FOR ASSISTANCE IN DETERMINING EXISTING UTILITY LOCATIONS AND DEPTHS PRIOR TO BEGINNING ANY CONSTRUCTION. CONTRACTOR SHALL FIELD VERIFY LOCATIONS OF ALL UTILITY CROSSINGS PRIOR TO BEGINNING ANY CONSTRUCTION.

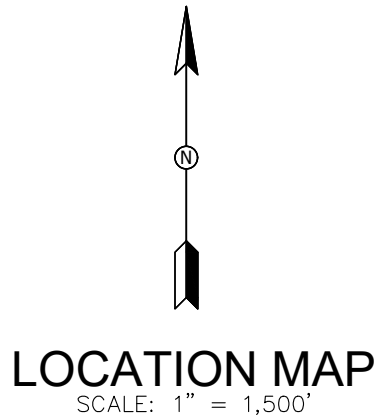

PREPARED BY:

**INK**  
CIVIL

2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351

SUBMITTED BY:  
MELANIE NORRIS, P.E. #140721  
INK CIVIL  
TBPE FIRM #F-13351  
2021 W SH46, STE 105  
NEW BRAUNFELS, TX 78132



SH 123 TRAFFIC SIGNAL PLANS  
SHEETS T36-T70  
KIMLEY HORN  
F-948  
BY: SANTIAGO A. ARAQUE, PE #125247  
DATE 7/14/2022

NO	DATE	ISSUES AND REVISIONS
1	9/6/2022	UPDATED PER TXDOT COMMENTS
2		
3		
4		
5		
6		
7		
8		
9		
10		

JARO NORTH SUBDIVISION  
PERMIT SET



TXDOT CONSTRUCTION GENERAL NOTES

1. "THE DESIGN AND CONSTRUCTION WILL PROVIDE FOR PRESERVING ALL EXISTING FEATURES IN OR NEAR THE STATE RIGHT OF WAY BEING AFFECTED BY THE WIDENING. THIS INCLUDES BUT IS NOT LIMITED TO, EXISTING DRIVEWAY GATE SET-BACKS, RELOCATION OF ELECTRONIC PRIVATE PROPERTY GATES, MAILBOX TURNOUTS, MAIL BOXES AND SUPPORTS, CATTLE GUARDS, ROADWAY SIGNING, EXISTING RIP-RAP OR OTHER PERMANENT EROSION CONTROL FEATURES, DIVERSIONARY DRENCH, SWALES, DITCHES, AMOUNT AND CONFIGURATION OF DRIVEWAY FLARES AND DRIVEWAY CENTERLINE PROFILE, METAL BEAM GUARD FENCE AND END TREATMENTS, ETC. EXISTING DRIVEWAY CULVERTS AND SAFETY END TREATMENTS IF EFFECTED BY ROADWAY WIDENING WILL BE RECONSTRUCTED TO PRESERVE EXISTING FRONT SLOPE RATES. THE COORDINATION OF ITEMS THAT EFFECT EXISTING PRIVATE PROPERTY ACCESS, MAIL DELIVERY, ETC. IS THE RESPONSIBILITY OF THE DEVELOPER. THE WRITTEN CONCURRENCE OF ANY EFFECTED PROPERTY OWNER FOR CONSTRUCTION EFFECTING THEIR DRIVEWAYS OR MAILBOX TURNOUTS MUST BE OBTAINED AND PROVIDED TXDOT PRIOR TO TXDOT DRIVEWAY PERMITS BEING ISSUED."

2. "FOR WORK IN STATE RIGHT OF WAY, THE DEVELOPER IS RESPONSIBLE FOR COORDINATION OF, OBTAINING PERMITS FOR, AND COMPLYING WITH ANY AND ALL STATE AND FEDERAL REGULATORY AGENCIES AND ALL APPLICABLE LAWS, RULES AND REGULATIONS PERTAINING TO THE REGULATION OF DRAINAGE, PRESERVATION OF CULTURAL RESOURCES, NATURAL RESOURCES AND THE ENVIRONMENT. THE DEVELOPER IS RESPONSIBLE FOR DETERMINING IF THE PROJECT IS IN AN ENVIRONMENTALLY SENSITIVE AREA SUCH AS WITHIN THE RECHARGE OR CONTRIBUTING ZONE OF PROTECTED AQUIFERS, AND ACT IN ACCORDANCE WITH ALL RESOURCE AGENCY REGULATIONS."

IF TXDOT HAS A CZP OR WPAP ON FILE WITH TCEQ, THE DEVELOPER IS RESPONSIBLE FOR AMENDING TXDOT'S PERMIT, OBTAINING TCEQ APPROVAL AND PROVIDING TXDOT WITH THE APPROVED AMENDED PERMIT. THE AMENDED PERMIT WILL ADDRESS THE RELOCATION OF ANY TXDOT PERMANENT BMP'S INCLUDING VEGETATIVE FILTER STRIPS THAT MAY BE IMPACTED BY WORK DONE WITHIN TXDOT ROW."

IF TXDOT DOES NOT HAVE A CZP OR WPAP ON FILE WITH TCEQ, ANY PERMANENT BMP'S INCLUDING VEGETATIVE FILTER STRIPS, THAT MAY BE REQUIRED IN ORDER TO TREAT ADDITIONAL IMPERVIOUS COVER PLACED IN TXDOT ROW WILL BE LOCATED IN PRIVATE PROPERTY AND THE DEVELOPER WILL PROVIDE TXDOT WITH EVIDENCE OF TCEQ APPROVAL OF THE ADDITIONAL IMPERVIOUS COVER.

THE DEVELOPER MAY NOT OPERATE UNDER RESOURCE AGENCY ENVIRONMENTAL CLEARANCE OF A PREVIOUS OR ONGOING TXDOT PROJECT, BUT WILL BE REQUIRED TO OBTAIN SEPARATE RESOURCE/ENVIRONMENTAL CLEARANCE."

3. "IF WASTE AREAS OR MATERIAL SOURCE AREAS RESULT FROM THIS PROJECT, THE CONTRACTOR IS REMINDED TO FOLLOW THE REQUIREMENTS OF THE TEXAS AGGREGATE QUARRY AND PIT SAFETY ACT. IN ADDITION, IT IS REQUESTED THAT THESE AREAS NOT BE VISIBLE FROM ANY HIGHWAY ON THE STATE SYSTEM."

3.5. "ANY MATERIALS REMOVED AND NOT REUSED AND DETERMINED TO BE SALVAGEABLE SHALL BE STORED WITHIN THE PROJECT LIMITS AT AN APPROVED LOCATION OR DELIVERED UNDAMAGED TO THE STORAGE YARD AS DIRECTED. PROPERLY DISPOSE UNSALVAGEABLE MATERIALS IN ACCORDANCE WITH LOCAL, STATE, AND FEDERAL REGULATIONS. DEFACE TRAFFIC SIGNS SO THAT THEY WILL NOT REAPPEAR IN PUBLIC AS SIGNS."

4. "ANY TREES EXISTING WITHIN STATE RIGHT OF WAY ARE THE NATURAL RESOURCES OF THE STATE AND WILL BE PROTECTED. IN THE EVENT THAT TREES MUST BE REMOVED, TXDOT WRITTEN PERMISSION WILL BE RECEIVED IN ADVANCE AND WILL IDENTIFY THE SPECIFIC TREES BY SPECIES, DIAMETER AND LOCATION TO BE REMOVED. THE DEVELOPER WILL BE FINED FOR ANY UNPERMITTED REMOVAL OF TREES."

4.5. "IN THE EVENT THAT THERE ARE AREAS OF PUBLIC ROW DEDICATION RESULTING FROM THE PLATTING PROCESS, THE AREA WITHIN THE PUBLIC ROW DEDICATION DOES NOT PASS INTO TXDOT OWNERSHIP AS A RESULT OF PLATTING. HOWEVER, THE DEVELOPER WILL REMOVE ANY OLD FENCING, GATES AND UNSUITABLE VEGETATION WITHIN THE AREA OF THE ROW DEDICATION, LEAVING IT IN AN AESTHETICALLY PLEASING CONDITION. THE AREA OF ROW DEDICATION WILL NOT BE MOWED OR OTHERWISE MAINTAINED BY TXDOT PRIOR TO REMOVAL OF TREES IN THE AREA OF ROW DEDICATION. THE TREES WILL FIRST BE EVALUATED IN ACCORDANCE WITH THE REQUIREMENTS OF LOCAL TREE PROTECTION ORDINANCES AND THE WRITTEN CONCURRENCE OF THE LOCAL JURISDICTION WILL BE PROVIDED TO TXDOT."

5. "THE DEVELOPER WILL MAINTAIN AT THE PROJECT SITE, AND MAKE AVAILABLE UPON REQUEST, COPIES OF ALL APPROVED ENVIRONMENTAL PLANS AND PERMITS RELATING TO WORK IN STATE RIGHT OF WAY."

6. "PRIOR TO BEGINNING GRADING ACTIVITY THE CONTRACTOR WILL SET AND MAINTAIN ROADWAY STATIONING, CONTROL POINTS, MARKS, STAKES TO ESTABLISH LINES, SLOPES, GRADES AND CENTERLINES."

7. "ANY SLOPES IN STATE RIGHT OF WAY WHICH BECOME STEEPER THAN 3:1 AS A RESULT OF THE WORK WILL BE TREATED WITH AT THICK REINFORCED CONCRETE RIPRAP AND BE TREATED WITH METAL BEAM GUARD FENCE. THIS MAY EXHAUST ADDITIONAL RIP-RAP BEYOND THAT SHOWN IN THE PLANS."

7.5. "UNLESS OTHERWISE SHOWN ON THE PLANS, WHERE EXISTING CONCRETE RIP-RAP IS REMOVED, MODIFIED OR EXTENDED, THE PORTION TO BE REMOVED WILL BE NEATLY SAW-CUT PRIOR TO REMOVAL AND THE NEW RIP-RAP WILL BE FORMED TO MATCH THE EXISTING LINES AND GRADES OF THE EXISTING RIP-RAP AND WILL BE DOWELED INTO THE EXISTING RIP-RAP WITH #3 BARS ON 12" CENTERS. THE DOWEL BARS WILL BE EPOXY IN PLACE WITH EPOXY MEETING TXDOT REQUIREMENTS. THE MINIMUM EMBEDMENT LENGTH IS 9 INCHES. THIS APPLIES TO ANY TYPE OF CONCRETE RIP-RAP INCLUDING METAL BEAM GUARD FENCE OR CABLE BARRIER MOW STRIPS."

8. "DUANE HOFFERFELTER (830) 609-0707 NEW BRAUNFELS, TRAVIS YOUNG (830) 303-0130 SEGUIN, CHAD LUX (830) 816-2430 BOERNE, MATTHEW FLORENCE (830) 393-1144 FLORENCE, TXDOT MAINTENANCE OFFICE WILL BE CONTACTED BY THE CONTRACTOR 48 HOURS PRIOR TO WORK OCCURRING IN STATE RIGHT OF WAY."

9. "STATE RIGHT OF WAY WILL NOT BE USED AS AN AREA FOR CONTRACTOR PARKING OR FOR STAGING THE RECEIPT OF MATERIALS OR EQUIPMENT."

10. "TRAFFIC CONTROL AND CONSTRUCTION BARRICADES WILL MEET THE REQUIREMENTS OF THE TEXAS MUTCD."

11. "THE CONTRACTOR WILL PROVIDE ADVANCE NOTIFICATION TO THE ENGINEER OF IMPENDING/UPCOMING LANE CLOSURES FOR ALL TEMPORARY AND/OR PERMANENT LANE, RAMP, CONNECTOR, FRONTAGE, SHOULDER, MEDIAN CROSSOVER, ETC. CLOSURES OR DETOURS."

12. "ACCESS TO ADJOINING PROPERTY MUST BE MAINTAINED AT ALL TIMES."

13. "UNLESS OTHERWISE NOTED IN THE PLANS AND/OR AS DIRECTED BY THE AREA ENGINEER OR MAINTENANCE SUPERVISOR, DAILY LANE CLOSURES SHALL BE LIMITED ACCORDING TO THE FOLLOWING RESTRICTIONS:

NIGHTTIME: MAINTENANCE SUPERVISOR AND/OR AREA ENGINEER APPROVAL REQUIRED. (WITH UNIFORMED OFF DUTY LAW ENFORCEMENT OFFICERS).

WEEKEND CLOSURES: MAINTENANCE SUPERVISOR AND/OR AREA ENGINEER APPROVAL REQUIRED."

14. "NO LANE CLOSURES OR ROADWAY CLOSURES WILL BE PERMITTED FOR THE FOLLOWING KEY DATES AND/OR SPECIAL EVENTS:

BETWEEN DECEMBER 15 AND JANUARY 1.  
WEDNESDAY BEFORE THANKSGIVING THRU THE SUNDAY AFTER THANKSGIVING.  
SATURDAY AND SUNDAY BEFORE MEMORIAL DAY AND LABOR DAY.  
SATURDAY OR SUNDAY WHEN JULY 4 FALLS ON A FRIDAY OR MONDAY."

15. "AT NO TIME WILL THE ROADWAY TRAVEL WAY BE BLOCKED"

16. "LANE CLOSURES WILL ONLY BE PERMITTED WITH 48 HOUR PRIOR APPROVAL OF THE TXDOT MAINTENANCE SUPERVISOR. LANE CLOSURES WILL BE PERMITTED ONLY BETWEEN 9:00 A.M. AND 4:00 P.M. MONDAY THROUGH FRIDAY."

16.5. "FOR LANE CLOSURES ON TWO-LANE TWO-WAY ROADWAYS, INCLUDING DURING PILOT CAR OPERATIONS, FLAGGERS WILL BE PLACED AT THE BEGINNING AND END OF THE WORK ZONE AS WELL AS AT EACH INDIVIDUAL DRIVEWAY AND SIDE ROAD INTERSECTION WITHIN THE LIMITS OF THE WORK ZONE AND EXTENDING FOR A MINIMUM OF THE BEGINNING OF ADVANCED WARNING SIGNS EITHER END OF THE WORK ZONE TO CONTROL, WARN AND DIRECT SIDE ROAD AND DRIVEWAY TRAFFIC OF THE CHANGE IN TRAFFIC OPERATIONS. WHENEVER ONE WAY TRAFFIC CONTROL IS ACCOMPLISHED BY TRAFFIC SIGNALS WORK ZONE FLAGGERS WILL BE SIMILARLY STATIONED AT EACH INDIVIDUAL DRIVEWAY AND SIDE ROAD INTERSECTION WITHIN THE LIMITS OF THE WORK ZONE AND EXTENDING FOR A MINIMUM OF THE BEGINNING OF THE ADVANCED WARNING SIGNS EITHER END OF THE WORK ZONE. ALL FLAGGERS WILL BE IN CONSTANT RADIO CONTACT."

17. "A MINIMUM 3:1 (H:V) TEMPORARY SAFETY SLOPE OF STABLE COMPACTED MATERIAL WILL BE REQUIRED ADJACENT TO THE STATE HIGHWAY EDGE OF PAVEMENT AT ALL TIMES DURING NON WORKING HOURS"

18. "ONLY ONE SIDE OF THE ROADWAY WILL BE OPEN TO CONSTRUCTION AT A TIME. WORK WILL BE COMPLETED AND PAVEMENT EDGES BACKFILLED ON ONE SIDE OF THE ROAD BEFORE WORK WILL BEGIN ON THE OPPOSITE SIDE OF THE ROADWAY."

19. "ALL MILLING, PAVING AND SEAL COAT OPERATIONS SHALL PROCEED IN THE DIRECTION OF TRAFFIC."

20. "ANY PAVEMENT EDGE DROP-OFFS BETWEEN 1 AND 2 INCHES IN HEIGHT WILL HAVE CW 8-11 WARNING SIGNS. ANY PAVEMENT EDGE DROP-OFF 2 INCHES OR GREATER WILL HAVE A 3:1 COMPACTED SAFETY SLOPE AND CW 8-9A OR CW 8-11 SIGNS PLUS CHANNELIZING DEVICES. PAVEMENT EDGES WILL BE SHOULDERED UP WITH COMPACTED EMBANKMENT MATERIAL AND 4 INCHES OF TOPSOIL AS SOON AS POSSIBLE AFTER PAVING IS COMPLETED ON THE SIDE OF THE ROAD BEING WIDENED."

21. "PROOF ROLLING OF SUBGRADE IS REQUIRED AND SHALL BE WITNESSED BY TXDOT PRIOR TO PLACEMENT OF PAVEMENT STRUCTURE UNLESS OTHERWISE APPROVED BY THE TXDOT MAINTENANCE SUPERVISOR. THE REQUIREMENT FOR PROOF-ROLLING OF SUBGRADE IS NOT SUPERSEDED BY ANY OTHER REQUIREMENTS INCLUDING THOSE OF ANY GEOTECHNICAL REPORT."

22. "ALL FLEXIBLE BASE WILL HAVE A MINIMUM PLASTICITY INDEX OF 4."

23. "ALL COURSES OF ASPHALTIC CONCRETE PAVEMENT (REGARDLESS OF TYPE) WILL BE PLACED WITH A ASPHALT PAVING EQUIPMENT MEETING THE REQUIREMENTS OF TXDOT ITEM 320, "EQUIPMENT FOR ASPHALT CONCRETE PAVEMENT", UNLESS OTHERWISE APPROVED BY THE MAINTENANCE SUPERVISOR."

23.5. "TACK COAT WILL BE APPLIED WITH AN ASPHALT DISTRIBUTOR AND SPREAD ACROSS THE SURFACE RECEIVING THE TACK COAT BY MULTIPLE PASSES OF A PNEUMATIC ROLLER. THE APPLICATION OF TACK COAT AND THE NUMBER OF PASSES OF THE PNEUMATIC ROLLER WILL BE SUFFICIENT TO MAKE THE SURFACE AND EXPOSED EDGES CONSISTENTLY BLACK WITH NO AREAS DEVOID OF TACK. ASPHALT FOR TACK COAT SHALL MEET TXDOT SPECS AND BE FROM A TXDOT APPROVED SOURCE."

24. "ALL SURFACE AGGREGATES WILL MEET THE REQUIREMENTS OF TXDOT FRICTION CLASSIFICATION "B" AND WILL MEET PG BINDER GRADE 70-22."

25. "ALL SURFACE ASPHALT CONCRETE PAVEMENT WILL BE UNDER-SEALED WITH A ONE COURSE SURFACE TREATMENT."

26. "ALL ASPHALTIC CONCRETE PAVEMENT USED IN BASE COURSES WILL BE TYPE "A" OR "B" AND WILL MEET PG BINDER GRADE 64-22."

27. "ALL PAVEMENT WIDENING INCLUDING SHOULDERS WILL MATCH THE EXISTING PAVEMENT CROSS SLOPE."

28. "ALL PAVEMENT MARKINGS WILL BE TYPE 1 THERMOPLASTIC (100 MIL) WITH UNDER-SEAL MEETING THE REQUIREMENTS OF TXDOT ITEM 666, REFLECTORIZED PAVEMENT MARKINGS. THE CONTRACTOR WILL PLACE GUIDE MARKS IN ACCORDANCE WITH ITEM 666 AND WILL MAKE ARRANGEMENTS FOR TXDOT INSPECTION OF THE PAVEMENT MARKING LAYOUT PRIOR TO PLACEMENT OF STRIPING. EQUIPMENT USED FOR THE PLACEMENT OF STRIPING WILL MEET THE PRODUCTION REQUIREMENTS OF ITEM 666 UNLESS OTHERWISE APPROVED IN ADVANCE BY THE TXDOT MAINTENANCE SUPERVISOR."

29. "EXISTING PAVEMENT MARKINGS THAT CONFLICT WITH PROPOSED PAVEMENT MARKINGS WILL BE LIGHTLY GROUND IN A MANNER THAT DOES NOT DAMAGE THE PAVEMENT SURFACE, TO REMOVE ANY PAVEMENT MARKING ACCUMULATION, AND WILL BE COVERED WITH A STRIP SEAL OF 18" MINIMUM WIDTH, CONSISTING OF PRECOATED GRADE 5, FRICTION CLASS B AGGREGATE."

30. "ALL MATERIALS AND CONSTRUCTION METHODS USED IN STATE RIGHT OF WAY WILL MEET TXDOT SPECIFICATIONS. THIS SUPERSEDES ALL OTHER SPECIFICATIONS IN THE PLANS."

31. "ALL TURN LANE CONCRETE PAVEMENT IN STATE ROW WILL MEET THE REQUIREMENTS OF TXDOT ITEM 360, CLASS P CONCRETE AND WILL BE BATCHED AT CONCRETE PLANTS HAVING A CURRENT APPROVED MIX DESIGN. CLASS P CONCRETE SHALL HAVE 7 AND 28 DAY COMPRESSIVE STRENGTH OF 3200 PSI AND 4400 PSI RESPECTIVELY."

32. "WHEN WIDENING EXISTING CONCRETE PAVEMENTS, JOINTS IN THE NEW PAVEMENT WILL MATCH JOINTS IN EXISTING PAVEMENT AND CURB."

33. "THE CONTRACTOR IS RESPONSIBLE FOR ENSURING THAT TXDOT APPROVED MATERIALS, MIX DESIGNS, APPROVED SOURCES AND PRODUCTS ARE USED FOR ALL WORK IN STATE ROW. THE CONTRACTOR WILL ARRANGE FOR THE SERVICES OF QUALIFIED TESTING LABORATORY FOR ALL ITEMS REQUIRING TESTING AND WILL NOTIFY TXDOT OF ANY DISCREPANCIES BETWEEN TEST RESULTS AND TXDOT SPECS IN A TIMELY MANNER. THE CONTRACTOR WILL PROVIDE TO TXDOT INVOICES AND TESTING RESULTS AS SOON THEY ARE AVAILABLE. FAILURE TO DO THIS WILL RESULT IN REJECTION OF THE WORK."

34. "SAWING OF CONTRACTION/CONSTRUCTION JOINTS IN CONCRETE PAVEMENT WILL BE ACCOMPLISHED AS SOON AS PERSONNEL CAN WALK ON THE CONCRETE WITHOUT DAMAGING THE SURFACE REGARDLESS OF TIME OF DAY OR WEATHER CONDITIONS. STAND-BY POWER DRIVEN CONCRETE SAWS WILL BE PROVIDED DURING THE SAWING OPERATION. CURING COMPOUND WILL BE RE-APPLIED TO THE SAWED JOINT IMMEDIATELY UPON SAWING THE JOINT."

35. "GUARDRAIL SGT'S WILL BE TYPE 3 UNLESS OTHERWISE APPROVED BY THE TXDOT MAINTENANCE SUPERVISOR. GUARDRAIL MOW STRIP PLACED ADJACENT TO OTHER CONCRETE RIP-RAP WILL BE SEPARATED BY A FORMED CONSTRUCTION JOINT."

36. "ANY CONCRETE CURB TO BE REMOVED WILL BE SAW-CUT AT THE LIMITS OF REMOVAL AND BE REMOVED ENTIRELY. SLICING THE TOP PORTION OF THE CURB OFF AND LEAVING REMAINING PORTION OF CURB IN PLACE IS UNACCEPTABLE."

37. "ANY DAMAGE TO TXDOT FACILITIES WILL BE REPAIRED AT NO EXPENSE TO THE STATE, TO TXDOT'S SATISFACTION."

38. "SIDEWALKS PLACED IN THE HIGHWAY RIGHT-OF-WAY WILL BE A MINIMUM WIDTH OF FIVE FEET OR COMPLY WITH THE MORE STRINGENT WIDTH AS REQUIRED BY CITY ORDINANCE AND WILL MEET ALL OTHER REQUIREMENTS OF THE AMERICANS WITH DISABILITIES ACT. PEDESTRIAN RAMPS WILL BE PROVIDED AT STREET AND DRIVEWAY INTERSECTIONS AS SHOWN ON THE CURRENT STATE STANDARD FOR PEDESTRIAN FACILITIES. COLOR CONTRAST AND TEXTURING OF PEDESTRIAN RAMPS WILL BE PLACED AT STREET INTERSECTION RAMPS ONLY AS SHOWN ON THE CURRENT STATE STANDARD FOR PEDESTRIAN FACILITIES. PEDESTRIAN RAMPS AT DRIVEWAY INTERSECTIONS WILL NOT RECEIVE ANY COLOR CONTRAST OR TEXTURING. METAL PLATING FOR SIDEWALK BRIDGES WILL MATCH THE TYPICAL WIDTH OF THE APPROACH SIDEWALK. HIS MAY RESULT IN A WIDTH THAT IS GREATER THAN SHOWN IN THE STANDARD DETAILS INCLUDED IN THE PLANS."

39. "THE CONTRACTOR WILL USE BEST MANAGEMENT PRACTICES (BMP'S) TO MINIMIZE EROSION AND SEDIMENTATION IN THE STATE RIGHT OF WAY RESULTING FROM THE PROPOSED CONSTRUCTION. RE-VEGETATION OF DISTURBED AREAS WILL BE COMPLETED IN ACCORDANCE WITH TXDOT STANDARD SPECIFICATIONS. PERMANENT VEGETATIVE COVER MUST ACHIEVE 70% COVERAGE PRIOR TO PROJECT ACCEPTANCE. SOIL RETENTION BLANKETS MAY BE REQUIRED TO PREVENT EROSION OF TOPSOIL PRIOR TO VEGETATION RE-ESTABLISHMENT"

40. "PRIOR TO SEEDING OR RE-VEGETATION THE FRONT SLOPES WILL BE SHOULDERED UP WITH TOPSOIL TO ELIMINATE ANY PAVEMENT EDGE DROP-OFF."

41. "MUD TRACKED ONTO THE ROADWAY FROM THE SITE WILL BE IMMEDIATELY REMOVED TO THE SATISFACTION OF TXDOT."

42. "IT WILL BE THE DEVELOPER/OWNER'S RESPONSIBILITY TO CLEAN OUT, TO THE STATE'S SATISFACTION, ANY DRAINAGE STRUCTURE OR STORM SEWER SYSTEM THAT BECOMES SILTED AS A RESULT OF THEIR OPERATIONS."

43. "THE ADJUSTMENT OF ANY UTILITIES IN STATE RIGHT OF WAY OR ADJACENT PRIVATE EASEMENT WILL BE THE RESPONSIBILITY OF THE DEVELOPER/OWNER'S."

44. "THE CONTRACTOR IS RESPONSIBLE FOR PLACING AND MAINTAINING EXISTING SIGNS ON TXDOT APPROVED TEMPORARY MOUNTS UNTIL PERMANENT SIGNS ARE PLACED."

45. "THE FINAL PLACEMENT OF PERMANENT SIGNS WILL BE COORDINATED PRIOR TO PLACEMENT WITH THE LOCAL TXDOT MAINTENANCE SUPERVISOR."

46. "FOR WORK WITHIN THE STATE RIGHT OF WAY WHERE REMOVAL OF MATERIALS OR DEBRIS WITHIN THE CONSTRUCTION LIMITS AND NOT INCORPORATED IN THE FINISHED ROADWAY SECTION OF RIGHT OF WAY, WILL BE DISPOSED OF IN A MANNER ACCEPTABLE TO THE MAINTENANCE SUPERVISOR AT NO EXPENSE TO THE STATE. MATERIALS THAT ARE NOT DETERMINED TO BE SALVAGEABLE BY THE MAINTENANCE SUPERVISOR BECOME THE PROPERTY OF THE CONTRACTOR FOR PROPER DISPOSAL. MATERIALS DETERMINED TO BE SALVAGEABLE WILL BE RETURNED TO THE STATE AND DELIVERED TO THE LOCATION AS DETERMINED BY THE MAINTENANCE SUPERVISOR."

47. "REGARDLESS OF ERRORS AND OMISSIONS IN INFORMATION PROVIDED IN THE PLANS OR CROSS-SECTIONS THE PERMITEE IS RESPONSIBLE FOR PROVIDING FOR POSITIVE DRAINAGE OUTFALLS WITHIN AND OFF THE LIMITS OF THE PROJECT."

47.5. "KEEP THE SIGNALS IN OPERATION AT ALL TIMES EXCEPT WHEN NECESSARY FOR SPECIFIC INSTALLATION OPERATIONS, INCLUDING ANY MODIFICATIONS TO EXISTING SIGNAL HEADS TO MAINTAIN CLEAR VISIBILITY AT ALL TIMES. WHEN IT IS NECESSARY FOR A SIGNAL TO BE TURNED OFF, HIRE OFF DUTY POLICE OFFICERS TO CONTROL THE TRAFFIC UNTIL THE SIGNALS ARE BACK IN SATISFACTORY CONDITION."

48. (FOR WORK IN CITY OF NEW BRAUNFELS) "ALL TRAFFIC SIGNALS ON THE STATE HIGHWAY SYSTEM WITHIN THE NEW BRAUNFELS CITY LIMITS, WITH THE EXCEPTION OF SIGNALS ON IH 35, ARE THE RESPONSIBILITY OF THE CITY OF NEW BRAUNFELS AND THE CITY OF NEW BRAUNFELS WILL PERFORM CONSTRUCTION INSPECTION. CONTACT GARRY FORD, P.E. AT (830) 221-4645, 48 HOURS PRIOR TO THE NEED FOR ANY INSPECTIONS. ALSO WHEN NON-TRAFFIC SIGNAL WORK IS BEING PERFORMED WITHIN 400 FEET OF AN EXISTING SIGNALIZED INTERSECTION, FLASHING BEACON OR SCHOOL ZONE FLASHER OR OTHER TYPE OF SIGNAL; IF WITHIN THE CITY OF NEW BRAUNFELS AREA OF RESPONSIBILITY CONTACT GARRY FORD, P.E. TO DETERMINE/VERIFY THE LOCATION OF LOOP DETECTORS, CONDUIT, GROUND-BOXES, ETC. FOR ALL OTHER LOCATIONS, CONTACT TXDOT REPRESENTATIVE, EDUARDO VILLALON, P.E., AT (210) 615-6308, E-MAIL IS EDUARDO.VILLALON@TXDOT.GOV. THE CONTRACTOR IS RESPONSIBLE FOR REPAIR OR REPLACEMENT OF ANY SIGNAL EQUIPMENT DAMAGED BY CONSTRUCTION OPERATIONS. THE METHOD OF REPAIR OR REPLACEMENT SHALL BE PRE-APPROVED AND INSPECTED, DEPENDING ON THE TYPE AND EXTENT OF THE DAMAGE, THE ENGINEER RESERVES THE RIGHT TO PERFORM THE REPAIR OR REPLACEMENT WORK AND THE CONTRACTOR WILL BE BILLED FOR THIS WORK. WHEN WORKING NEAR AERIAL ELECTRICAL LINES OR UTILITY POLES, COMPLY WITH FEDERAL, STATE AND LOCAL REGULATIONS."



NB DEAN, LLC  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

JARO NORTH SUBDIVISION

TXDOT NOTES

SHEET

T1 of T35

NO DATE ISSUES AND REVISIONS

△		



2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351



Drawing Name: N:\Projects\B&C002 Jaro North Subdivision\Civil\Construction Drawings\TxDOT Sheets\T2 TxDOT GENERAL SIGNAL NOTES.dwg User: melainnorris Jul 12, 2022 - 8:28am

GENERAL NOTES  
2014 SPECIFICATION BOOK (REVISED MAY 4, 2022)

G-3 CONTACT THE ENGINEER OR THE CITY WHEN CONSTRUCTION OPERATIONS ARE WITHIN 400 FEET OF A SIGNALIZED INTERSECTION TO DETERMINE/VERIFY THE LOCATION OF LOOP DETECTORS, CONDUIT, GROUND-BOXES, ETC. REPAIR OR REPLACE ANY SIGNAL EQUIPMENT DAMAGED BY CONSTRUCTION OPERATIONS. THE METHOD OF REPAIR OR REPLACEMENT SHALL BE PRE-APPROVED AND INSPECTED, DEPENDING ON THE TYPE AND EXTENT OF THE DAMAGE. THE ENGINEER RESERVES THE RIGHT TO PERFORM THE REPAIR OR REPLACEMENT WORK AND THE CONTRACTOR WILL BE BILLED FOR THIS WORK.

G-4 ANY MATERIALS REMOVED AND NOT REUSED AND DETERMINED TO BE SALVAGEABLE SHALL BE STORED WITHIN THE PROJECT LIMITS AT AN APPROVED LOCATION OR DELIVERED UNDAMAGED TO THE STORAGE YARD AS DIRECTED. DEFACE TRAFFIC SIGNS SO THAT THEY WILL NOT REAPPEAR IN PUBLIC AS SIGNS.

G-5 ANY SIGN PANELS THAT ARE ADJUSTED OR REMOVED AND REPLACED, SHALL BE DONE THE SAME WORKMAY UNLESS OTHERWISE APPROVED. THIS WORK SHALL BE CONSIDERED SUBSIDIARY TO ITEM 502.

G-6 NOTIFY THE ENGINEER AT LEAST TWO WEEKS PRIOR TO A PROPOSED TRAFFIC PATTERN CHANGE(S) THAT WILL REQUIRE A REVISION TO TRAFFIC SIGNALS.

G-7 LOCATE AND REFERENCE ALL MANHOLES AND VALVES WITHIN THE CONSTRUCTION AREA WITH STATION AND OFFSET OR GPS. EACH MANHOLE AND VALVE SHALL BE IDENTIFIED BY ITS OWNER (SAWS, CPS, ETC.). NO ROADWORK WILL BEGIN UNTIL THIS LIST HAS BEEN SUBMITTED. ALL VALVES AND MANHOLE COVERS HAVE TO BE ACCESSIBLE AT ALL TIMES, THEREFORE, TEMP. CIB, MATERIAL STOCKPILES, ETC. CANNOT BE PLACED OVER THESE VALVES OR COVERS.

G-9 HURRICANE EVACUATION

HURRICANE SEASON IS FROM JUNE 1 THRU NOVEMBER 30, AS THE CLOSEST METROPOLITAN CITY INLAND FROM THE TEXAS COAST, THE CITY OF SAN ANTONIO IS A MAJOR SHELTER DESTINATION DURING MANDATORY HURRICANE EVACUATIONS. AS SUCH, PLANNED WORK ZONE LANE OR ROAD CLOSURES MAY BE RESTRICTED AND/OR SUSPENDED DURING MANDATORY HURRICANE EVACUATION OPERATIONS. THE DISTRICT WILL COORDINATE THESE RESTRICTIONS AT A MINIMUM H-120 FROM ANY PROJECTED IMPACT TO THE TEXAS COAST.

NO TIME CHARGES WILL BE MADE IF THE ENGINEER DETERMINES THAT WORK ON THE PROJECT WAS IMPACTED BY THE HURRICANE.

THE ENGINEER MAY ORDER CHANGES IN THE TRAFFIC CONTROL PLAN TO ACCOMMODATE EVACUATION TRAFFIC, AND MAY SUSPEND THE WORK, ALL OR IN PART, TO ENSURE TIMELY COMPLETION OF THIS WORK. ALL WORK TO IMPLEMENT CHANGES IN THE TRAFFIC CONTROL PLAN WILL BE PAID THROUGH EXISTING BID PRICES OR THROUGH ITEM 9.5, FORCE ACCOUNT. HOWEVER, THE DEPARTMENT WILL NOT ENTERTAIN ANY REQUEST FOR DELAY DAMAGES. LOSS OF EFFICIENCY THAT MAY BE ATTRIBUTED TO THE RESTRICTION OR SUSPENSION OF ROAD OR LANE CLOSURES, OR TO CHANGES IN THE TRAFFIC CONTROL PLAN.

G-14IN ACCORDANCE WITH THE UNDERGROUND FACILITY DAMAGE PREVENTION ACT (ONE CALL BILL) THE PHONE NUMBER FOR A UTILITY LOCATOR IS 811. IT IS THE CONTRACTOR'S RESPONSIBILITY TO PLAN FOR UTILITY LOCATORS AS NEEDED.

G-15UNDERGROUND UTILITIES OWNED BY THE TEXAS DEPARTMENT OF TRANSPORTATION MAY BE PRESENT WITHIN THE RIGHT-OF-WAY. CALL OR EMAIL THE TxDOT OFFICES LISTED BELOW FOR LOCATES A MINIMUM OF 48 HOURS IN ADVANCE OF EXCAVATION. IF CITY OR TOWN OWNED IRRIGATION FACILITIES ARE PRESENT, CALL THE APPROPRIATE DEPARTMENT OF THE LOCAL CITY OR TOWN A MINIMUM OF 48 HOURS IN ADVANCE OF EXCAVATION. THE CONTRACTOR IS LIABLE FOR ALL DAMAGES INCURRED TO THE ABOVE-MENTIONED UTILITIES WHEN WORKING WITHOUT HAVING THE UTILITIES LOCATED PRIOR TO EXCAVATION.

FOR SIGNAL AND ITS LOCATES CALL TRANSGUIDE AT 210-731-5136 OR EMAIL SAT ITS LOCATES@TXDOT.GOV FOR ITS LOCATES AND SIGNAL.REQUEST@TXDOT.GOV FOR SIGNAL LOCATES.

G-16CONTRACTOR QUESTIONS ON THIS PROJECT ARE TO BE ADDRESSED TO THE FOLLOWING INDIVIDUAL(S): WILL LOCKETT, P.E. WILL.LOCKETT@TXDOT.GOV

CONTRACTOR QUESTIONS WILL BE ACCEPTED THROUGH EMAIL, PHONE, AND IN PERSON BY THE ABOVE INDIVIDUALS.

ALL CONTRACTOR QUESTIONS WILL BE REVIEWED BY THE ENGINEER, ONCE A RESPONSE IS DEVELOPED, IT WILL BE POSTED TO TxDOT'S PUBLIC FTP AT THE FOLLOWING ADDRESS:  
[HTTPS://FTP.DOT.STATE.TX.US/PUB/TXDOT-INFO/ENG/LETTING/ENGINDEX/](https://ftp.dot.state.tx.us/pub/txdot/info/eng/letting/engindex/)  
ALL QUESTIONS SUBMITTED THAT GENERATE A RESPONSE WILL BE POSTED THROUGH THIS SITE. THE SITE IS ORGANIZED BY DISTRICT, PROJECT TYPE (CONSTRUCTION OR MAINTENANCE), LETTING DATE, CCSJ/PROJECT NAME.

G-17THE CONTRACTOR MUST MEASURE THE VERTICAL CLEARANCE AT EACH STRUCTURE AFTER THE FINAL SURFACE OF THE ROADWAY IS COMPLETED AND PROVIDE THE VERTICAL CLEARANCE MEASUREMENT TO THE ENGINEER.

--ITEM 5--

5-3 PREVENTION OF MIGRATORY BIRD NESTING

IT IS ANTICIPATED THAT MIGRATORY BIRDS, A PROTECTED GROUP OF SPECIES, MAY TRY TO NEST ON BRIDGES, CULVERTS, VEGETATION, OR GRAVEL SUBSTRATE, AT ANY TIME OF THE YEAR. THE PREFERRED NESTING SEASON FOR MIGRATORY BIRDS IS FROM FEBRUARY 15 THROUGH OCTOBER 1. WHEN PRACTICABLE, SCHEDULE CONSTRUCTION OPERATIONS OUTSIDE OF THE PREFERRED NESTING SEASON. OTHERWISE, NESTS CONTAINING MIGRATORY BIRDS MUST BE AVOIDED AND NO WORK WILL BE PERFORMED IN THE NESTING AREAS UNTIL THE YOUNG BIRDS HAVE FLEDGED.

STRUCTURES

BRIDGE AND CULVERT CONSTRUCTION OPERATIONS CANNOT BEGIN UNTIL SWALLOW NESTING PREVENTION IS IMPLEMENTED, UNTIL AFTER OCTOBER 1 IF IT'S DETERMINED THAT SWALLOW NESTING IS ACTIVELY OCCURRING, OR UNTIL IT'S DETERMINED SWALLOW NESTS HAVE BEEN ABANDONED. IF THE STATE INSTALLED NESTING DETERRENT ON THE BRIDGES AND CULVERTS, MAINTAIN THE EXISTING NESTING DETERRENT TO PREVENT SWALLOW NESTING UNTIL OCTOBER 1 OR COMPLETION OF THE BRIDGE AND CULVERT WORK, WHICHEVER OCCURS EARLIER. IF NEW NESTS ARE BUILT AND OCCUPIED AFTER THE BEGINNING OF THE WORK, DO NOT PERFORM WORK THAT CAN INTERFERE WITH OR DISCOURAGE SWALLOWS FROM RETURNING TO THEIR NESTS. PREVENTION OF SWALLOW NESTING CAN BE PERFORMED BY ONE OF THE FOLLOWING METHODS:

1. BY FEBRUARY 15 BEGIN THE REMOVAL OF ANY EXISTING MUD NESTS AND ALL OTHER MUD PLACED BY SWALLOWS FOR THE CONSTRUCTION OF NESTS ON ANY PORTION OF THE BRIDGE AND CULVERTS. THE ENGINEER WILL INSPECT THE BRIDGES AND CULVERTS FOR NEST BUILDING ACTIVITY. IF SWALLOWS BEGIN NEST BUILDING, ESCAPE, OR WASH DOWN ALL NEST SITES. PERFORM THESE ACTIVITIES DAILY UNLESS THE ENGINEER DETERMINES THE NEED TO DO THIS WORK MORE FREQUENTLY. REMOVE NESTS AND MUD THROUGH OCTOBER 1 OR UNTIL BRIDGE AND CULVERT CONSTRUCTION OPERATIONS ARE COMPLETED.

2. BY FEBRUARY 15 PLACE A NESTING DETERRENT (WHICH PREVENTS ACCESS TO THE BRIDGE AND CULVERT BY SWALLOWS) ON THE ENTIRE BRIDGE (EXCEPT DECK AND RAILING) AND CULVERTS. THIS WORK IS SUBSIDIARY TO THE VARIOUS BID ITEMS.

NO EXTENSION OF TIME OR COMPENSATION PAYMENT WILL BE GRANTED FOR A DELAY OR SUSPENSION OF WORK CAUSED BY NESTING SWALLOWS.

5-5 WHEN A PRECAST OR CAST-IN-PLACE CONCRETE ELEMENT IS INCLUDED IN THE PLANS, A PRECAST CONCRETE ALTERNATE MAY BE SUBMITTED IN ACCORDANCE WITH "STANDARD OPERATING PROCEDURE FOR ALTERNATE PRECAST PROPOSAL SUBMISSION" FOUND ONLINE AT [HTTPS://WWW.TXDOT.GOV/NRSE-TXDOT/FORMS-PUBLICATIONS/CONSULTANTS-CONTRACTORS/PUBLICATIONS/BRIDGE.HTML#DESIGN](https://www.txdot.gov/nrse-txdot/forms-publications/consultants-contractors/publications/bridge.html#design). ACCEPTANCE OR DENIAL OF AN ALTERNATE IS AT THE SOLE DISCRETION OF THE ENGINEER. IMPACTS TO THE PROJECT SCHEDULE AND ANY ADDITIONAL COSTS RESULTING FROM THE USE OF ALTERNATES ARE THE SOLE RESPONSIBILITY OF THE CONTRACTOR.

--ITEM 6--

6-1 SHOW THE STOCKPILE LOT AND/OR SUB LOT NUMBERS ON ALL TICKETS FOR ALL MATERIALS.

6-2 STEEL WRAPPED OR ASBESTOS UTILITY LINES:

EXISTING STEEL WRAPPED NATURAL GAS AND/OR ASBESTOS CEMENT (AC) WATER LINES THAT WILL NO LONGER BE IN SERVICE ARE USUALLY ABANDONED IN PLACE (AIP). HOWEVER, IF ANY OF THESE LINES HAVE TO BE REMOVED FOR WHATEVER REASON (IN THE WAY OF OTHER CONSTRUCTION, TO MAKE TIE-INS, ETC.), COMPLY WITH ITEM 6.

IF REMOVAL OF AC WATER LINES IS INCLUDED IN THE CONSTRUCTION CONTRACT, THEN NOTIFY THE ENGINEER OF PROPOSED TOPES OF REMOVAL OF THE AC WATER LINES IN ACCORDANCE TO ITEM 6. EXCAVATE TO THE TOP OF THE AC WATER LINE TO ALLOW A SEPARATE CONTRACTOR HIRED BY THE STATE TO REMOVE THE AC WATER LINE. THE EXCAVATION FOR THE AC WATER LINE REMOVAL IS SUBSIDIARY TO THE WORK THAT CREATED THE NEED FOR THE REMOVAL (EXCAVATION FOR STRUCTURES, ROADWAY, A NEW LINE, TIE-INS, ETC.).

--ITEM 7--

7-1BTHE TOTAL DISTURBED AREA WITHIN THE PROJECT IS ANTICIPATED AT LESS THAN ONE (1) ACRE. DUE TO THIS TYPE OF CONSTRUCTION, THE PROJECT QUALIFIES FOR EXCLUSION UNDER THE CONSTRUCTION GENERAL PERMIT (CGP) ISSUED BY THE TEXAS COMMISSION ON ENVIRONMENTAL QUALITY (TCEQ). HOWEVER, SHOULD THE SUM OF THE ENGINEER'S ANTICIPATED DISTURBANCES AND THE CONTRACTOR'S (ON ROW AND OFF ROW) PSL'S EQUAL OR EXCEED THE ONE (1) ACRE THRESHOLD, BOTH TxDOT AND THE CONTRACTOR HAVE PROJECT RESPONSIBILITIES UNDER THE CGP THAT REVERTS TO NON-EXCLUSION STATUS. OBTAIN APPROVAL FOR ALL NON-DEPOTED AREAS OF DISTURBANCE THAT INCREASES THE INITIAL SOIL AND VEGETATION DISTURBED AREA ESTIMATES BEFORE WORK STARTS AT THESE LOCATIONS.

7-2 NOTIFY THE ENGINEER OF THE DISTURBED ACREAGE WITHIN ONE (1) MILE OF THE PROJECT LIMITS. OBTAIN AUTHORIZATION FROM THE TCEQ FOR CONTRACTOR PSL'S FOR CONSTRUCTION SUPPORT ACTIVITIES ON OR OFF ROW.

7-3A NO SIGNIFICANT TRAFFIC GENERATORS EVENTS IDENTIFIED.

--ITEM 8--

8-1 WORKING DAYS WILL BE COMPUTED AND CHARGED IN ACCORDANCE WITH ARTICLE 8.3.1. TYPICAL WORK WEEK.

8-3 CREATE AND MAINTAIN A BAR CHART SCHEDULE.

--ITEM 500--

500-1 "MATERIALS ON HAND" PAYMENTS WILL NOT BE CONSIDERED IN DETERMINING PERCENTAGES FOR MOBILIZATION PAYMENTS.

--ITEM 502--

502-1 WHEN ADVANCED WARNING FLASHING ARROW PANELS AND/OR CHANGEABLE MESSAGE SIGN IS SPECIFIED, HAVE ONE STANDBY UNIT IN GOOD CONDITION AT THE JOB SITE. STANDBY TIME SHALL BE CONSIDERED SUBSIDIARY TO THE BID ITEM.

502-2 TREAT THE PAVEMENT DROP-OFFS AS SHOWN IN THE TOP.

502-4 THERE ARE TRAFFIC SIGNALS AT THE INTERSECTION OF SH 123 & FM 758/OR 148. ALWAYS KEEP THE SIGNALS IN OPERATION EXCEPT WHEN NECESSARY FOR SPECIFIC INSTALLATION OPERATIONS, INCLUDING ANY MODIFICATIONS TO EXISTING SIGNAL HEADS TO ALWAYS MAINTAIN CLEAR VISIBILITY. ALTERATIONS TO VERTICAL CLEARANCES OR MODIFICATIONS TO RAILROAD ANY OTHER MODIFICATIONS TO THE ROADWAY THAT MAY ADVERSELY AFFECT THE MOBILITY OF OVERSIZED/OVERWEIGHT TRUCKS ALSO REQUIRE TO BUSINESS DAYS ADVANCE WRITTEN NOTICE TO THE ENGINEER. AT LEAST ONE LANE HAS TO REMAIN OPEN AT ALL TIMES.

502-6 FOR CLOSURES NOT LISTED IN THE TOP, THE LANE CLOSURES ARE LIMITED TO BETWEEN THE HOURS OF 9 AM TO 4 PM, AND AT LEAST ONE LANE HAS TO REMAIN OPEN AT ALL TIMES.

502-7 AVOID PLACING STOCKPILES WITHIN THE ROADWAYS HORIZONTAL CLEAR ZONE. IF A STOCKPILE IS PLACED WITHIN THE CLEAR ZONE, ADDRESS IN ACCORDANCE WITH THE TMUTCD.

502-8 IN ADDITION TO PROVIDING A CONTRACTOR'S RESPONSIBLE PERSON AND A PHONE NUMBER FOR EMERGENCY CONTACT, HAVE AN EMPLOYEE AVAILABLE TO RESPOND ON THE PROJECT FOR EMERGENCIES AND FOR TAKING CORRECTIVE MEASURES WITHIN 2 HOURS OR WITHIN A REASONABLE TIME FRAME AS SPECIFIED BY THE ENGINEER.

502-10 IF NIGHTTIME WORK IS REQUIRED AND WORK IS NOT BEHIND POSITIVE BARRIER THEN FULL TY 3 REFLECTIVE GEAR IS REQUIRED TO BE WORN BY ALL WORKERS, HARD HAT HALOS ARE REQUIRED TO BE WORN BY THE FLAGGERS AT FLAGGING STATIONS, TY II BARRICADES ARE REQUIRED TO BE SPACED AT 500 FT. AND A MANDATORY NIGHT WORK MEETING IS REQUIRED.

--ITEM 618--

618-1 IT MIGHT BE NECESSARY TO CUT CONCRETE FOR PLACEMENT OF CONDUIT. SAW CUT EXISTING CONCRETE, REMOVE THE CONCRETE FROM THE STEEL REINFORCEMENT (BARS OR FABRIC) AND BEND THE STEEL TO INSTAL THE CONDUIT. AFTER THE CONDUIT HAS BEEN PLACED, BEND THE STEEL BACK TO ITS ORIGINAL POSITION AND BACK-FILL THE TRENCH WITH AN APPROVED CONCRETE. THIS WORK IS SUBSIDIARY TO THIS ITEM.

--ITEM 628--

628-1 MAKE ALL ARRANGEMENTS FOR ELECTRICAL SERVICE, AND COMPLIANCE WITH LOCAL STANDARDS AND PRACTICES FOR PROPER INSTALLATIONS.

--ITEM 680--

680-1 FURNISH AND INSTALL ALL REQUIRED MATERIALS AND EQUIPMENT NECESSARY FOR THE COMPLETE AND OPERATING TRAFFIC SIGNAL INSTALLATION AT THE FOLLOWING INTERSECTIONS:  
SH 123 & PANTHER RIDGE

680-2 THE LOCATIONS SHOWN ON THE PLANS FOR SIGNAL POLE FOUNDATIONS, CONTROLLER FOUNDATIONS, CONDUIT AND OTHER ITEMS MAY BE ADJUSTED TO BETTER FIT FIELD CONDITIONS AS APPROVED.

680-3 FURNISH AND INSTALL A NEW HENKE ENTERPRISES OR MOBOTREX EIGHT-PHASE NEMA TS2 TYPE 2 CONTROLLER AND CABINET, MEETING THE REQUIREMENTS OF DEPARTMENTAL MATERIALS SPECIFICATIONS DMS-11170. PROVIDE DETECTOR PANEL TOGGLE SWITCHES THAT ADDITIONALLY PERMIT THE USER TO DISCONNECT THE DETECTOR. FOR BOTH GROUND AND POLE-MOUNT CABINETS, PROVIDE CABINET CONFIGURATION WITH 16 POSITION LOAD BAY.

680-4 DELIVER TS TYPE 2 CONTROLLER CABINET AND ASSEMBLY TO THE TxDOT SAN ANTONIO DISTRICT SIGNAL SHOP FOR PROGRAMMING AND TESTING TWO WEEKS IN ADVANCE PRIOR TO CONTRACTOR INSTALLING EQUIPMENT IN THE FIELD. COORDINATE DROP OFF AND PICK UP WITH MARK PEREZ (210) 218-7430.

680-5 CONNECT ALL FIELD WIRING TO THE CONTROLLER ASSEMBLY INTO THE POLYPHASE. THE SIGNAL SHOP REPRESENTATIVE WILL ASSIST IN DETERMINING HOW THE DETECTION CABLES ARE TO BE CONNECTED, AND WILL ALSO PROGRAM THE CONTROLLER FOR OPERATION. HOOK UP THE MALFUNCTION MANAGEMENT UNIT (MMU) OR CONFLICT MONITOR, DETECTOR UNITS, AND OTHER EQUIPMENT, AND TURN ON THE CONTROLLER. HAVE A QUALIFIED TECHNICIAN ON THE PROJECT SITE TO PLACE THE TRAFFIC SIGNALS IN OPERATION.

680-6 ONCE FINAL PUNCH LIST IS COMPLETE, CONTRACTOR IS ALLOWED TO BEGIN FLASHING SIGNAL OPERATIONS. SIGNAL SHALL FLASH FOR A MINIMUM OF 7 DAYS PRIOR TO FULL OPERATION, UNLESS OTHERWISE APPROVED BY THE ENGINEER.

680-7 USE LED LAMPS FROM THE PREQUALIFIED MATERIAL PRODUCER LISTS AS SHOWN ON THE TEXAS DEPARTMENT OF TRANSPORTATION (TxDOT) - CONSTRUCTION DIVISION'S (CSD) MATERIAL PRODUCER LIST. CATEGORY IS "ROADWAY ILLUMINATION AND ELECTRICAL SUPPLIES" UNDER ITEM 610. NO SUBSTITUTIONS WILL BE ALLOWED FOR MATERIALS FOUND ON THIS LIST.

680-8 DEMONSTRATE THAT THE FIELD WIRING IS PROPERLY INSTALLED. INSTALL THE ELECTRICAL EQUIPMENT IN A NEAT AND WORKMANLIKE MANNER.

680-9 USE THE FOLLOWING WIRING SEQUENCE WHEN CONNECTING SIGNAL SECTIONS TO THE CABINET:

CONDUCTOR NO.BASE COLORTRACER COLOR SIGNAL FACE1BLACK YELLOW BALL2WHITE NEUTRAL3RED RED BALL4GREEN GREEN BALL5ORANGE YELLOW ARROW6BLUE GREEN ARROW7WHITEBLACKSPARE

680-10 ALL EXISTING SIGNAL EQUIPMENT WITH THE EXCEPTION OF THE SIGNAL CONTROLLER AND RELATED EQUIPMENT BECOME THE PROPERTY OF THE CONTRACTOR. DELIVER THE CONTROLLER AND RELATED EQUIPMENT TO THE SIGNAL SHOP, LOCATED AT 4815 NW LOOP 410 (CORNER OF IH 410 AND CALLAGHAN ROAD) IN SAN ANTONIO, TEXAS OR TO THE AREA OFFICE AS DIRECTED.

680-11 USE QUALIFIED PERSONNEL TO RESPOND TO AND DIAGNOSE ALL TROUBLE CALLS DURING THE THIRTY-DAY TEST PERIOD. REPAIR ANY MALFUNCTION TO CONTRACTOR-SUPPLIED SIGNAL EQUIPMENT. PROVIDE TO THE ENGINEER A LOCAL TELEPHONE NUMBER, NOT SUBJECT TO FREQUENT CHANGES AND AVAILABLE ON A 24-HOUR BASIS, FOR REPORTING TROUBLE CALLS. RESPONSE TIME TO REPORTED CALLS MUST BE LESS THAN 2 HOURS. MAKE APPROPRIATE REPAIRS WITHIN 24 HOURS. PLACE A LOGBOOK IN THE CONTROLLER CABINET AND KEEP A RECORD OF EACH TROUBLE CALL REPORTED. NOTIFY THE ENGINEER

OF EACH TROUBLE CALL. DO NOT CLEAR THE ERROR LOG IN THE CONFLICT MONITOR OR MMU DURING THE THIRTY-DAY TEST PERIOD WITHOUT APPROVAL.

680-13 THIS PROJECT INCLUDES THE INSTALLATION OF AT LEAST ONE CELLULAR MODEM AT THE LOCATION(S) SPECIFIED IN THE PLANS. CELLULAR MODEM(S) AND POWER SUPPLY(S) WILL BE FURNISHED BY THE DEPARTMENT. PROVIDE ALL MATERIALS NOT SUPPLIED BY THE DEPARTMENT NECESSARY FOR THE CELLULAR MODEM INSTALLATION. ALL MATERIALS PROVIDED BY THE CONTRACTOR MUST BE NEW UNLESS OTHERWISE SHOWN ON THE PLANS. EQUIPMENT PROVIDED BY THE DEPARTMENT SHALL BE STORED BY THE DEPARTMENT FOR PICK UP AT THE TxDOT SAN ANTONIO TRANSGUIDE OFFICE, 3500 NW LOOP 410 SAN ANTONIO, TX 78229. PREVENT DAMAGE TO ALL CELLULAR MODEM COMPONENTS SUPPLIED BY THE DEPARTMENT. REPLACE ANY COMPONENT THAT IS DAMAGED OR LOST DURING TRANSPORTATION OR INSTALLATION AT THE CONTRACTOR'S EXPENSE. VERIFY OPERATION OF THE CELLULAR MODEM(S) TOGETHER WITH OPERATION OF ITS LINKS; DEMONSTRATE THAT DATA CAN BE TRANSMITTED AT A SATISFACTORY RATE FROM THE FIELD LOCATION TO THE CENTRAL LOCATION. DEMONSTRATE THAT THE CELLULAR MODEM(S) DATA PACKETS ARE BEING RECEIVED AT THE CENTRAL SITE VIA A NETWORKED COMPUTER. TRANSPORTATION, INSTALLATION AND INCIDENTALS FOR INSTALLATION OF THE CELLULAR MODEM(S) SHALL BE CONSIDERED SUBSIDIARY TO ITEM 680.

680-14 PROVIDE A SUBMITTAL COMPLIANCE MATRIX WITH ALL TRAFFIC SIGNAL SUBMITTALS.

680-15 FIELD VERIFY THE DEPTHS OF THE DRILL SHAFTS TO MEET THE MINIMUM CLEARANCES SPECIFIED IN THE PLANS BEFORE ORDERING MATERIALS.

680-16 ENSURE THAT ALL TMS (TRAFFIC MANAGEMENT SYSTEM) EQUIPMENT FURNISHED AND INSTALLED IS COMPLETELY COMPATIBLE WITH THE EXISTING HARDWARE AND SOFTWARE LOCATED WITHIN THE TRANSGUIDE OPERATIONS CENTER (I.E. TRANSGUIDE CENTRAL SOFTWARE). THE CONTRACTOR SHALL CONTACT THE TRAFFIC MANAGEMENT ENGINEER FOR DETAILS ON THE SYSTEM NETWORK ARCHITECTURE.

680-17 CONTRACTOR SHALL BE RESPONSIBLE FOR INTEGRATING AND TESTING ALL NEW TMS EQUIPMENT AND ANY EXISTING TMS EQUIPMENT THAT IS RELOCATED INTO THE EXISTING NETWORK MANAGEMENT SYSTEM, SUBSIDIARY TO THE VARIOUS BID ITEMS.

--ITEM 682--

682-1 PEDESTRIAN SIGNALS MAY BE BY A DIFFERENT MANUFACTURER THAN THE VEHICLE SIGNAL HEADS. PEDESTRIAN SIGNALS MAY BE BY A DIFFERENT MANUFACTURER THAN THE VEHICLE SIGNAL HEADS.

682-2 COVER ALL SIGNAL FACES UNTIL PLACED IN OPERATION. THIS WORK IS SUBSIDIARY TO VARIOUS BID ITEMS.

682-3 ALL MOUNTING ATTACHMENTS SHALL BE CONSTRUCTED OF STEEL PIPE AND MOUNTED AS SHOWN ON THE PLANS.

--ITEM 684--

684-1 PROVIDE AN EXTRA 10' FOR EACH CABLE TERMINATING IN THE CONTROLLER CABINET. ALL CABLES MUST BE CONTINUOUS WITHOUT SPLICES FROM TERMINAL POINT TO TERMINAL POINT. ALL PROPOSED SIGNAL CABLE MUST BE #12 AWG STRANDED COPPER.

--ITEM 686 & 687--

686-1 PROVIDE ALL SIGNAL POLES FROM THE SAME MANUFACTURER. PEDESTRIAN POLES MAY BE FROM A DIFFERENT MANUFACTURER.

--ITEM 688--

688-2 THE BUTTON PLACEMENT MUST BE COORDINATED WITH THE CONCRETE PAD TO ACCESS THE BUTTON ACCORDING TO ADA AND TAS. IF ANY MOUNTING MODIFICATIONS ARE NEEDED (EXTENSIONS, BRACKETS, ETC.) TO MEET ADA AND TAS REQUIREMENTS THE ADJUSTMENT WILL BE SUBSIDIARY TO ITEM 688. THE CONCRETE PAD (IF REQUIRED) WILL BE PAID SEPARATELY.

688-3 THE PEDESTRIAN PUSH BUTTON MUST BE WIRED WITH A 2/C#14 LOOP DETECTOR CABLE IN LIEU OF A #12 A.W.G. XHHW WIRE.

688-4 FURNISH AND INSTALL NEW POLARA ENTERPRISES ACCESSIBLE PEDESTRIAN SIGNALS (APS) PUSH BUTTONS OR APPROVED EQUIVALENT.

--ITEM 6292--

6292-1 RADAR PRESENCE DETECTION DEVICE MUST UTILIZE TRUE-PRESENCE DETECTION. SYSTEMS USING LOOKING ALGORITHMS TO ATTEMPT PRESENCE DETECTION WILL NOT BE ACCEPTED. IN ADDITION, RADAR SYSTEMS WILL NOT BE ALLOWED TO USE EXTENSIONS/DELAYS OR PLACE THE CONTROLLER ON LOOKING DETECTION TO AID IN PRESENCE DETECTION.

6292-2 RADAR PRESENCE DETECTION DEVICE MUST BE ABLE TO DETECT UP TO 10 LANES WITH A MINIMUM OFFSET OF 6' AND HAVE AT LEAST 16 ZONES AND CHANNELS PER UNIT.

6292-3 RADAR PRESENCE DETECTION DEVICE MUST BE MOUNTED ON THE SAME SIDE OF THE INTERSECTION AS THE LANES IT IS SET TO DETECT.

6292-4 FINAL PLACEMENT OF RADAR DEVICES MUST BE APPROVED BY THE ENGINEER.

6292-5 FURNISH AND INSTALL NEW WAVETRONIX SMARTSENSOR MATRIX, OR APPROVED EQUIVALENT, FOR RADAR PRESENCE DETECTORS AND WAVETRONIX SMARTSENSOR ADVANCE, OR APPROVED EQUIVALENT, FOR RADAR ADVANCED DETECTION DEVICES.



NB DEAN, LLC  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

JARO NORTH SUBDIVISION

TxDOT GENERAL SIGNAL NOTES

SHEET  
T2 of T35

NO	DATE	ISSUES AND REVISIONS
△		

INK

CIVIL

2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351

© COPYRIGHT 2021



DETOURS, BARRICADES, WARNING SIGNS, SEQUENCE OF WORK, ETC.

THE CONTRACTOR'S ATTENTION IS DIRECTED TO THE REQUIREMENTS OF ITEM 7, "LEGAL RELATIONS AND RESPONSIBILITIES TO THE PUBLIC", OF THE STANDARD SPECIFICATIONS. IN ADDITION TO THESE REQUIREMENTS, THE FOLLOWING PROVISIONS SHALL ALSO GOVERN ON THIS CONTRACT:

1. GENERAL

- (1) TRAFFIC MUST BE HANDLED THROUGHOUT THE PROJECT DURING CONSTRUCTION. THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING A SAFE AND COMFORTABLE PASSAGE FOR VEHICULAR AND PEDESTRIAN TRAFFIC WITH MINIMAL INCONVENIENCE TO THE PUBLIC, AS SHOWN IN THE PLANS OR AS DIRECTED/APPROVED BY THE ENGINEER.
- (2) THE CONTRACTOR MAY PROPOSE/RECOMMEND MODIFICATIONS TO THE SEQUENCE OF WORK FOR CONSIDERATION BY THE ENGINEER. ANY MAJOR RECOMMENDED MODIFICATION BY THE CONTRACTOR SHALL INCLUDE ANY CHANGES TO THE VARIOUS BID ITEMS, IMPACT TO TRAFFIC, EFFECT OF OVERALL PROJECT IN TIME AND COST, ETC. IF THIS PROPOSAL IS IMPLEMENTED, THE CONTRACTOR WILL BE RESPONSIBLE FOR DEVELOPING DETAILED PLAN SHEETS TO BE SEALED BY A LICENSED PROFESSIONAL ENGINEER FOR INCLUSION WITH THE CHANGE ORDER. THE CONTRACTOR CANNOT PROCEED WITH ANY CONSTRUCTION OPERATIONS BASED ON A REVISED PHASE/SEQUENCE UNTIL WRITTEN APPROVAL IS OBTAINED FROM THE ENGINEER. IF AT ANY TIME DURING CONSTRUCTION THE CONTRACTOR'S PROPOSED PLAN OF OPERATION FOR HANDLING TRAFFIC DOES NOT PROVIDE FOR SAFE AND COMFORTABLE MOVEMENT, THE CONTRACTOR WILL IMMEDIATELY CHANGE THEIR OPERATION TO CORRECT THE UNSATISFACTORY CONDITION.
- (3) DO NOT STORE ANY CONSTRUCTION MATERIAL OR EQUIPMENT AT ANY LOCATION THAT WILL CONSTITUTE A HAZARD AND WILL ENDANGER TRAFFIC.
- (4) THE CONTRACTOR WILL PROVIDE ADVANCE NOTIFICATION TO THE ENGINEER OF IMPENDING / UPCOMING LANE CLOSURES FOR ALL TEMPORARY AND / OR PERMANENT LANE, RAMP, CONNECTOR, FRONTAGE, SHOULDER, ETC. CLOSURES OR DETOURS. SEE GENERAL NOTES FOR NOTIFICATION REQUIREMENTS.
- (5) ACCESS TO ADJOINING PROPERTY MUST BE MAINTAINED AT ALL TIMES.
- (6) TEMPORARY DRAINAGE IS THE RESPONSIBILITY OF THE CONTRACTOR.
- (7) AT NO TIME SHALL TWO CONSECUTIVE INTERSECTING ROADWAYS BE CLOSED AT ONE TIME DURING CONSTRUCTION.
- (8) AT NO TIME SHALL TWO CONSECUTIVE RAMPs BE CLOSED AT ONE TIME DURING CONSTRUCTION OR OVERLAY OPERATIONS.
- (9) UNLESS OTHERWISE NOTED IN THE PLANS AND/OR AS DIRECTED BY THE ENGINEER, DAILY LANE CLOSURES SHALL BE LIMITED ACCORDING TO THE FOLLOWING RESTRICTIONS:  
NIGHTTIME: ASK AREA ENGINEER AND CONSTRUCTION ENGINEER. (WITH UNIFORMED OFF DUTY LAW ENFORCEMENT OFFICERS)  
WEEKEND CLOSURES WHEN APPROVED BY THE ENGINEER: ASK AREA ENGINEER AND CONSTRUCTION ENGINEER.
- NO LANE CLOSURES WILL BE PERMITTED FOR THE FOLLOWING DATES AND/OR SPECIAL EVENTS:  
BETWEEN DECEMBER 15 AND JANUARY 1:  
WEDNESDAY BEFORE THANKSGIVING THRU THE SUNDAY AFTER THANKSGIVING  
SATURDAY AND SUNDAY BEFORE MEMORIAL DAY AND LABOR DAY.  
SATURDAY OR SUNDAY WHEN JULY 4 FALLS ON A FRIDAY OR MONDAY.
- (10) REMOVAL AND DISPOSAL OF EXISTING ABANDONED UTILITIES (EITHER PREVIOUSLY ABANDONED OR ABANDONED DURING THIS PROJECT) REQUIRED TO SUPPORT THIS PROJECT'S CONSTRUCTION SHALL BE PERFORMED UNDER THE OVERALL PREPARE RIGHT-OF-WAY ITEM (ITEM 100).
- (11) COORDINATE WITH ADJACENT PROJECTS.
- (12) COVER PERMANENT SIGNS IF NOT USED. THIS IS SUBSIDIARY TO ITEM 502.
- (13) EXCAVATION WITHIN 5 FEET OF AN EXISTING CPS ENERGY POLE WILL REQUIRE POLE BRACING. CONTACT CPS ENERGY UTILITY COORDINATION TO REQUEST POLE BRACING (JOHN OFFER, [JOFFER@CPSENERGY.COM](mailto:JOFFER@CPSENERGY.COM)). THE ESTIMATED DURATION FOR THE POLE BRACING PROCESS IS APPROXIMATELY 6 TO 8 WEEKS.
- (14) COORDINATE WITH THE CITY OF SAN ANTONIO OR TxDOT FOR SIGNAL TIMING REVISIONS, AS NECESSARY.

2. SEQUENCE OF WORK

- (1) THIS PROJECT WILL BE CONSTRUCTED IN (4) PHASES. BEFORE THE COMMENCEMENT OF EACH PHASE, INSTALL ADVANCE WARNING SIGNS, TEMPORARY SIGNS AND BARRICADES AS SHOWN ON THE PLANS AND/OR AS DIRECTED/APPROVED BY THE ENGINEER. DAILY LANE CLOSURES WILL BE USED IN ACCORDANCE WITH STATE TSP STANDARDS. DROP OFF CONDITIONS OF GREATER THAN 2" MUST HAVE A 3:1 SLOPE AT THE END OF EACH DAY, AS WELL AS THROUGHOUT THE PROJECT WHERE ACCESS TO ADJACENT PROPERTIES IS ALLOWED TO DRIVEWAYS AND SIDE STREETS.
- (2) PREPARING ROW / REMOVAL OF EXISTING ITEMS TO BE DONE ONLY IN AREAS WHERE WORK IS OCCURRING, AS PER THE PHASES NOTED BELOW.
- (3) PLANING, SURFACE TREATMENTS AND OVERLAYS SHALL BE PERFORMED IN THE DIRECTION OF TRAFFIC. BEGIN SURFACE CONSTRUCTION ON HIGH SIDE OF ROAD TO AVOID WATER PONDING ISSUES.
- (4) A BRIEF DESCRIPTION OF THESE PHASES ARE AS FOLLOWS:

PHASE 1

THE INTENT OF THIS PHASE IS TO INSTALL THE NEW PAVEMENT FOR THE WIDENING REQUIRED FOR THE RIGHT TURN LANE FROM SH 123 TO PANTHER RIDGE. CONTRACTOR TO MAINTAIN A TWO LANE ONE DIRECTIONAL FLOW OF TRAFFIC.

PHASE 2

THE INTENT OF THIS PHASE IS TO MILL AND REPAVE THE SOUTHBOUND SIDE OF SH 123. CONTRACTOR TO MAINTAIN A TWO LANE ONE DIRECTIONAL FLOW OF TRAFFIC.

PHASE 3

THE INTENT OF THIS PHASE IS TO MILL AND REPAVE THE NORTHBOUND SIDE OF SH 123. AFTER PAVING, CONTRACTOR TO INSTALL STRIPING FOR THE NORTHBOUND SIDE. CONTRACTOR TO MAINTAIN A TWO LANE ONE DIRECTIONAL FLOW OF TRAFFIC.

PHASE 4

THE INTENT OF THIS PHASE IS TO INSTALL STRIPING FOR THE SOUTHBOUND SIDE OF SH 123. CONTRACTOR TO MAINTAIN A TWO LANE ONE DIRECTIONAL FLOW OF TRAFFIC.

3. SAFETY

- (1) THE CONTRACTOR WILL PROVIDE, CONSTRUCT AND MAINTAIN BARRICADES AND SIGNS IN ACCORDANCE WITH STATE STANDARDS. ANY SIGNS REQUIRED THAT ARE NOT DETAILED IN THE STANDARD SHEETS SHALL BE IN CONFORMANCE WITH THE "TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS" AND THE "STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS."
- (2) BARRICADES AND WARNING SIGNS SHALL BE PLACED AS INDICATED ON THE PLANS. THIS SHALL

BE CONSIDERED THE MINIMUM REQUIRED TO PROVIDE FOR THE SAFETY OF TRAFFIC DURING CONSTRUCTION. THE CONTRACTOR SHALL PROVIDE AND MAINTAIN OTHER SUCH BARRICADES AND SIGNS DEEMED NECESSARY BY THE ENGINEER OR AS DIRECTED BY FIELD CONDITIONS, TO PROVIDE FOR THE PASSAGE OF TRAFFIC IN SAFETY AT ALL TIMES.

- (3) THE CONTRACTOR SHALL PROVIDE AND MAINTAIN FLAGGERS AS DIRECTED/APPROVED BY THE ENGINEER, AT SUCH POINTS AND FOR SUCH PERIODS OF TIME AS MAY BE REQUIRED, TO PROVIDE FOR THE SAFETY OF THE TRAVELING PUBLIC AND THE CONTRACTOR'S PERSONNEL.

- (4) THE CONTRACTOR SHALL KEEP THE ROADWAY CLEAN AND FREE OF DIRT OR OTHER MATERIALS DURING HAULING OPERATIONS. IF THE CONTRACTOR DOES NOT MAINTAIN A CLEAN ROADWAY, THEY SHALL CEASE ALL CONSTRUCTION OPERATIONS, WHEN DIRECTED BY THE ENGINEER, TO CLEAN THE ROADWAY TO THE SATISFACTION OF THE ENGINEER.

4. HAULING EQUIPMENT

- (1) THE USE OF RUBBER-TIRED EQUIPMENT WILL BE REQUIRED FOR MOVING DIRT OR OTHER MATERIALS ALONG OR ACROSS PAVEMENTED SURFACES. WHERE THE CONTRACTOR DESIRES TO MOVE ANY EQUIPMENT NOT LICENSED FOR OPERATION ON PUBLIC HIGHWAYS, ON OR ACROSS PAVEMENT, THEY SHALL PROTECT THE PAVEMENT FROM DAMAGE AS DIRECTED / APPROVED BY THE ENGINEER.

- (2) THROUGHOUT CONSTRUCTION OPERATIONS, THE CONTRACTOR WILL BE REQUIRED TO CONDUCT THEIR HAULING OPERATIONS IN A MANNER SUCH THAT VEHICLES WILL NOT HAUL OVER PREVIOUSLY RECOMPACTED SUBGRADE OR COMPACTED BASE MATERIAL, EXCEPT IN SHORT SECTIONS FOR DUMPING MANIPULATIONS.

5. FINAL CLEAN UP

UPON COMPLETION OF THE WORK AND BEFORE FINAL ACCEPTANCE AND FINAL PAYMENT IS MADE, THE CONTRACTOR SHALL CLEAR AND REMOVE FROM THE SITE ALL SURPLUS AND DISCARDED MATERIALS AND DEBRIS OF EVERY KIND AND LEAVE THE ENTIRE PROJECT IN A SMOOTH, NEAT AND SIGHTLY CONDITION.

6. PAYMENT

ALL BARRICADES, SIGNS, AND FLAGGERS SHALL BE SUBSIDIARY TO ITEM 502 BARRICADES, SIGNS AND TRAFFIC HANDLING. ALL EROSION AND SEDIMENT CONTROL DEVICES WILL BE PAID FOR UNDER ITEM 506 TEMPORARY EROSION, SEDIMENTATION, AND ENVIRONMENTAL CONTROLS. ALL WORK ZONE PAVEMENT MARKINGS WILL BE PAID FOR UNDER ITEM 662 WORK ZONE PAVEMENT MARKINGS. ALL OTHER WORK AND MATERIALS SHALL BE SUBSIDIARY TO THE VARIOUS BID ITEMS UNLESS OTHERWISE INDICATED IN THE PLANS.



NB DEAN, LLC  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

JARO NORTH SUBDIVISION

TRAFFIC CONTROL NARRATIVE



SHEET  
T3 OF T35

NO	DATE	ISSUES AND REVISIONS
△		



2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351



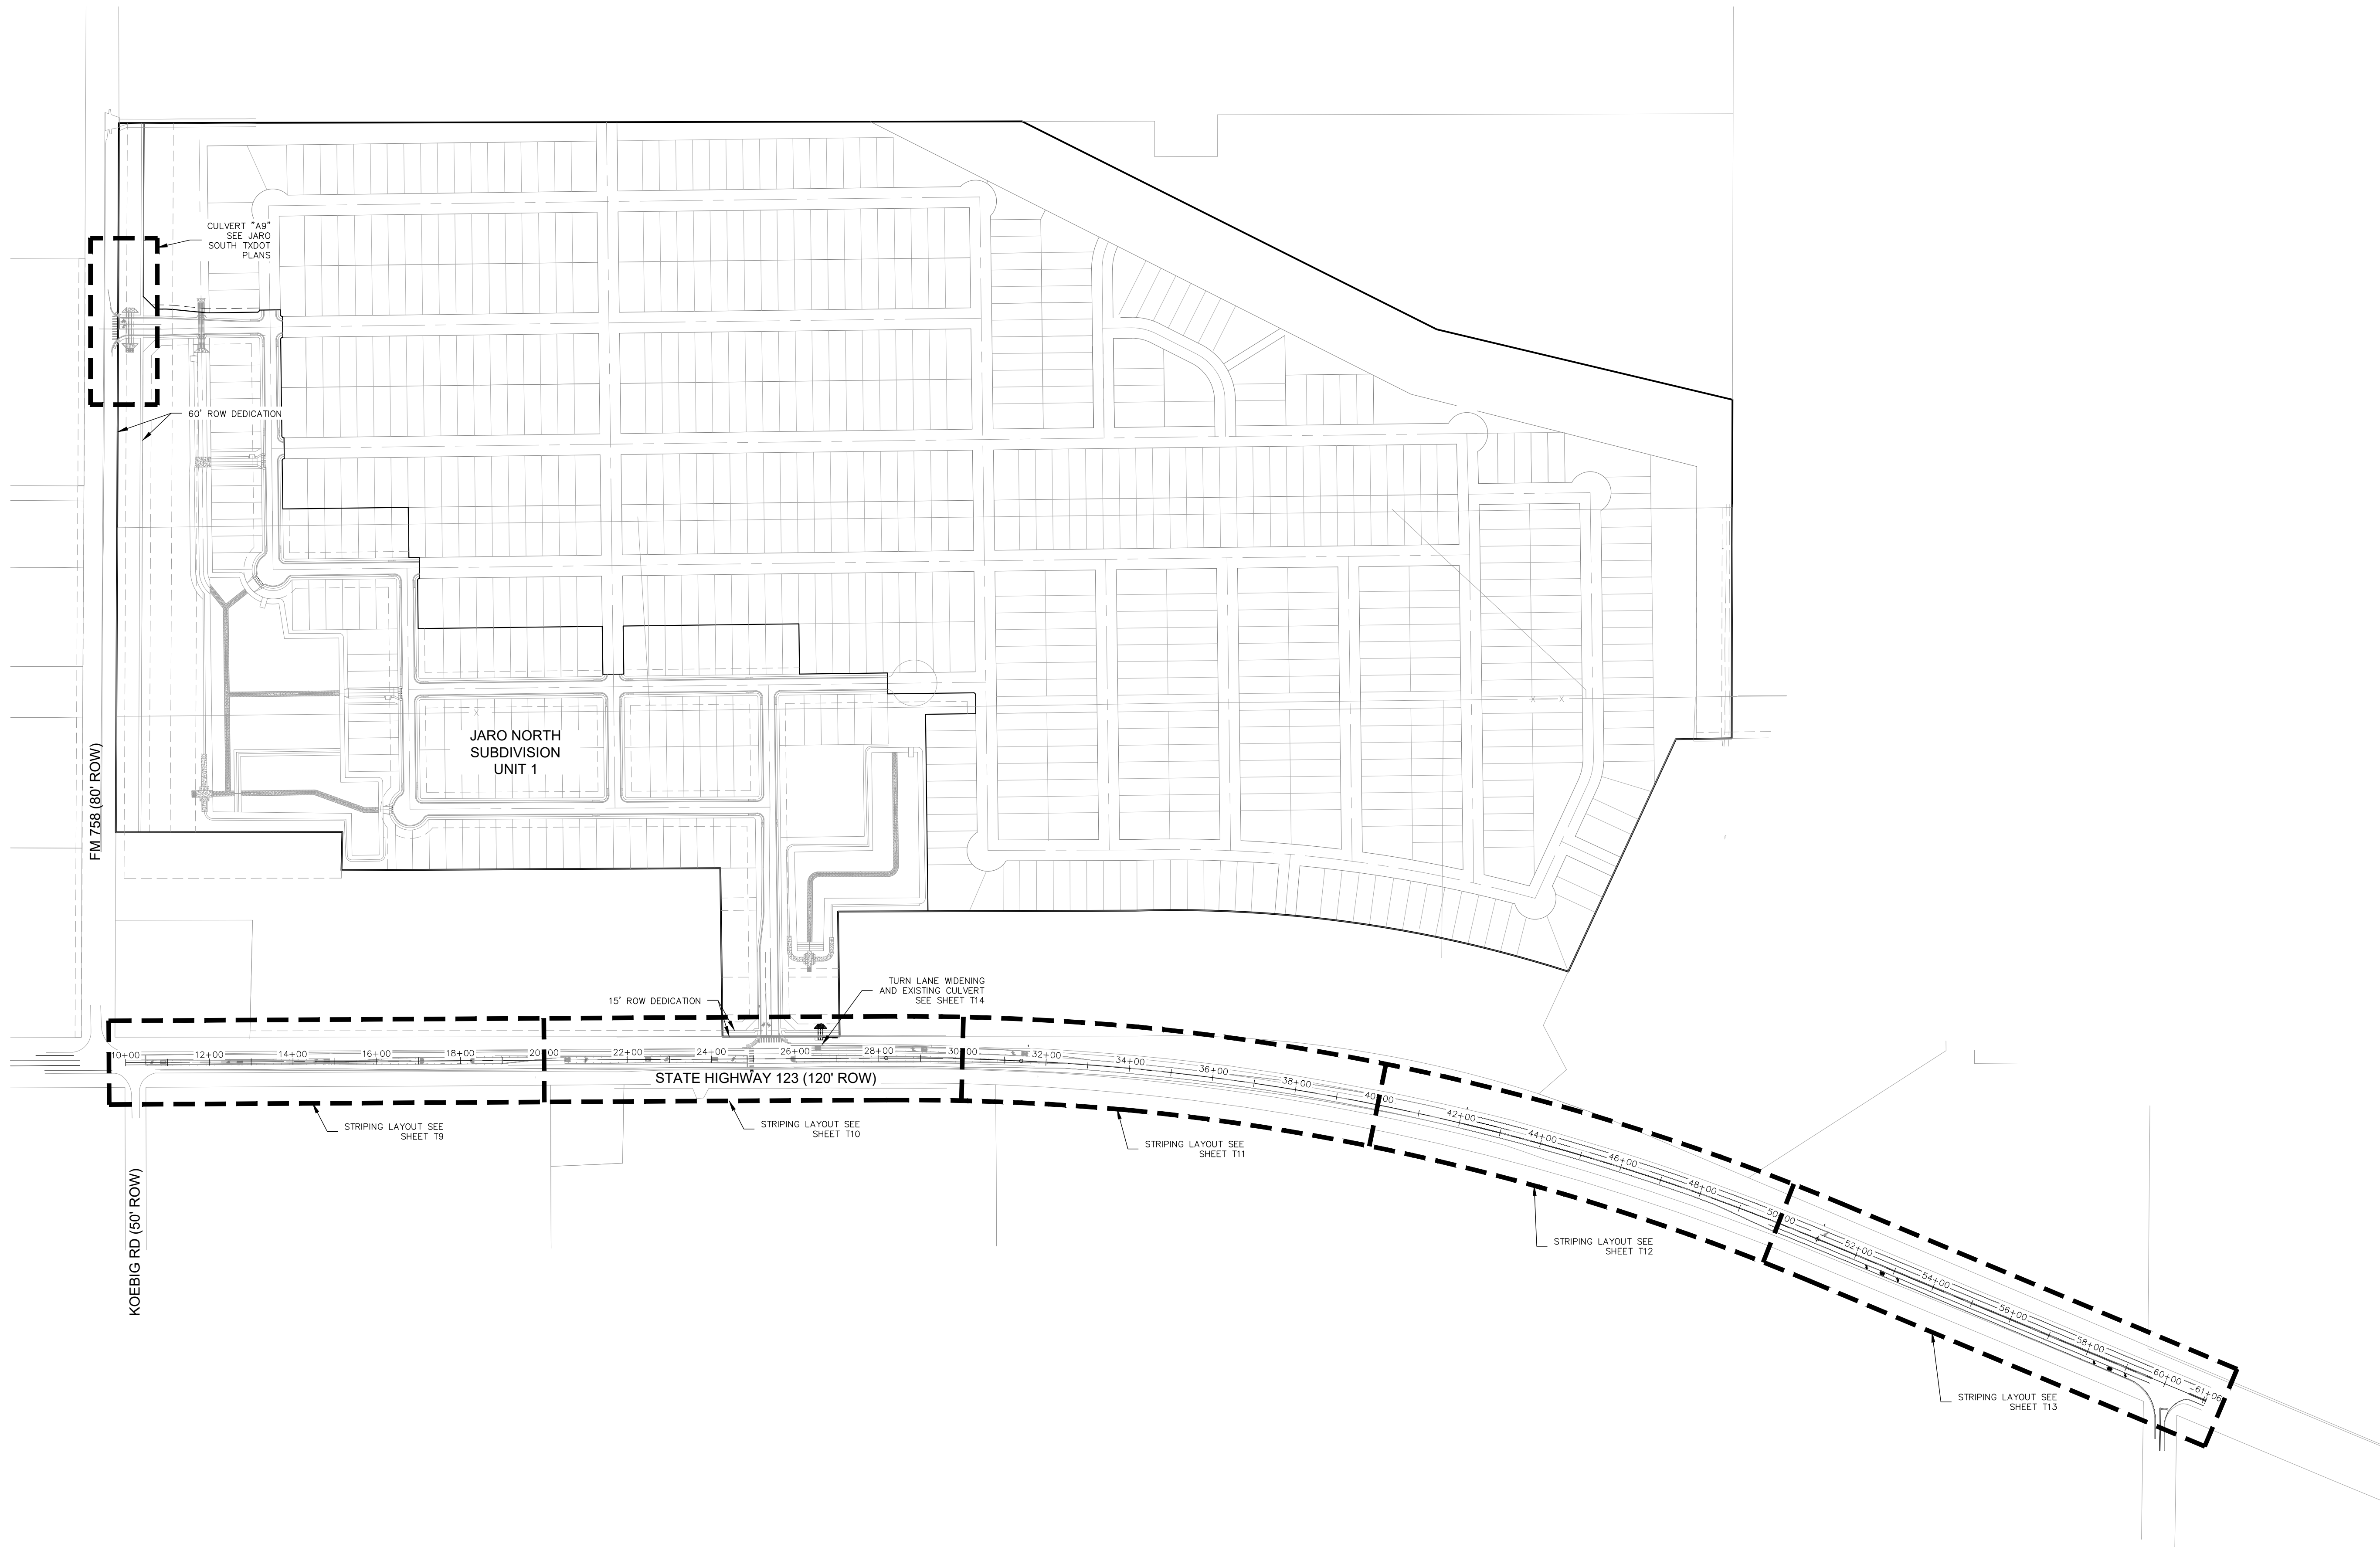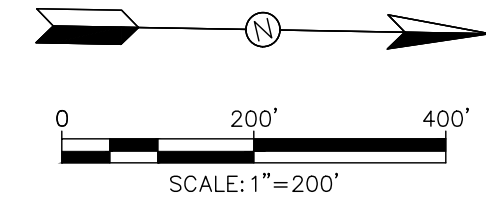

NB DEAN, LLC  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

JARO NORTH SUBDIVISION

OVERALL IMPROVEMENTS  
SCHEMATIC

SHEET  
T4 OF T35

NO	DATE	ISSUES AND REVISIONS
△		




2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351

Drawing Name: N:\Projects\BEAC02 Jaro North Subdivision\Civil\Construction Drawings\T400T Sheets\T4 OVERALL IMPROVEMENTS SCHEMATIC.dwg User: melanie.norris Jul 12, 2022 8:28am



Jaro North Subdivision Unit 1 - Existing Conditions Hydrology SCS Calculations									
Point	AREA ID	Area (ac)	CN	T <sub>c</sub> (min)	Q <sub>2</sub> (cfs)	Q <sub>10</sub> (cfs)	Q <sub>25</sub> (cfs)	Q <sub>50</sub> (cfs)	Q <sub>100</sub> (cfs)
A	EX-A	176.20	84	41	250.17	506.03	702.74	878.11	1078.80
B	EX-B	92.30	84	23	175.90	353.96	491.44	613.94	754.08
					Existing culvert at the intersection of FM 758 & SH 123				
					Existing culvert at SH 123				

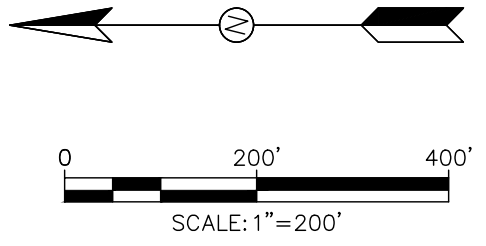

LEGEND

- LIMITS OF DRAINAGE AREA
- LIMITS OF SUB-DRAINAGE AREA
- TIME OF CONCENTRATION
- EXISTING CONTOURS
- PROPOSED CONTOURS
- FLOW ARROWS
- DRAINAGE BASIN LABEL
- BASIN AREA (AC)
- SUB-DRAINAGE AREA LABEL
- SUB-DRAINAGE AREA (AC)
- INLET LABEL
- ANALYSIS POINT LABEL



NB DEAN, LLC  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

JARO NORTH SUBDIVISION

DRAINAGE AREA MAP -  
EXISTING

SHEET  
T5 OF T35

NO	DATE	ISSUES AND REVISIONS
1		
2		
3		
4		

INK  
CIVIL


2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351



Drawing Name: N:\Projects\BEC002 Jaro North Subdivision\Civil\Construction Drawings\T600 Sheets\T7 DRAINAGE AREA MAP - PROPOSED.dwg User: melanie.norris Jul 12, 2022 - 8:30am

Jaro North Subdivision Unit 1 - Proposed Conditions Hydrology SCS Calculations										
Point	AREA ID	Area (ac)	CN	T <sub>c</sub> (min)	Q <sub>2</sub> (cfs)	Q <sub>10</sub> (cfs)	Q <sub>25</sub> (cfs)	Q <sub>50</sub> (cfs)	Q <sub>100</sub> (cfs)	Location
A1	PRO-A1	99.40	84	41	141.13	285.47	396.44	495.37	608.59	Existing culvert at the intersection of FM 758 & SH 123
A2	PRO-A2	70.20	87	18	155.36	299.06	408.25	505.34	616.42	Pond A
Detained Flow (Pond A)					109.58	204.42	279.88	362.23	462.04	Pond A Outfall
Combined Flow (Pro-A)					249.59	488.00	674.01	852.48	1060.34	Existing culvert at the intersection of FM 758 & SH 123
B1	PRO-B1	24.30	84	17	48.67	98.27	136.33	170.24	209.04	Existing culvert at SH 123
B2	PRO-B2	74.60	87	23	156.75	301.58	411.93	510.07	622.34	Pond B
Detained Flow (Pond B)					134.93	265.92	370.66	462.74	570.92	Pond B Outfall
Combined Flow (Pro-B)					174.03	347.30	485.33	608.02	751.37	Existing culvert at SH 123

Existing/Proposed Comparison			Existing/Proposed Comparison		
Storm Event	EX A Q (CFS)	PRO A Q (CFS)	Storm Event	EX B Q (CFS)	PRO B Q (CFS)
2	250.17	249.59	2	175.90	174.03
10	506.03	488.00	10	353.96	347.30
25	702.74	674.01	25	491.44	485.33
50	878.11	852.48	50	613.94	608.02
100	1,078.80	1,060.34	100	754.08	751.37

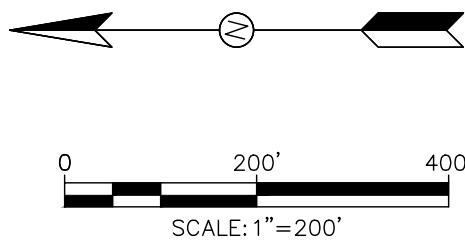

LEGEND

- LIMITS OF DRAINAGE AREA
- - - LIMITS OF SUB-DRAINAGE AREA
- TC — TC — TIME OF CONCENTRATION
- 900 — EXISTING CONTOURS
- 900 — PROPOSED CONTOURS
- FLOW ARROWS
- A  
9.0 DRAINAGE BASIN LABEL  
BASIN AREA (AC)
- A1  
2.0 SUB-DRAINAGE AREA LABEL  
SUB-DRAINAGE AREA (AC)
- A1 INLET LABEL
- A1 ANALYSIS POINT LABEL

NOTE:  
THIS MAP IS FOR COMPARISON TO  
EXISTING AT THE DOWNSTREAM  
CULVERTS USING THE SCS METHOD.  
SEE SHEET T7 FOR SIZING OF  
CULVERT "A9" LOCATED WITHIN  
TXDOT ROW.



NB DEAN, LLC  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

JARO NORTH SUBDIVISION

DRAINAGE AREA MAP -  
PROPOSED SCS

SHEET  
T6 OF T35

NO	DATE	ISSUES AND REVISIONS
1		
2		
3		
4		
5		



2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351



PROPOSED CONDITIONS - SCS METHOD

SCALE: 1"=200'



Drawing Name: N:\Projects\BEC002 Jaro North Subdivision\Civil\Construction Drawings\T007 Sheet\T7 DRAINAGE AREA MAP - PROPOSED.dwg User: melanie.norris Jul 12, 2022 - 8:30am

Jaro Subdivision North TxDOT Improvements - Proposed Conditions Hydrology Calculations																				Location
Point	AREA ID	Area (ac)	C <sub>2</sub>	C <sub>5</sub>	C <sub>10</sub>	C <sub>25</sub>	C <sub>50</sub>	C <sub>100</sub>	T <sub>c</sub> (min)	I <sub>2</sub> (in/hr)	I <sub>5</sub> (in/hr)	I <sub>10</sub> (in/hr)	I <sub>25</sub> (in/hr)	I <sub>50</sub> (in/hr)	I <sub>100</sub> (in/hr)	Q <sub>2</sub> (cfs)	Q <sub>5</sub> (cfs)	Q <sub>10</sub> (cfs)	Q <sub>25</sub> (cfs)	
A9	A9	72.30	0.29	0.32	0.35	0.39	0.42	0.46	27	3.14	3.93	4.60	5.53	6.25	7.03	65.84	90.92	116.40	155.93	Culvert A9
A11	A11	4.70	0.45	0.48	0.52	0.56	0.60	0.64	16	4.10	5.14	6.03	7.26	8.25	9.29	8.69	11.71	14.70	19.18	Culvert A11

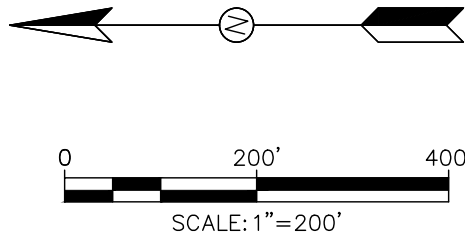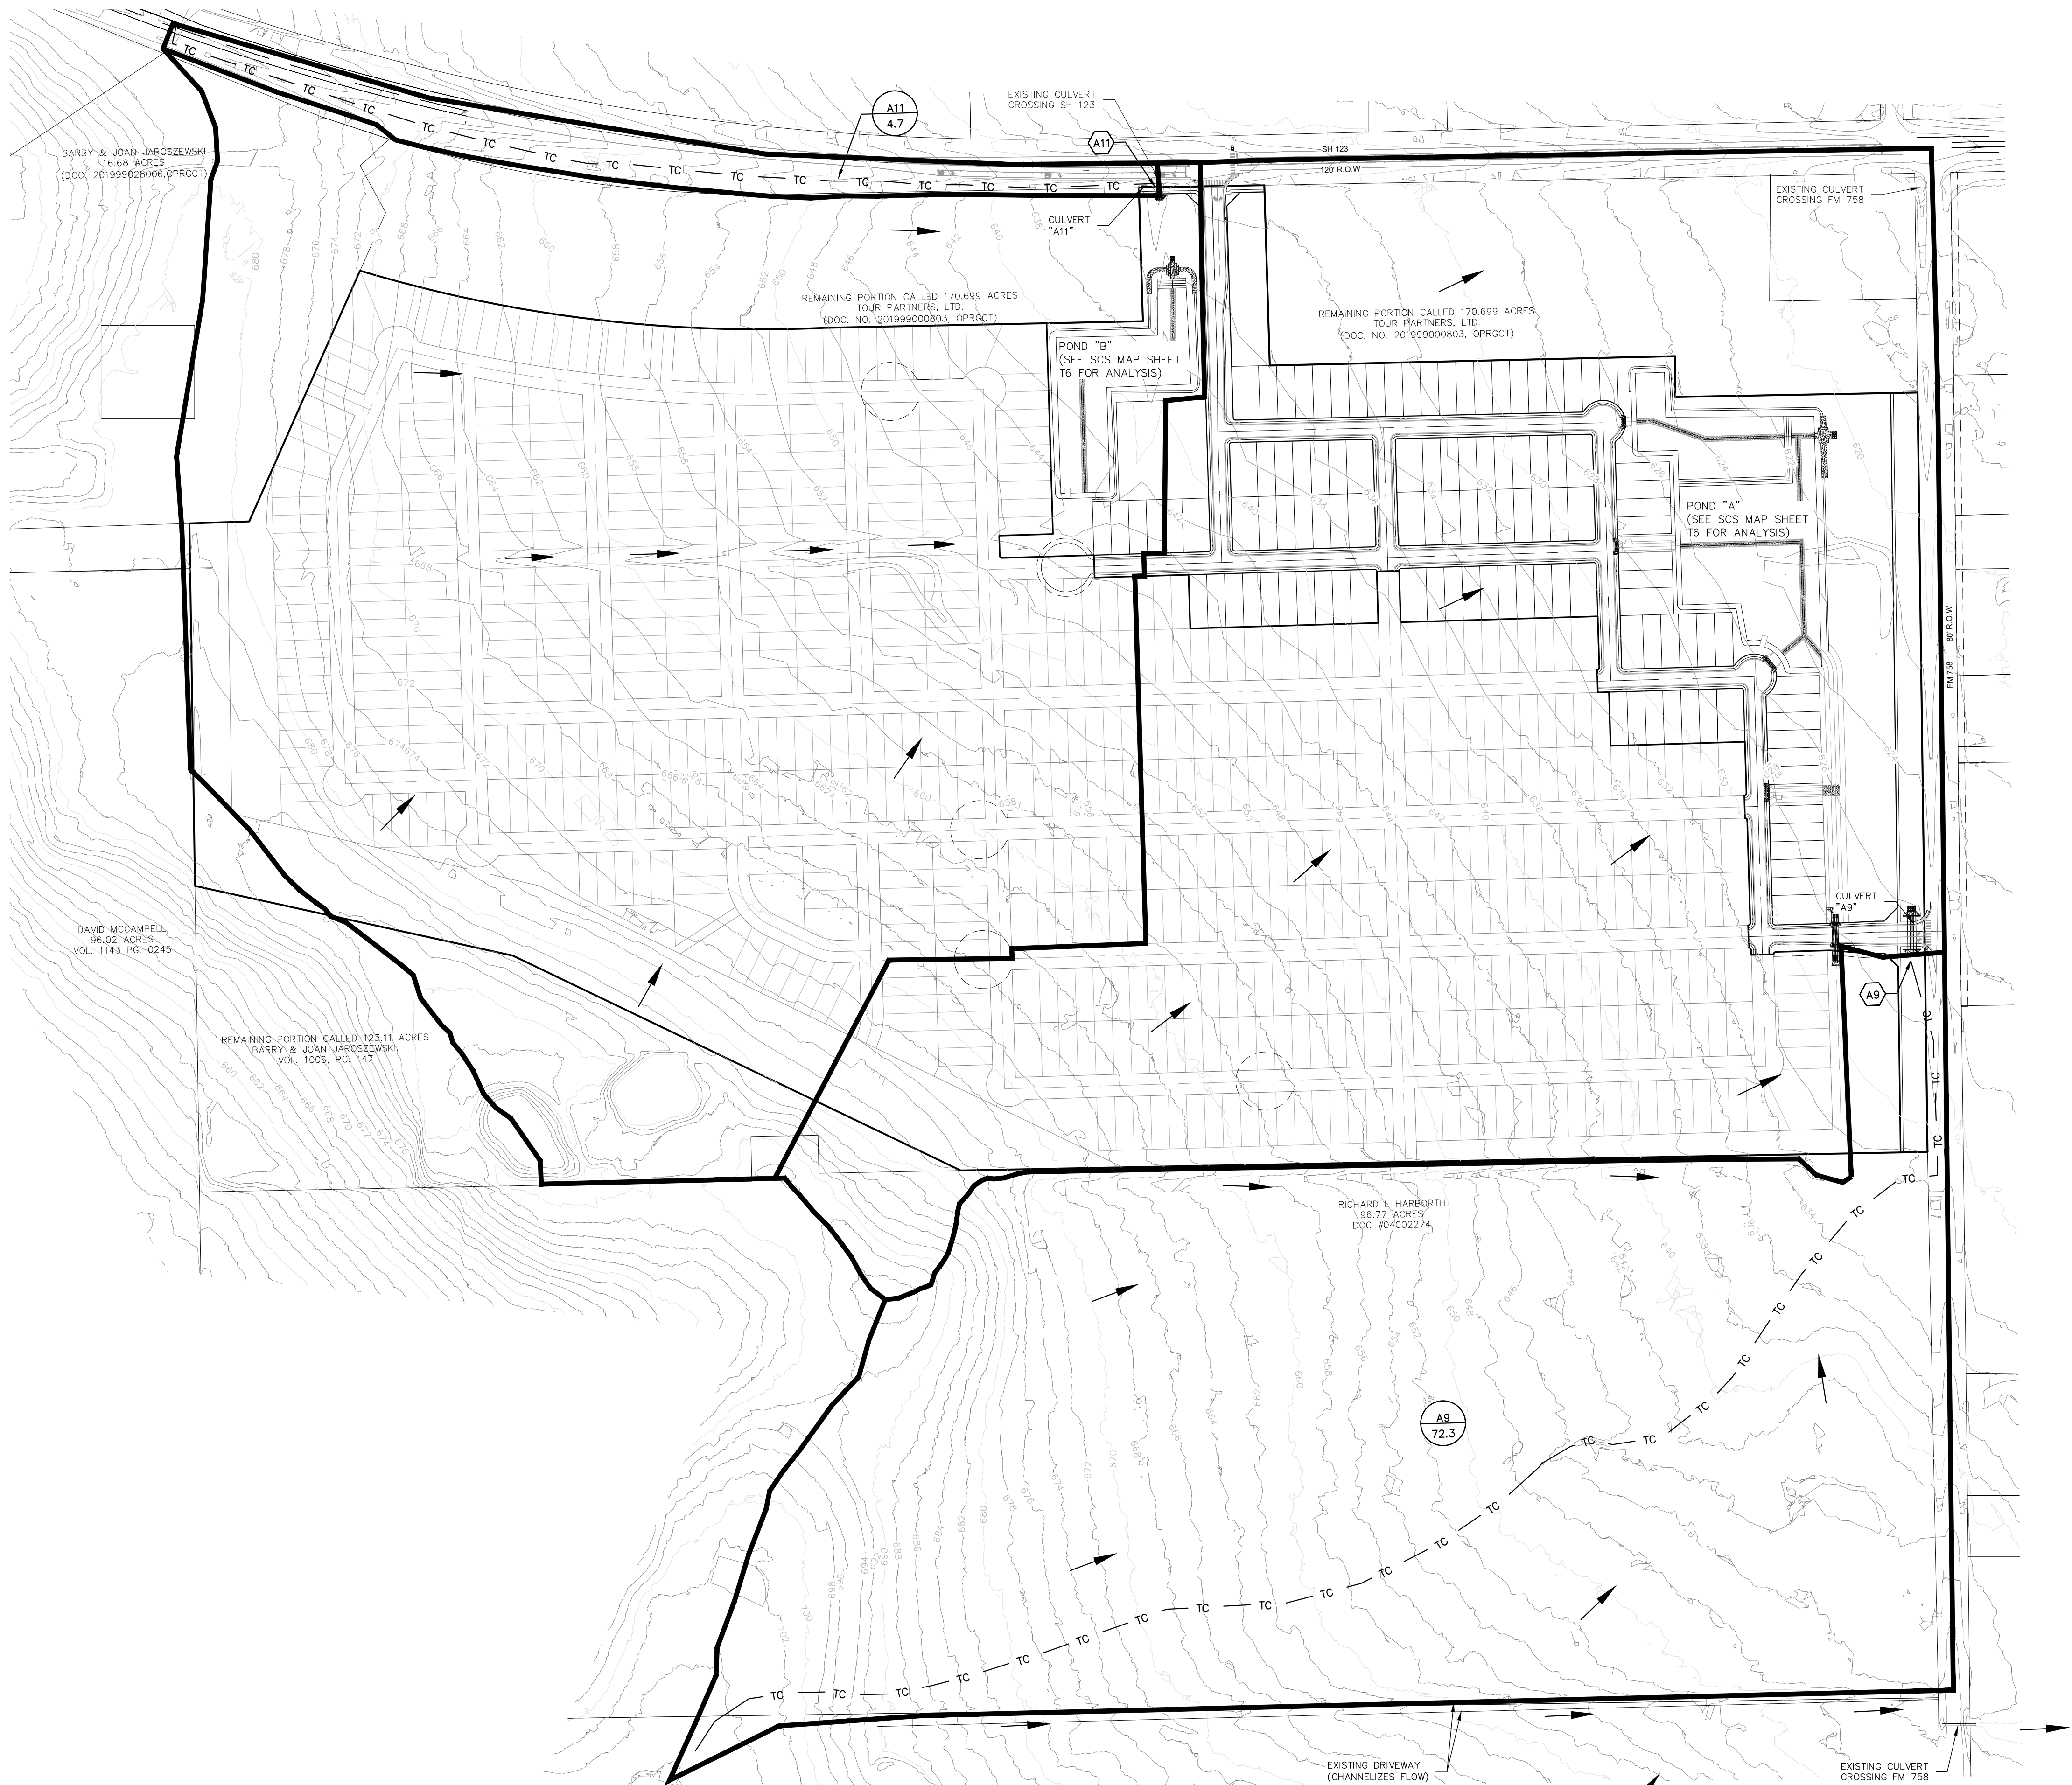

LEGEND

- LIMITS OF DRAINAGE AREA
- LIMITS OF SUB-DRAINAGE AREA
- TIME OF CONCENTRATION
- EXISTING CONTOURS
- PROPOSED CONTOURS
- FLOW ARROWS
- DRAINAGE BASIN LABEL
- BASIN AREA (AC)
- SUB-DRAINAGE AREA LABEL
- SUB-DRAINAGE AREA (AC)
- INLET LABEL
- ANALYSIS POINT LABEL

NOTE:  
THIS MAP IS FOR THE SIZING OF CULVERT "A9" LOCATED WITHIN TxDOT ROW USING THE RATIONAL METHOD.  
SEE SHEET T6 FOR DOWNSTREAM ANALYSIS AT THE EXISTING CULVERTS USING THE SCS METHOD.



NB DEAN, LLC  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

JARO NORTH SUBDIVISION

DRAINAGE AREA MAP - PROPOSED



SHEET  
T7 OF T35

NO	DATE	ISSUES AND REVISIONS
1		
2		
3		
4		
5		

2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351



- NOTES:
1. FOR LIMITS OF PAVEMENT STRIPING REMOVAL AS INDICATED, CONTRACTOR TO MILL EXISTING SURFACE AND REPAVE WITH A ONE COURSE SURFACE TREATMENT. AN ACP SUPERPAVE DRIVING SURFACE WILL ALSO BE REQUIRED OUTSIDE THE LIMITS OF THE TXDOT PROJECT.
  2. EXISTING CENTERLINE RUMBLE STRIP SHOULD BE REMOVED WITH A 2" MILL AND INLAY OF 2" TYPE C ACP FOR A MINIMUM WIDTH OF 2-FT FROM APPROXIMATELY STATION 16+47 TO STAY 32+40.
  3. EXISTING PAVEMENT MARKINGS WILL NEED TO BE SKIM MILLED BEFORE PLACEMENT OF THE FINAL ONE COURSE SURFACE TREATMENT. WORK ZONE TEMPORARY PAVEMENT MARKINGS CAN BE PLACED AFTER PAVEMENT INSTALLATION AND NEW PAVEMENT MARKING PLACEMENT.
  4. CONTRACTOR TO MAINTAIN EXISTING CENTERLINE AND CROWN/CROSS SLOPES WITH ALL IMPROVEMENTS.
  5. SEE SHEET T30-T31 FOR TXDOT STANDARD SIGN AND OBJECT MARKER DETAIL SHEETS.

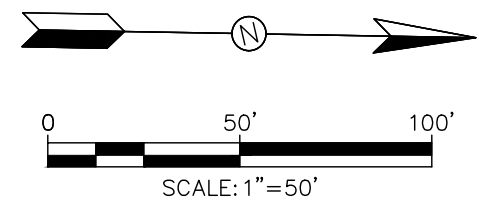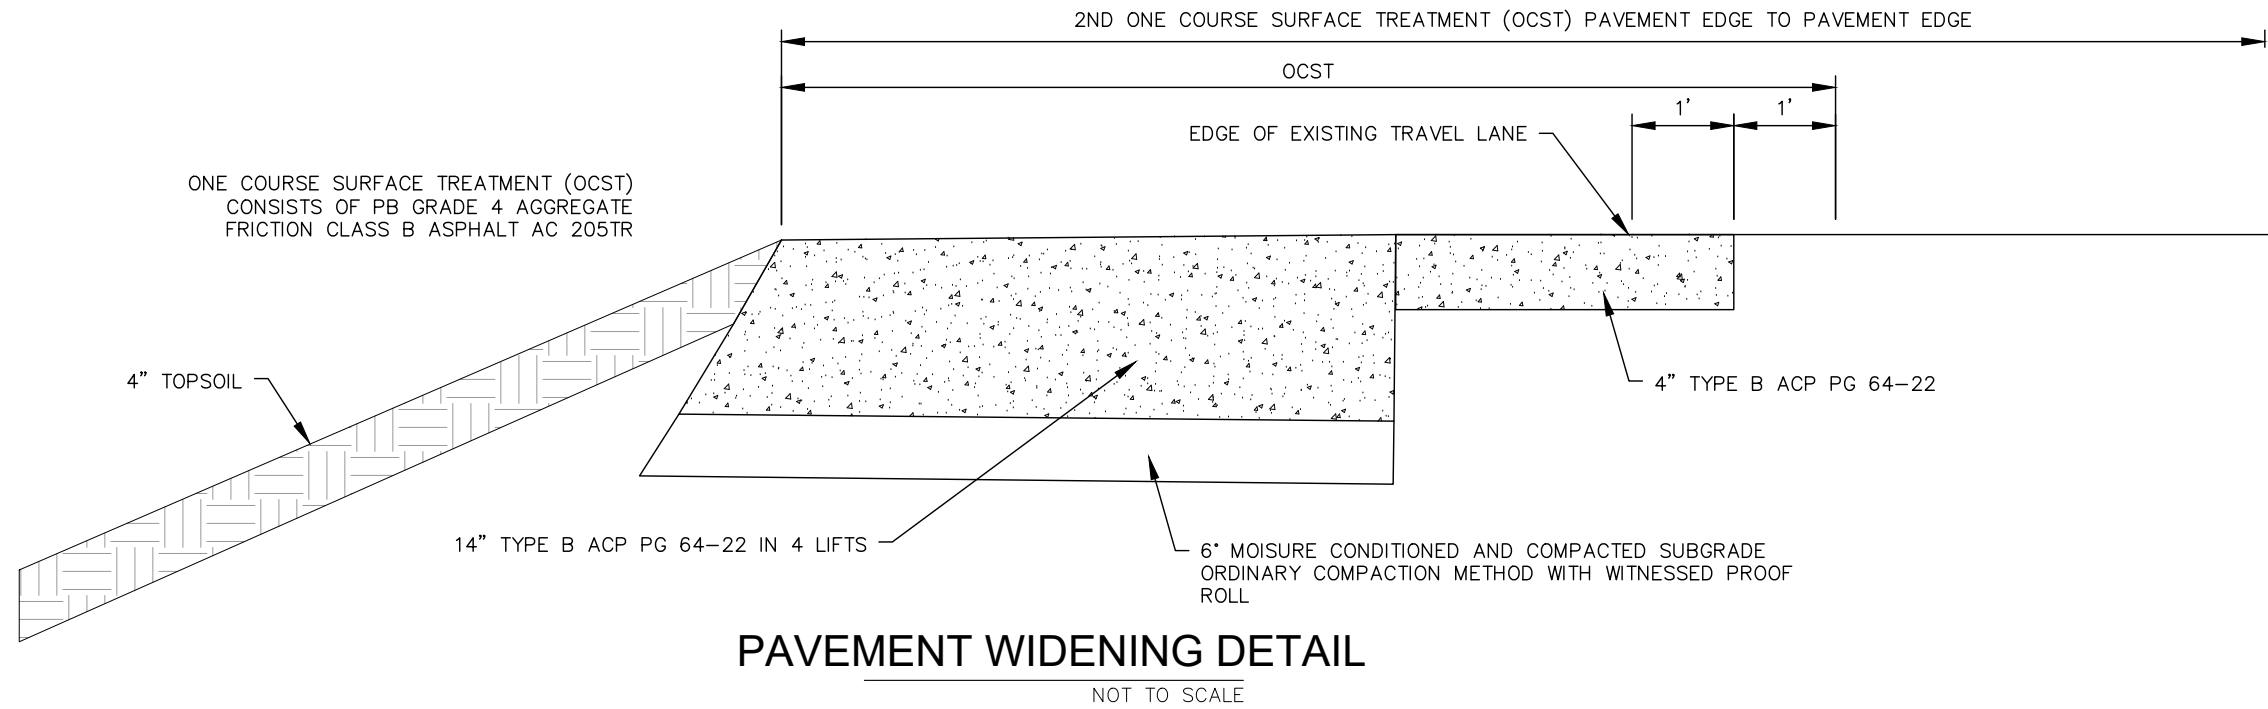

LEGEND

BEGIN PAVEMENT AND REMOVE EXISTING STRIPING (SEE NOTES THIS PAGE)

FM 758 (80' ROW)

STA = 10+00.00  
BEGIN PAVEMENT

EXISTING EDGE OF PAVEMENT

EXISTING STRIPING

STATE HIGHWAY 123 (120' ROW)

TXDOT PROJECT SUPERPAVE SCOPE

JARO NORTH SUPERPAVE SCOPE

MATCHLINE STA. 25+00  
THIS SHEET

KOEBIG RD (50' ROW)

PANTHER RIDGE (60' ROW)


EXISTING EDGE OF PAVEMENT

EXISTING STRIPING

STATE HIGHWAY 123 (120' ROW)

EXISTING EDGE OF PAVEMENT

MATCHLINE STA. 37+00  
THIS SHEET

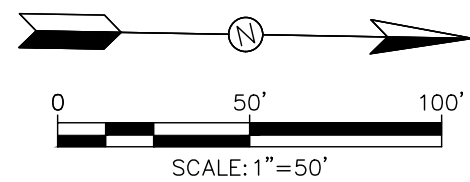

NB DEAN, LLC  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

JARO NORTH SUBDIVISION

SH 123 EXISTING STRIPING  
REMOVAL PLAN

SHEET

T8 OF T35

NO DATE ISSUES AND REVISIONS

9/6/2022 UPDATED PER TXDOT COMMENTS

INK  
CIVIL

2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351




NOTES:

- SEE SHEETS T28-T29 FOR TXDOT STANDARD PAVEMENT MARKING DETAIL SHEETS.
- SEE SHEETS T30-T31 FOR TXDOT STANDARD SIGN AND OBJECT MARKER DETAIL SHEETS.
- THE EXISTING SH 123 CENTERLINE STRIPING WILL BE THE ALIGNMENT LINE AND CONTROL FOR STRIPING LAYOUT. CONTRACTOR IS REQUIRED TO PROVIDE OFFSET STAKING TO ENSURE RECOVER OF THE EXISTING CENTERLINE AFTER SH 123 IS REPAVED.



STRIPING PLAN KEYNOTES	
ITEM	DESCRIPTION
A	REFL PAV MRK TY I (W) (ARROW)
B	REFL PAV MRK TY I (W) (WORD)
C	REFL PAV MRK TY I (W) 4" (SLD)
D	REFL PAV MRK TY I (W) 8" (SLD) W/ REFL PAV MRKR TY 1-C SPACED @ 20' O.C.
E	REFL PAV MRK TY I (W) 24" (SLD)
F	RE PM W/RET REQ TY 1 (Y) 4" (SLD)
G	RE PM W/RET REQ TY 1 (Y) 4" (SLD) DOUBLE YELLOW WITH REFL PAV MRKR TY II-A-A SPACED @ 20' O.C.
H	RE PM W/RET REQ TY 1 (Y) 4" (BRK) WITH REFL PAV MRKR TY II-A-A SPACED AT 40' O.C.
I	REFL PAV MRK TY I (Y) (MED NOSE) WITH REFL PAV MRK TY II-A-A SPACED AT 2' O.C.

\*NOTE: ALL PAVEMENT STRIPING TO BE 100ML THICKNESS.

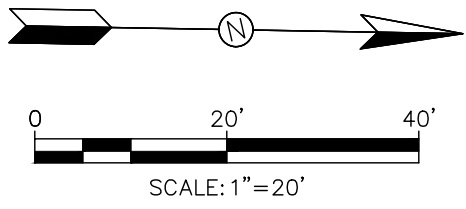

LEGEND

ALUMINUM SIGNS (TYPE A)

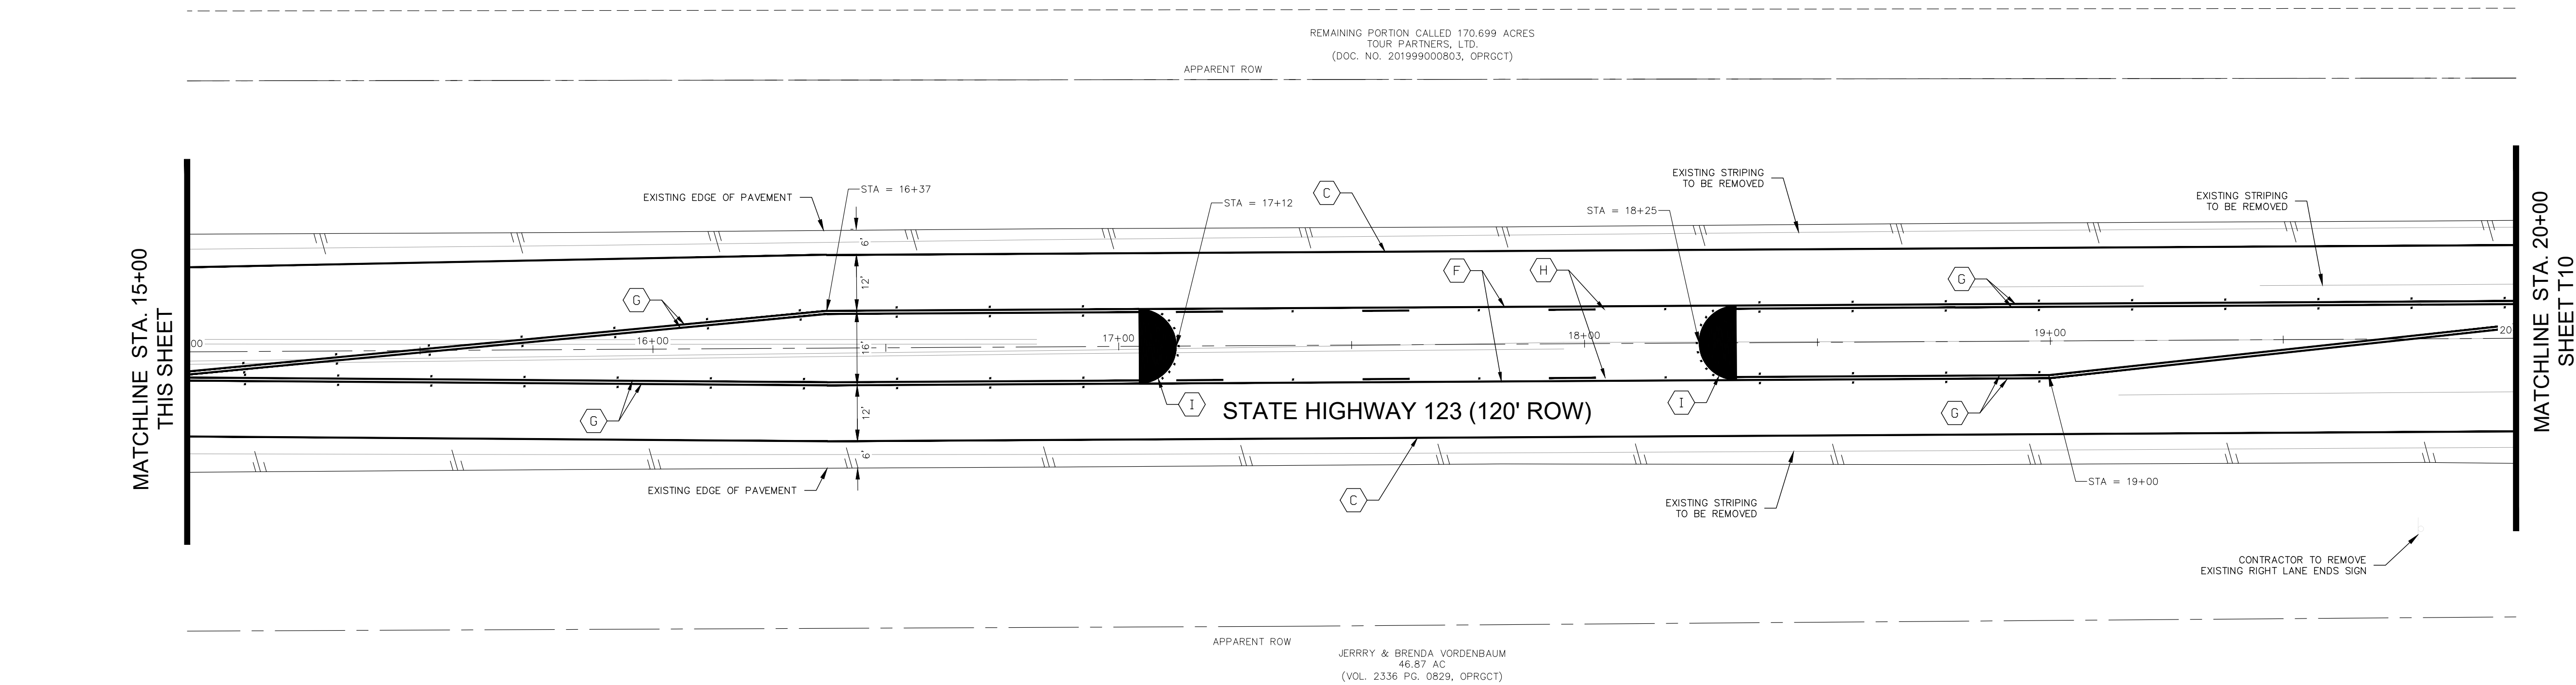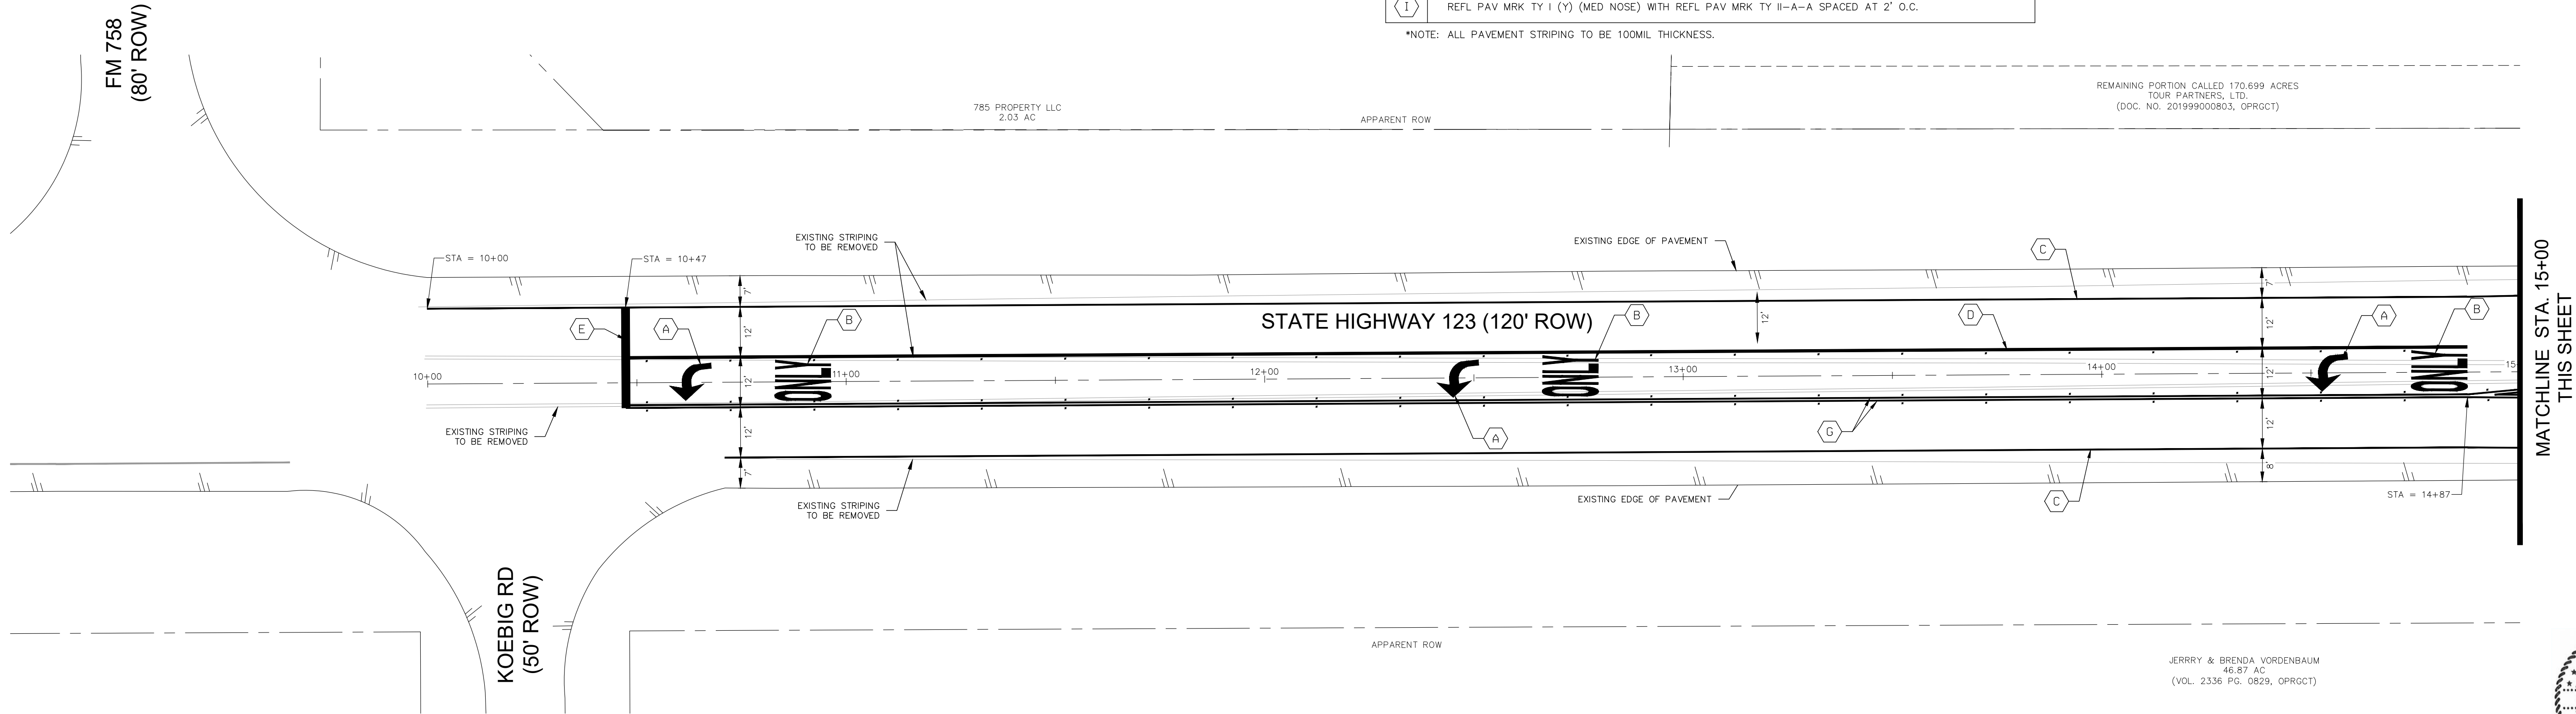

NB DEAN, LLC  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

JARO NORTH SUBDIVISION

SH 123 PAVEMENT MARKING &  
SIGNAGE PLANS STA 10+00 TO 20+00

SHEET  
T9 OF T35

NO	DATE	ISSUES AND REVISIONS
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		

**INK**  
CIVIL

2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351




NOTES:

1. SEE SHEETS T28-T29 FOR TXDOT STANDARD PAVEMENT MARKING DETAIL SHEETS.
2. SEE SHEETS T30-T31 FOR TXDOT STANDARD SIGN AND OBJECT MARKER DETAIL SHEETS.
3. THE EXISTING SH 123 CENTERLINE STRIPING WILL BE THE ALIGNMENT LINE AND CONTROL FOR STRIPING LAYOUT. CONTRACTOR IS REQUIRED TO PROVIDE OFFSET STAKING TO ENSURE RECOVER OF THE EXISTING CENTERLINE AFTER SH 123 IS REPAVED.

STRIPING PLAN KEYNOTES



ITEM	DESCRIPTION
A	REFL PAV MRK TY I (W) (ARROW)
B	REFL PAV MRK TY I (W) (WORD)
C	REFL PAV MRK TY I (W) 4" (SLD)
D	REFL PAV MRK TY I (W) 8" (SLD) W/ REFL PAV MRKR TY 1-C SPACED @ 20' O.C.
E	REFL PAV MRK TY I (W) 24" (SLD)
F	RE PM W/RET REQ TY 1 (Y) 4" (SLD)
G	RE PM W/RET REQ TY 1 (Y) 4" (SLD) DOUBLE YELLOW WITH REFL PAV MRKR TY II-A-A SPACED @ 20' O.C.
H	RE PM W/RET REQ TY 1 (Y) 4" (BRK) WITH REFL PAV MRKR TY II-A-A SPACED AT 40' O.C.
I	REFL PAV MRK TY I (Y) (MED NOSE) WITH REFL PAV MRK TY II-A-A SPACED AT 2' O.C.

\*NOTE: ALL PAVEMENT STRIPING TO BE 100MIL THICKNESS.

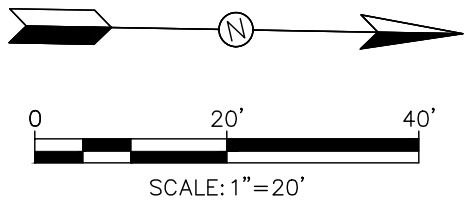

LEGEND

ALUMINUM SIGNS (TYPE A)

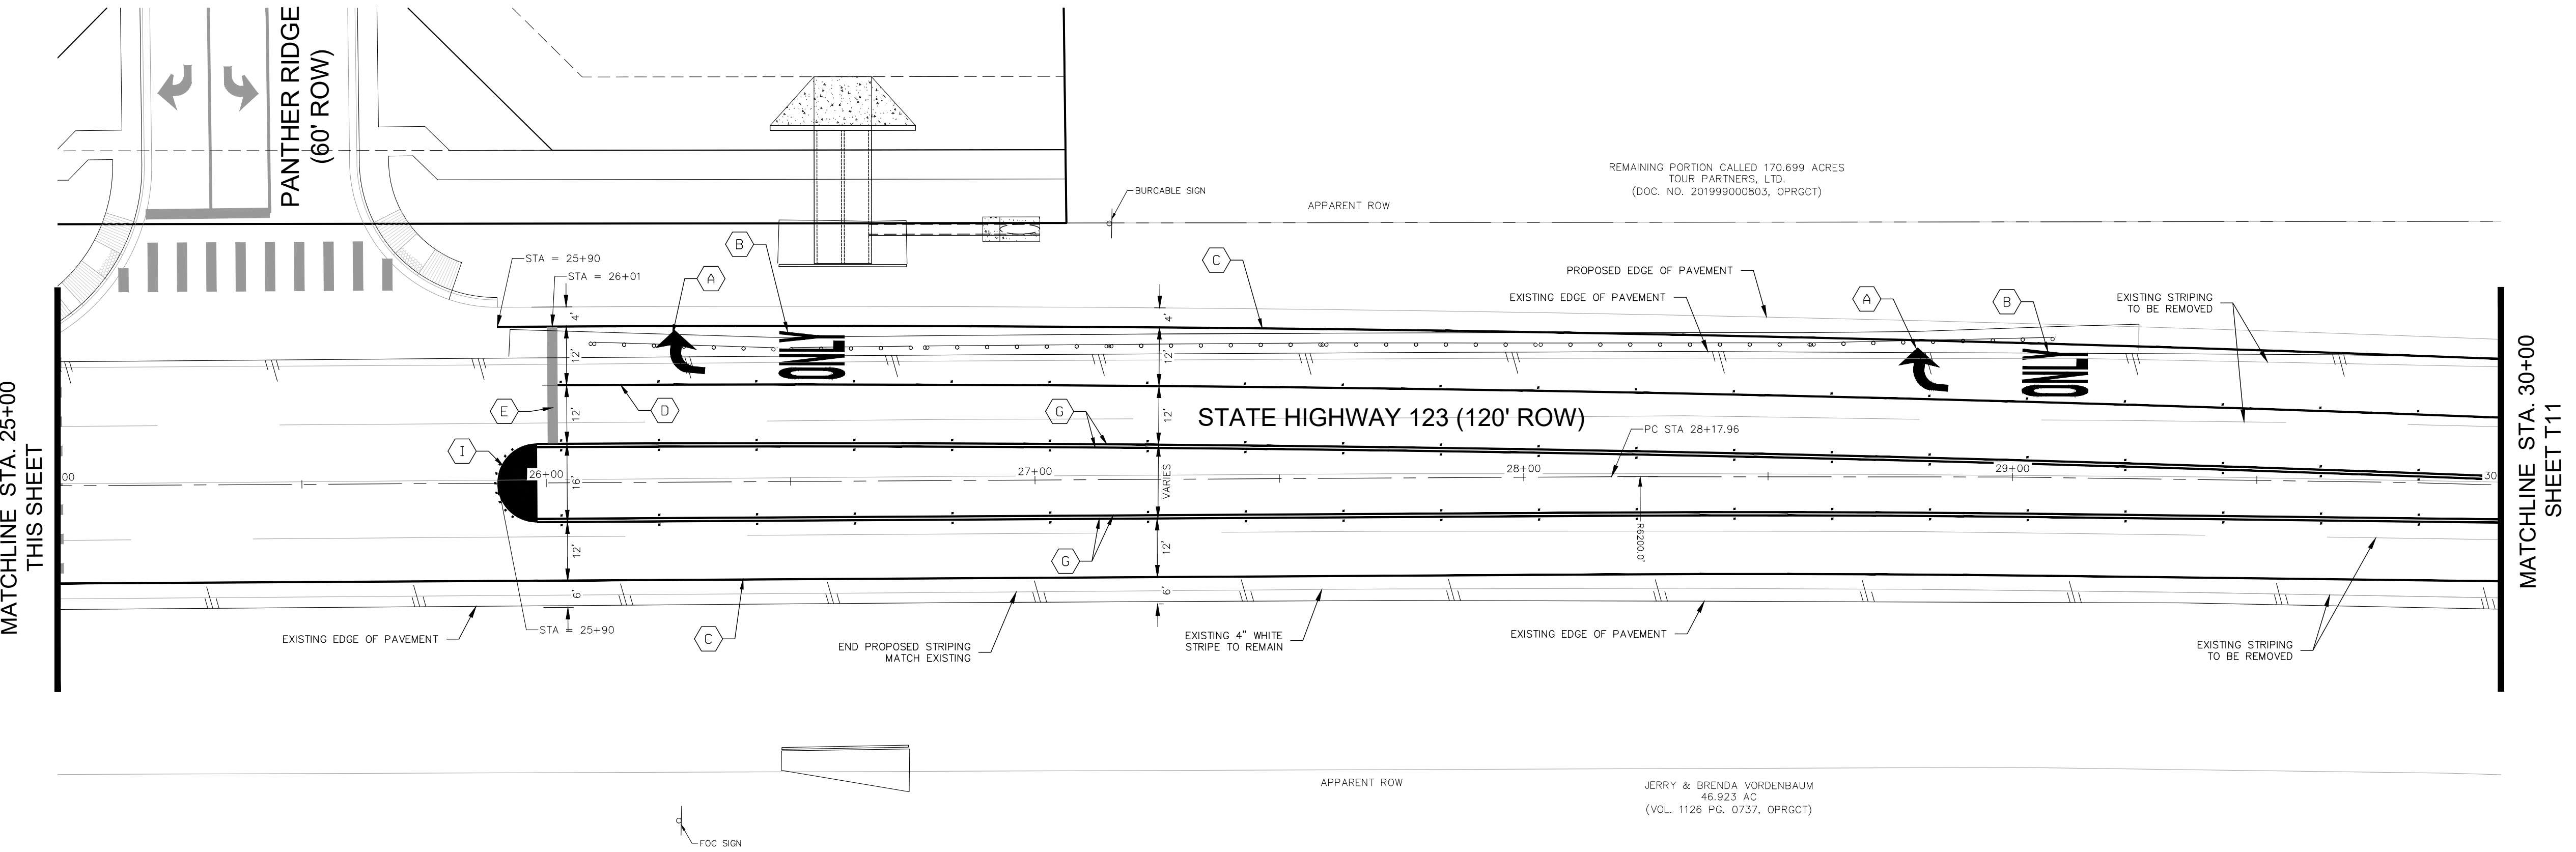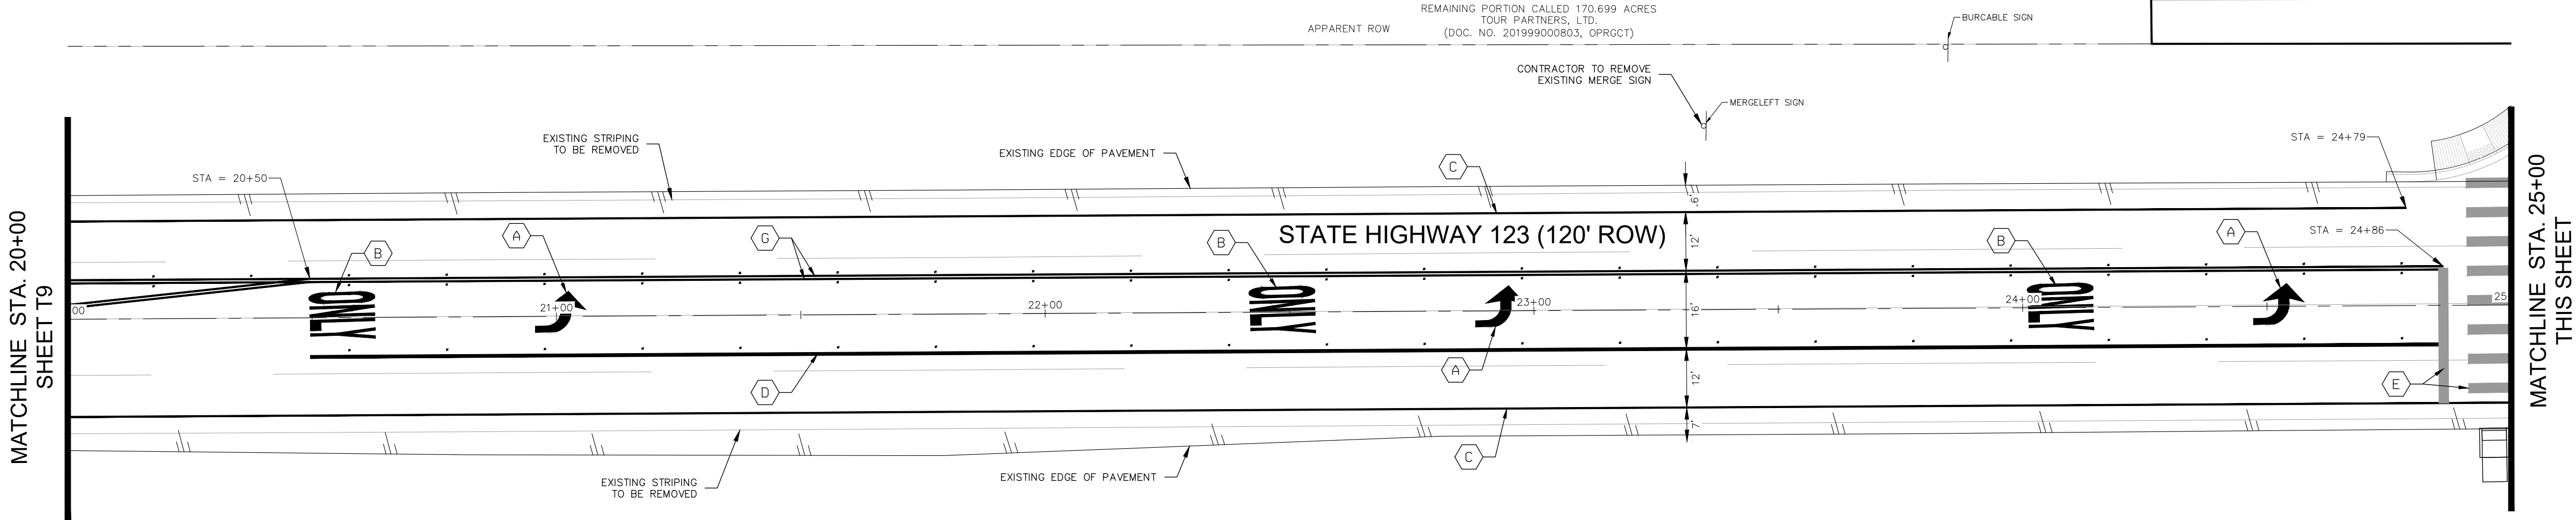

NB DEAN, LLC  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

JARO NORTH SUBDIVISION

SH 123 PAVEMENT MARKING &  
SIGNAGE PLANS STA 20+00 TO 30+00

SHEET

T10 OF T35

NO	DATE	ISSUES AND REVISIONS
1		

**INK**  
CIVIL

2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351




NOTES:

- SEE SHEETS T28-T29 FOR TXDOT STANDARD PAVEMENT MARKING DETAIL SHEETS.
- SEE SHEETS T30-T31 FOR TXDOT STANDARD SIGN AND OBJECT MARKER DETAIL SHEETS.
- THE EXISTING SH 123 CENTERLINE STRIPING WILL BE THE ALIGNMENT LINE AND CONTROL FOR STRIPING LAYOUT. CONTRACTOR IS REQUIRED TO PROVIDE OFFSET STAKING TO ENSURE RECOVER OF THE EXISTING CENTERLINE AFTER SH 123 IS REPAVED.


STRIPING PLAN KEYNOTES	
ITEM	DESCRIPTION
A	REFL PAV MRK TY I (W) (ARROW)
B	REFL PAV MRK TY I (W) (WORD)
C	REFL PAV MRK TY I (W) 4" (SLD)
D	REFL PAV MRK TY I (W) 8" (SLD) W/ REFL PAV MRKR TY 1-C SPACED @ 20' O.C.
E	REFL PAV MRK TY I (W) 24" (SLD)
F	RE PM W/RET REQ TY 1 (Y) 4" (SLD)
G	RE PM W/RET REQ TY 1 (Y) 4" (SLD) DOUBLE YELLOW WITH REFL PAV MRKR TY II-A-A SPACED @ 20' O.C.
H	RE PM W/RET REQ TY 1 (Y) 4" (BRK) WITH REFL PAV MRKR TY II-A-A SPACED AT 40' O.C.
I	REFL PAV MRK TY I (Y) (MED NOSE) WITH REFL PAV MRK TY II-A-A SPACED AT 2' O.C.

\*NOTE: ALL PAVEMENT STRIPING TO BE 100ML THICKNESS.

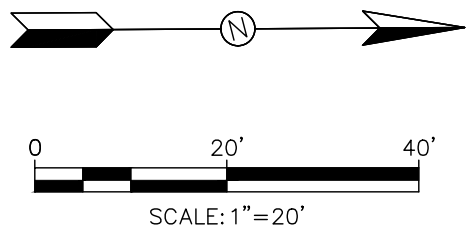



LEGEND

ALUMINUM SIGNS (TYPE A)

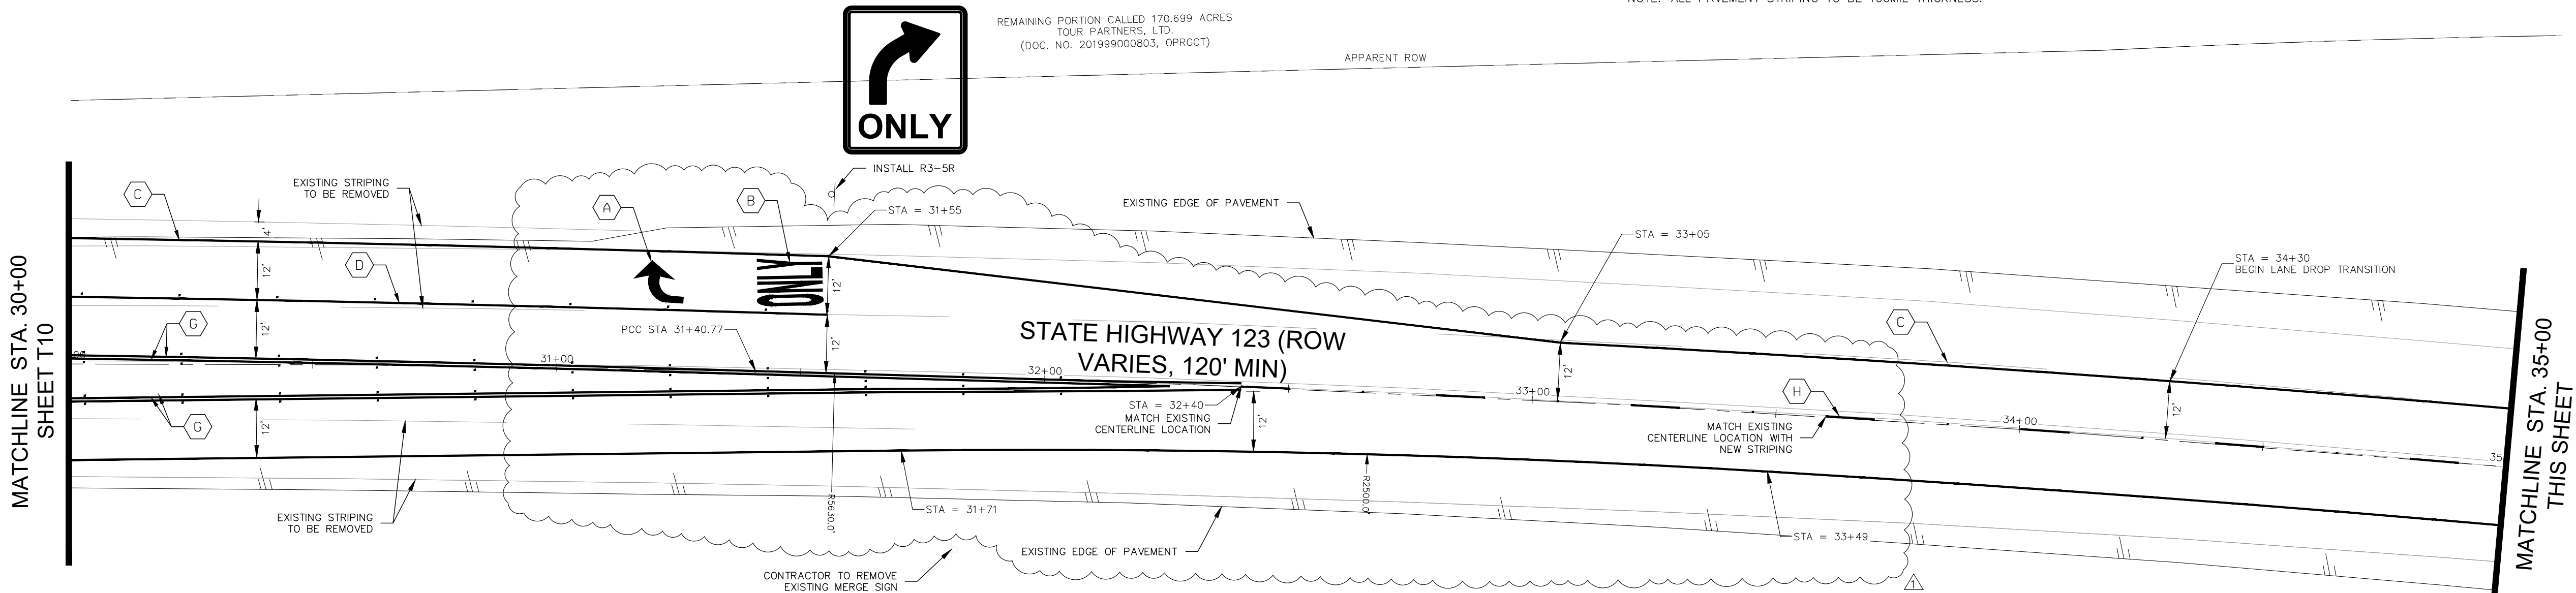

JERRY & BRENDA VORDENBAUM  
254.935 AC  
(VOL. 975 PG. 313, OPRGCT)

REMAINING PORTION CALLED 170.699 ACRES  
TOUR PARTNERS, LTD.  
(DOC. NO. 201999000803, OPRGCT)

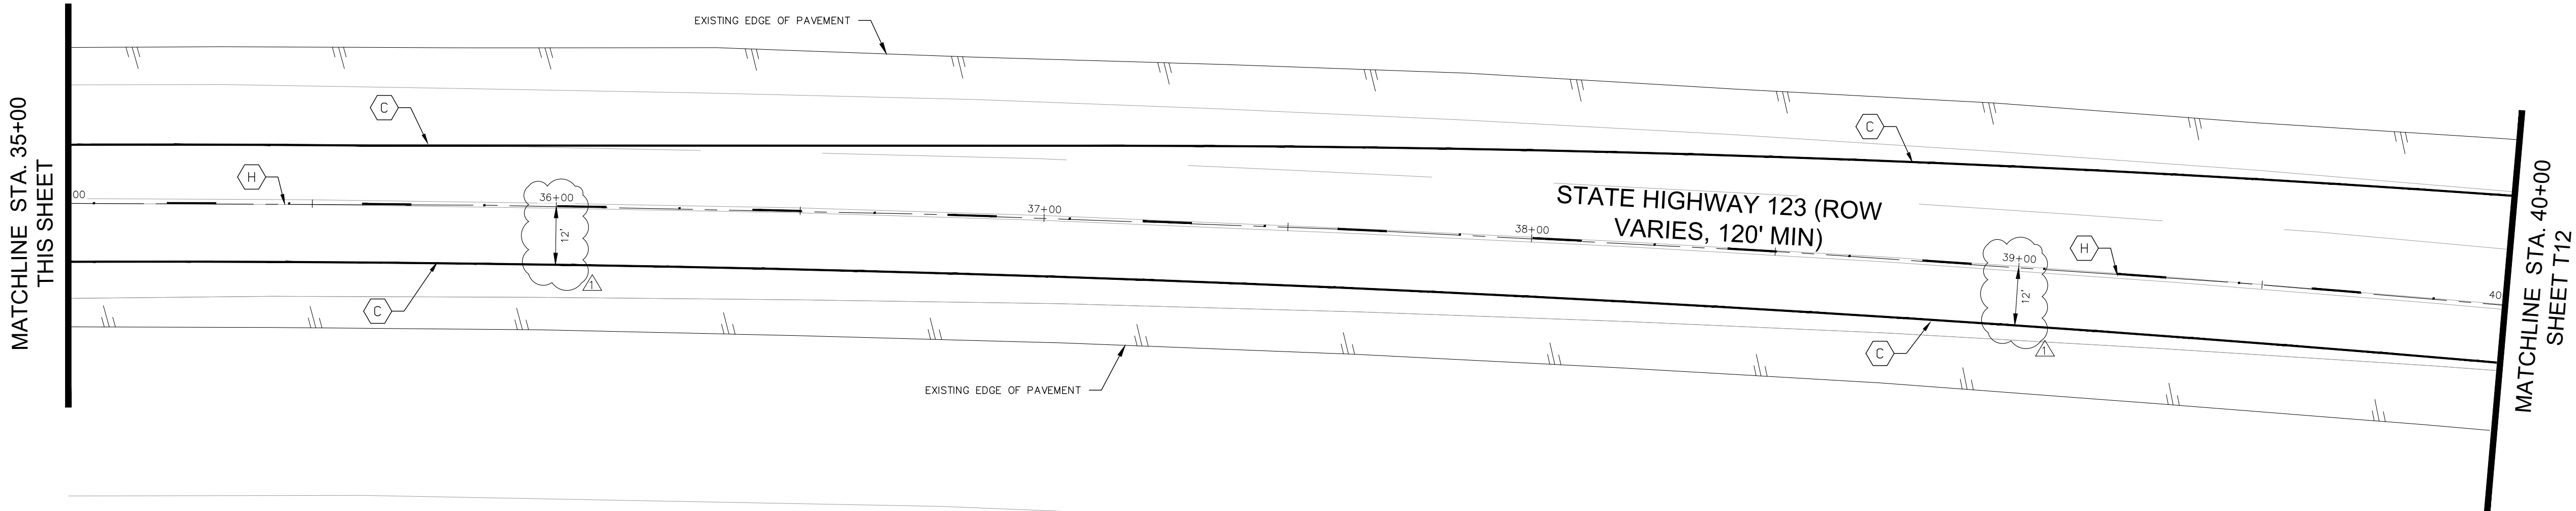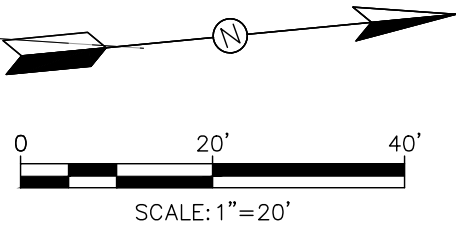

JERRY & BRENDA VORDENBAUM  
254.935 AC  
(VOL. 975 PG. 313, OPRGCT)



NB DEAN, LLC  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

JARO NORTH SUBDIVISION

SH 123 PAVEMENT MARKING &  
SIGNAGE PLANS STA 30+00 TO 40+00

SHEET  
T11 OF T35

NO	DATE	ISSUES AND REVISIONS
1	9/6/2022	UPDATED PER TXDOT COMMENTS

**INK**  
CIVIL


2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351



NOTES:


- SEE SHEETS T28-T29 FOR TXDOT STANDARD PAVEMENT MARKING DETAIL SHEETS.
- SEE SHEETS T30-T31 FOR TXDOT STANDARD SIGN AND OBJECT MARKER DETAIL SHEETS.
- THE EXISTING SH 123 CENTERLINE STRIPING WILL BE THE ALIGNMENT LINE AND CONTROL FOR STRIPING LAYOUT. CONTRACTOR IS REQUIRED TO PROVIDE OFFSET STAKING TO ENSURE RECOVER OF THE EXISTING CENTERLINE AFTER SH 123 IS REPAVED.

STRIPING PLAN KEYNOTES	
ITEM	DESCRIPTION
A	REFL PAV MRK TY I (W) (ARROW)
B	REFL PAV MRK TY I (W) (WORD)
C	REFL PAV MRK TY I (W) 4" (SLD)
D	REFL PAV MRK TY I (W) 8" (SLD) W/ REFL PAV MRKR TY 1-C SPACED @ 20' O.C.
E	REFL PAV MRK TY I (W) 24" (SLD)
F	RE PM W/RET REQ TY 1 (Y) 4" (SLD)
G	RE PM W/RET REQ TY 1 (Y) 4" (SLD) DOUBLE YELLOW WITH REFL PAV MRKR TY II-A-A SPACED @ 20' O.C.
H	RE PM W/RET REQ TY 1 (Y) 4" (BRK) WITH REFL PAV MRKR TY II-A-A SPACED AT 40' O.C.
I	REFL PAV MRK TY I (Y) (MED NOSE) WITH REFL PAV MRK TY II-A-A SPACED AT 2' O.C.
*NOTE: ALL PAVEMENT STRIPING TO BE 100ML THICKNESS.	

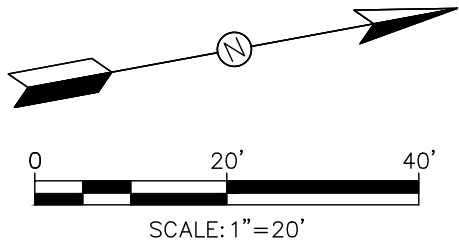


LEGEND

ALUMINUM SIGNS (TYPE A)

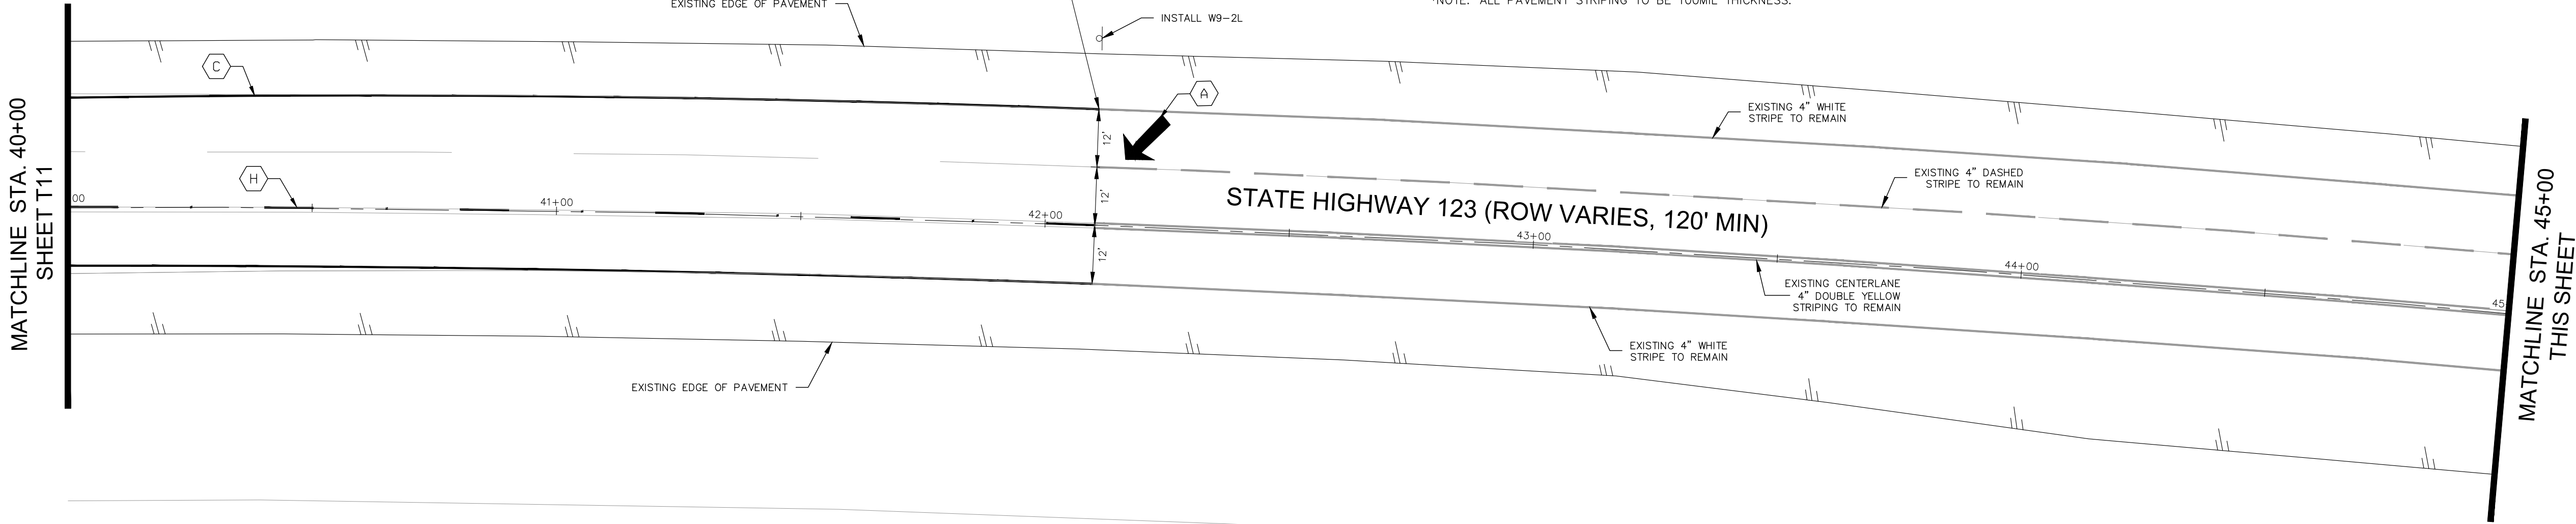

JERRY & BRENDA VORDENBAUM  
254.938 AC  
(VOL. 975 PG. 313, OPROCT)

BARRY & JOAN JAROSZEWSKI  
16.68 ACRES  
(DOC. 201999028006, OPROCT)

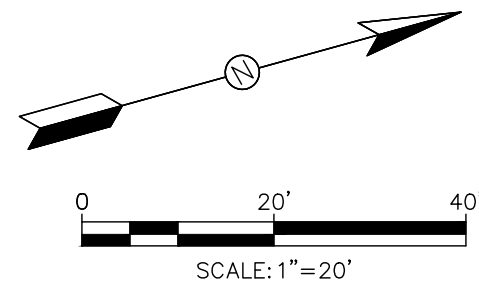

NB DEAN, LLC  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

JARO NORTH SUBDIVISION

SH 123 PAVEMENT MARKING &  
SIGNAGE PLANS STA 40+00 TO 50+00

SHEET  
T12 OF T35

NO	DATE	ISSUES AND REVISIONS
1		



2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351




NOTES:

- SEE SHEETS T28–T29 FOR TXDOT STANDARD PAVEMENT MARKING DETAIL SHEETS.
- SEE SHEETS T30–T31 FOR TXDOT STANDARD SIGN AND OBJECT MARKER DETAIL SHEETS.
- THE EXISTING SH 123 CENTERLINE STRIPING WILL BE THE ALIGNMENT LINE AND CONTROL FOR STRIPING LAYOUT. CONTRACTOR IS REQUIRED TO PROVIDE OFFSET STAKING TO ENSURE RECOVER OF THE EXISTING CENTERLINE AFTER SH 123 IS REPAVED.

STRIPING PLAN KEYNOTES	
ITEM	DESCRIPTION
A	REFL PAV MRK TY I (W) (ARROW)
B	REFL PAV MRK TY I (W) (WORD)
C	REFL PAV MRK TY I (W) 4" (SLD)
D	REFL PAV MRK TY I (W) 8" (SLD) W/ REFL PAV MRKR TY 1–C SPACED @ 20' O.C.
E	REFL PAV MRK TY I (W) 24" (SLD)
F	RE PM W/RET REQ TY I (Y) 4" (SLD)
G	RE PM W/RET REQ TY I (Y) 4" (SLD) DOUBLE YELLOW WITH REFL PAV MRKR TY II–A–A SPACED @ 20' O.C.
H	RE PM W/RET REQ TY I (Y) 4" (BRK) WITH REFL PAV MRKR TY II–A–A SPACED AT 40' O.C.
I	REFL PAV MRK TY I (Y) (MED NOSE) WITH REFL PAV MRK TY II–A–A SPACED AT 2' O.C.

\*NOTE: ALL PAVEMENT STRIPING TO BE 100ML THICKNESS.

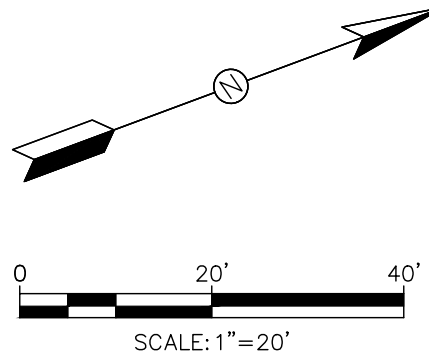

LEGEND

ALUMINUM SIGNS (TYPE A)



TOUR PARTNERS LTD  
83.21 ACRES  
(DOC. 201999000803,OPRGCT)

MATCHLINE STA. 50+00  
SHEET T12


MATCHLINE STA. 55+00  
THIS SHEET

INSTALL W9–1R  
STA = 51+04  
PT STA 51+00.75

STATE HIGHWAY 123 (120' ROW)

JERRY & BRENDA VORDENBAUM  
254.938 AC  
(VOL. 975 PG. 313, OPRGCT)

TOUR PARTNERS LTD  
83.21 ACRES  
(DOC. 201999000803,OPRGCT)

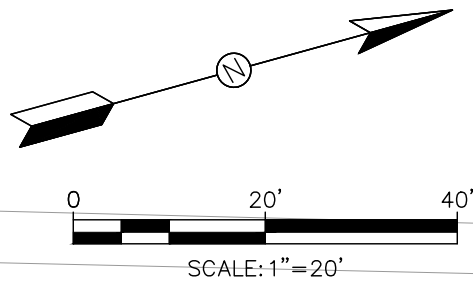

NB DEAN, LLC  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

JARO NORTH SUBDIVISION

SH 123 PAVEMENT MARKING &  
SIGNAGE PLANS STA 50+00 TO END

SHEET  
T13 OF T35

NO	DATE	ISSUES AND REVISIONS
1		

INK  
CIVIL



2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830–358–7127 ink–civil.com  
TBPE FIRM F–13351

MATCHLINE STA. 55+00  
THIS SHEET









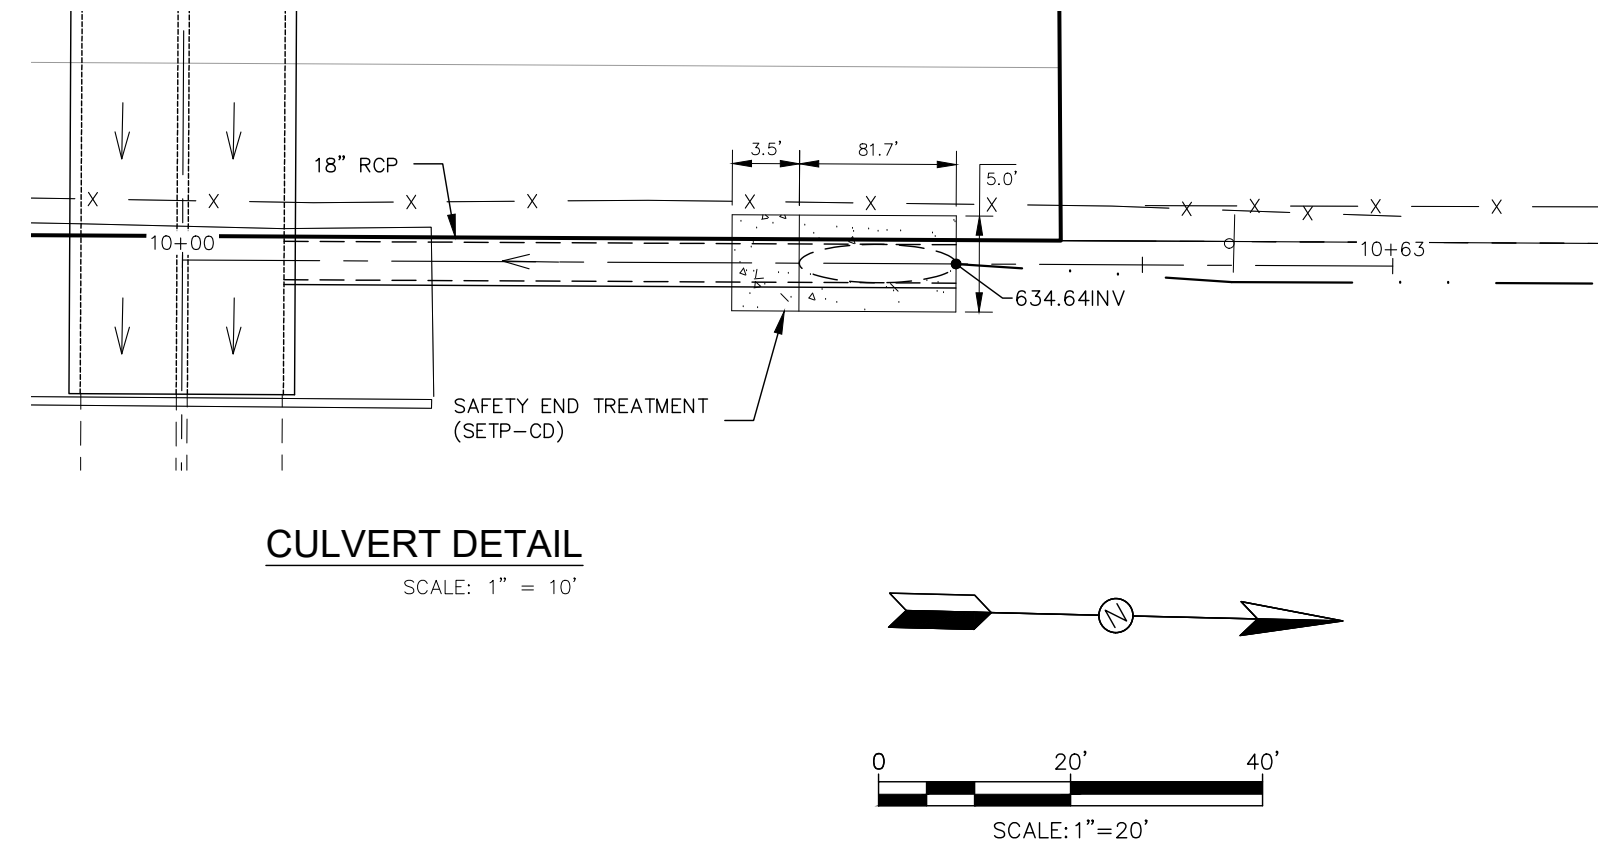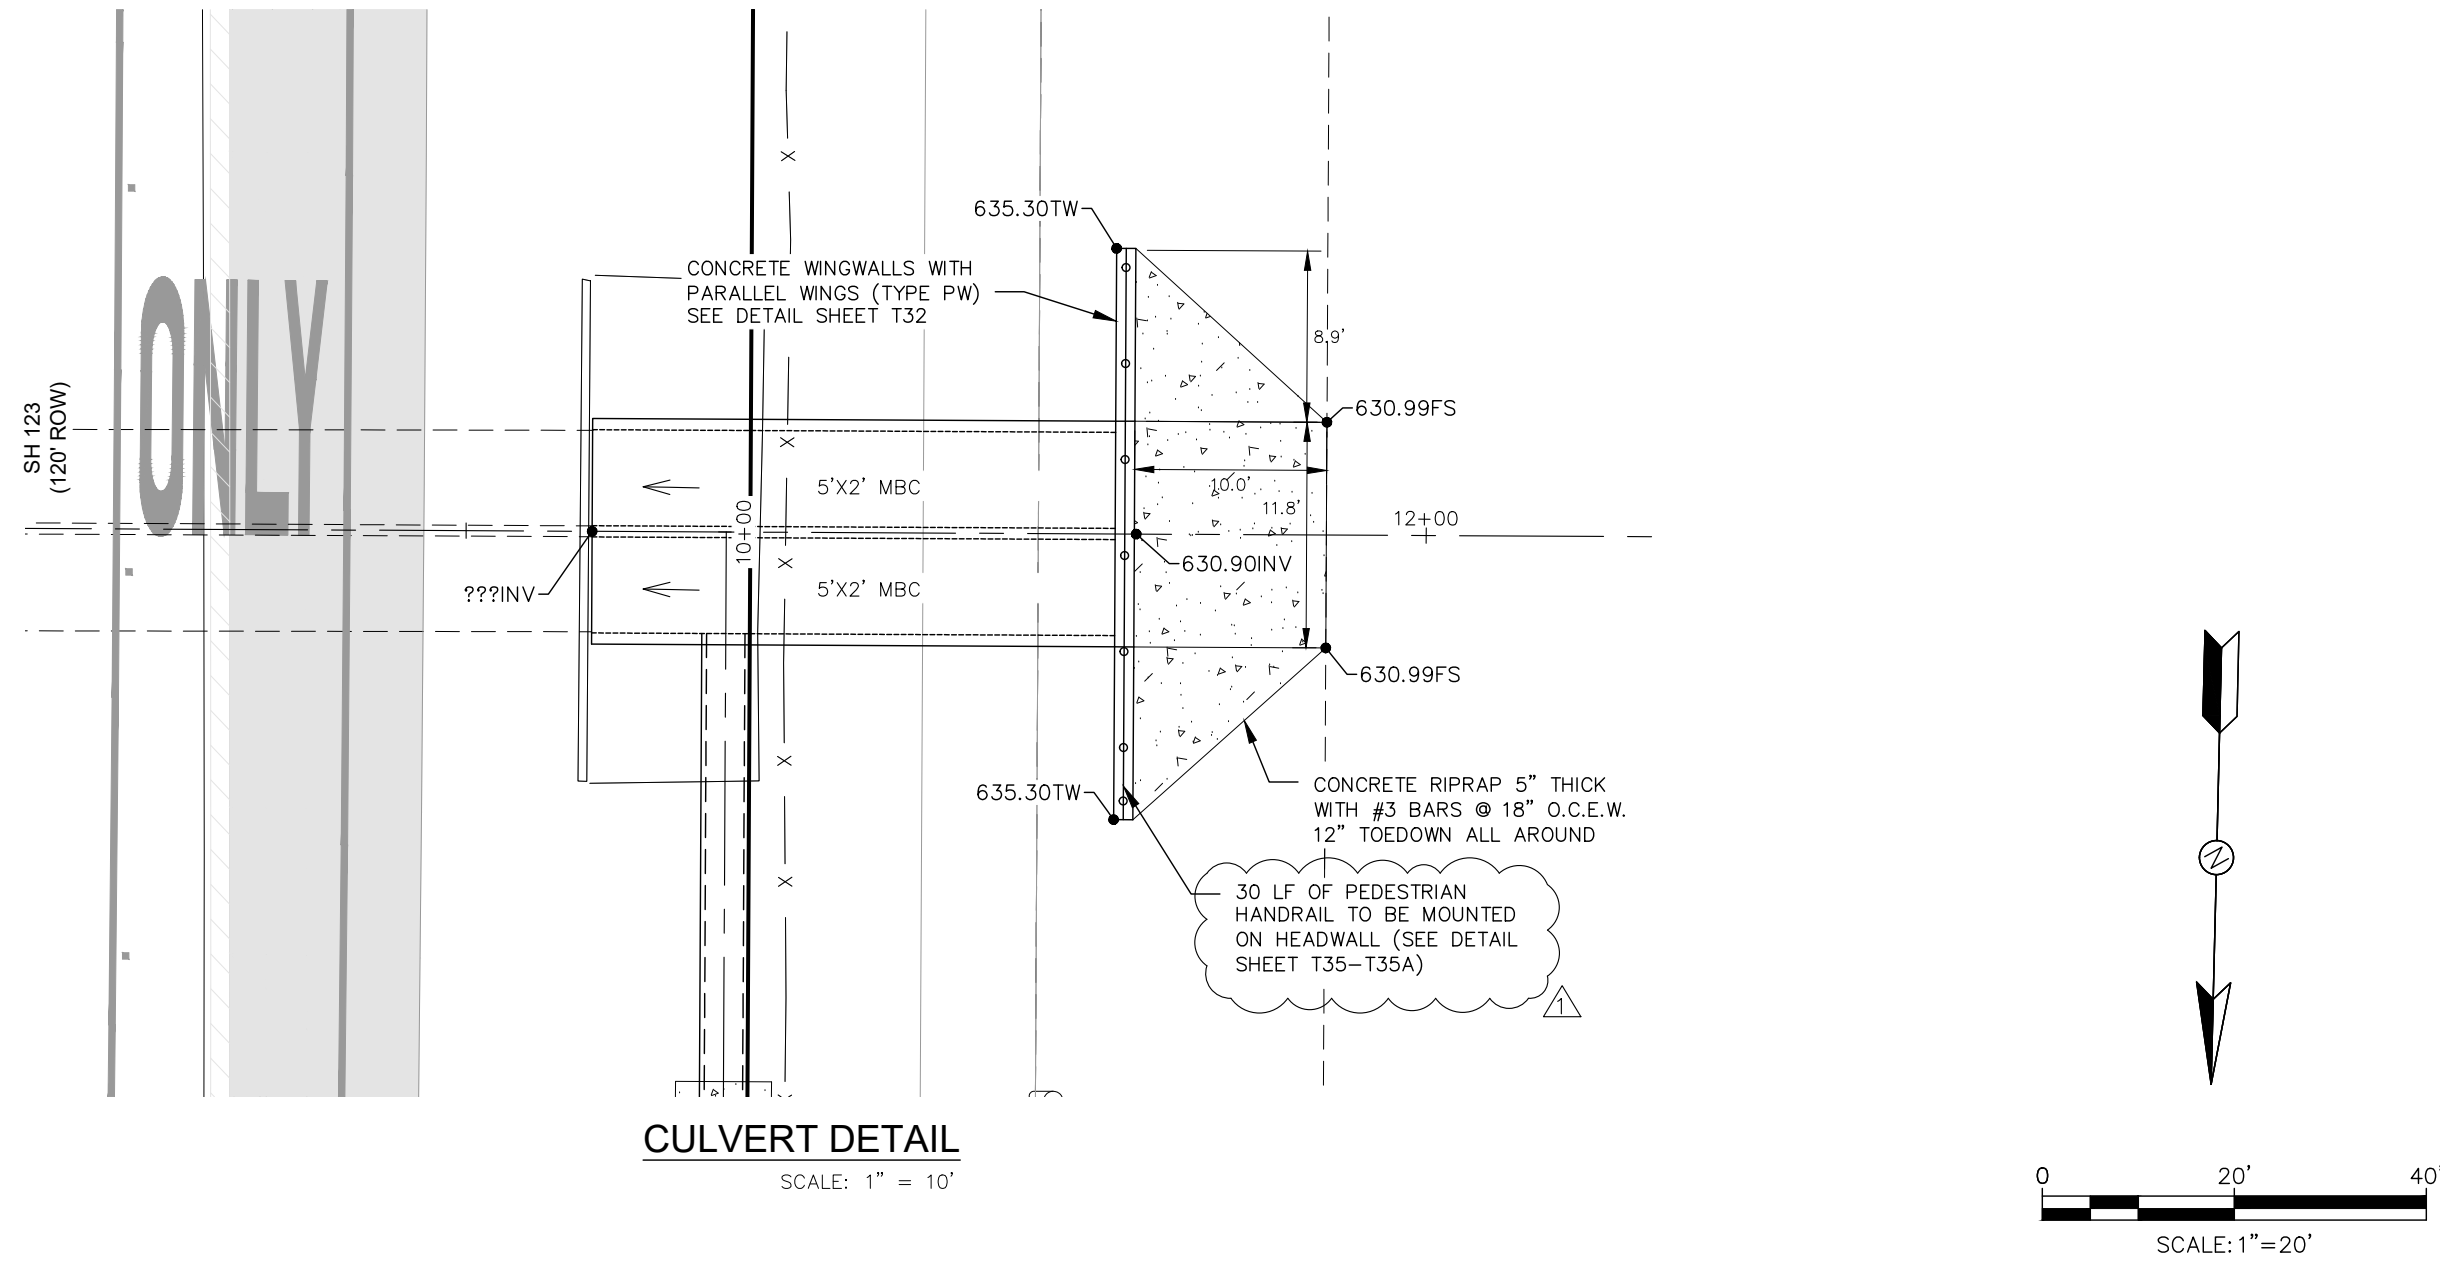

- LEGEND**
- 900 — PROPOSED CONTOUR
  - - - 900 - - - EXISTING CONTOUR
  - ← DRAINAGE FLOW ARROW
  - . . - . . - GRADE BREAK/SWALE
  - NEW PAVEMENT
  - SAWCUT PAVEMENT

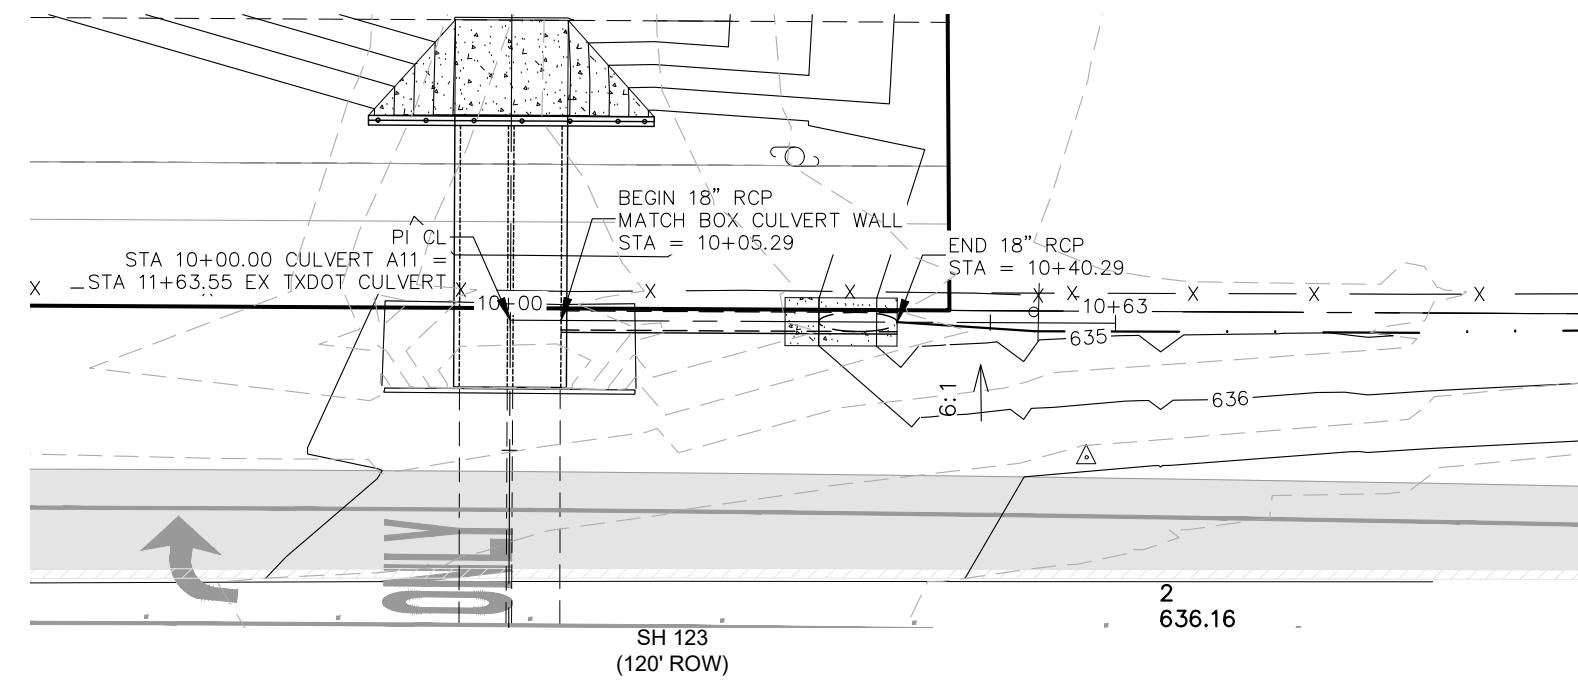
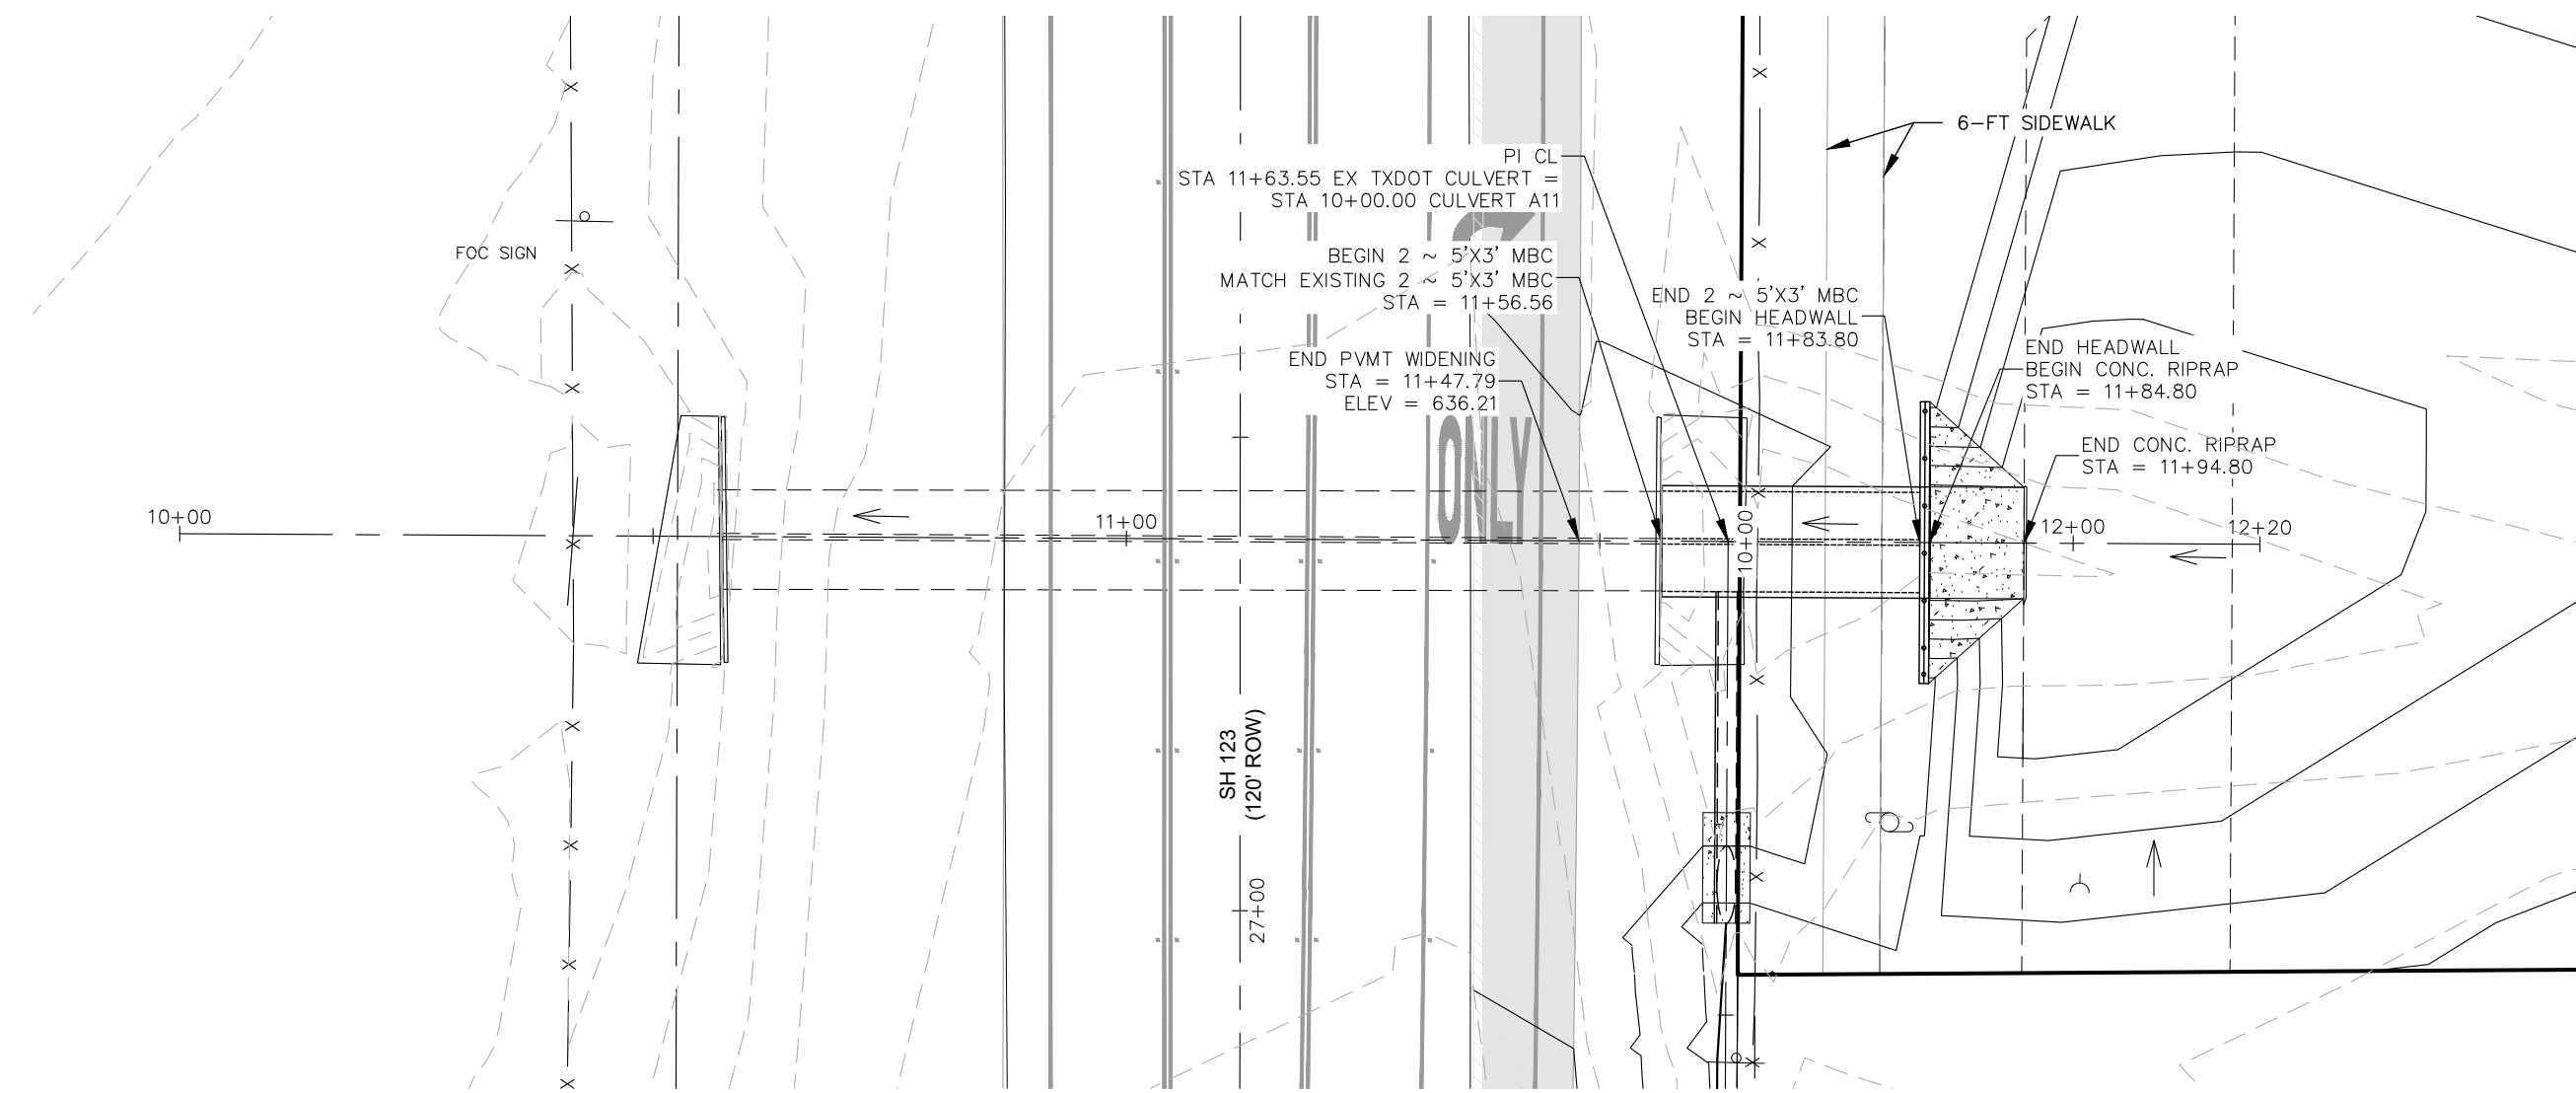


EXISTING TXDOT CULVERT PROFILE

SCALE:  
HORIZONTAL 1" = 20'  
VERTICAL 1" = 5'

CULVERT A11 PROFILE

SCALE:  
HORIZONTAL 1" = 20'  
VERTICAL 1" = 5'

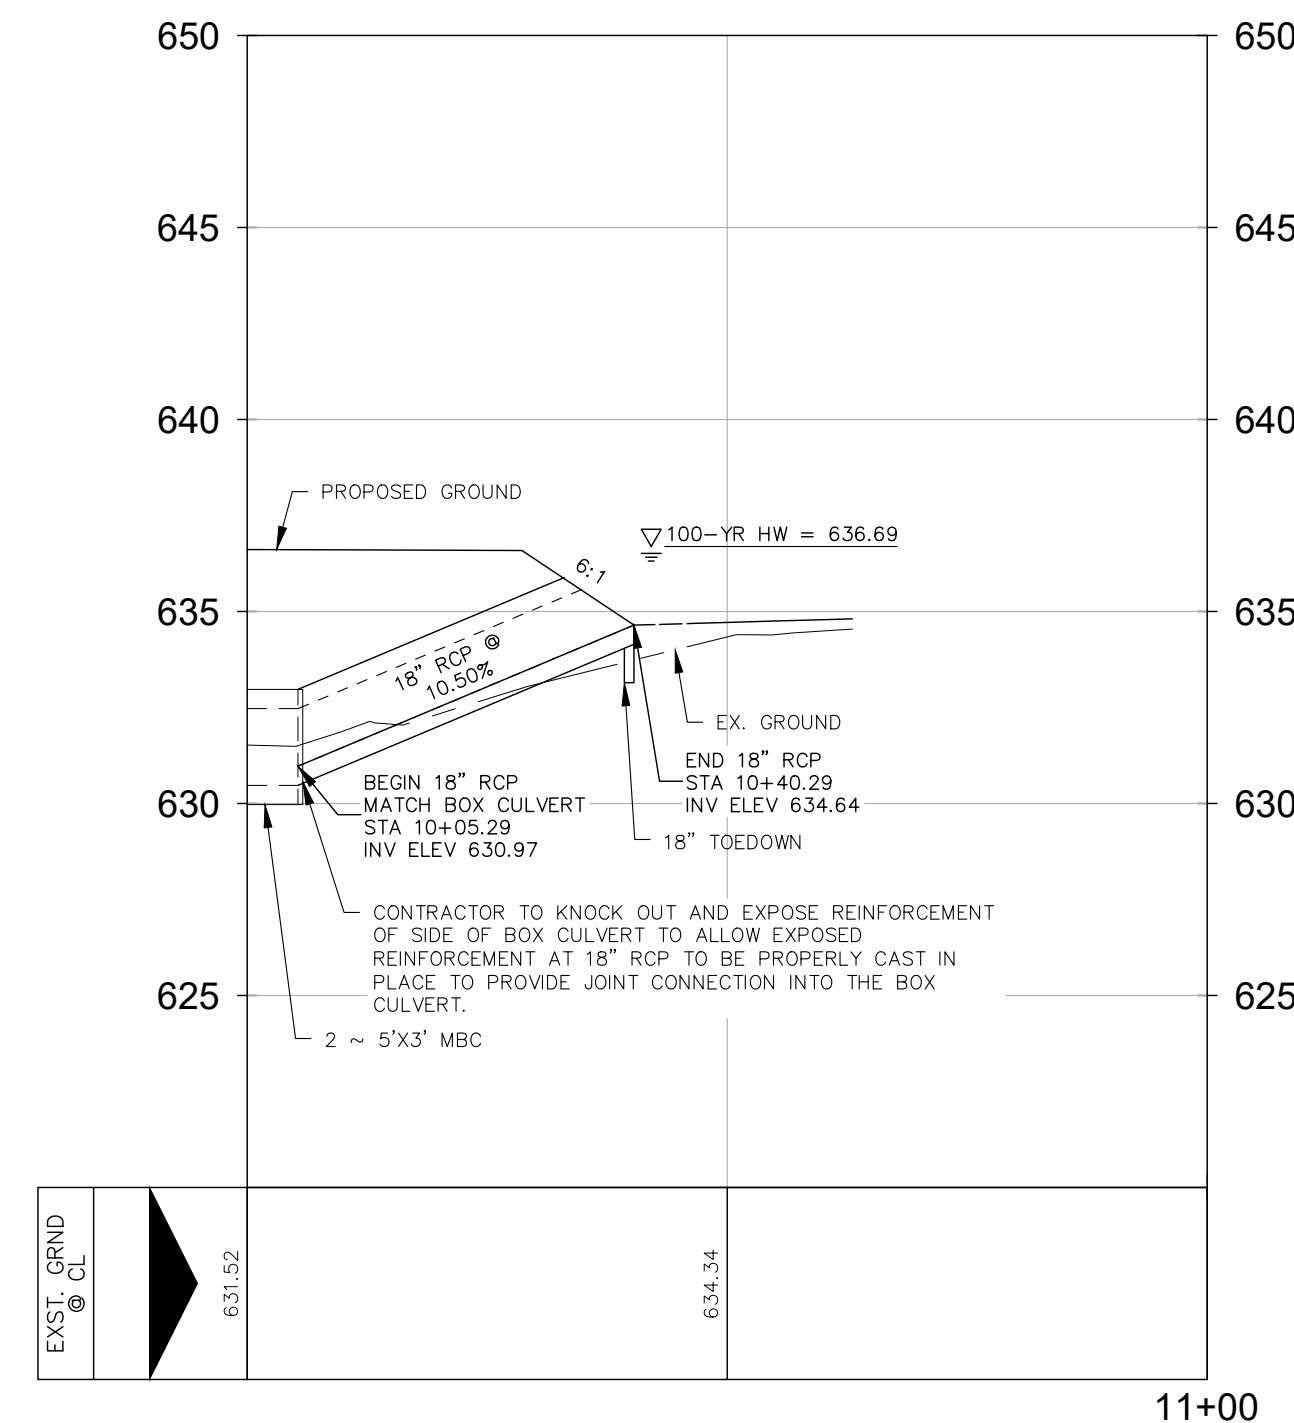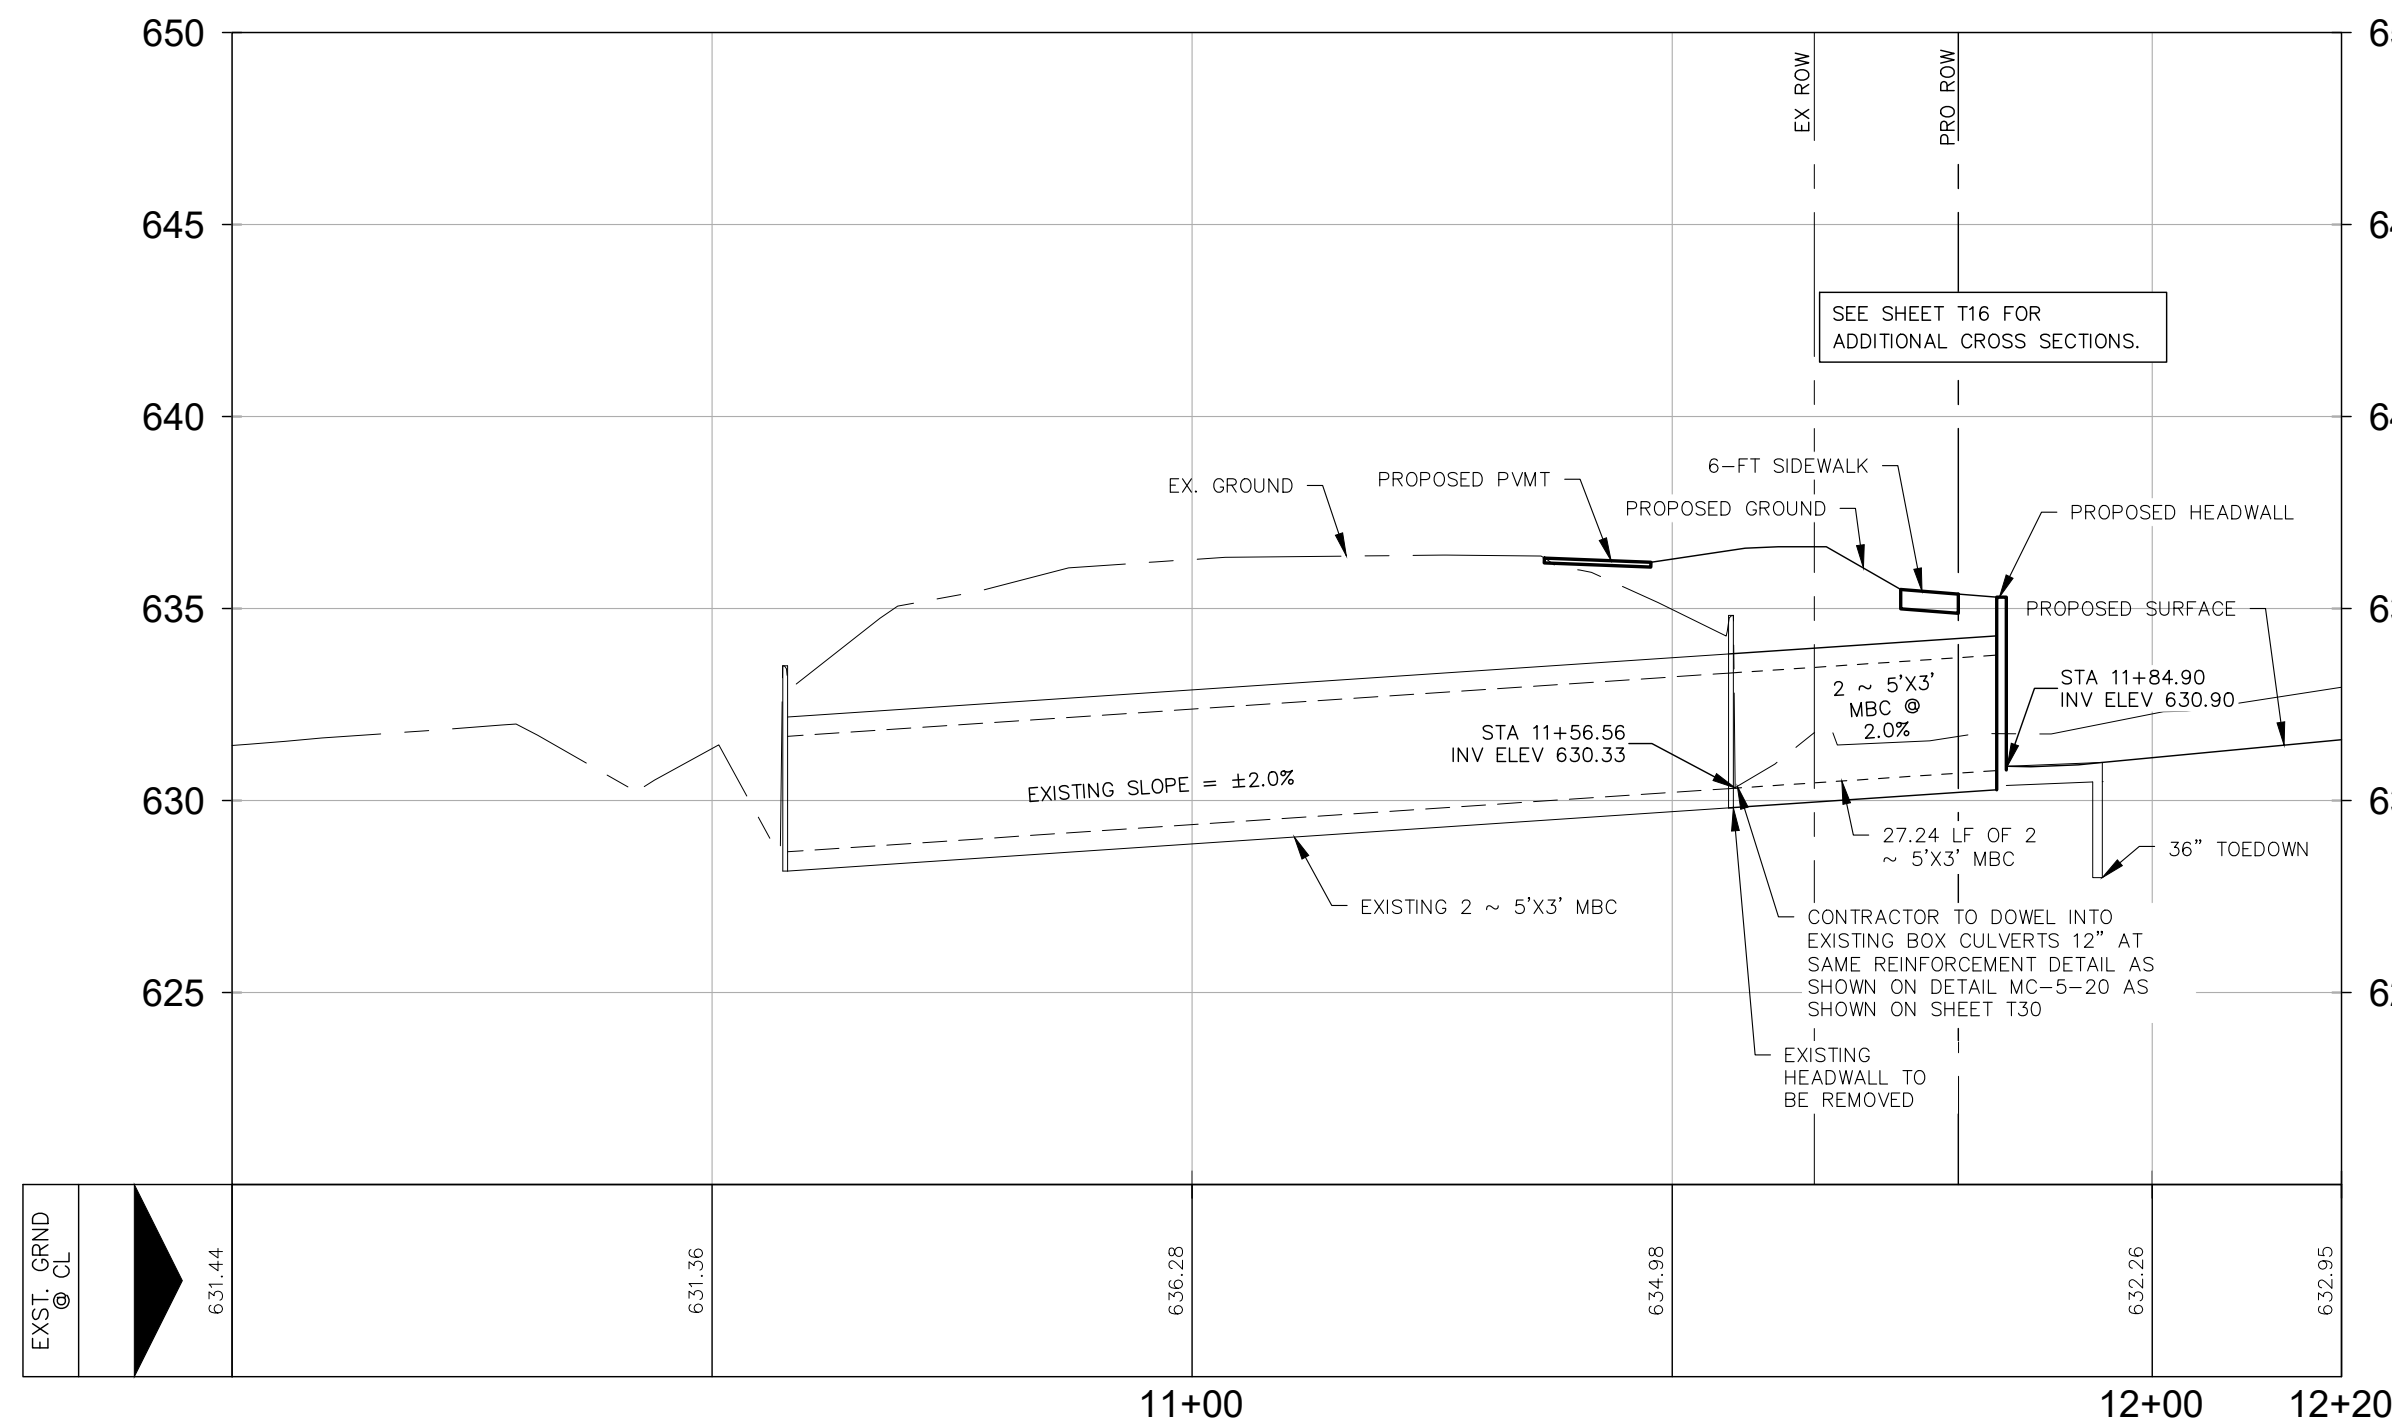

**NB DEAN, LLC**  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

**JARO NORTH SUBDIVISION**

**TXDOT CULVERTS**

**SHEET T15 OF T35**


**NO DATE ISSUES AND REVISIONS**

9/6/2022 UPDATED PER TXDOT COMMENTS





2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351



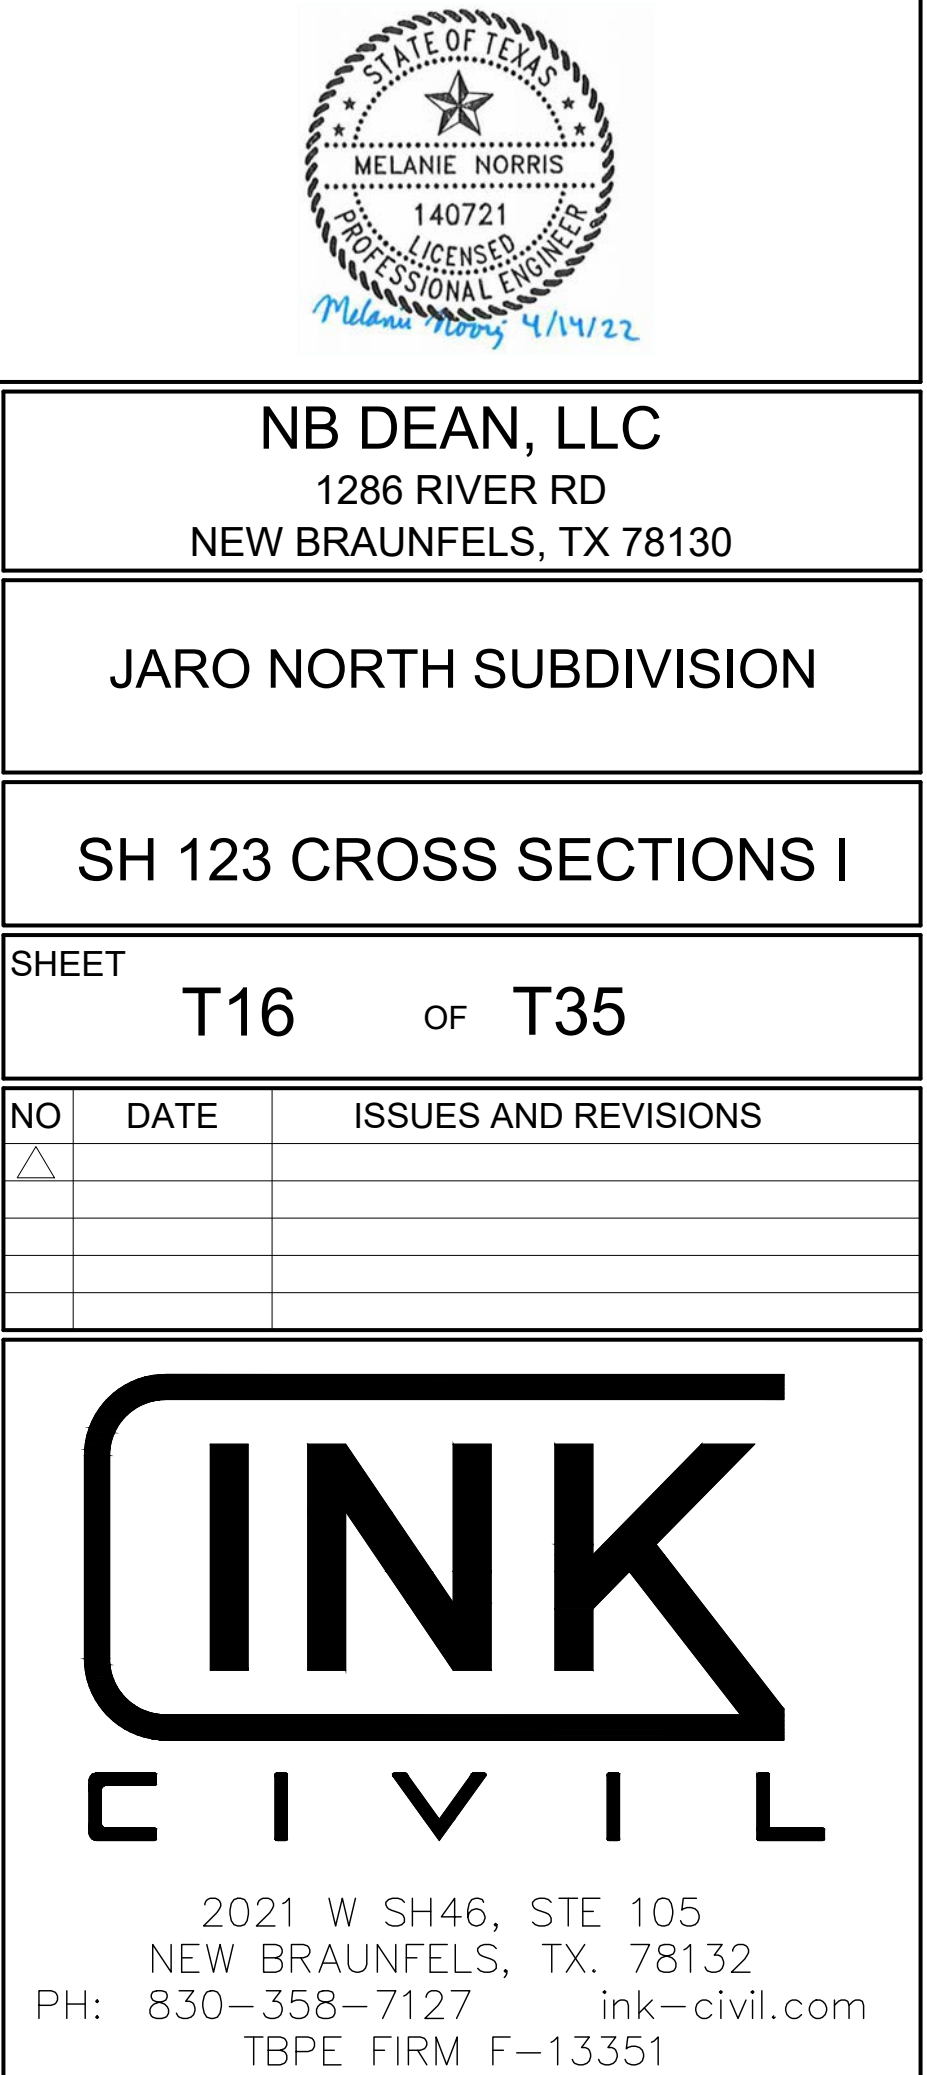




Drawing Name: N:\Projects\BEAC02 Jaro North Subdivision\Civil\Construction Drawings\T17 SH 123 CROSS SECTIONS II.dwg User: melanieorris Jul 12, 2022 9:12am

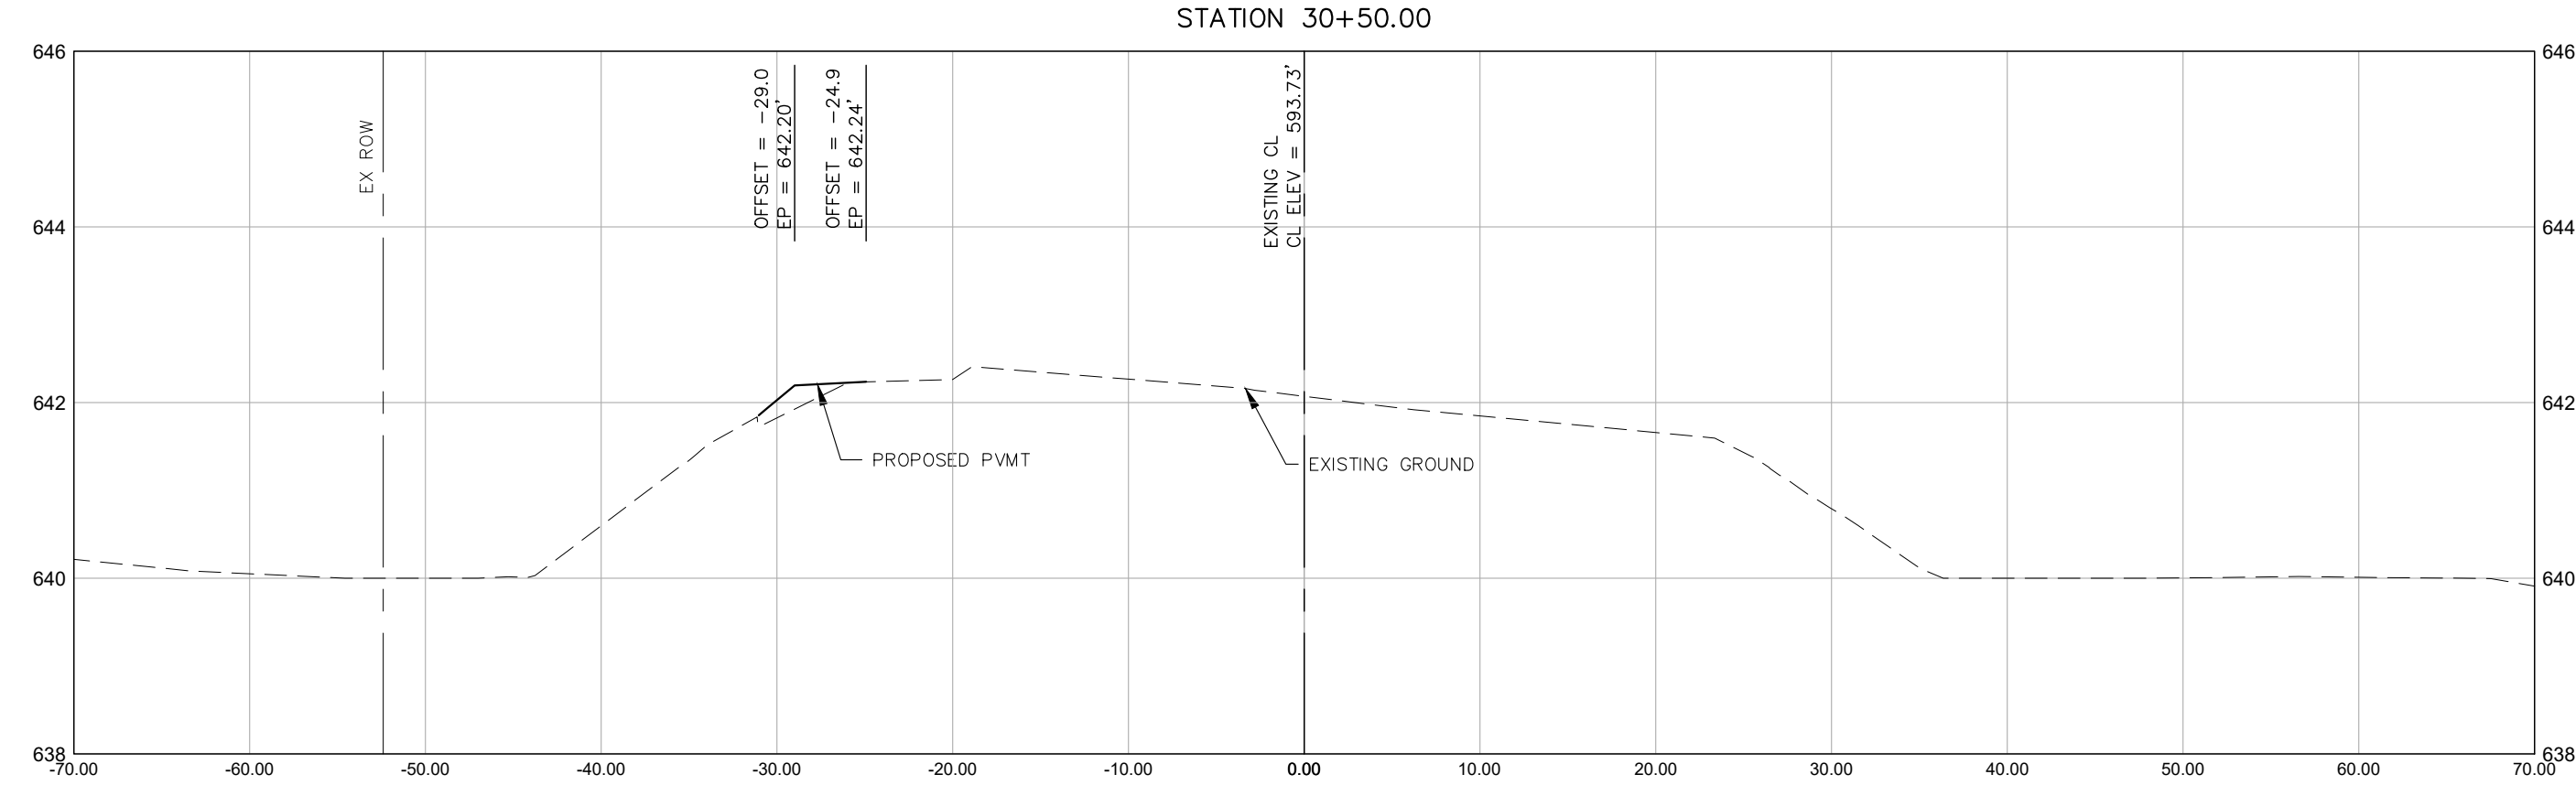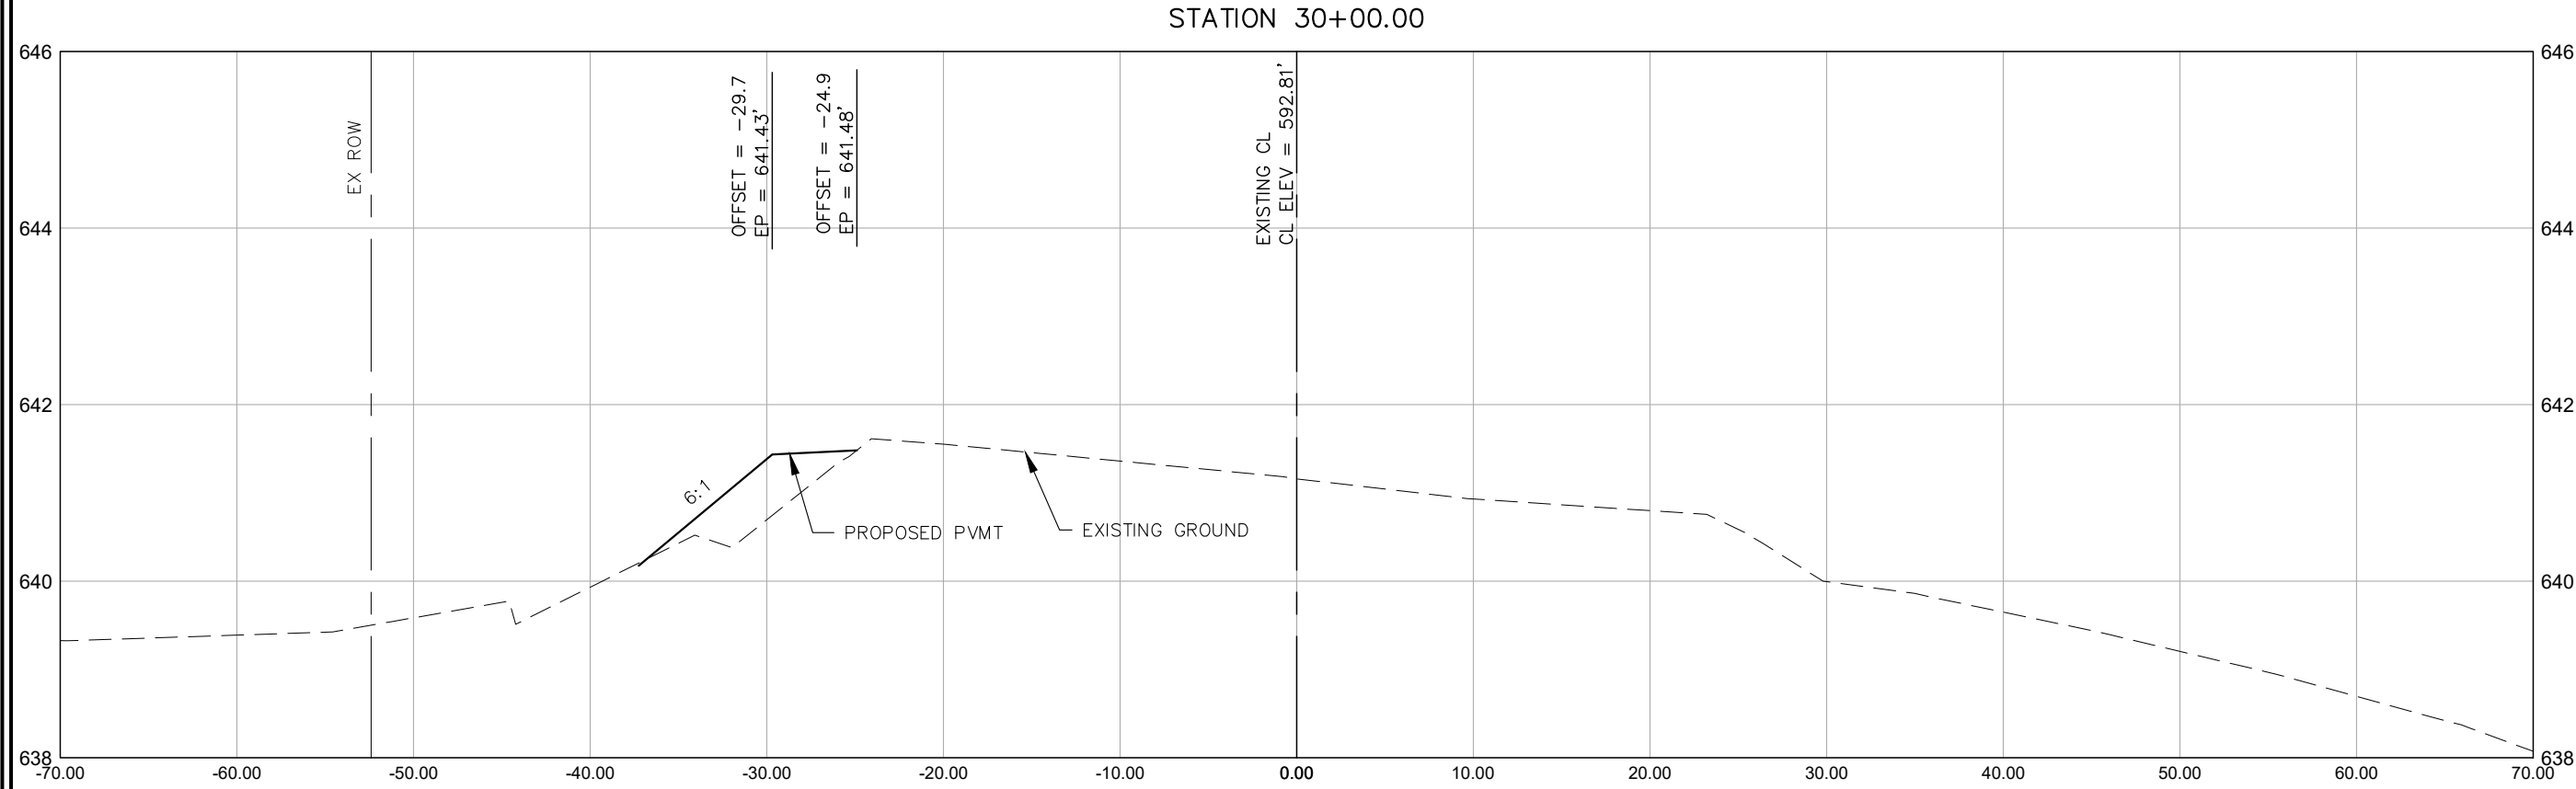

SCALE:  
HORIZONTAL 1" = 10'  
VERTICAL 1" = 5'

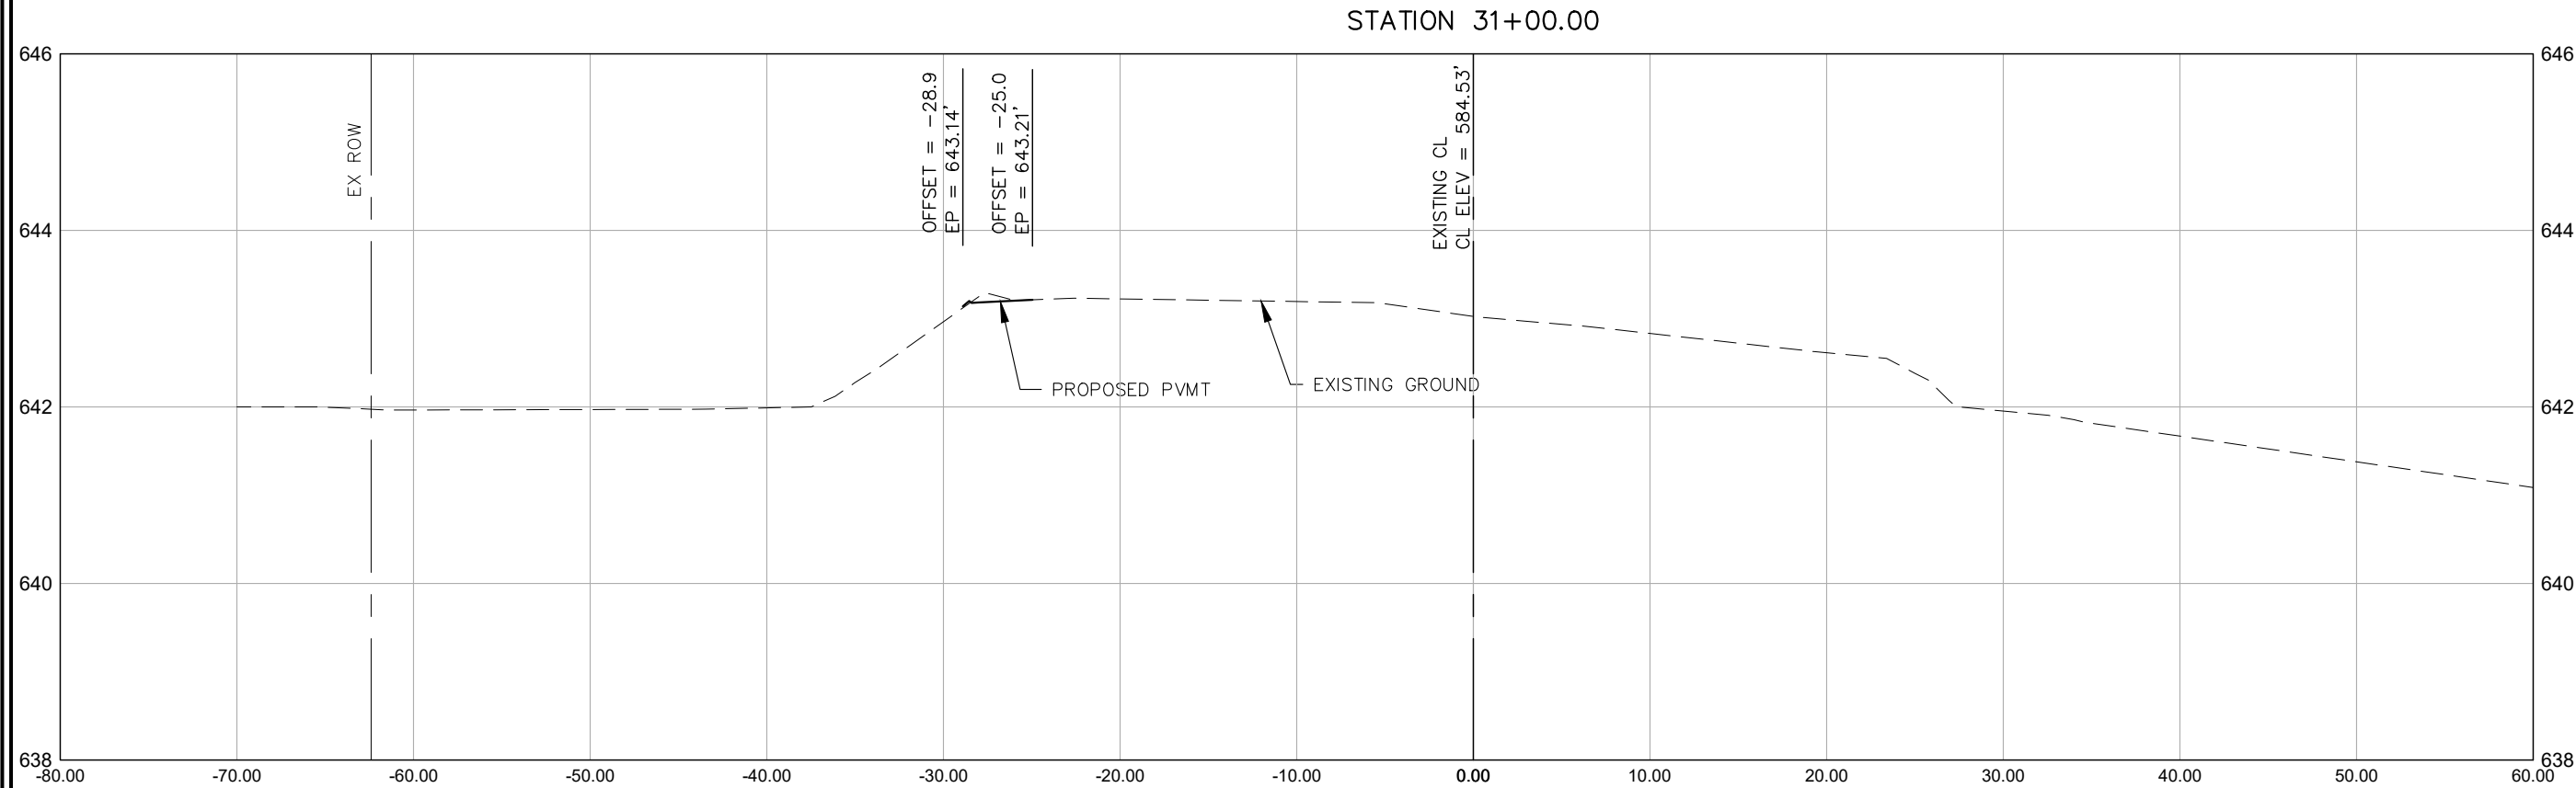

NB DEAN, LLC  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

JARO NORTH SUBDIVISION

SH 123 CROSS SECTIONS II

SHEET  
T17 OF T35

NO	DATE	ISSUES AND REVISIONS
△		



INK

CIVIL


2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351



JERRY & BRENDA WORENBAUM  
46,924 AC  
(VOL. 1126 PG. 0737, 0896CT)

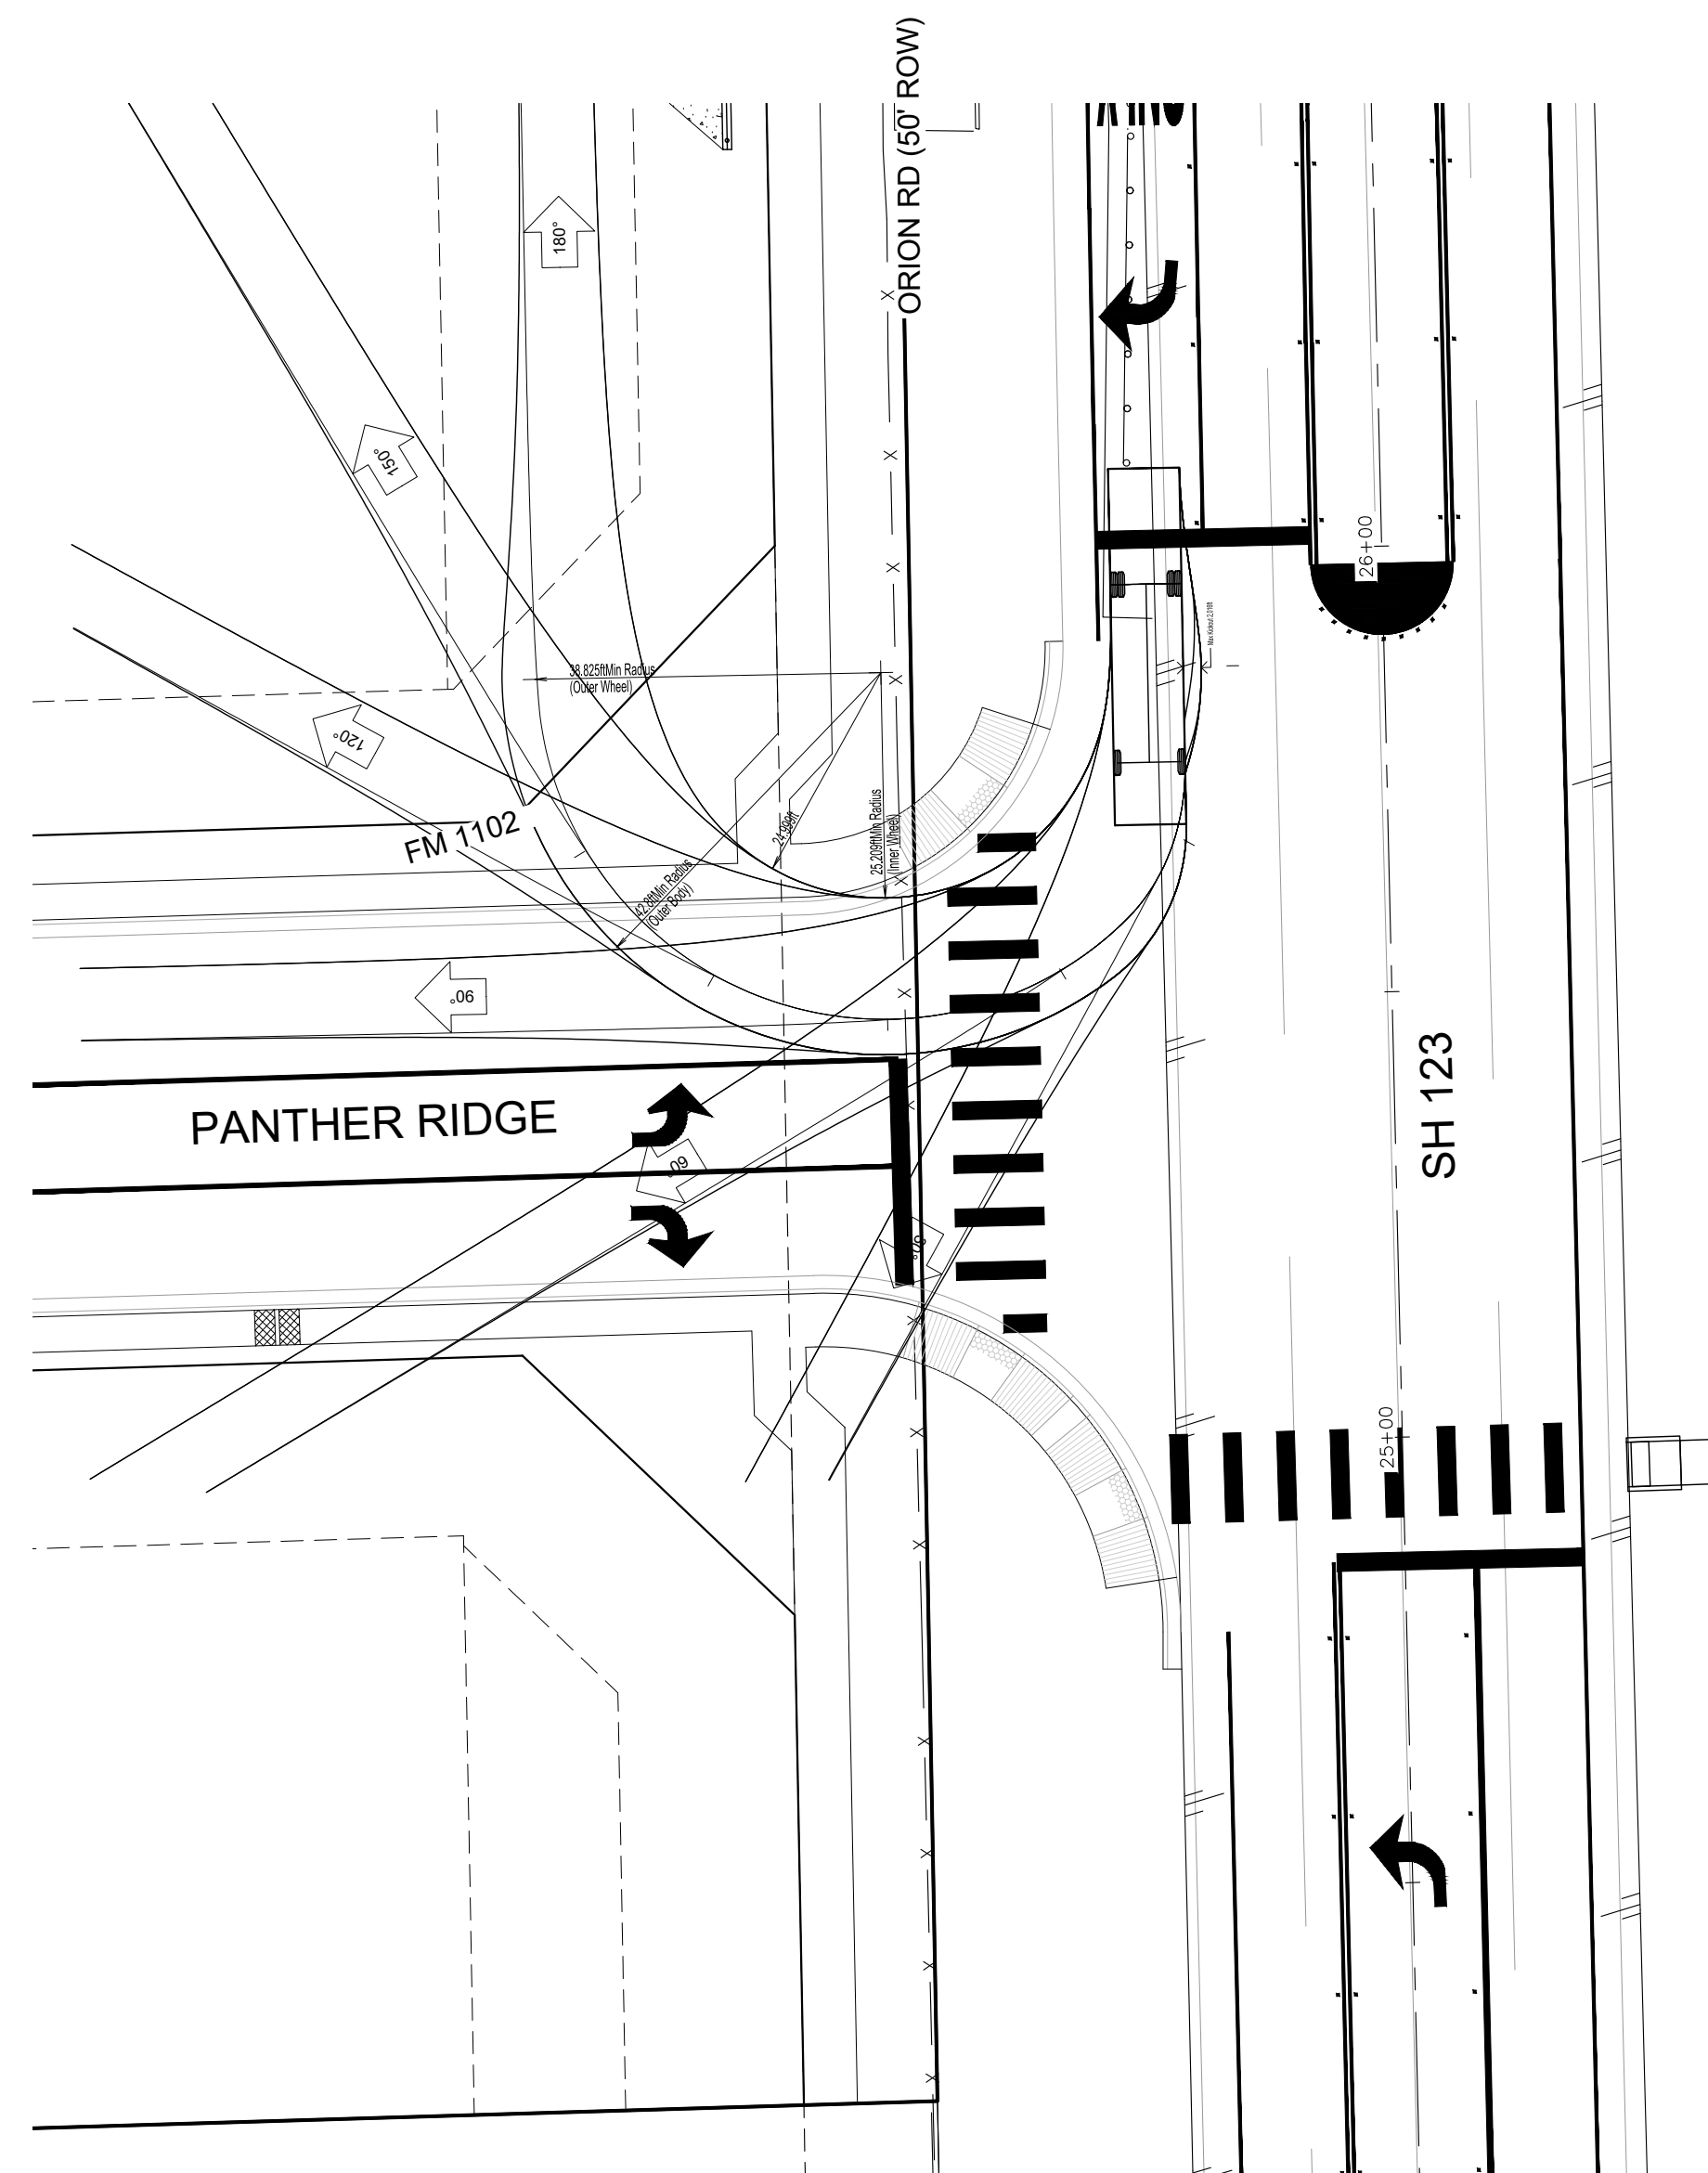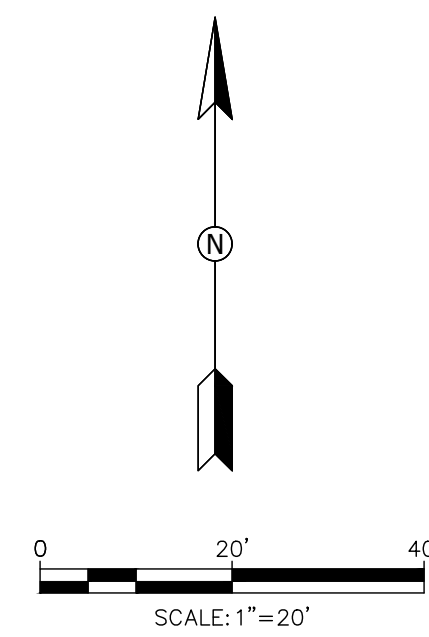

JERRY & BEBUDA VORNEBAUM  
46-972 AC  
(VOL. 1126 PG. 0737, OFFRECT)

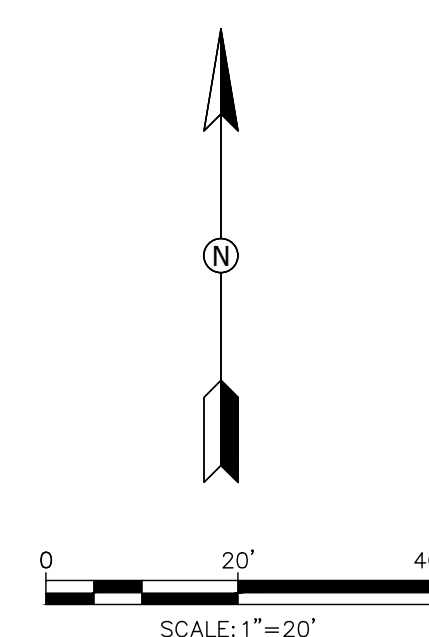

**NB DEAN, LLC**  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

JARO NORTH SUBDIVISION

BUS TURNING EXHIBIT

SHEET T17A OF T35



NO	DATE	ISSUES AND REVISIONS
△		





2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351




DISCLAIMER  
TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from the use of this standard for any purpose whatsoever.  
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever.

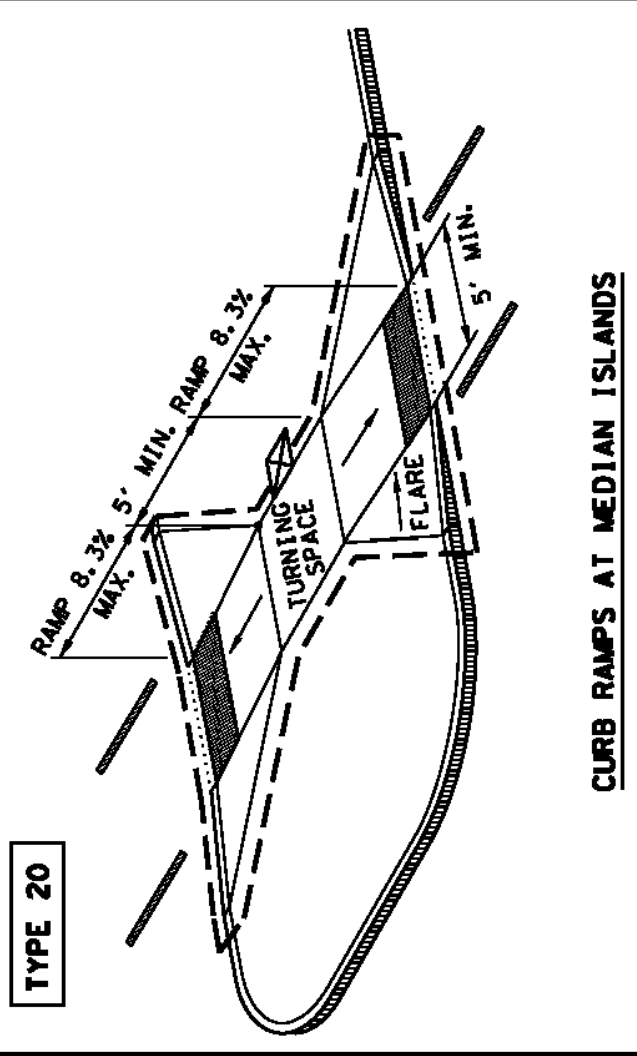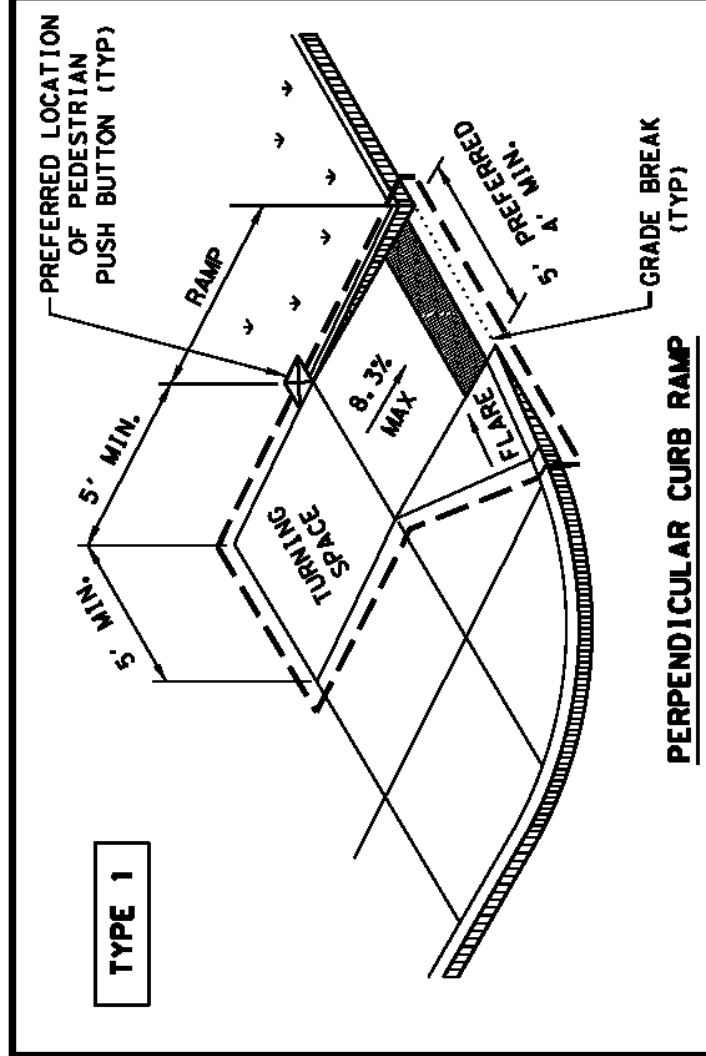




**CURB RAMPS AT MEDIAN ISLANDS**

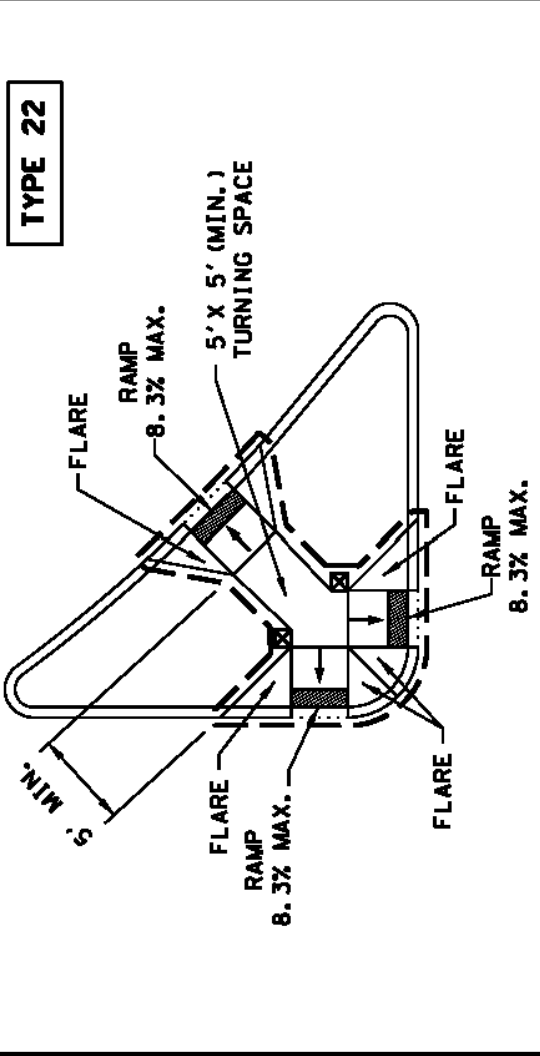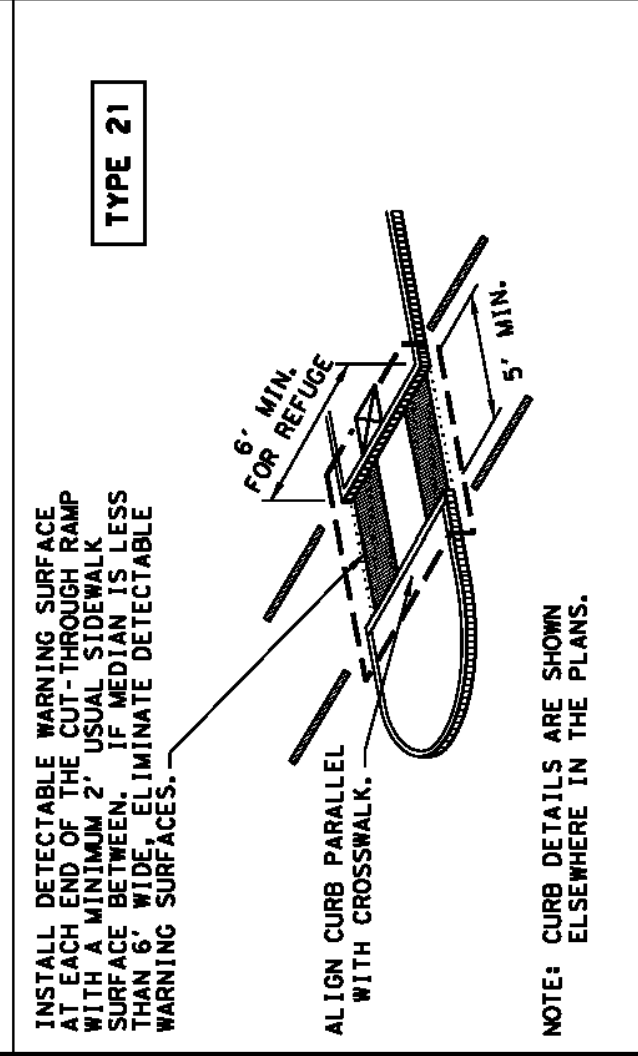


**COMBINATION ISLAND RAMPS**

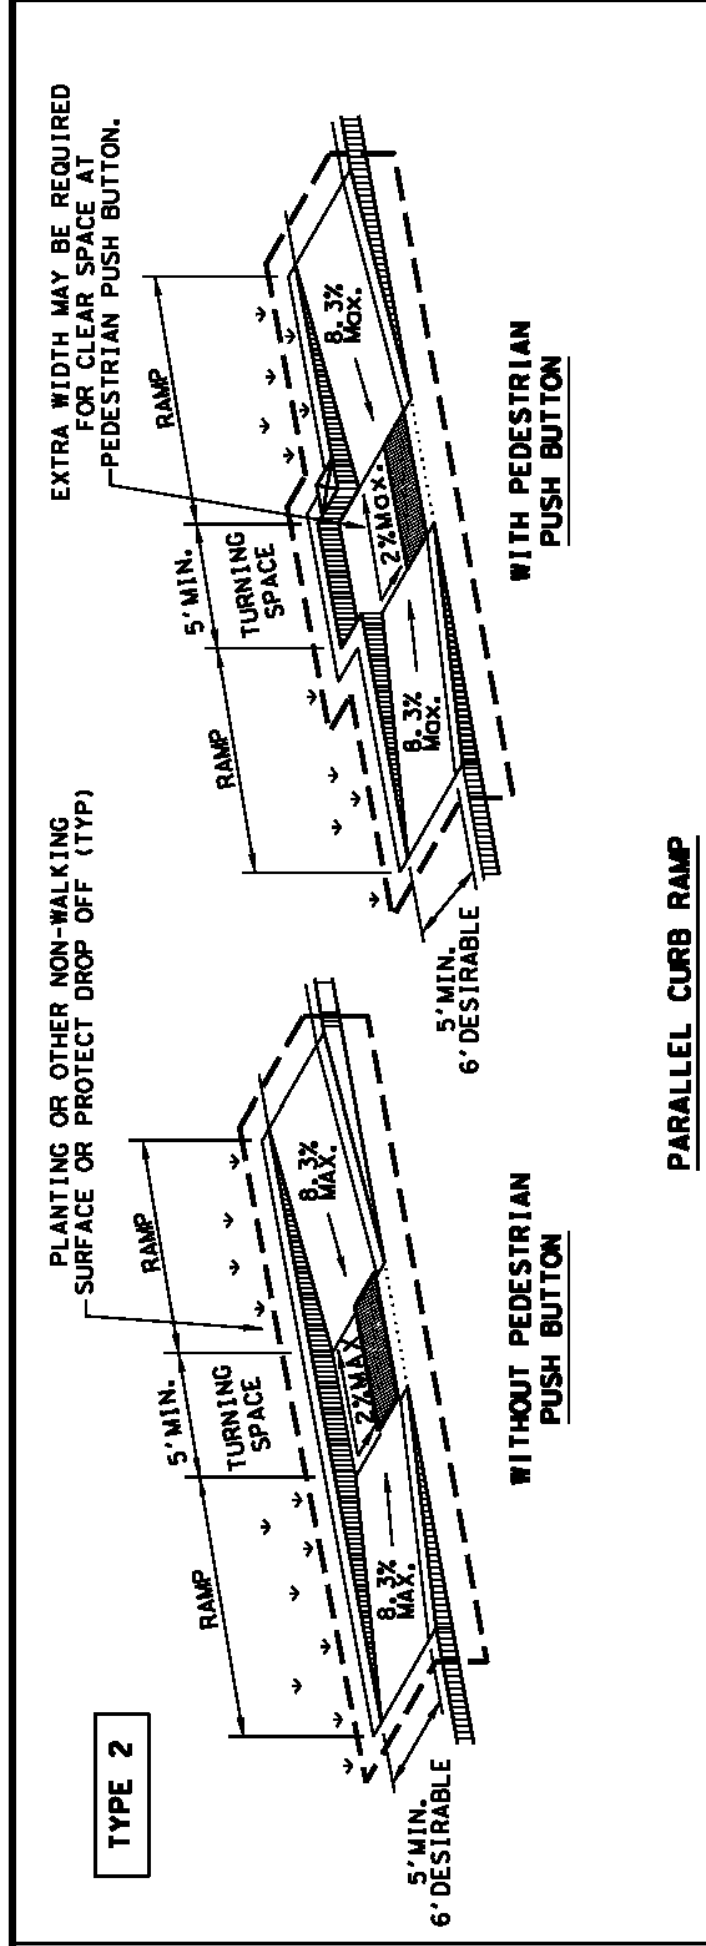


**PARALLEL CURB RAMP**

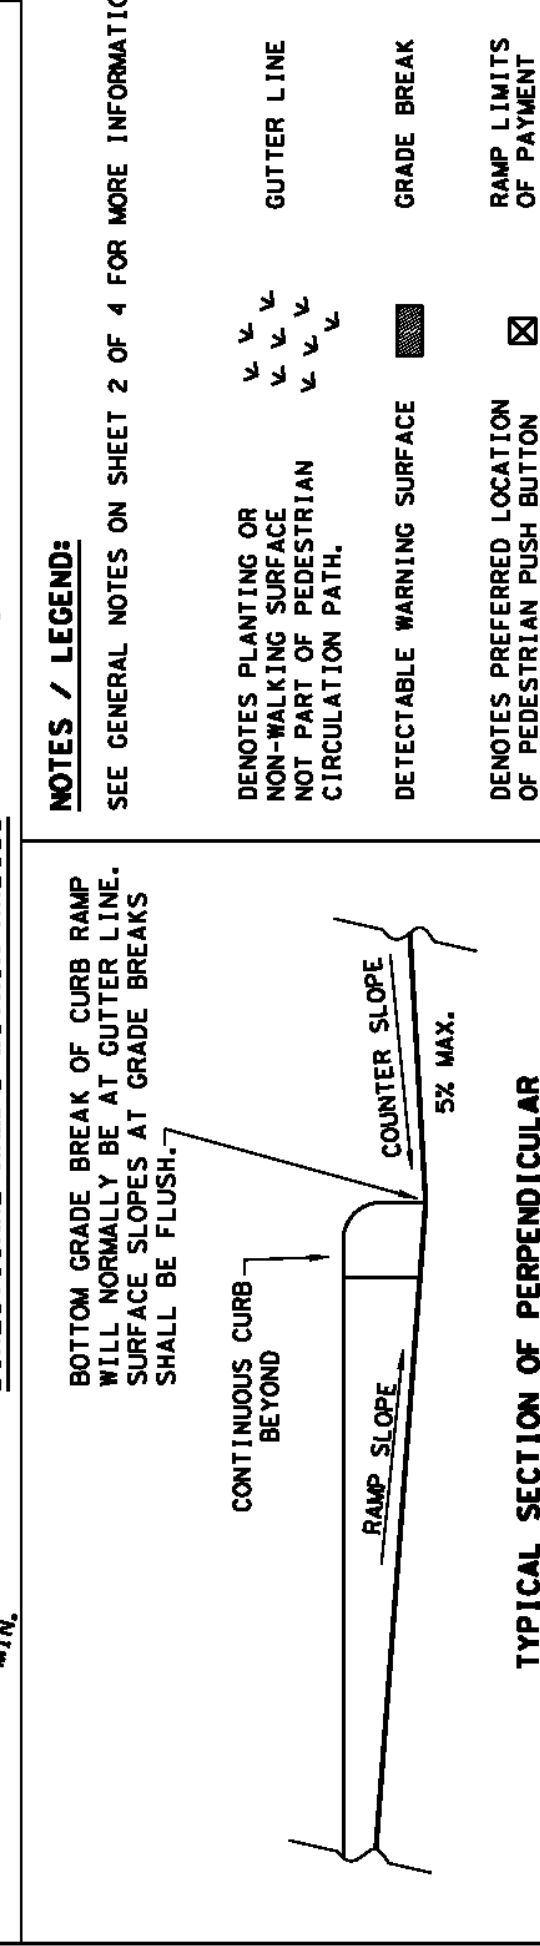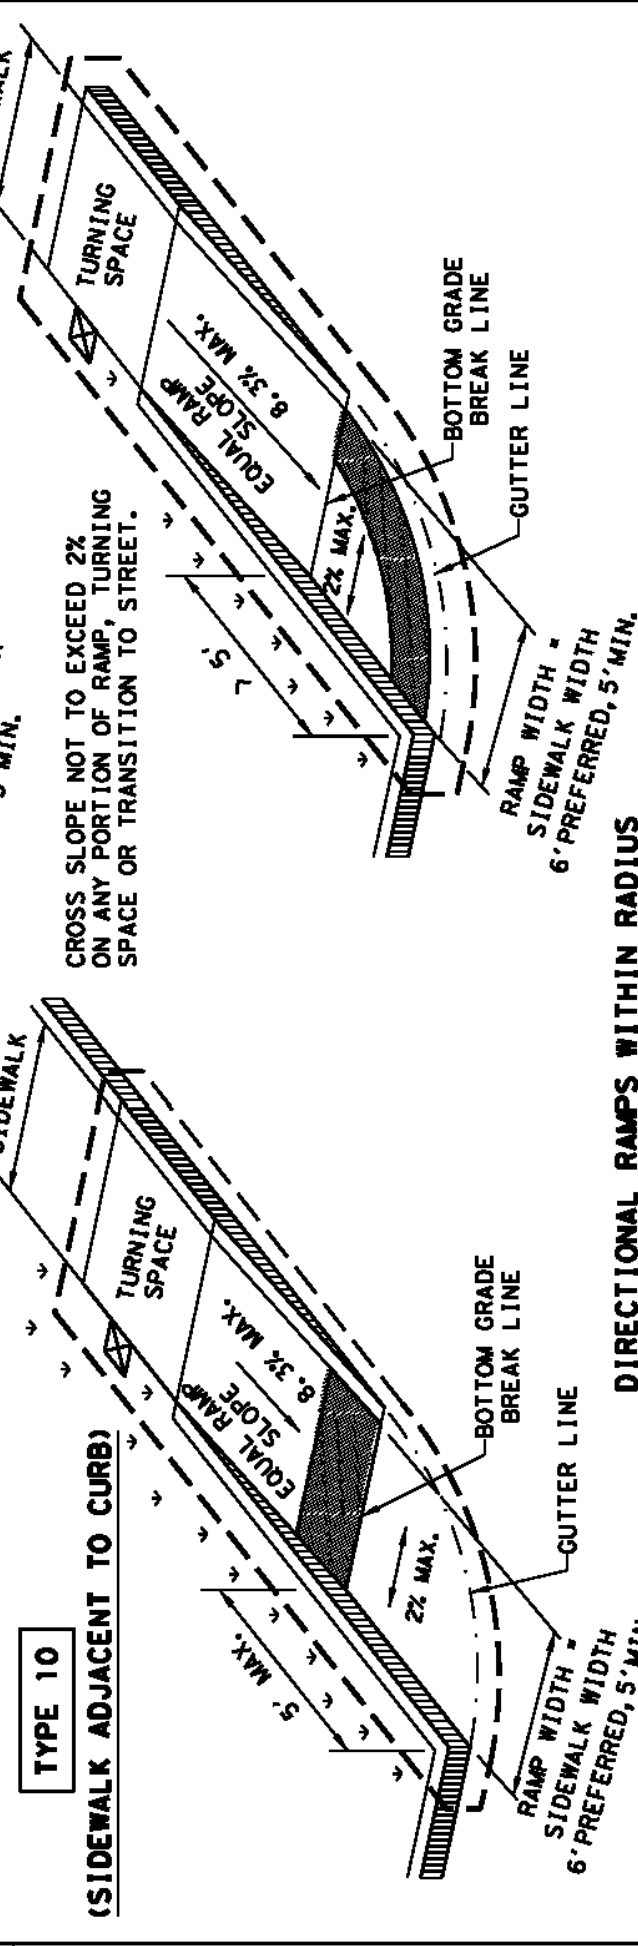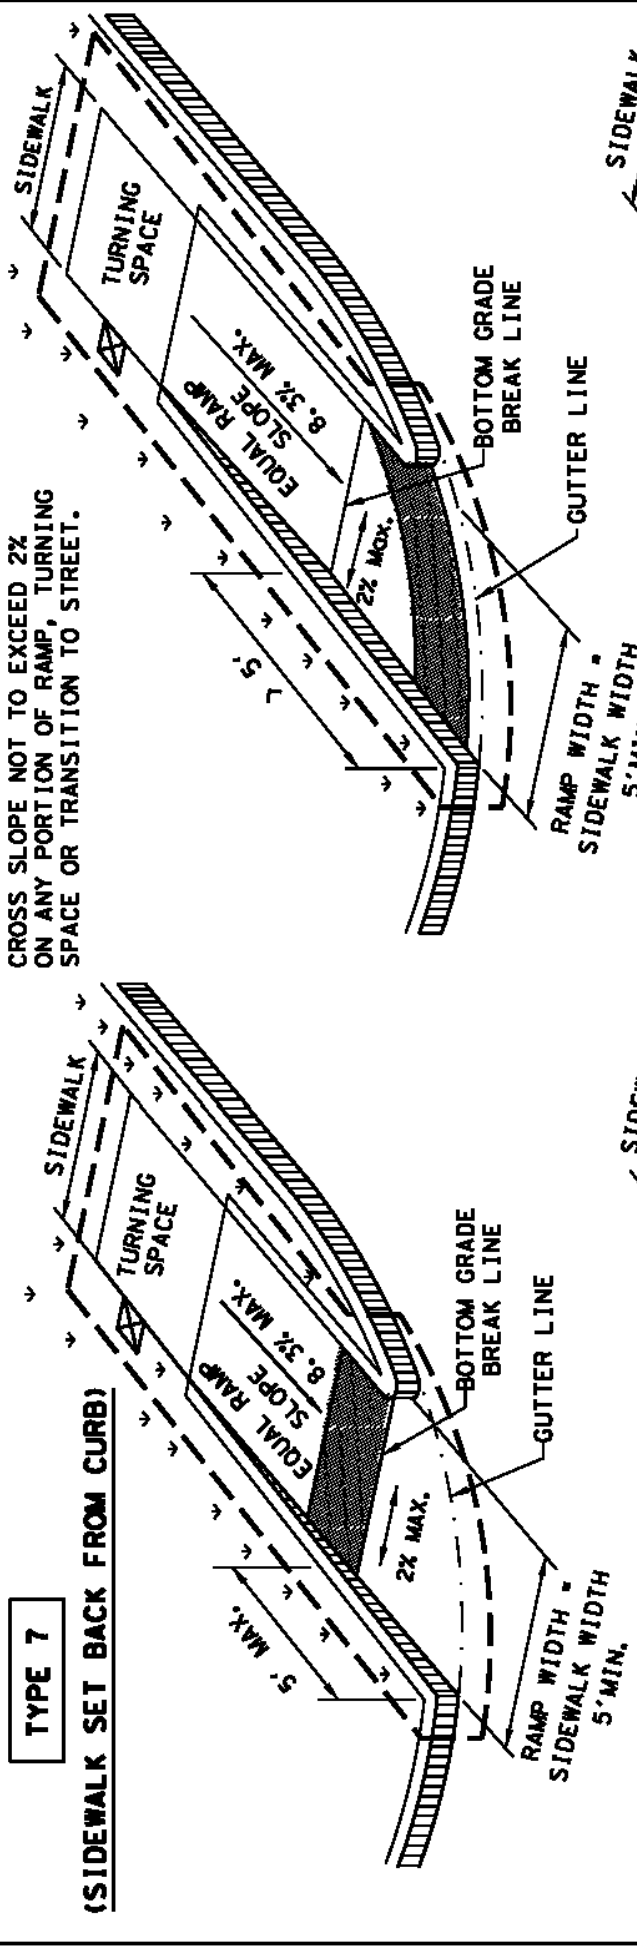




**TYPICAL SECTION OF PERPENDICULAR CURB RAMP AT CONNECTION TO ROADWAY**

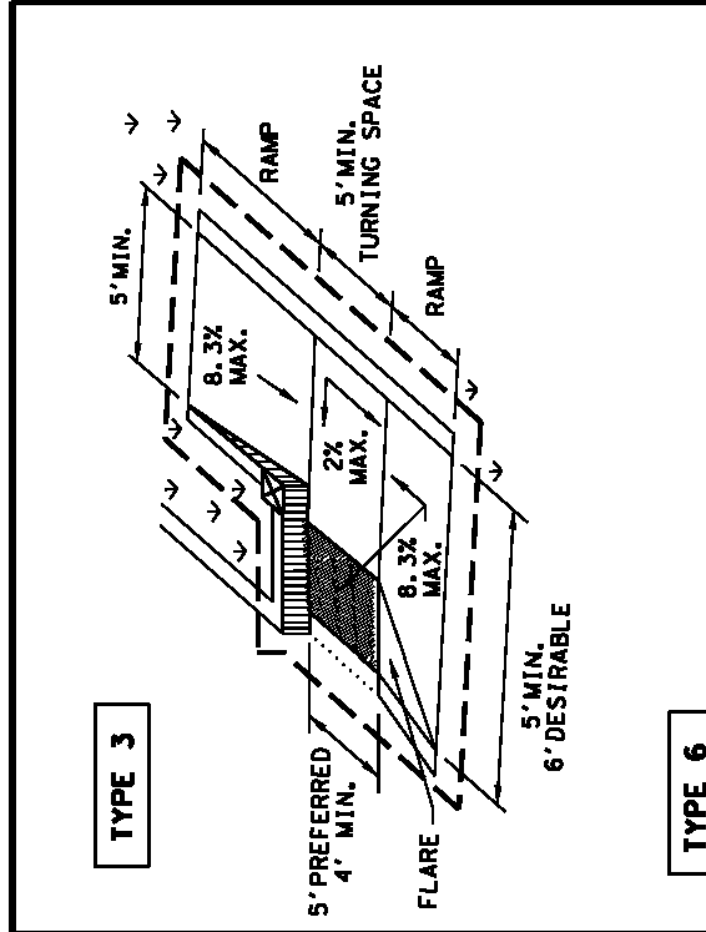

**TYPE 6**

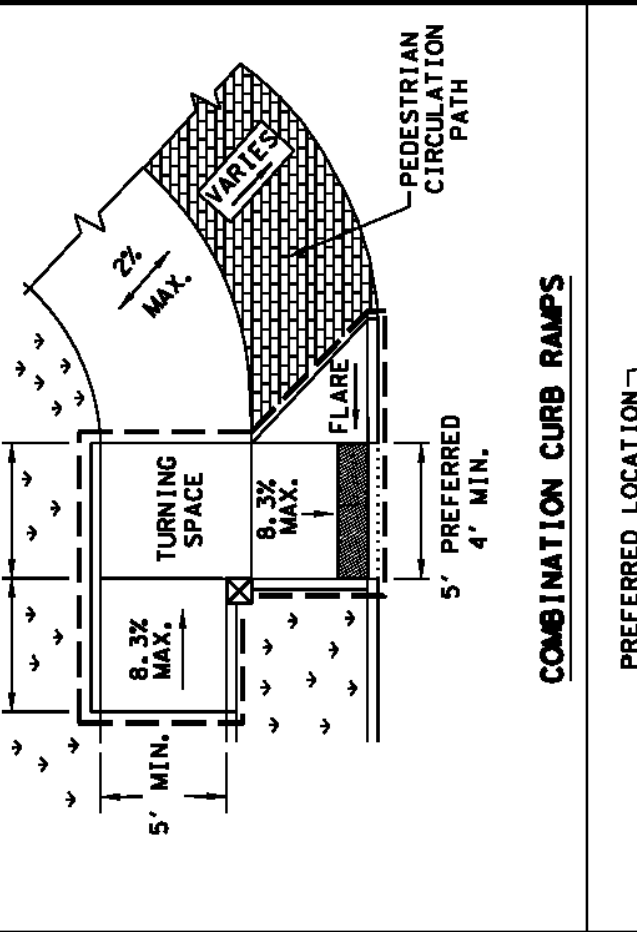

**COMBINATION CURB RAMPS**

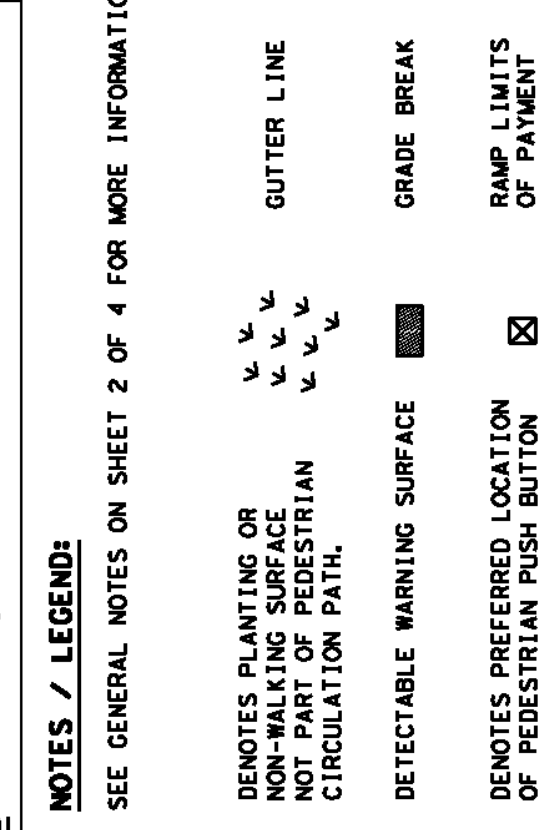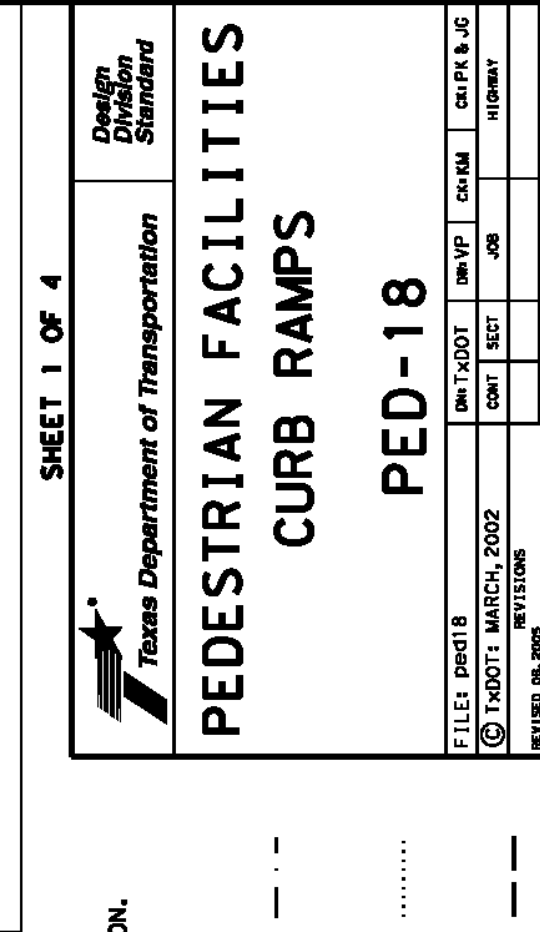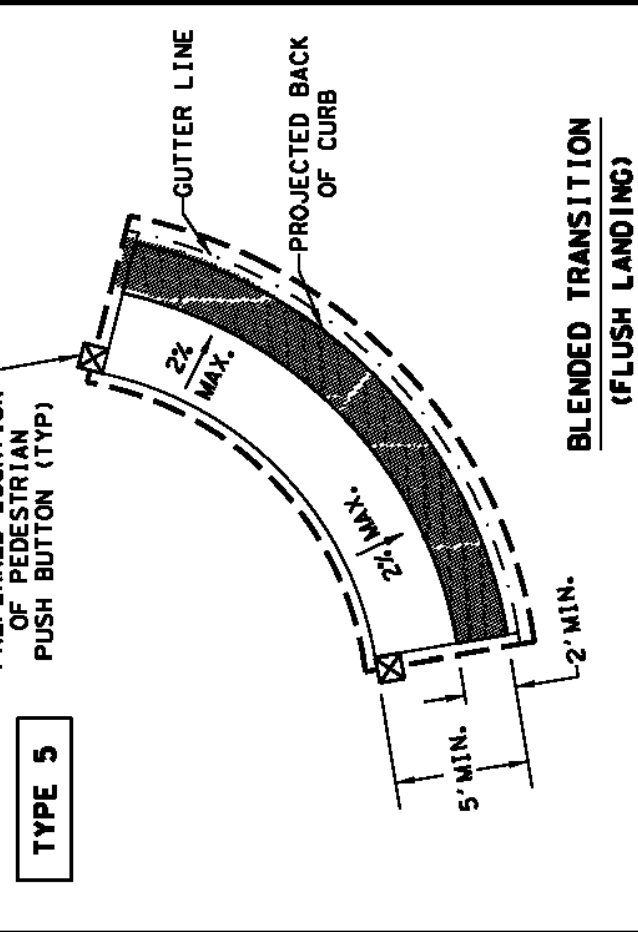

**PEDESTRIAN FACILITIES CURB RAMPS**

**PED-18**

DESIGN DIVISION STANDARD

FILED: JBE-0202 JARO NORTH SUBDIVISION

DATE: 12/12/2022

BY: JBE

CHECKED: JBE

DESIGNED: JBE

PROJECT: JBE-0202

SHEET NO. 18

**GENERAL NOTES**

- CURB RAMPS**
1. Install a curb ramp or blended transition at each pedestrian street crossing.
  2. All slopes shown are maximum allowable. Cross slopes of 1.5% and lesser running should be used. Adjust curb ramp length or grade of approach sidewalks as directed.
  3. Maximum allowable cross slope on sidewalk and curb ramp surfaces is 2%.
  4. The minimum sidewalk width is 5'. Where the sidewalk is adjacent to the back of curb, a 6' sidewalk width is desirable. Where a 5' sidewalk cannot be provided due to site conditions, the minimum width shall be 5'. The minimum width shall not be less than 5' x 5' passing areas of intervals not to exceed 200' are required.
  5. Turning Spaces shall be 5' x 5' minimum. Cross slope shall be maximum 2%.
  6. Clear space at the bottom of curb ramps shall be a minimum of 4' x 4' wholly contained within the crosswalk and wholly outside the parallel vehicular travel path.
  7. Provide flared sides where the pedestrian circulation path crosses the curb ramp. Flared sides shall be sloped at 10% maximum, measured parallel to the curb. Returned curbs may be used only where pedestrians would not normally walk across the curb ramp. The adjacent surface is planned, substantially obstructed, or otherwise protected.
  8. Additional information on curb ramp location, design, light reflective value and crosswalk dimensions, crosswalk markings and stop bar locations shall be as shown on the plans. The design shall be in accordance with the Texas Department of Transportation (TxDOT) Manual for Design of Pedestrian Facilities in the Public Right of Way (PROMAG) as published by the U.S. Architectural and Transportation Barriers Compliance Board (Access Board).
  9. To serve as a pedestrian refuge area, the median should be a minimum of 5' wide, measured from back of curbs. Medians should be designed to provide accessible passage over or through them.
  10. Small channelization islands, which do not provide a minimum 5' x 5' landing at the top of curb ramps, shall be cut through level with the surface of the street.
  11. Crosswalk dimensions, crosswalk markings and stop bar locations shall be as shown on the plans. The design shall be in accordance with the Texas Department of Transportation (TxDOT) Manual for Design of Pedestrian Facilities in the Public Right of Way (PROMAG) as published by the U.S. Architectural and Transportation Barriers Compliance Board (Access Board).
  12. Provide curb ramps to connect the pedestrian access route at each pedestrian street crossing. Handrails are not required on curb ramps.
  13. Curb ramps and landings shall be constructed and paid for in accordance with Item 531 "Sidewalks".
  14. Place concrete at a minimum depth of 5" for ramps, flares and landings, unless otherwise directed.
  15. Furnish and install No. 3 reinforcing steel bars at 18" o.c. both ways, unless otherwise directed.
  16. Provide a smooth transition where the curb ramps connect to the street.
  17. Curbs shown on sheet within the limits of payment are considered part of the curb ramp for payment, whether it is concrete curb, gutter, or combined curb and gutter.
  18. Existing features that comply with applicable standards may remain in place unless otherwise shown on the plans.

**DETECTABLE WARNING MATERIAL**

19. Curb ramps must contain a detectable warning surface that consists of raised truncated domes complying with PROMAG. The surface must contrast visually with adjoining surfaces, including side flares. Furnish and install an approved color-in-place dark brown or dark red detectable warning surface material adjacent to unobstructed concrete, unless specified elsewhere in the plans.
20. Detectable warning materials must meet TxDOT Departmental Materials Specification with manufacturer's specifications.
21. Detectable warning surfaces must be firm, stable and slip resistant.
22. Detectable warning surfaces shall be a minimum of 24 inches in depth in the direction of pedestrian travel, and extend the full width of the curb ramp or landing where pedestrian access route enters the street.
23. Detectable warning surfaces shall be located so that the edge nearest the curb line is at the back of curb and neither end of that edge is greater than 5 feet from the back of curb. Detectable warning surfaces may be curved along the corner radius.
24. Shaded areas on Sheet 1 of 4 indicate the approximate location for the detectable warning surface for each curb ramp type.




**DETECTABLE WARNING PAVERS (IF USED)**

25. Furnish detectable warning paver units meeting all requirements of ASTM C-936, C-33. Lay in a two by two unit basket weave pattern or as directed.
26. Lay full-size units first followed by closure units consisting of at least 25 percent (25%) of a full unit. Cut detectable warning paver units using a power saw.


**SIDEWALKS**

27. Provide clear ground space at accessible parts, including pedestrian curb buttons, PROMAG section R406. Operable parts shall be placed within unobstructed reach range specified in PROMAG section R406.
28. Place traffic signal or illumination poles, ground boxes, controller boxes, signs, drainage facilities and other items so as not to obstruct the pedestrian access route or clear ground space.
29. Street grades and cross slopes shall be as shown elsewhere in the plans.
30. Changes in level greater than 1/4 inch are not permitted.
31. The least possible grade should be used to maximize accessibility. The running slope of sidewalks and crosswalks within the public right of way may follow the grade of the parallel roadway. Where a continuous grade greater than five percent (5%) must be used, the grade shall be as shown on the plans. The design shall be in accordance with the Texas Department of Transportation (TxDOT) Manual for Design of Pedestrian Facilities in the Public Right of Way (PROMAG) as published by the U.S. Architectural and Transportation Barriers Compliance Board (Access Board).
32. Handrail extensions shall not protrude into the usable landing area or into intersecting pedestrian routes.
33. Driveways and turnouts shall be constructed and paid for in accordance with Item 531 "Sidewalks".
34. Sidewalk details are shown elsewhere in the plans.

**DETECTABLE WARNING SURFACE DETAILS**

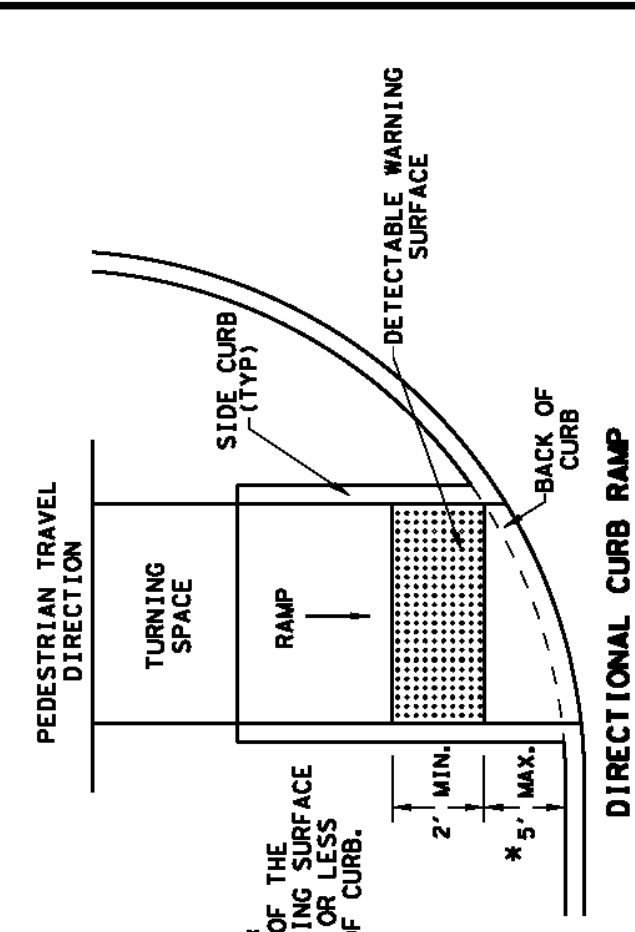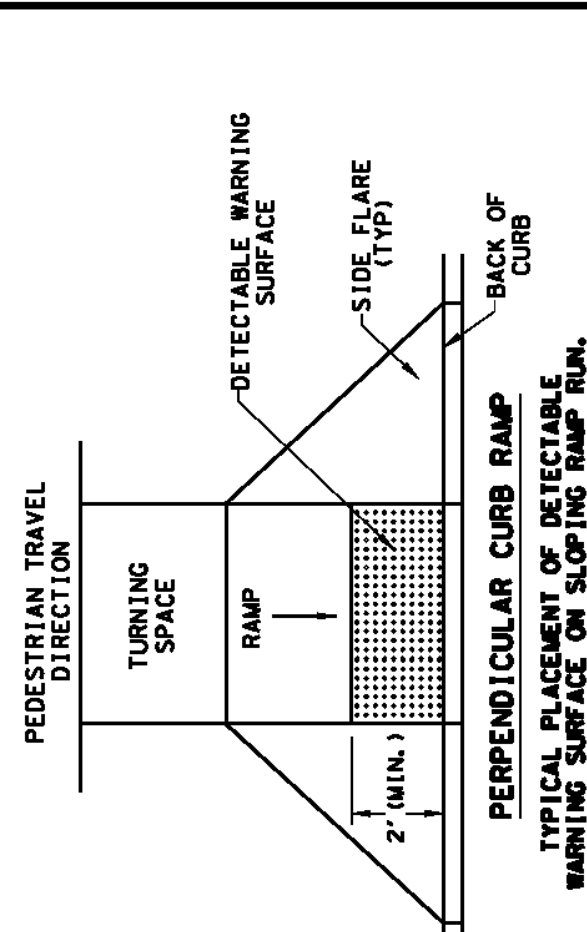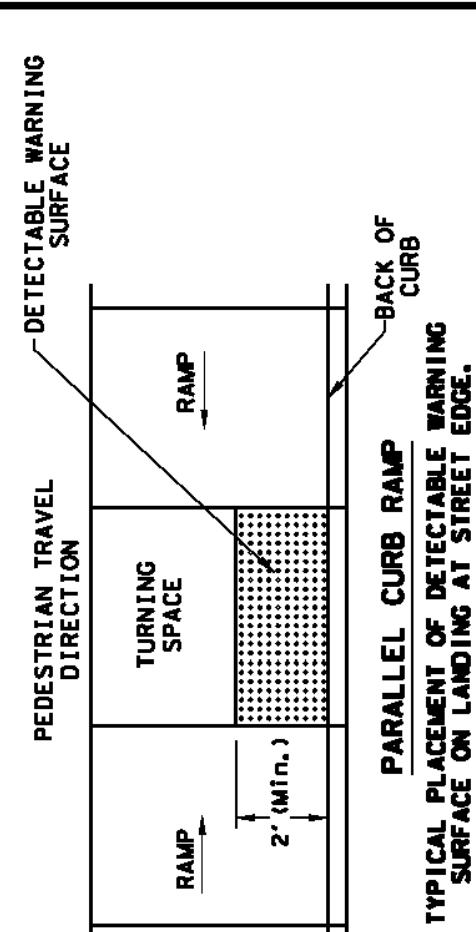

**SECTION VIEW DETAIL CURB RAMP AT DETECTABLE WARNINGS**

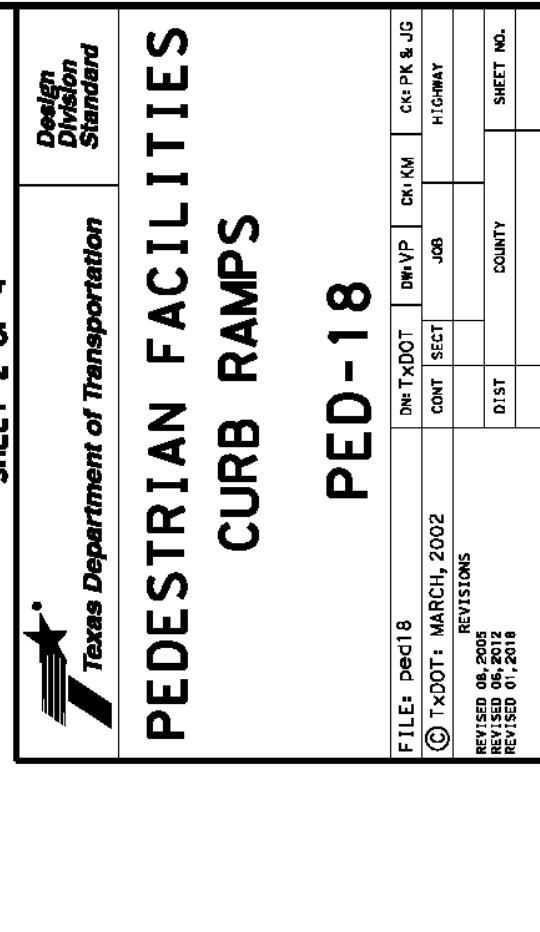

2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351

JARO NORTH SUBDIVISION

TXDOT DETAILS I


SHEET T18 OF T35

NO	DATE	ISSUES AND REVISIONS
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
51		
52		
53		
54		
55		
56		
57		
58		
59		
60		
61		
62		
63		
64		
65		
66		
67		
68		
69		
70		
71		
72		
73		
74		
75		
76		
77		
78		
79		
80		
81		
82		
83		
84		
85		
86		
87		
88		
89		
90		
91		
92		
93		
94		
95		
96		
97		
98		
99		
100		




NB DEAN, LLC  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130



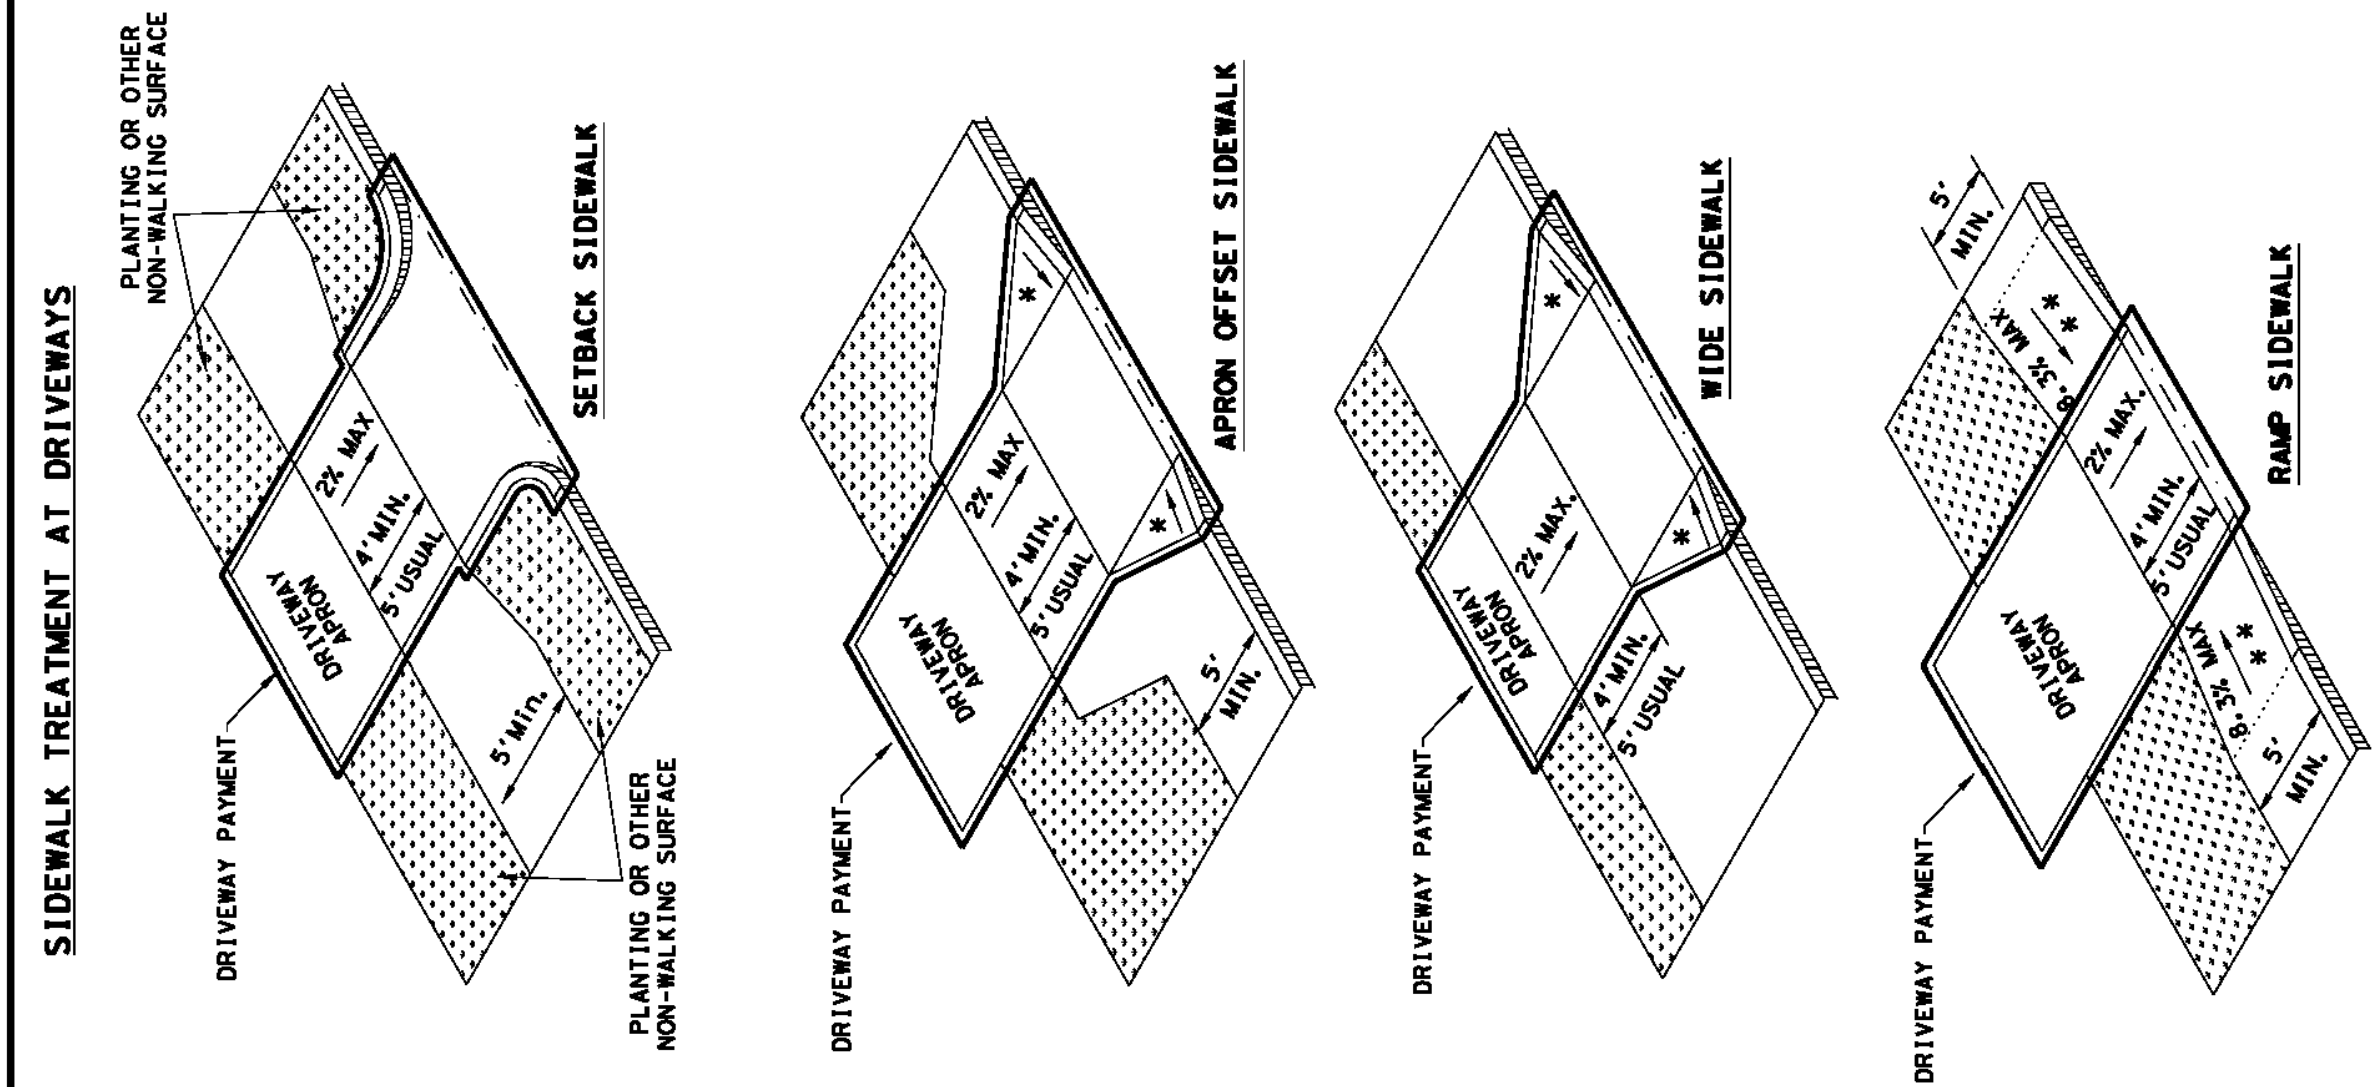


NOTES:  
\* WHERE DRIVEWAYS CROSS THE PEDESTRIAN ROUTE, SIDES SHALL BE FLARED AT 10% MAX. SLOPE.  
\* IF CURB HEIGHT IS GREATER THAN 6" INCHES, USE GRADE LESS THAN OR EQUAL TO 5%. HANDRAIL AND DETECTABLE WARNING ARE NOT REQUIRED.

DATE: FILE:

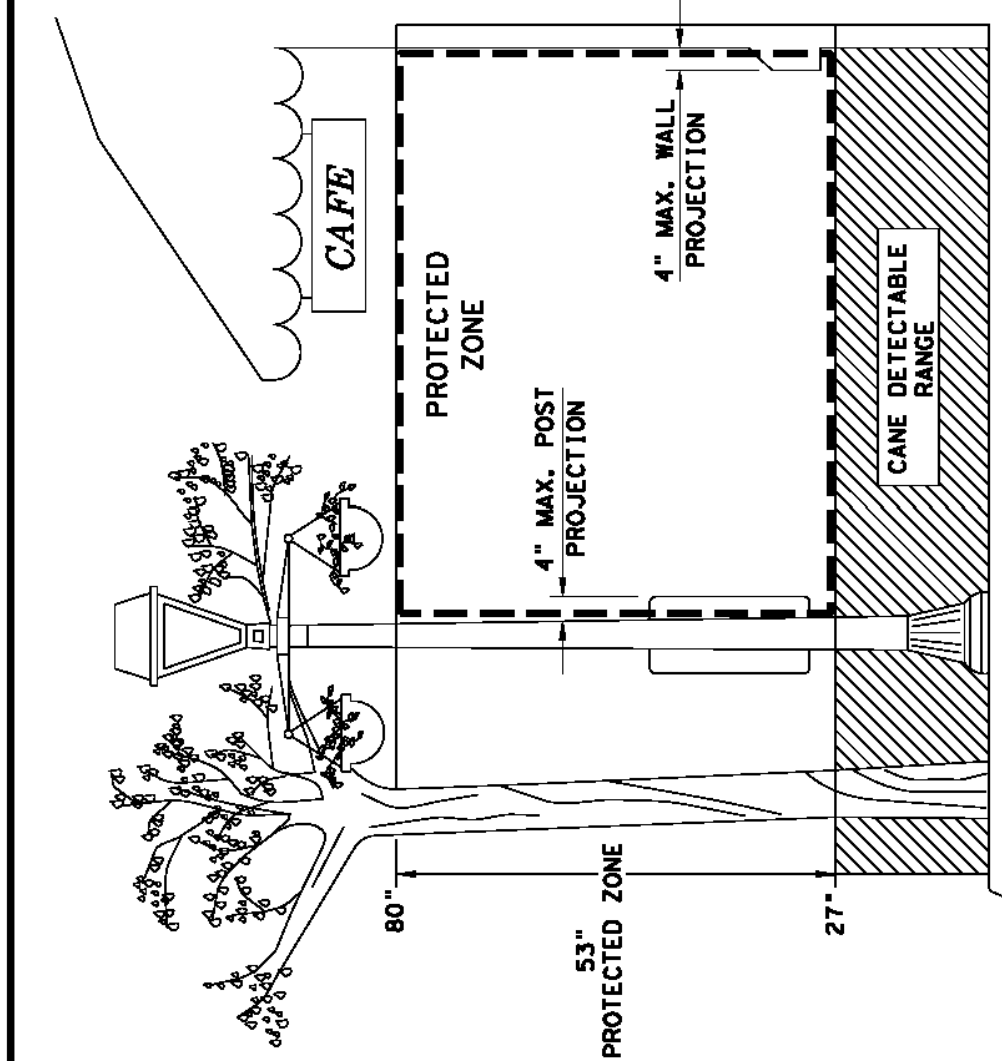

**PROTECTED ZONE**


NOTE: IN PEDESTRIAN CIRCULATION AREA, MAXIMUM 4" PROJECTION FOR POST OR WALL MOUNTED OBJECTS BETWEEN 27" AND 80" ABOVE THE SURFACE.

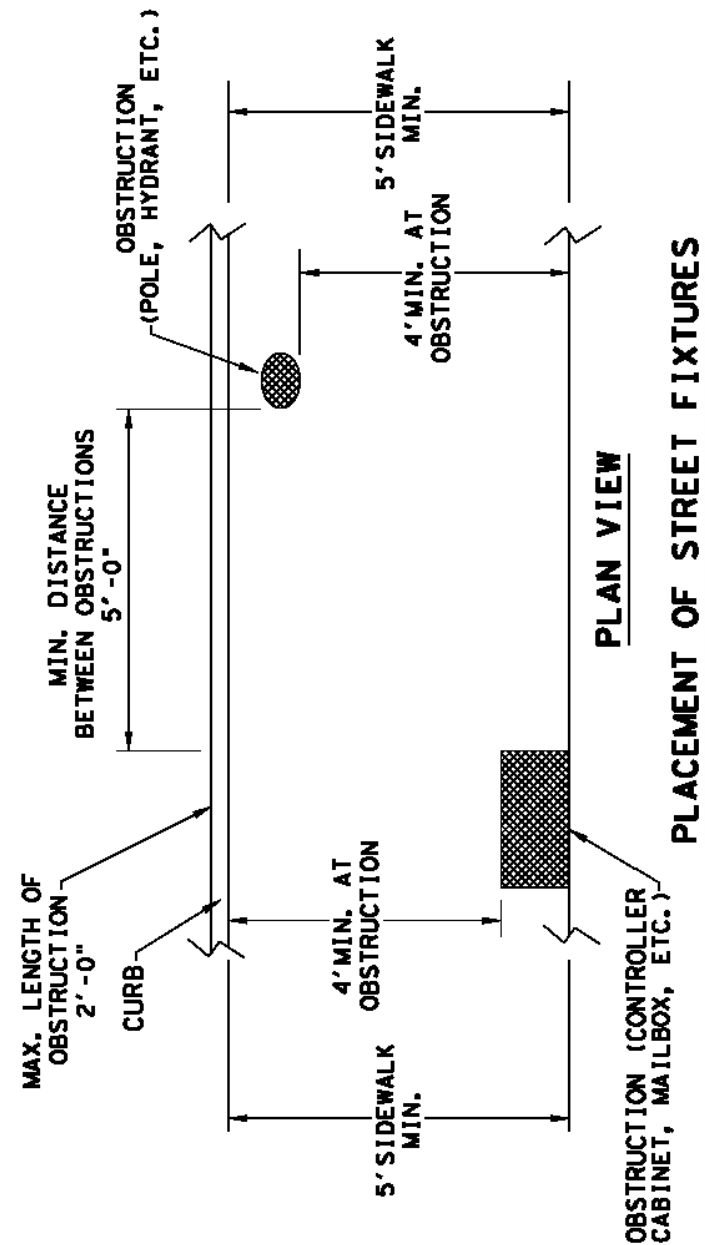


**PLAN VIEW**

**PLACEMENT OF STREET FIXTURES**

NOTE: ITEMS NOT INTENDED FOR PUBLIC USE. REQUIRED AT PUBLIC USE FIXTURES.

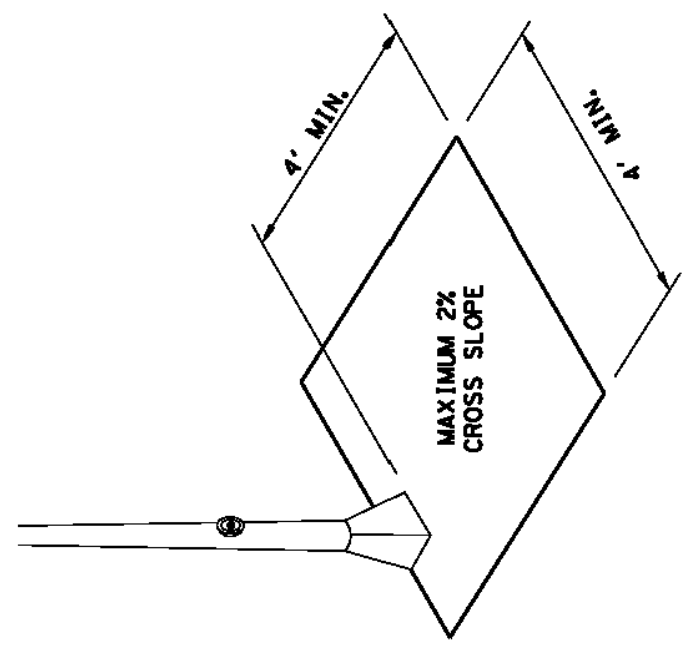

**CLEAR SPACE ADJACENT TO PEDESTRIAN PUSH BUTTON**

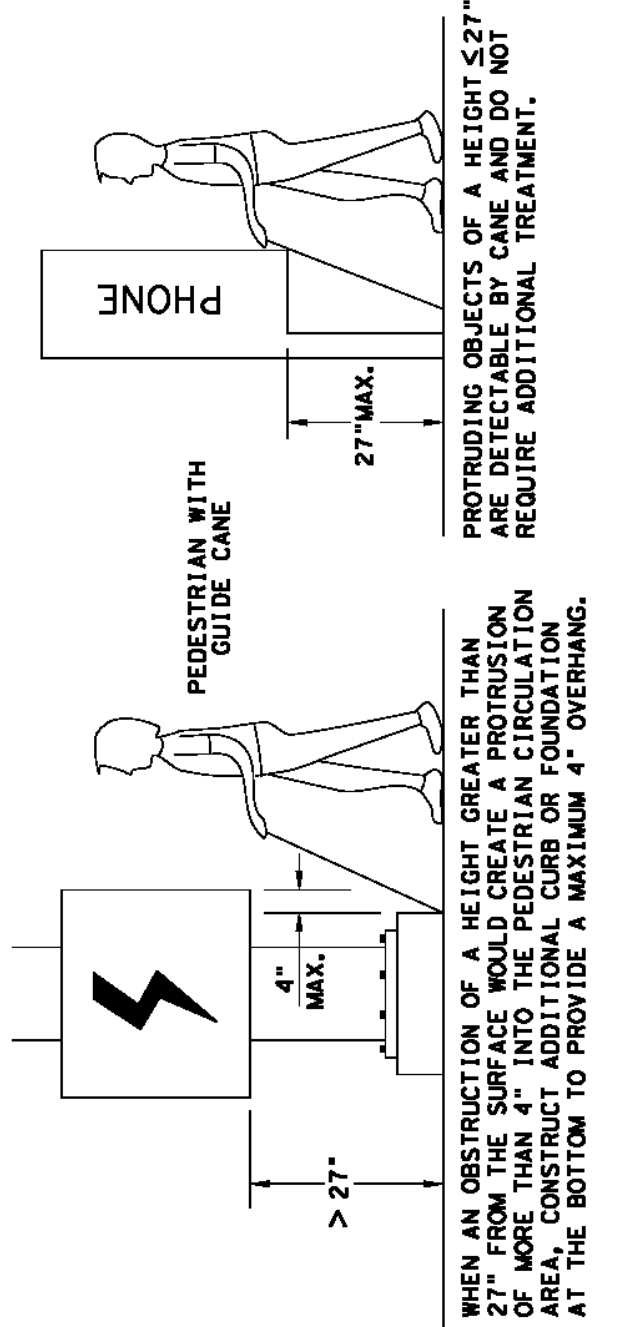

**DETECTION BARRIER FOR < 80"**

SHEET 3 OF 4


**PEDESTRIAN FACILITIES CURB RAMPS PED-18**

DESIGN STANDARD  
Texas Department of Transportation


FILE: SHEET 18  
TXDOT - MARCH 2002  
REVISIONS  
REVISION NO. DATE  
REVISION BY: J. L. B. 01/18/2011  
SHEET NO.

**TYPICAL CROSSING LAYOUTS AND DIMENSIONS**

SEE SHEET 1 OF 4 FOR DETAILS AND DIMENSIONS

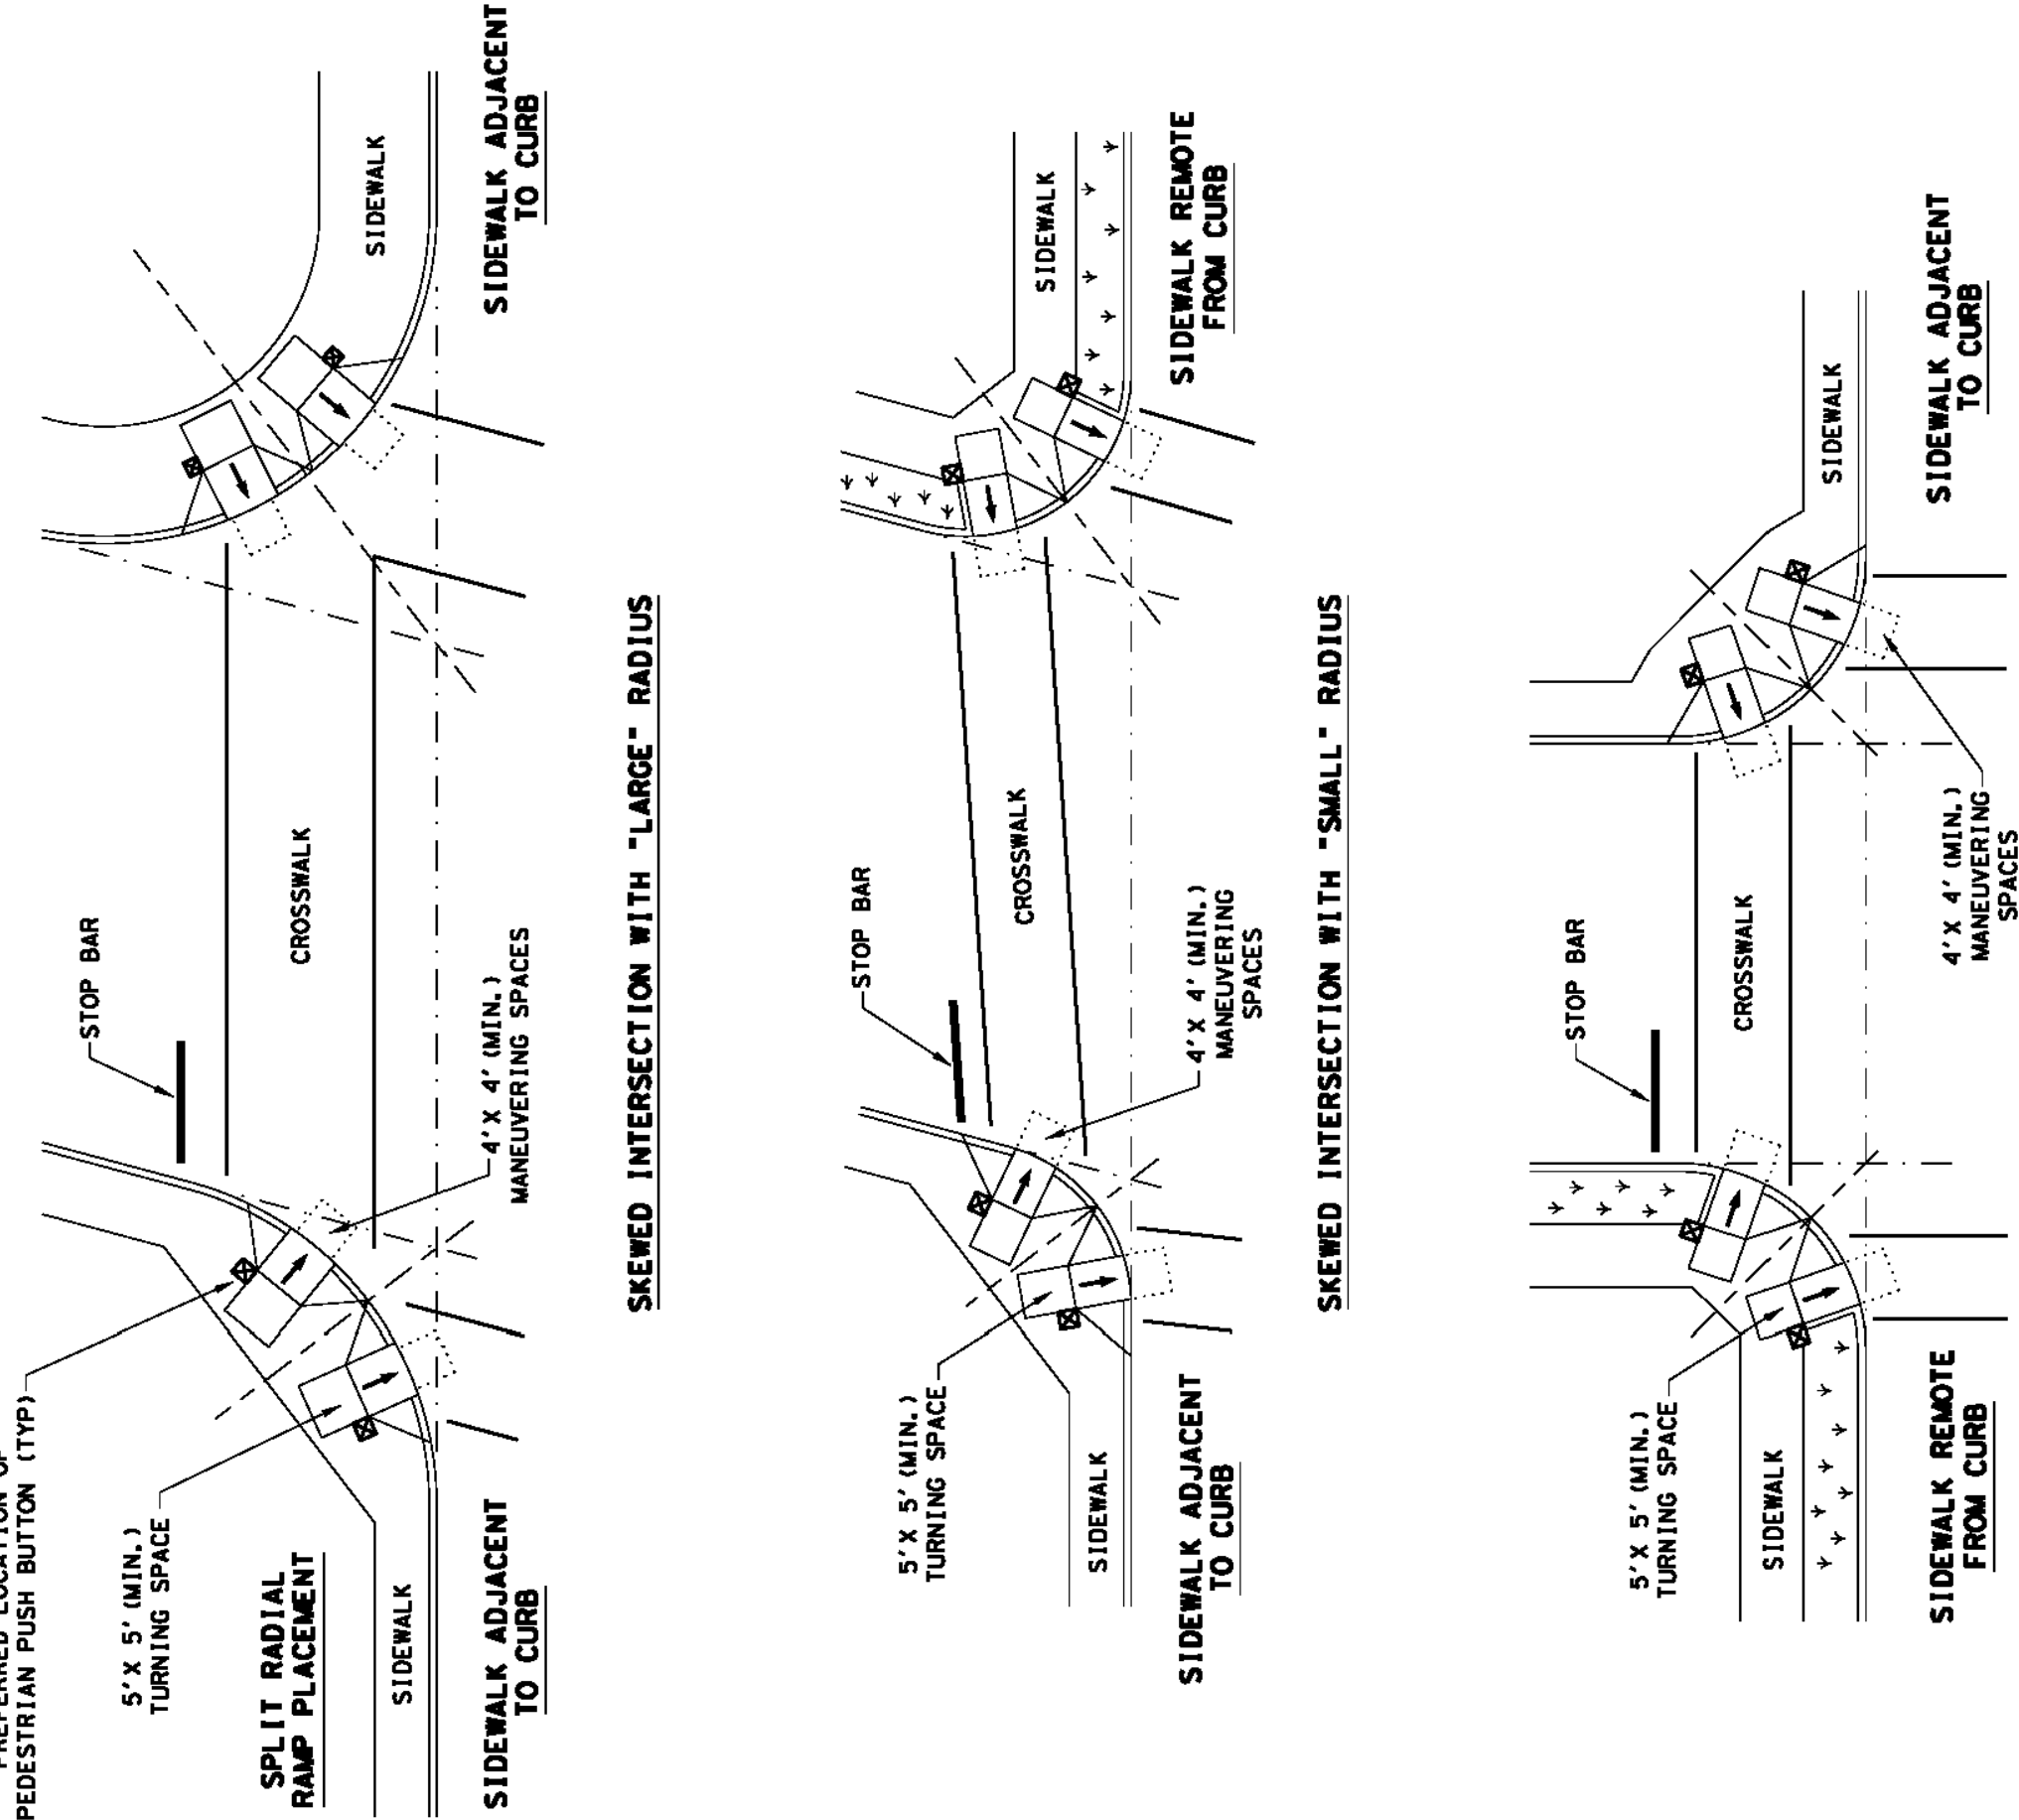

**AT INTERSECTION W/FREE RIGHT TURN & ISLAND**

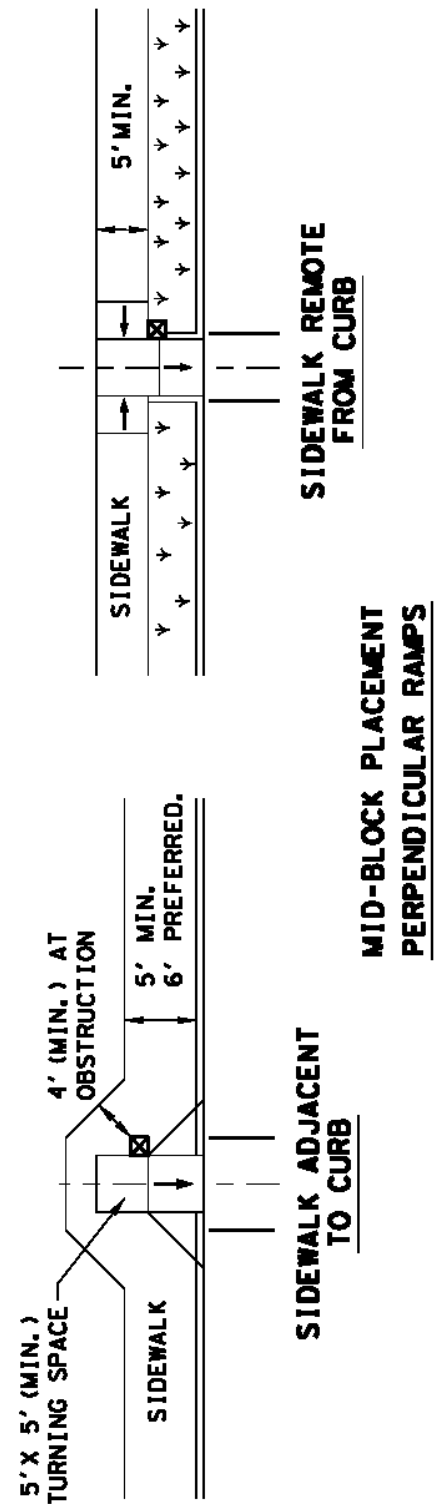

SHEET 4 OF 4

**PEDESTRIAN FACILITIES CURB RAMPS PED-18**

DESIGN STANDARD  
Texas Department of Transportation

FILE: SHEET 18  
TXDOT - MARCH 2002  
REVISIONS  
REVISION NO. DATE  
REVISION BY: J. L. B. 01/18/2011  
SHEET NO.

**LEGEND**

- SHOWS DOWNWARD SLOPE.
- DENOTES PREFERRED LOCATION OF PEDESTRIAN PUSH BUTTON (IF APPLICABLE).
- DENOTES PLANTING OR NON-WALKING SURFACE NOT PART OF PEDESTRIAN CIRCULATION PATH.



**NB DEAN, LLC**  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

**JARO NORTH SUBDIVISION**

**TXDOT DETAILS II**


SHEET **T19** OF **T35**

NO	DATE	ISSUES AND REVISIONS
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		


2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351






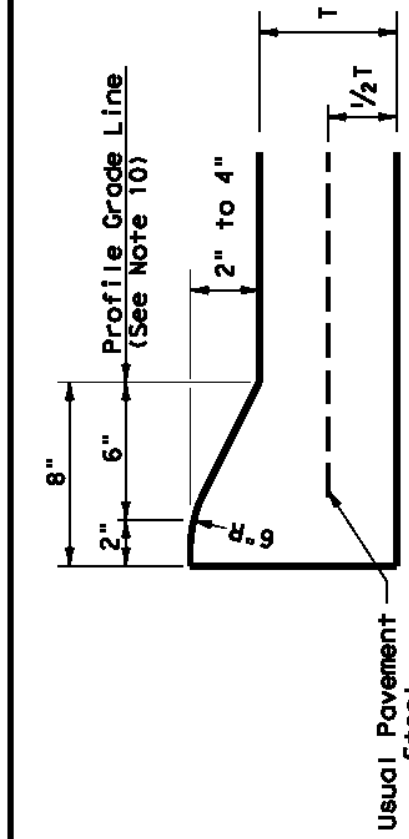


TYPE I CURB (MONOLITHIC)  
2' - 4" HEIGHT

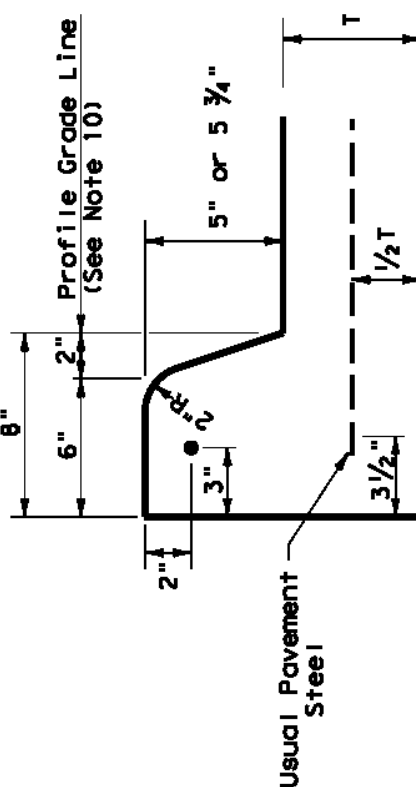


TYPE II CURB (MONOLITHIC)  
5' - 5 3/4" HEIGHT

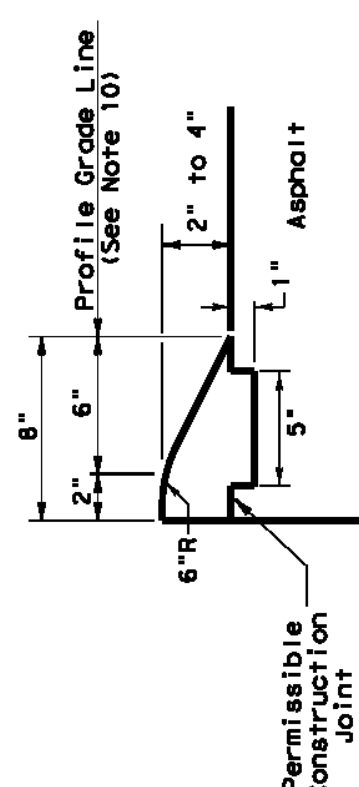


TYPE III CURB (KEYED)  
2' - 4" HEIGHT

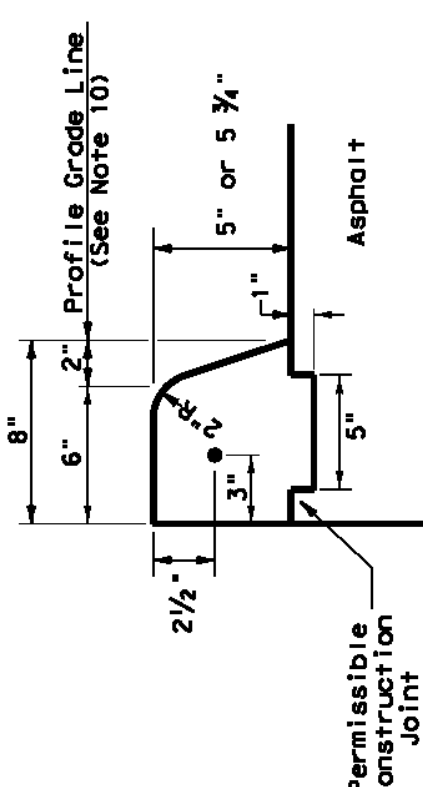


TYPE IV CURB (KEYED)  
5' - 5 3/4" HEIGHT

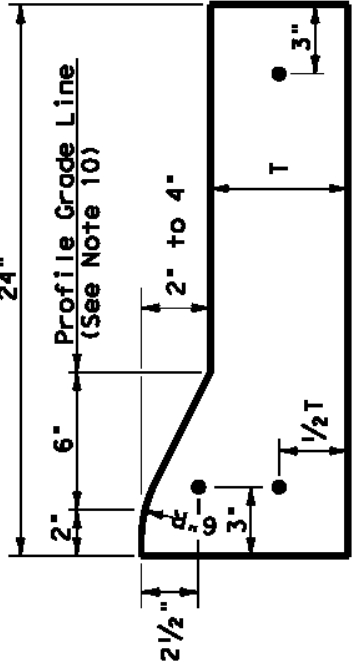


TYPE I CURB AND GUTTER  
2' - 4" HEIGHT

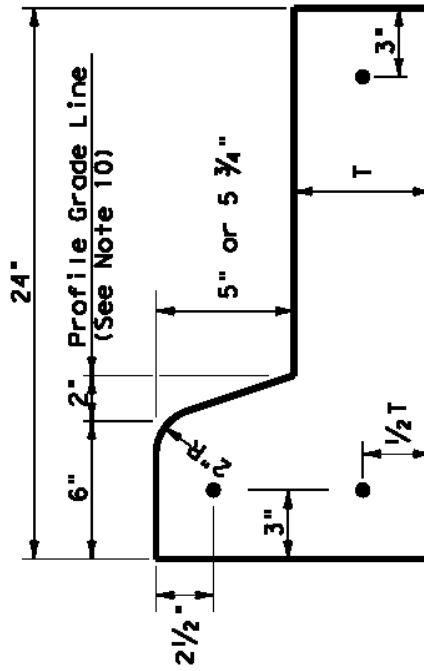

TYPE II CURB AND GUTTER  
5' - 5 3/4" HEIGHT

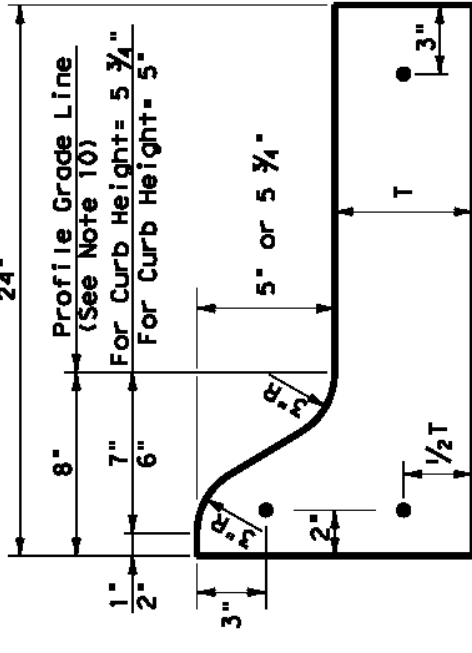


TYPE II CURB AND GUTTER  
5' - 5 3/4" HEIGHT

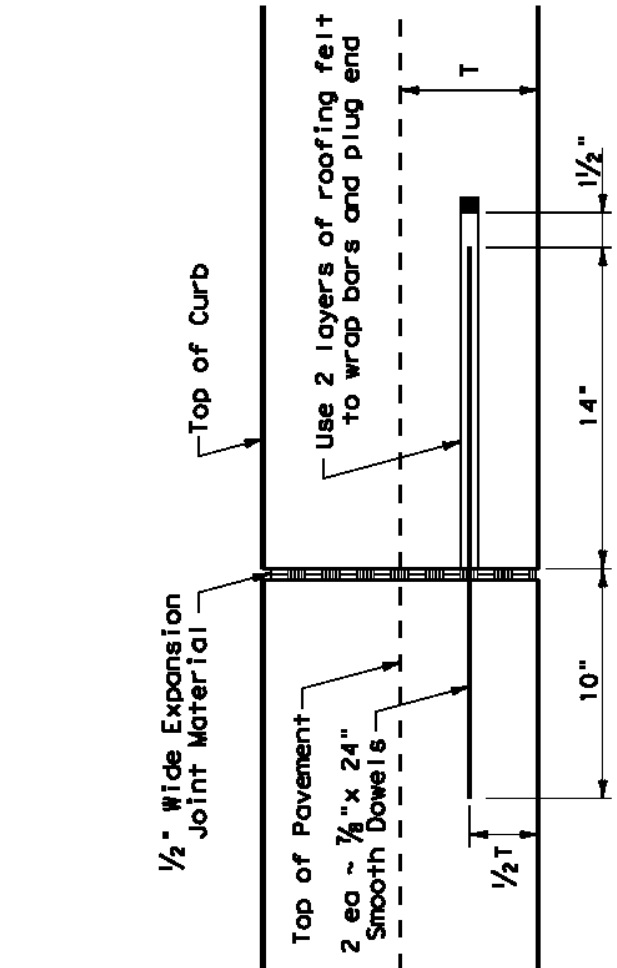

EXPANSION JOINT DETAIL


CURB TRANSITION NOTES:  
Field conditions may require a longer or shorter transition, and shall be shown elsewhere in the plans, or as directed by the Engineer.  
10'-0" Curb Transition (0" to 2"), (See Curb Transition Note)

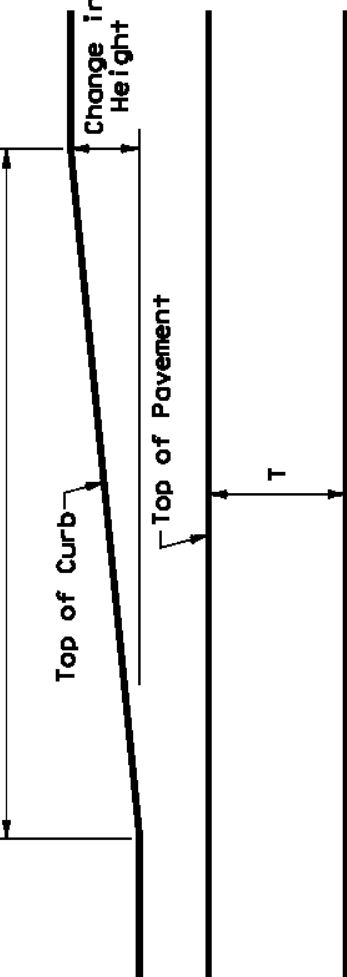

CURB TRANSITION  
Note: To be paid for as Highest Curb

### GENERAL NOTES

- All materials and construction shall be in accordance with Item 529, "Concrete Curb, Gutter, and Combined Curb and Gutter."
- Concrete shall be Class A.
- When reinforcing bars are used, they shall be No. 4 unless otherwise shown. The use of fiber reinforced concrete in lieu of reinforcing steel is acceptable. Use fibers meeting the requirements of DMS 4550, "Fibers for Concrete," and use fibers meeting the requirements of DMS 4550, "Fibers for Concrete," and use fibers for Class A and B Concrete Applications.
- Round exposed sharp edges with a rounding tool, to a minimum radius of 1/4 inch.
- All existing curbs and driveways to be removed shall be sawed or removed at existing joints.
- Where concrete curb is to be placed on existing concrete pavement, Bar B may be drilled and the grouted in place, or may be inserted into fresh concrete.
- Expansion and contraction joints shall be constructed to match pavement joints in all curbs and curb and gutter adjacent to jointed concrete pavement. Where placement of curb or curb and gutter is not adjacent to jointed concrete pavement, expansion and contraction joints shall be provided at structures, curb returns at streets, and at locations directed by the Engineer.
- Vertical and horizontal dowel bars and transverse reinforcing bars shall be placed at four feet C-C.
- Dimension "T" shown is the thickness of concrete pavement. Where the curb is adjacent to flexible pavement dimension "T" is 8" maximum.
- Usual profile grade lines. Refer to typical sections and plan-profile sheets for exact locations.
- One-half inch expansion joint material shall be provided where curb or curb and gutter is adjacent to sidewalk or riprap.
- When horizontal permissible construction joints are used, the longitudinal pavement detail is shown elsewhere in the plans. The curb and gutter shall be constructed to conform to that required for concrete curb.
- Bar B used as needed to support curb reinforcing steel during concrete placement.

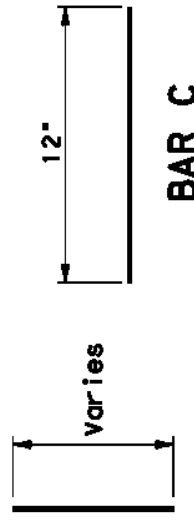

BAR B

BAR C

CONCRETE CURB AND GUTTER

CCCG-21




REVISIONS

FILED: 020210.DPT  
10/01/21  
FEBRUARY 2021

CONTRACT NO. 1-1000000000  
SECTION 1-1000000000  
JOB NO. 1-1000000000  
COUNTY 0107  
SHEET NO. 1-1000000000

### REQUIREMENTS FOR INDEPENDENT MOUNTED ROUTE SIGNS





USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	WHITE	TYPE A SHEETING
BACKGROUND	ALL OTHERS	TYPE B OR C SHEETING
LEGEND & BORDERS	WHITE	TYPE A SHEETING
LEGEND & BORDERS	BLACK	ACRYLIC NON-REFLECTIVE FILM
LEGEND & BORDERS	ALL OTHERS	TYPE B OR C SHEETING

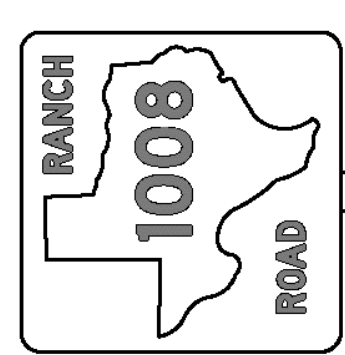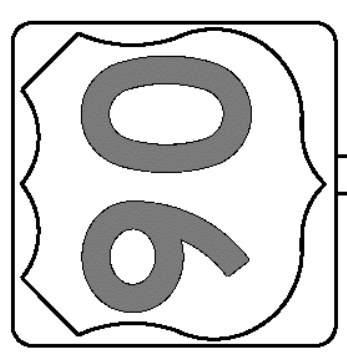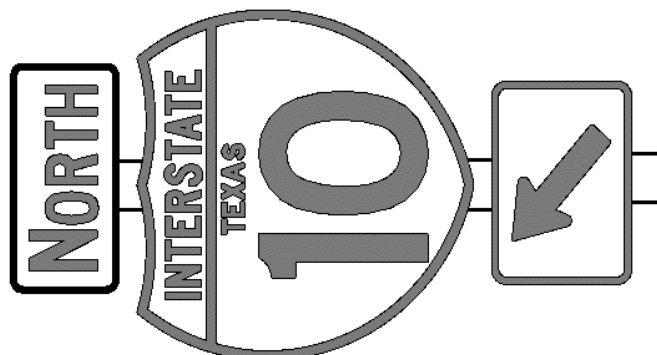

TYPICAL EXAMPLES

### REQUIREMENTS FOR BLUE, BROWN & GREEN D AND I SERIES GUIDE SIGNS

USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	ALL	TYPE B OR C SHEETING
LEGEND & BORDERS	WHITE	TYPE D SHEETING
LEGEND, SYMBOLS & BORDERS	ALL OTHERS	TYPE B OR C SHEETING

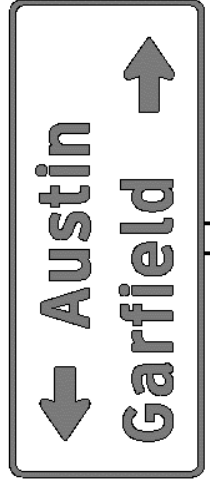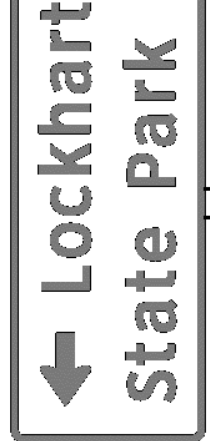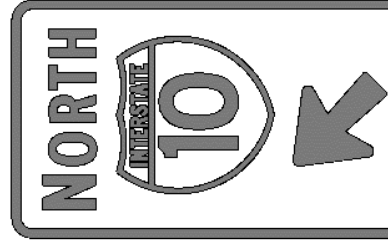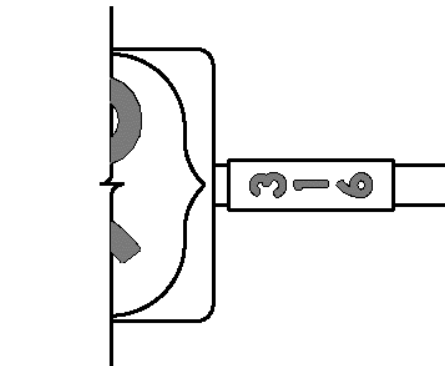

TYPICAL EXAMPLES

### GENERAL NOTES

- Signs to be furnished shall be as detailed elsewhere in the plans and/or as shown on sign tabulation sheet. Standard sign designs and arrow dimensions can be found in the "Standard Highway Sign Design for Texas" (SHSD).
- White legend shall use the ClearView Alphabet. The following ClearView fonts shall be used to replace the existing white Federal Highway Administration (FHWA) Standard Highway Alphabets, when not specified in the SHSD, or in the plans.
- Route sign legend (i.e. IH, US, SH and PM shields) shall use the Federal Highway Administration (FHWA) Standard Highway Alphabets B, C, D, E, End or FI.
- Lateral spacing between letters and numerals shall conform with the SHSD, and any approved changes thereto. Lateral spacing of legend shall provide a balanced appearance when spacing is not shown.
- Independent mounted route sign with white or colored legend and borders shall be applied by screening process with transparent color ink. Transparent color ink shall be applied to the sign face and the legend and borders shall be colored background sheeting or application thereof. White legend, borders and borders on all other signs shall be cut-out white sheeting applied to colored background sheeting.
- Information regarding borders and radii for signs is found in the "Standard Highway Sign Design for Texas". Dimensions shown and described for borders and corner radii on parent sign are nominal. Borders may vary in width as much as 1/2 inch. Corner radii above 3 inches may vary in width as much as 1 inch. Borders and corner radii within a parent sign shall be of matching width. The sign area outside the corner radius shall be trimmed or rounded.
- Sign substrate shall be any material that meets the Departmental Material Specification requirements of DMS-7110 or approved alternative.
- Mounting details of roadside signs are shown in the "SAD series" Standard Plan Sheets.

B	CV-1W
C	CV-2W
D	CV-3W
E	CV-4W
End	CV-5W
FI	CV-6W

DEPARTMENTAL MATERIAL SPECIFICATIONS	
ALUMINUM SIGN BLANKS	DMS-7110
SIGN FACE MATERIALS	DMS-8300

ALUMINUM SIGN BLANKS THICKNESS	
Square Feet	Minimum Thickness
Less than 7.5	0.080
7.5 to 15	0.100
Greater than 15	0.125

The Standard Highway Sign Design for Texas (SHSD) can be found at the following website:  
<http://www.txdot.gov/>

TYPICAL SIGN REQUIREMENTS

TSR(31)-13

FILED: 10/01/21  
10/01/21  
OCTOBER 2021

CONTRACT NO. 1-1000000000  
SECTION 1-1000000000  
JOB NO. 1-1000000000  
COUNTY 0107  
SHEET NO. 1-1000000000



2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351



JARO NORTH SUBDIVISION

TXDOT DETAILS III

SHEET  
T20 OF T35

NO DATE ISSUES AND REVISIONS

NB DEAN, LLC  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130


















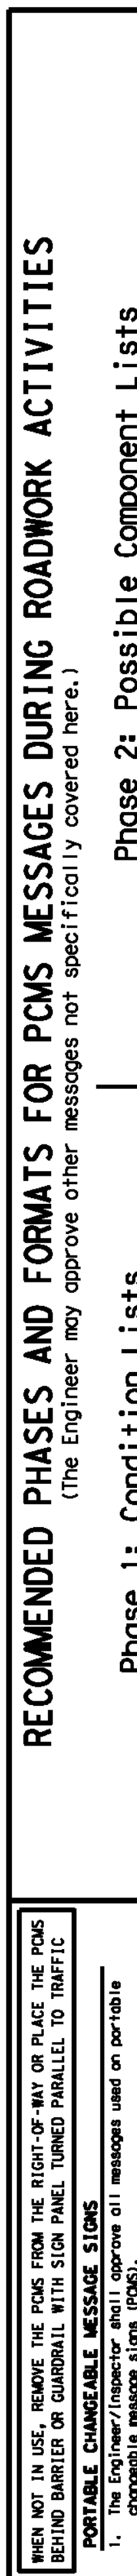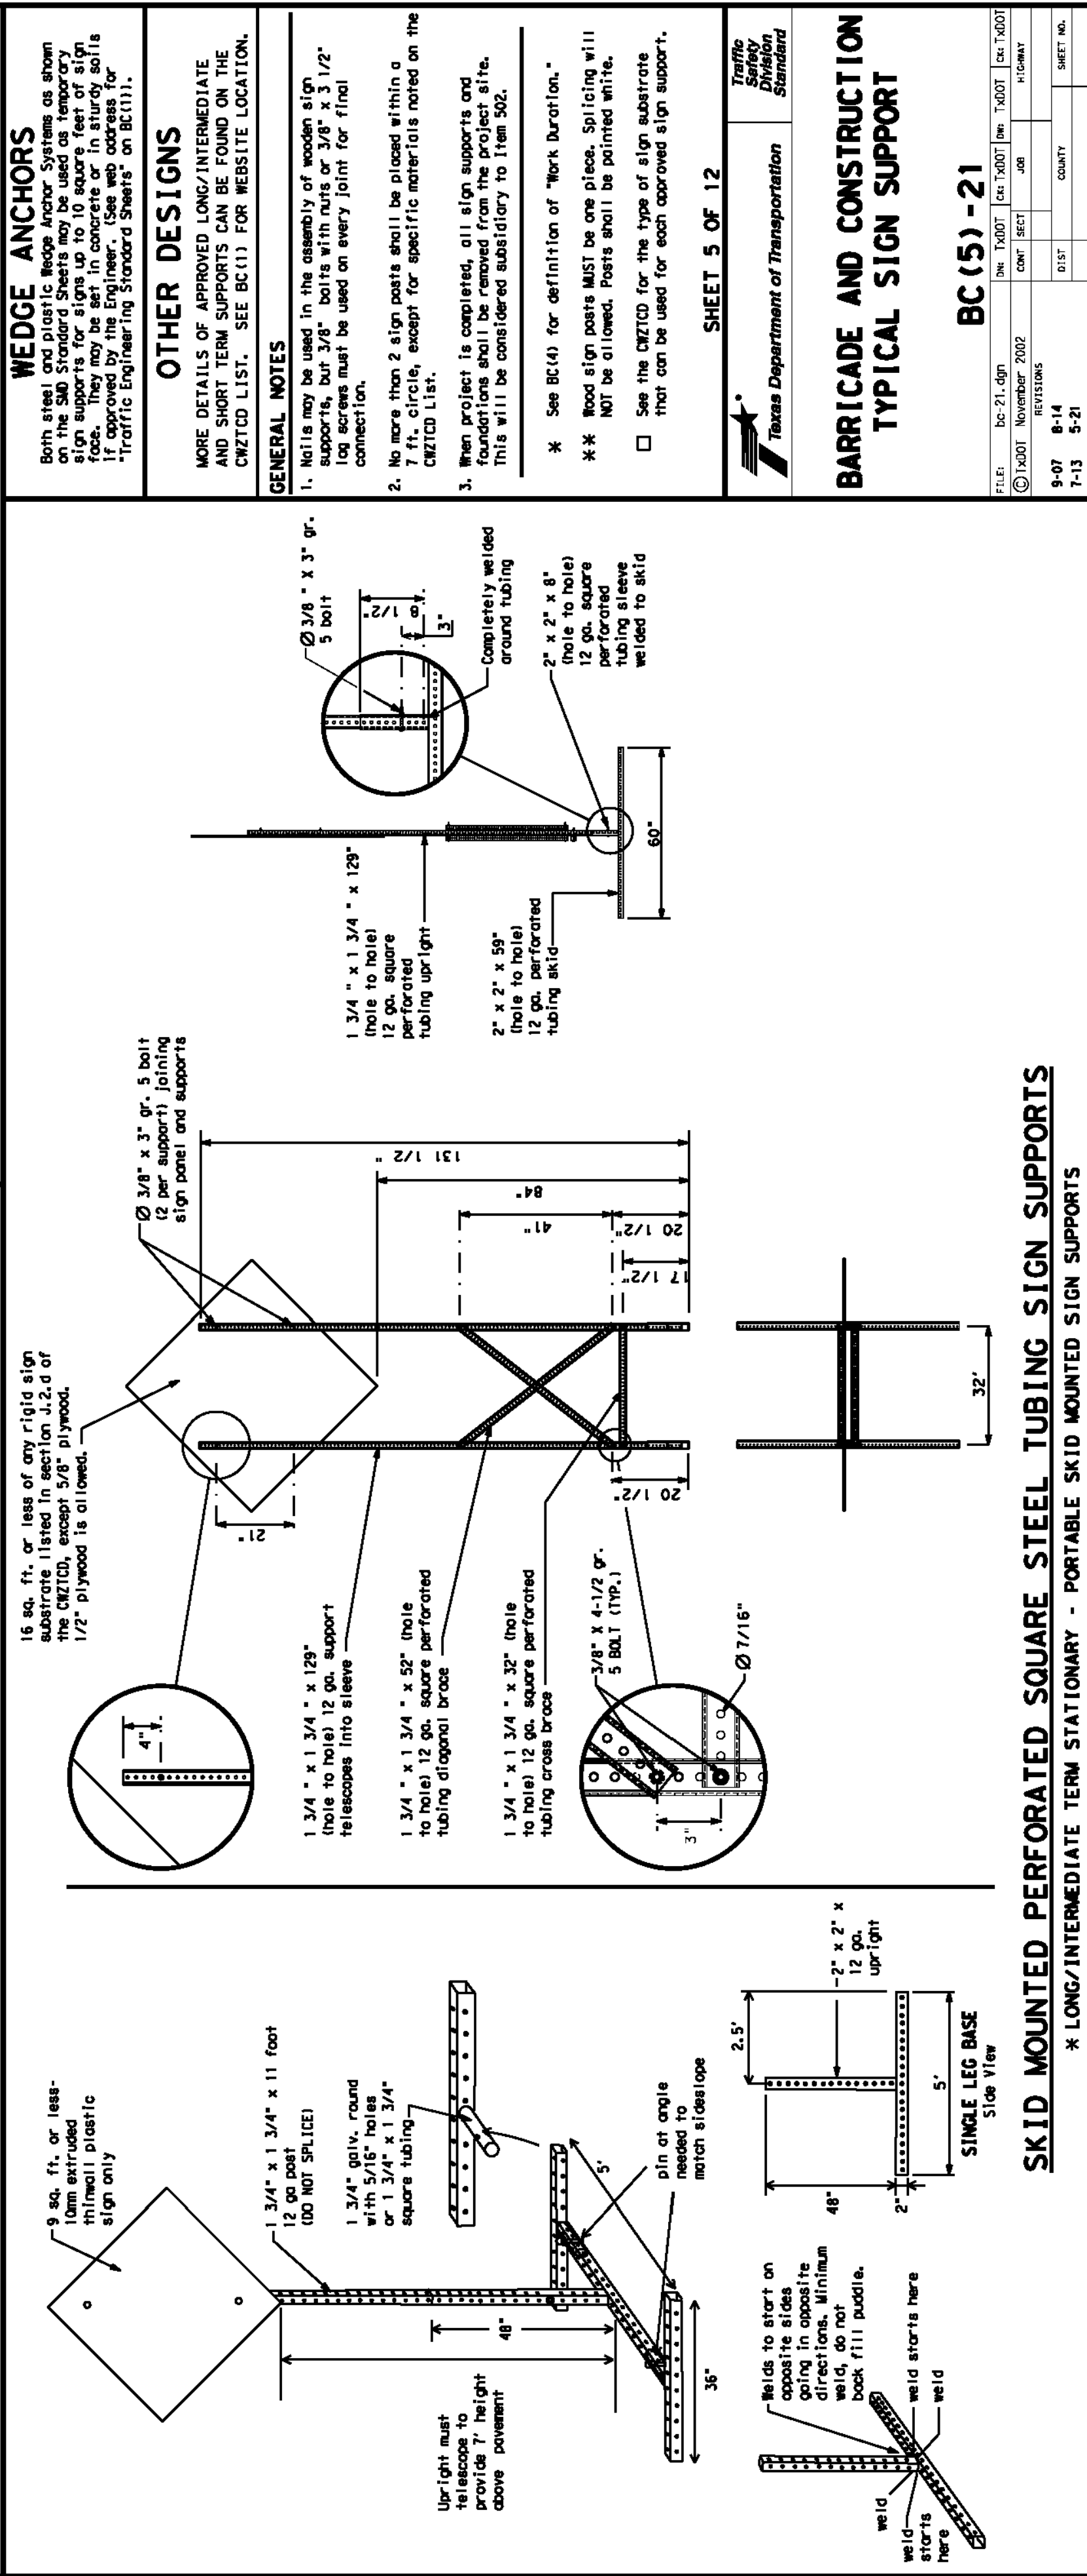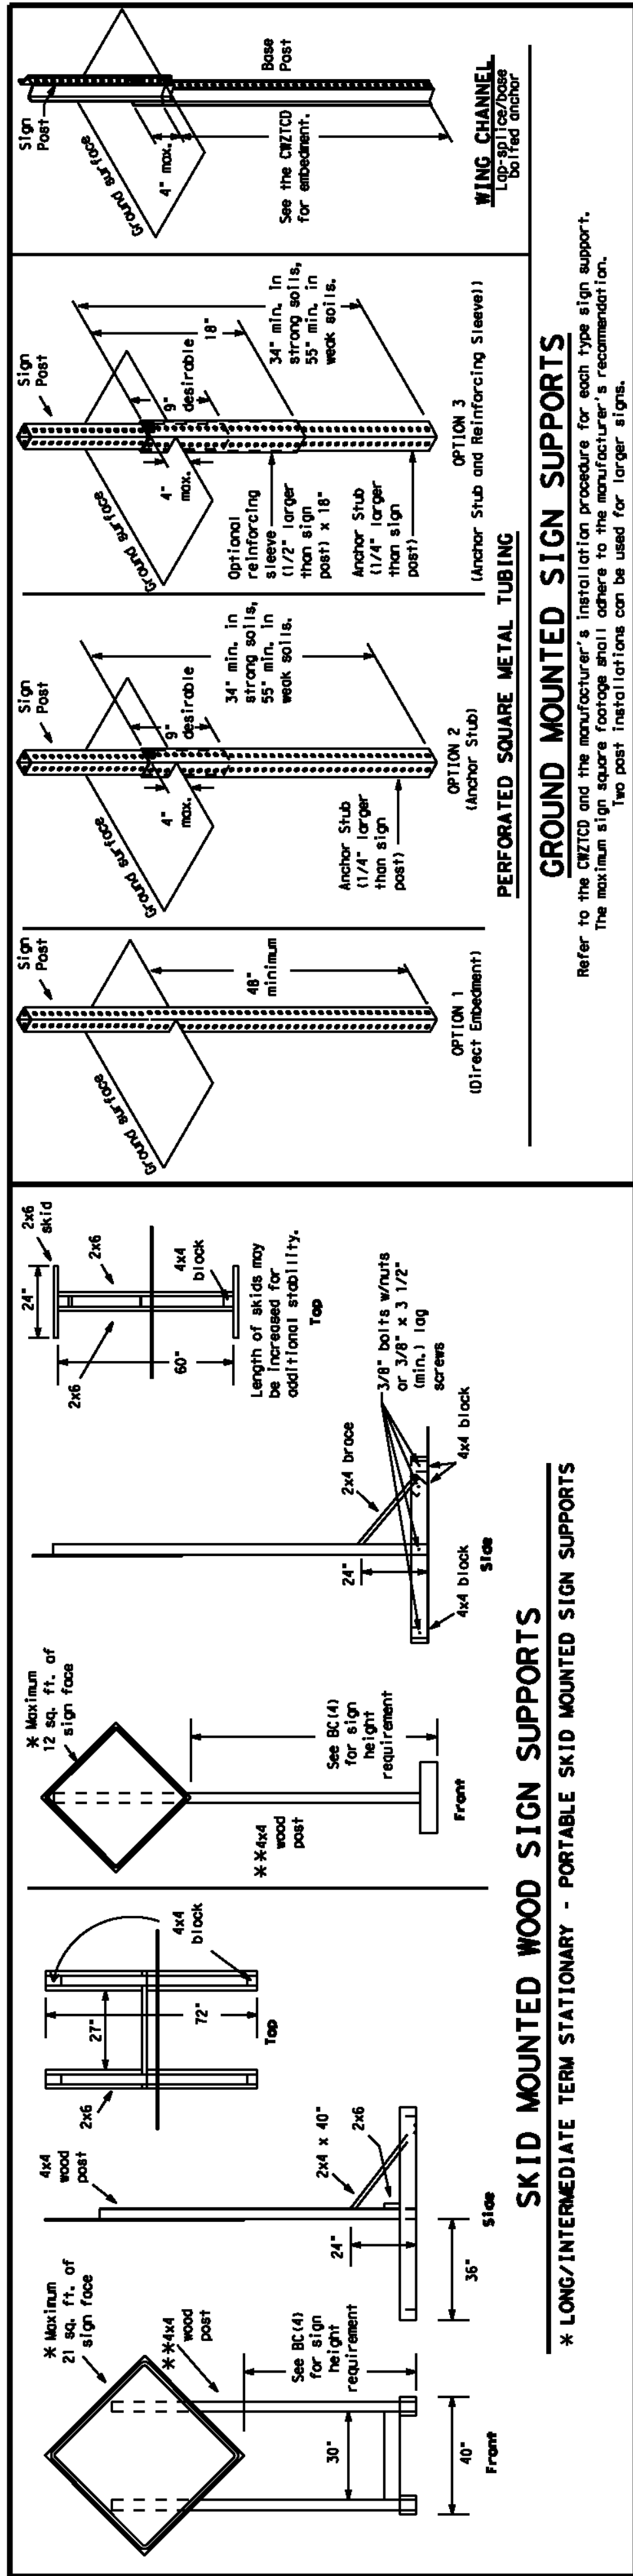

RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES				
(The Engineer may approve other messages not specifically covered here.)				
Phase 1: Condition Lists				
Road/Lane/Ramp Closure List		Other Condition List		Warning List
Freeway Closed X Mile	Frontage Road Closed	Roadwork XXX Ft	Road Repairs XXXX Ft	
Road Closed At Sh XXX	Shoulder Closed XXX Ft	Flagger XXXX Ft	Lane Narrows XXXX Ft	Tue-Fri XX AM- XX PM
Road Closed FM XXXX	Right Ln Closed XXX Ft	Right Ln Narrows FM XXXX	Two-Way Traffic XX Mile	Apr XX- XX PM-X AM
Right X Lanes Closed	Right X Lanes Open	Merging Traffic XXXX Ft	Const Traffic XXX Ft	Begins Monday
Center Lane Closed	Daytime Lane Closures	Loose Gravel XXXX Ft	Uneven Lanes XXXX Ft	Begins May XX
Exit Closed	Night Lane Closures	Detour X Mile	Rough Road XXXX Ft	May X-X XX PM - XX AM
Various Lanes Closed	Exit XXX Closed X Mile	Roadwork Past Next	Roadwork Frt-Sun XXXX Ft	Next Frt-Sun
Exit Closed	Right Ln To Be Closed	Bump XXXX Ft	US XXX North X Miles	XX AM To XX PM
Mall Driveway Closed	X Lanes Closed	Traffic Signal	Lanes Shift	Next Tue Aug XX
				Tonight XX PM-
Phase 2: Possible Component Lists				
Action to Take/Effect on Travel		Location List		Warning List
Merge Right	Form X Lines Right	AT FM XXXX	SPEED LIMIT XX MPH	
Detour Next X Exits <td>Use XXXX RD Exit<td>Before Railroad Crossing<td>Maximum Speed XX MPH<td>Apr XX- XX PM-X AM</td></td></td></td>	Use XXXX RD Exit <td>Before Railroad Crossing<td>Maximum Speed XX MPH<td>Apr XX- XX PM-X AM</td></td></td>	Before Railroad Crossing <td>Maximum Speed XX MPH<td>Apr XX- XX PM-X AM</td></td>	Maximum Speed XX MPH <td>Apr XX- XX PM-X AM</td>	Apr XX- XX PM-X AM
Use Exit XXX <td>Use Exit North<td>Next X Miles<td>Minimum Speed XX MPH<td>Begins Monday</td></td></td></td>	Use Exit North <td>Next X Miles<td>Minimum Speed XX MPH<td>Begins Monday</td></td></td>	Next X Miles <td>Minimum Speed XX MPH<td>Begins Monday</td></td>	Minimum Speed XX MPH <td>Begins Monday</td>	Begins Monday
Stay On US XXX South <td>Use 1-XX E To 1-XX N<td>Past US XXX Exit<td>Advisory Speed XX MPH<td>Begins May XX</td></td></td></td>	Use 1-XX E To 1-XX N <td>Past US XXX Exit<td>Advisory Speed XX MPH<td>Begins May XX</td></td></td>	Past US XXX Exit <td>Advisory Speed XX MPH<td>Begins May XX</td></td>	Advisory Speed XX MPH <td>Begins May XX</td>	Begins May XX
Trucks Use US XXX N <td>Watch For Trucks<td>XXXXXX To Lane XXXXXX<td>Right Lane Exit<td>May X-X XX PM - XX AM</td></td></td></td>	Watch For Trucks <td>XXXXXX To Lane XXXXXX<td>Right Lane Exit<td>May X-X XX PM - XX AM</td></td></td>	XXXXXX To Lane XXXXXX <td>Right Lane Exit<td>May X-X XX PM - XX AM</td></td>	Right Lane Exit <td>May X-X XX PM - XX AM</td>	May X-X XX PM - XX AM
Watch For Trucks <td>Expect Delays<td>US XXX For FM XXXX<td>Use Caution<td>Next Frt-Sun</td></td></td></td>	Expect Delays <td>US XXX For FM XXXX<td>Use Caution<td>Next Frt-Sun</td></td></td>	US XXX For FM XXXX <td>Use Caution<td>Next Frt-Sun</td></td>	Use Caution <td>Next Frt-Sun</td>	Next Frt-Sun
Expect Delays <td>Prepare To Stop<td></td><td>Drive Safely<td>XX AM To XX PM</td></td></td>	Prepare To Stop <td></td> <td>Drive Safely<td>XX AM To XX PM</td></td>		Drive Safely <td>XX AM To XX PM</td>	XX AM To XX PM
Reduce Speed XXX Ft <td>End Shoulder Use<td></td><td>Drive With Care<td>Next Tue Aug XX</td></td></td>	End Shoulder Use <td></td> <td>Drive With Care<td>Next Tue Aug XX</td></td>		Drive With Care <td>Next Tue Aug XX</td>	Next Tue Aug XX
Use Other Routes <td>Watch For Workers<td></td><td></td><td>Tonight XX PM-</td></td>	Watch For Workers <td></td> <td></td> <td>Tonight XX PM-</td>			Tonight XX PM-
** See Application Guidelines Note 6.				

use is up to date.


WORD OR PHRASE	ABBREVIATION
Access Road	ACCESS RD
Alert	ALERT
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL
Alert	AL</








DISCLAIMER  
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

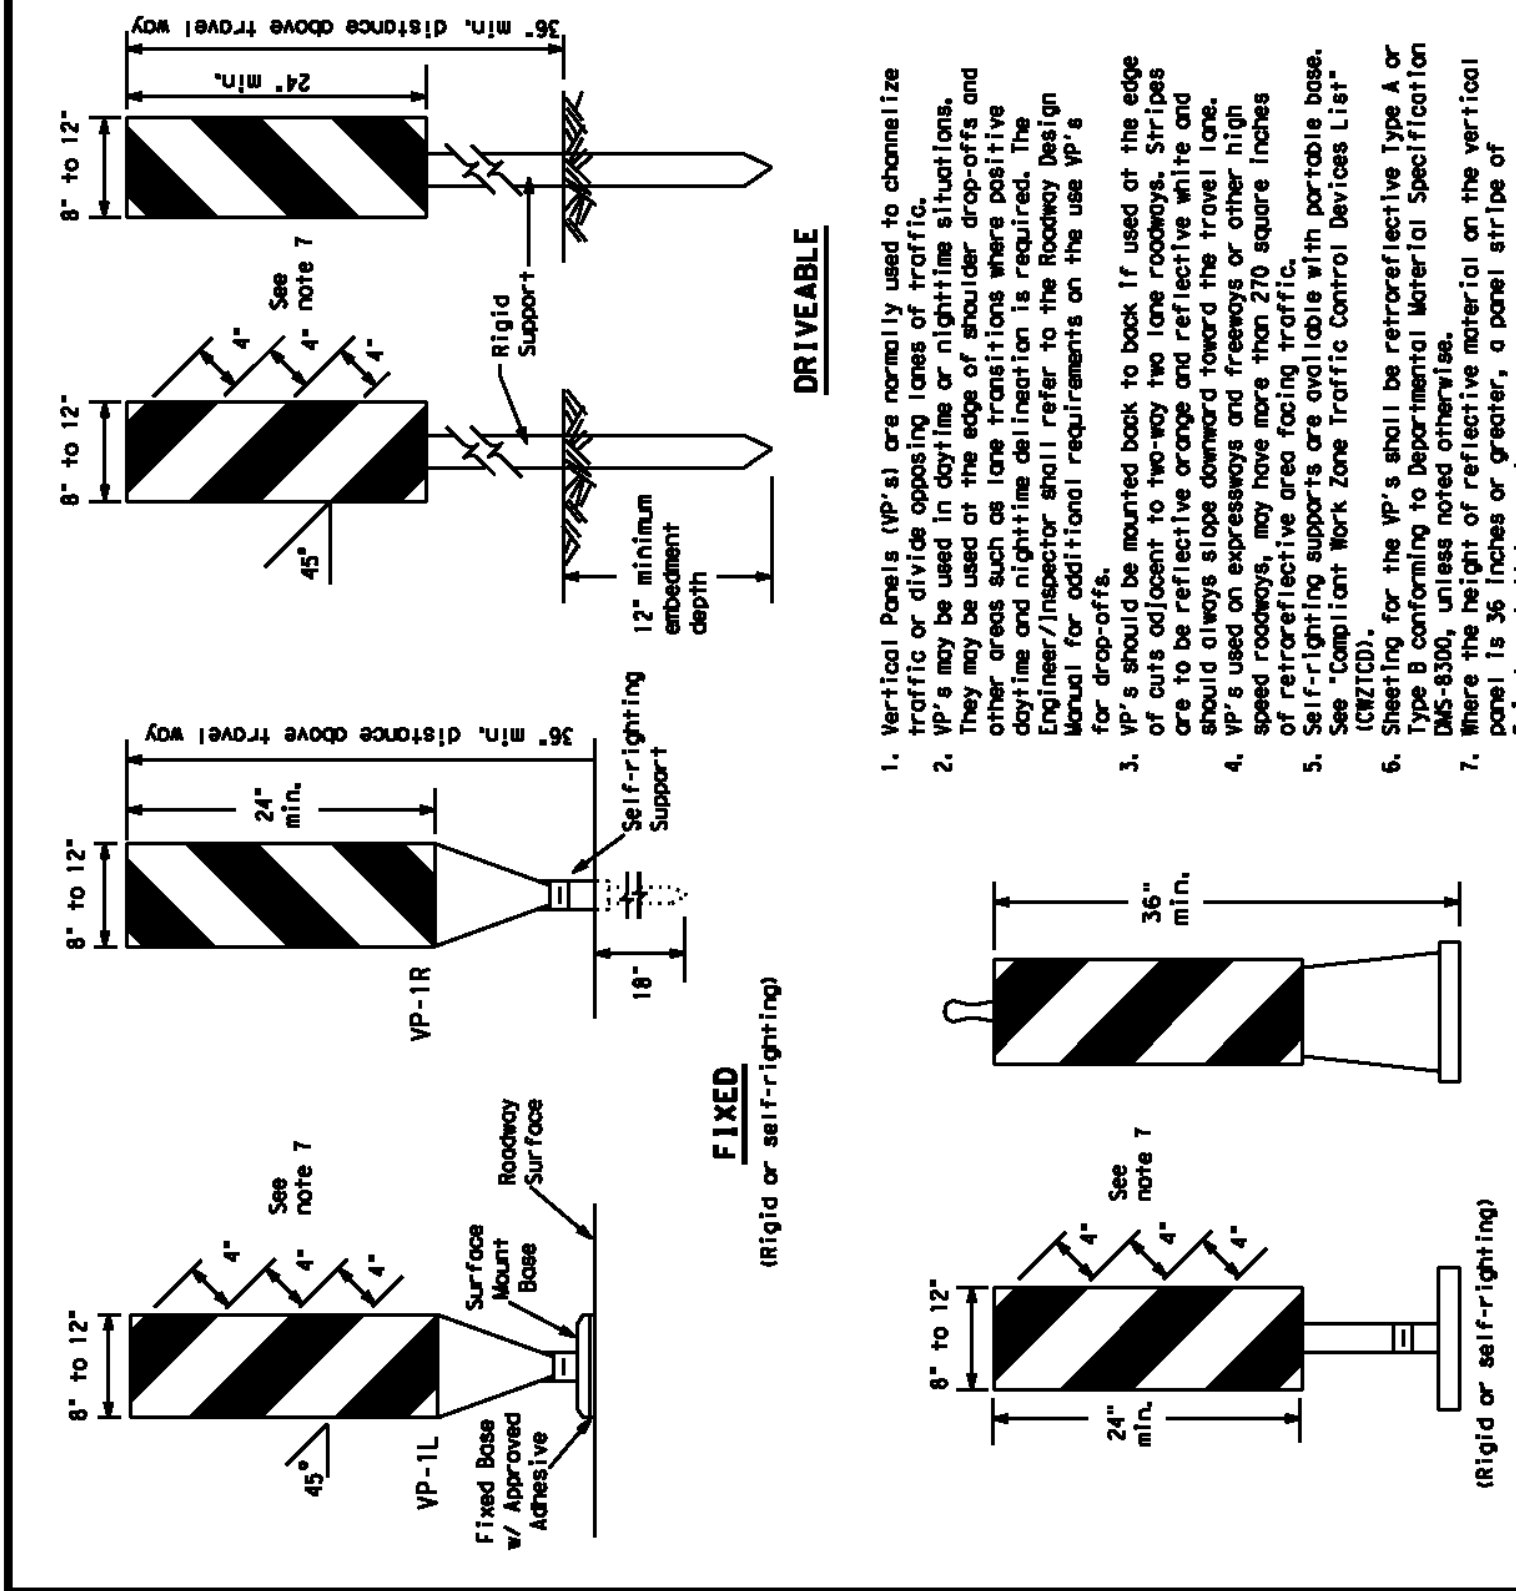


- DRIVEABLE**
- Vertical Panels (VPs) are normally used to channelize traffic on one-way roadways.
  - VPs may be used in day-time or night-time situations. They may be used on the edge of shoulder drop-offs and other areas where traffic is moving in a single direction. The Engineer/Inspector shall refer to the Roadway Design Manual for additional requirements on the use of VP's.
  - VP's should be mounted back to back if used at the edge of cuts adjacent to two-way two lane roadways. Stripes are to be reflective orange and reflective white and reflective yellow and reflective white.
  - VP's are used on expressways and freeways or other high speed roadways, may have more than 270 square inches of reflective area facing traffic.
  - VP's are retroreflective only facing traffic.
  - VP's should be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
  - Where the VP is used as a barrier, a panel stripe of 6 inches shall be used.

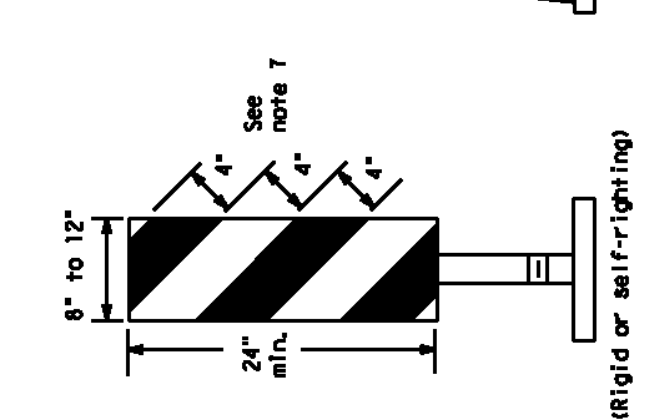


**VERTICAL PANELS (VPs)**

- Opening Traffic Lane Dividers (OTLDs) are used to channelize traffic on two-way roadways. OTLD's are used on temporary centerlines. The upward and downward arrow on the OTLD's shall be reflective orange and reflective white. The OTLD's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- OTLD's should be used in combination with 42" cones or VPs.
- Spacing between the OTLD shall not exceed 500 feet.
- OTLD's should be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- OTLD's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- OTLD's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- OTLD's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.

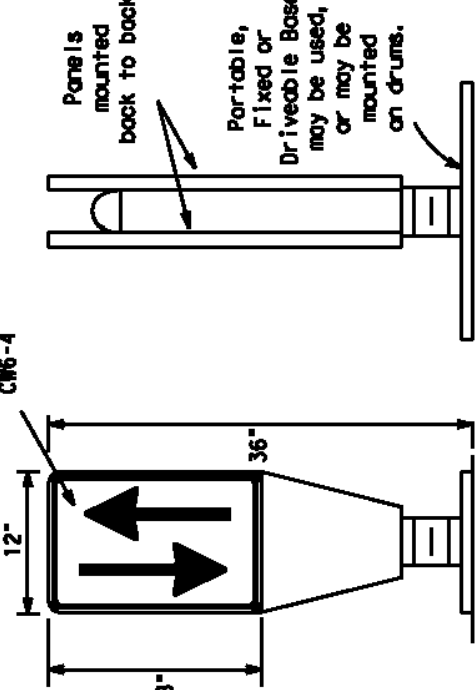


**OPPOSING TRAFFIC LANE DIVIDERS (OTLD)**

- TYPE 3 BARRICADES**
- Refer to the Compliant Work Zone Traffic Control Devices List (CWZTDL) for details of the Type 3 Barricade and a list of all materials.
  - Type 3 Barricades shall be used at each end of construction projects closed to all traffic.
  - Barricades extending across a roadway should have stripes that slope downward in both directions from the center of the barricade. When both right and left turns are provided, the chevron striping may be used on the right side of the barricade. The chevron striping should slope downward in both directions from the center of the barricade.
  - Striping of rolls, for the right side of the roadway, should slope downward to the left, for the left side of the roadway, should slope downward to the right.
  - Identification markings may be shown only on the back of the barricade rolls. The maximum height of letter and/or company logos shall not exceed 100 feet.
  - Barricade rolls shall not be placed parallel to traffic unless an adequate clear zone is provided.
  - Warning lights shall NOT be installed on barricades from turning gear, the use of sandbags with dry, catalinella sand is recommended. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight. Sand bags shall not be stacked in a manner that would prevent the use of the sandbags. The sandbags shall NOT be permitted. Sandbags should weigh a minimum of 35 lbs and a maximum of 45 lbs. Sandbags shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
  - Striping of rolls, for the right side of the roadway, should slope downward to the left, for the left side of the roadway, should slope downward to the right.
  - Striping of rolls, for the right side of the roadway, should slope downward to the left, for the left side of the roadway, should slope downward to the right.
  - Striping of rolls, for the right side of the roadway, should slope downward to the left, for the left side of the roadway, should slope downward to the right.

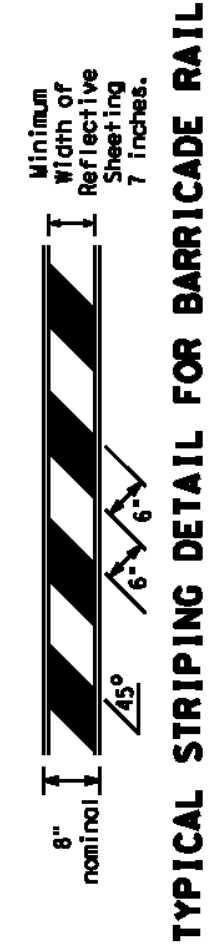

**TYPICAL PANEL DETAIL FOR SKID OR POST TYPE BARRICADES**

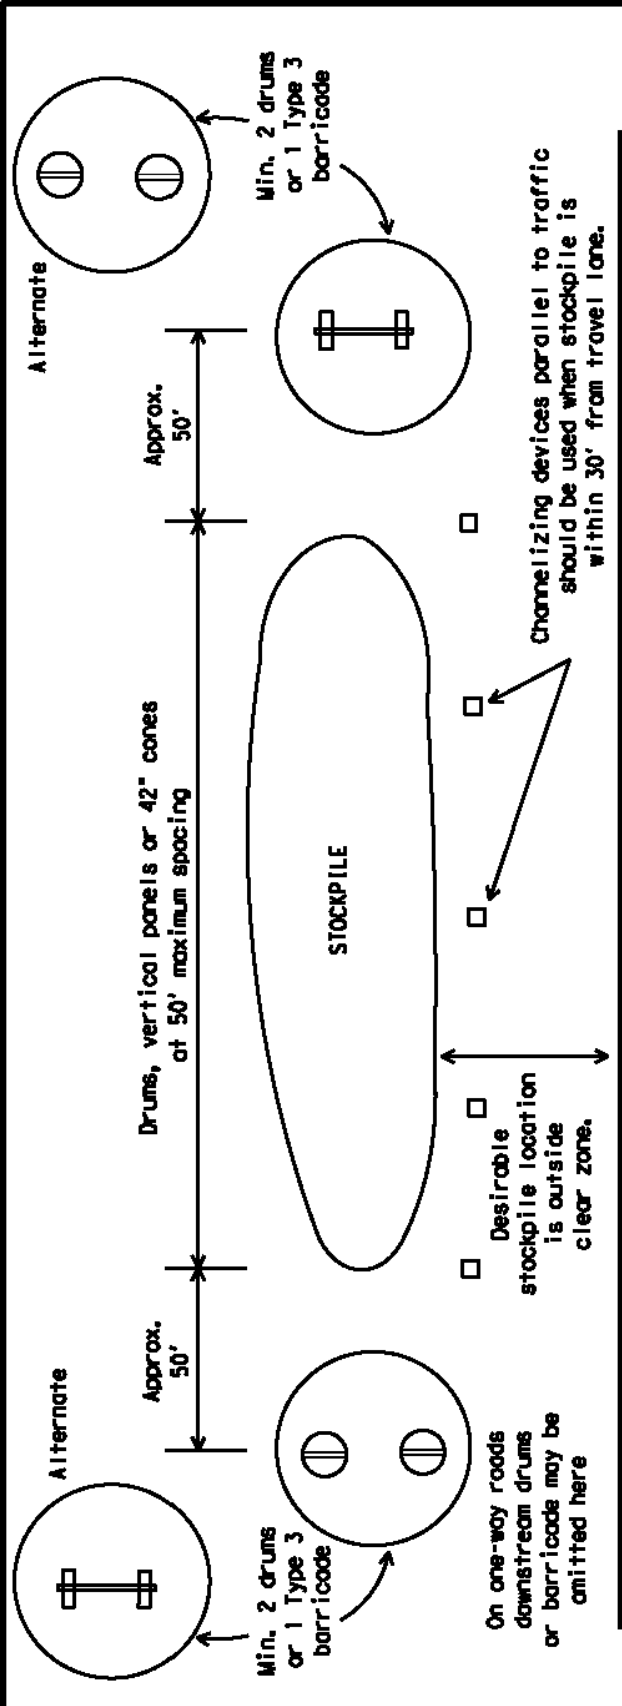

**TRAFFIC CONTROL FOR MATERIAL STOCKPILES**



2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351




NB DEAN, LLC  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

JARO NORTH SUBDIVISION

TXDOT DETAILS IX


SHEET  
T26 OF T35

NO DATE ISSUES AND REVISIONS

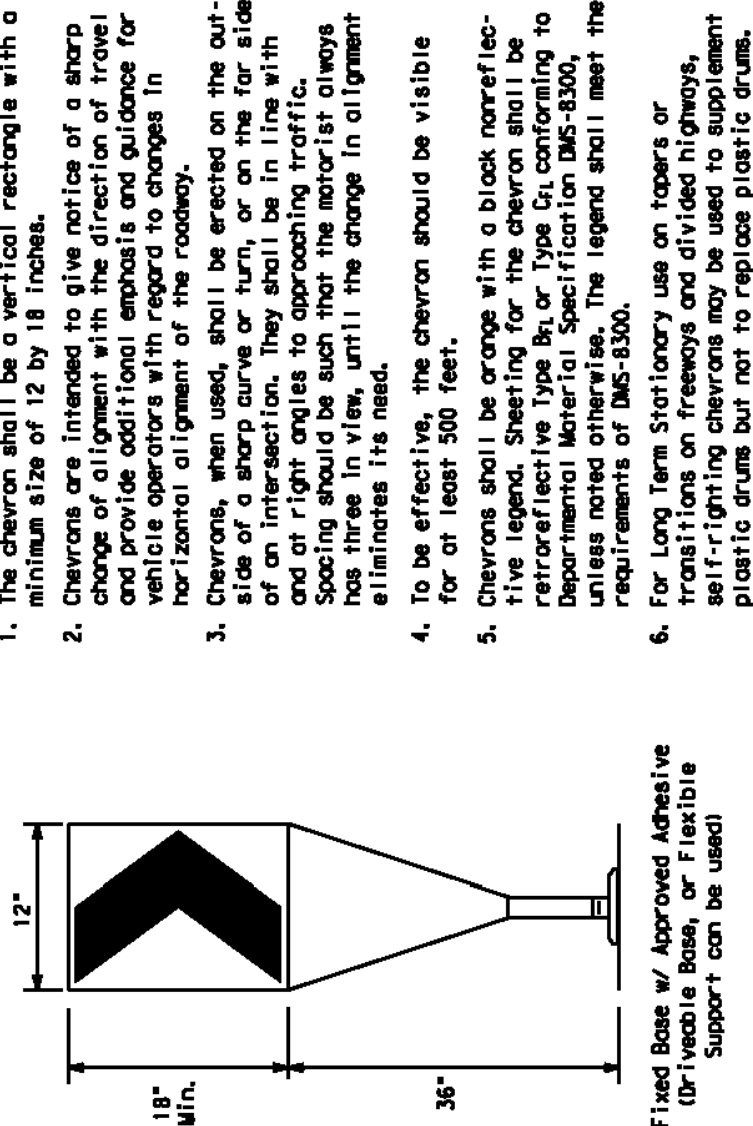

**CHEVRONS**

- The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
- Chevrons are intended to give notice of a sharp change in the direction of travel.
- Chevrons, when used, shall be erected on the outside of the curve of the roadway.
- Chevrons, when used, shall be erected on the outside of the curve of the roadway.
- Chevrons, when used, shall be erected on the outside of the curve of the roadway.
- Chevrons, when used, shall be erected on the outside of the curve of the roadway.
- Chevrons, when used, shall be erected on the outside of the curve of the roadway.

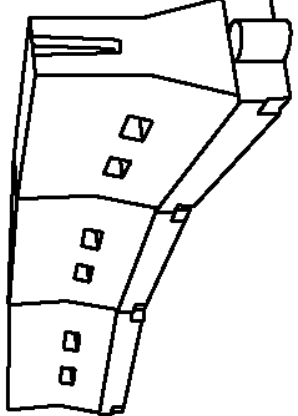

**LONGITUDINAL CHANNELIZING DEVICES (LCD)**

- LCDs are constructed of lightweight, deformable devices that are slightly visible, have good target value and can be connected together. They are not designed to contain or deflect a vehicle on impact.
- LCDs may be used instead of a line of cones or drums.
- LCDs shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- LCDs should be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- LCDs should be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- LCDs should be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- LCDs should be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.

**WATER BALLASTED SYSTEMS USED AS BARRIERS**

- Water ballasted systems used as barriers shall not be used solely to channelize road users, but also to protect the roadway from vehicles that may enter the roadway.
- Water ballasted systems used as barriers shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- Water ballasted systems used as barriers shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- Water ballasted systems used as barriers shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- Water ballasted systems used as barriers shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- Water ballasted systems used as barriers shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- Water ballasted systems used as barriers shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.

If used to channelize pedestrians, longitudinal channelizing devices or water ballasted systems shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.

**HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS**

- GENERAL NOTES**
- The channelizing devices illustrated on this sheet may be provided in any combination of colors and materials that are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUD).
  - Channelizing devices shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
  - Channelizing devices shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
  - Channelizing devices shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
  - Channelizing devices shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
  - Channelizing devices shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
  - Channelizing devices shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.

Posted Speed	Formula	Minimum Target Value	Desirable Target Value	Channelizing Device	Spacing
30	$L = \frac{WS^2}{150}$	150'	165'	180'	30'
35	$L = \frac{WS^2}{150}$	205'	225'	245'	35'
40	$L = \frac{WS^2}{150}$	265'	295'	320'	40'
45	$L = \frac{WS^2}{150}$	330'	365'	400'	45'
50	$L = \frac{WS^2}{150}$	405'	445'	480'	50'
55	$L = \frac{WS^2}{150}$	490'	535'	600'	55'
60	$L = \frac{WS^2}{150}$	585'	635'	720'	60'
65	$L = \frac{WS^2}{150}$	690'	745'	840'	65'
70	$L = \frac{WS^2}{150}$	805'	865'	960'	70'
75	$L = \frac{WS^2}{150}$	930'	995'	1080'	75'
80	$L = \frac{WS^2}{150}$	1065'	1135'	1200'	80'


**SUGGESTED MAXIMUM SPACING OF CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS**

**SHEET 9 OF 12**  
Texas Department of Transportation


**BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES**

BC (9) - 21

FILE	DATE	BY	CHK	DATE	BY	CHK	DATE	BY	CHK
BC (9) - 21	09/07/2002	WILLIAMS	09/14/2002	WILLIAMS	09/14/2002	WILLIAMS	09/14/2002	WILLIAMS	09/14/2002
9-07	8-14	015	015	015	015	015	015	015	015
7-13	5-21								

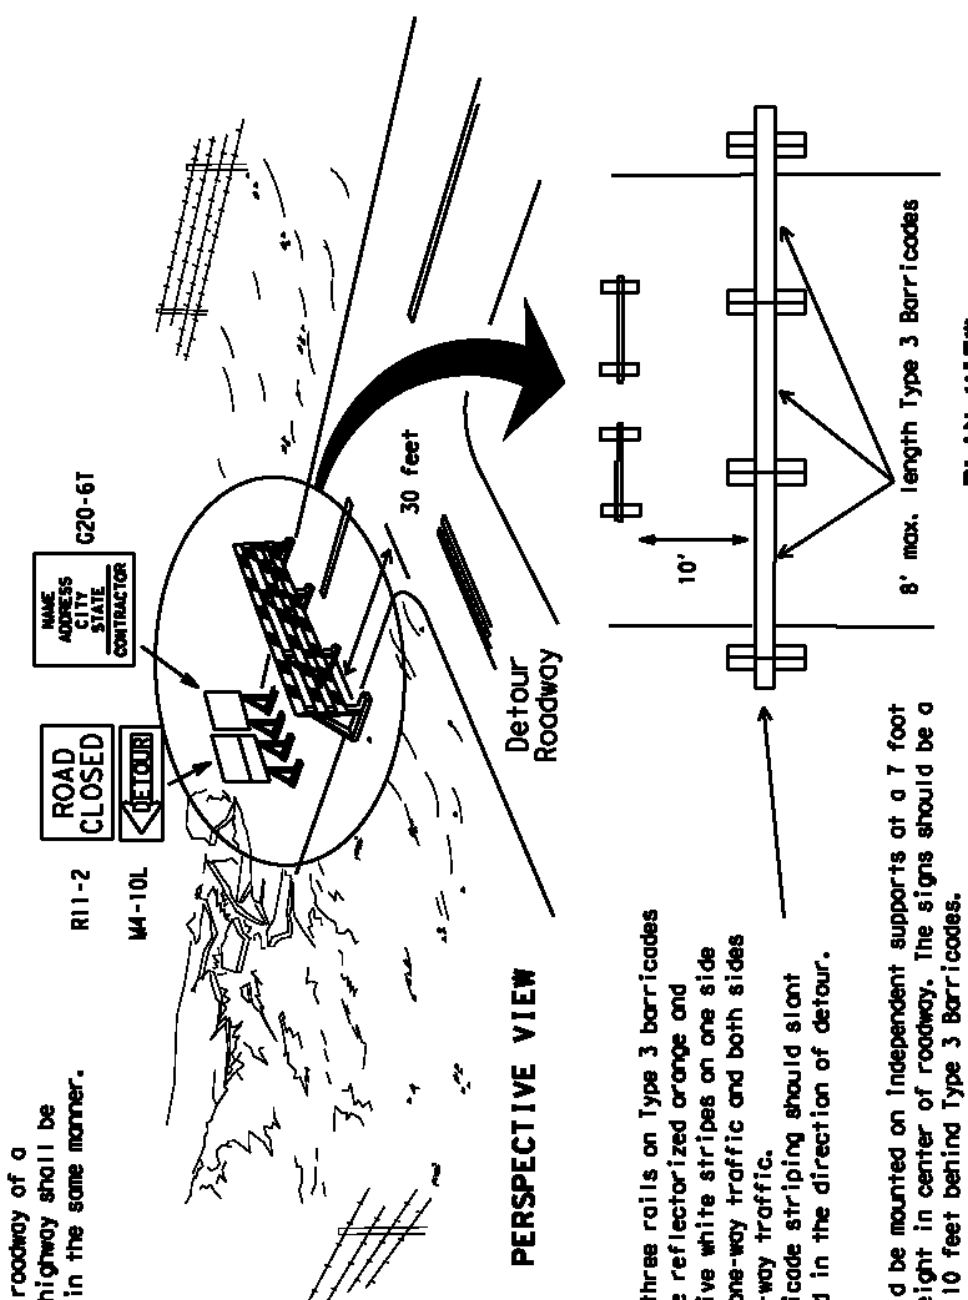


**TYPE 3 BARRICADE (POST AND SKID) TYPICAL APPLICATION**

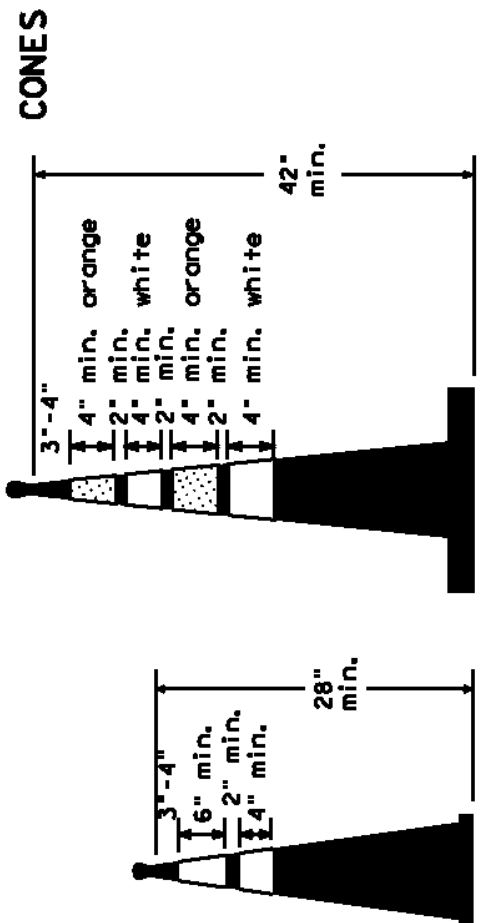

**One-Piece Cones**

28" Cones shall have a minimum weight of 9 1/2 lbs.  
42" 2-piece cones shall have a minimum weight of 30 lbs., including base.

- Traffic cones and tubular markers shall be predominantly orange, and meet the height and weight requirements shown above.
- One-piece cones have the body and base of the cone molded in one consolidated unit. Two-piece cones have a cone shaped body and a separate rubber base.
- Two-piece cones may have a handle or loop extending up to 8" above the minimum height shown, in order to aid in retrieving the device.
- Cones or tubular markers shall have white or orange reflective material on the upper surface and meet the requirements of Departmental Material Specification DMS-8300 Type A or Type B.
- Two-piece cones shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- For intermediate-term or long-term stationary work unless personnel is on-site to maintain them in their proper upright position.
- Two-piece cones, vertical panels or drums are suitable for all work zone and shapes.

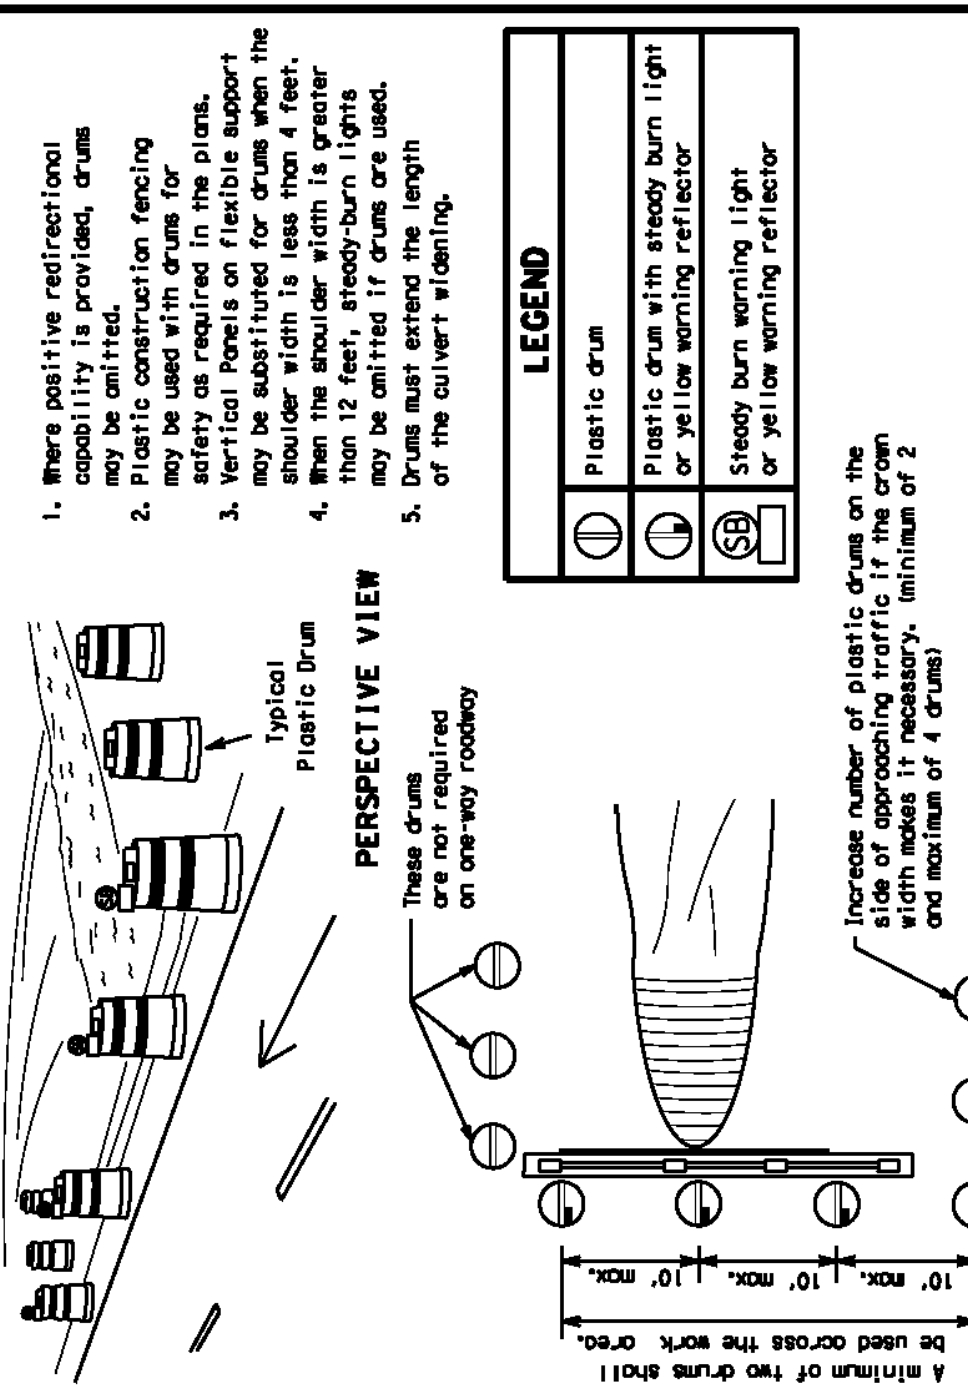

**PLAN VIEW**

**CULVERT WIDENING OR OTHER ISOLATED WORK WITHIN THE PROJECT LIMITS**

**Tubular Marker**

**SHEET 10 OF 12**  
Texas Department of Transportation

**BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES**

BC (10) - 21

FILE	DATE	BY	CHK	DATE	BY	CHK	DATE	BY	CHK
BC (10) - 21	09/07/2002	WILLIAMS	09/14/2002	WILLIAMS	09/14/2002	WILLIAMS	09/14/2002	WILLIAMS	09/14/2002
9-07	8-14	015	015	015	015	015	015	015	015
7-13	5-21								



WORK ZONE PAVEMENT MARKINGS

- GENERAL**
- The Contractor shall be responsible for maintaining work zone and construction markings throughout the project. Construction markings shall be installed in accordance with the TxDOT Standard Plan Sheet WZS(PM). Within the CS, limits unless otherwise stated in the plans, color, patterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUD). Additional supplemental pavement marking details may be found in the plans or specifications.
  - Pavement markings shall be installed in accordance with the TMUD and as shown on the plans.
  - When short term markings are required on the plans, short term markings shall conform with the TMUD, the plans and details as shown on the Standard Plan Sheet WZS(PM).
  - When standard pavement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the work zone. When standard pavement markings are not in place, PASS WITH CARE signs at the beginning of sections where passing is permitted.
  - All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

RAISED PAVEMENT MARKERS

- Raised pavement markers used for work zone markings shall meet the requirements of Item 671, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
- All raised pavement markers used for work zone markings shall meet the requirements of Item 671, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.

PREFABRICATED PAVEMENT MARKINGS


- Removable prefabricated pavement markings shall meet the requirements of Item 672, "Work Zone Pavement Markings."
- Non-removable prefabricated pavement markings (roll back) shall meet the requirements of Item 672, "Work Zone Pavement Markings."

MAINTAINING WORK ZONE PAVEMENT MARKINGS

- The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
- Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Item 599.
- The markings should provide a visible reference for a minimum distance of 300 feet from the closed roadway. The markings should be placed at least 300 feet from the closed roadway and 100 feet from the open roadway. The markings should be placed at right angles to the distance is restricted by roadway geometry.
- Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

- REMOVAL OF PAVEMENT MARKINGS**
- Pavement markings that are no longer needed, could create confusion or direct traffic into the work zone, shall be removed or obliterated before the roadway is opened to traffic.
  - The above shall not apply to detours in place for less than three days, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
  - Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Pavement Markings and Markers."
  - The removal of pavement markings may require resurfacing or seal coating portions of the roadway as used in Item 677.
  - Subject to the approval of the Engineer, any method that proves to be successful on a particular type pavement may be used.
  - Blank cleaning may be used but will not be required unless specifically stated in the plans.
  - Over-painting of the markings SHALL NOT BE permitted.
  - Removal of raised pavement markers shall be as directed by the Engineer.
  - Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
  - Blank-out marking tape may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

Temporary Flexible-Reflective Roadway Marker Tabs

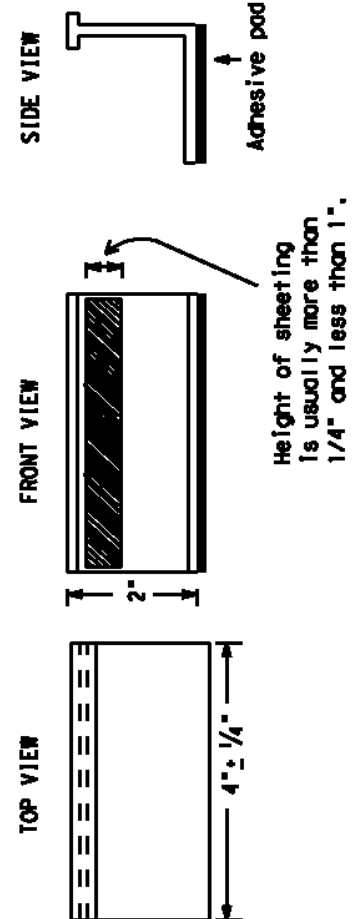

STAPLES OR NAILS SHALL NOT BE USED TO SECURE TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER TABS TO THE PAVEMENT SURFACE

- Temporary flexible-reflective roadway marker tabs used as guidemarks shall meet the requirements of Item 672, "Work Zone Pavement Markings."
- Guidemarks detailed on this sheet are to be inspected and accepted by the Engineer or designated representative. Sampling and testing is not normally required, however at the option of the Engineer, either "A" or "B" testing may be required to ensure quality before placement on the roadway.
- Select five (5) or more tabs at random from each lot or shipment and submit to the Construction Division, Materials and Pavement Section to determine specification compliance.
- Select five (5) tabs and perform the following test. Affix five (5) tabs at 24 inch intervals on an asphaltic pavement in a straight line. Using a medium size passenger vehicle or pickup, travel the line at a speed of 30 to 40 miles per hour in one direction. No more than one (1) out of the five (5) reflective surfaces shall be lost or displaced as a result of this test.
- Small design variations may be noted between tab manufacturers.
- See Standard Sheet WZS(PM) for tab placement on new pavements. See Standard Sheet T27(1-1) for tab placement on seal coat work.

RAISED PAVEMENT MARKERS USED AS GUIDEMARKS

- Raised pavement markers used as guidemarks shall be from the approved product list, and meet the requirements of Item 672, "Work Zone Pavement Markings."
- All temporary construction raised pavement markers provided on a project shall be of the same manufacturer.
- Adhesive for guidemarks shall be bituminous material hot applied or butyl rubber pad for all surfaces, or thermoplastic for concrete surfaces.

Guidemarks shall be designated as:  
YELLOW - two color reflective surface with yellow body.  
WHITE - one color reflective surface with white body.

**SHEET 11 OF 12**


**BARRICADE AND CONSTRUCTION PAVEMENT MARKINGS**

**BC(11)-21**


FILED: DEC 21, 2021  
COUNTY: DALLAS  
PROJECT: 1-97  
SHEET NO.: 11 OF 12

DATE: JAN 12, 2022  
COUNTY: DALLAS  
PROJECT: 1-97  
SHEET NO.: 11 OF 12


PAVEMENT MARKING PATTERNS

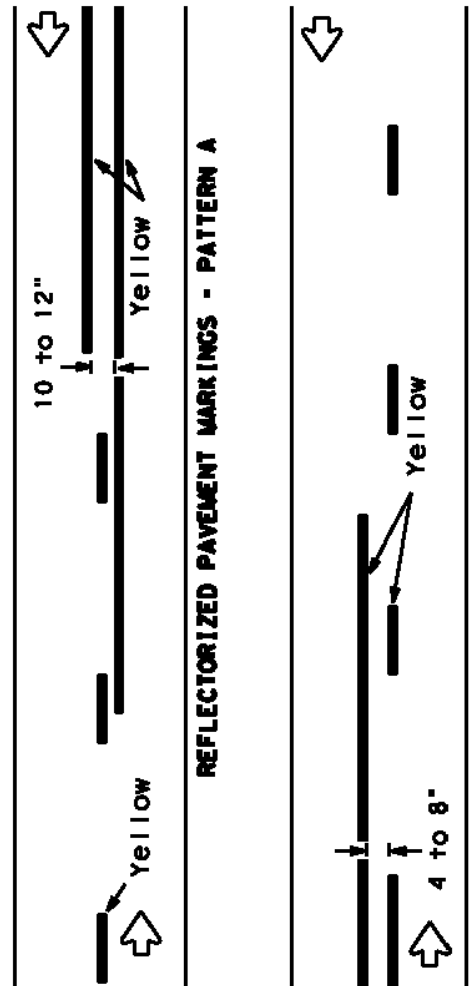


CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO-LANE, TWO-WAY HIGHWAYS

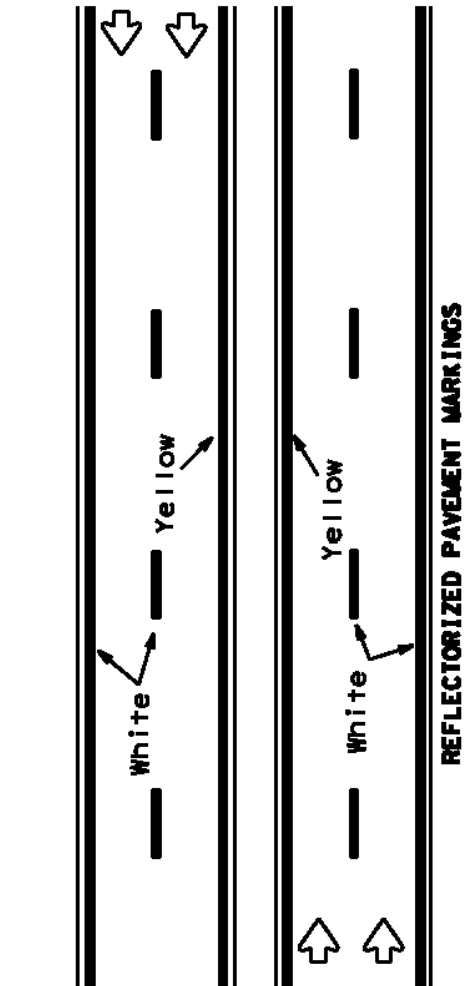


EDGE & LANE LINES FOR DIVIDED HIGHWAY

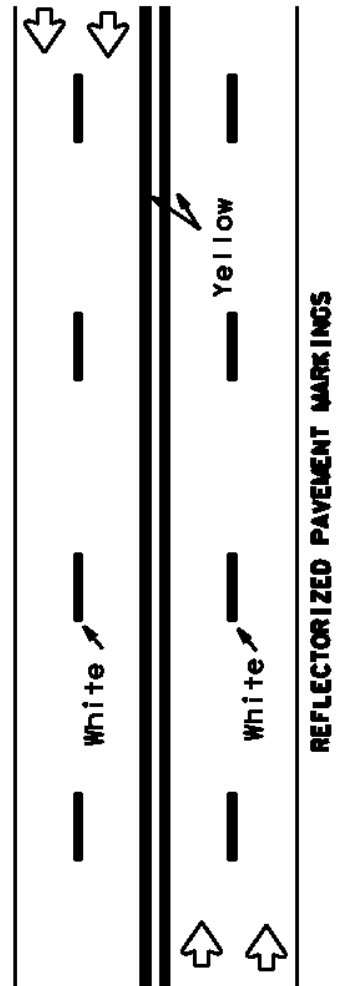


LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS

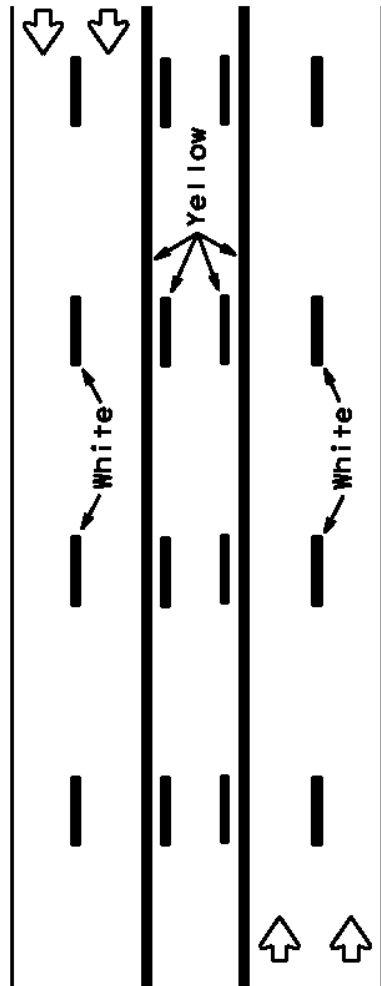

TWO-WAY LEFT TURN LANE



STANDARD WORK ZONE PAVEMENT MARKINGS DETAILS

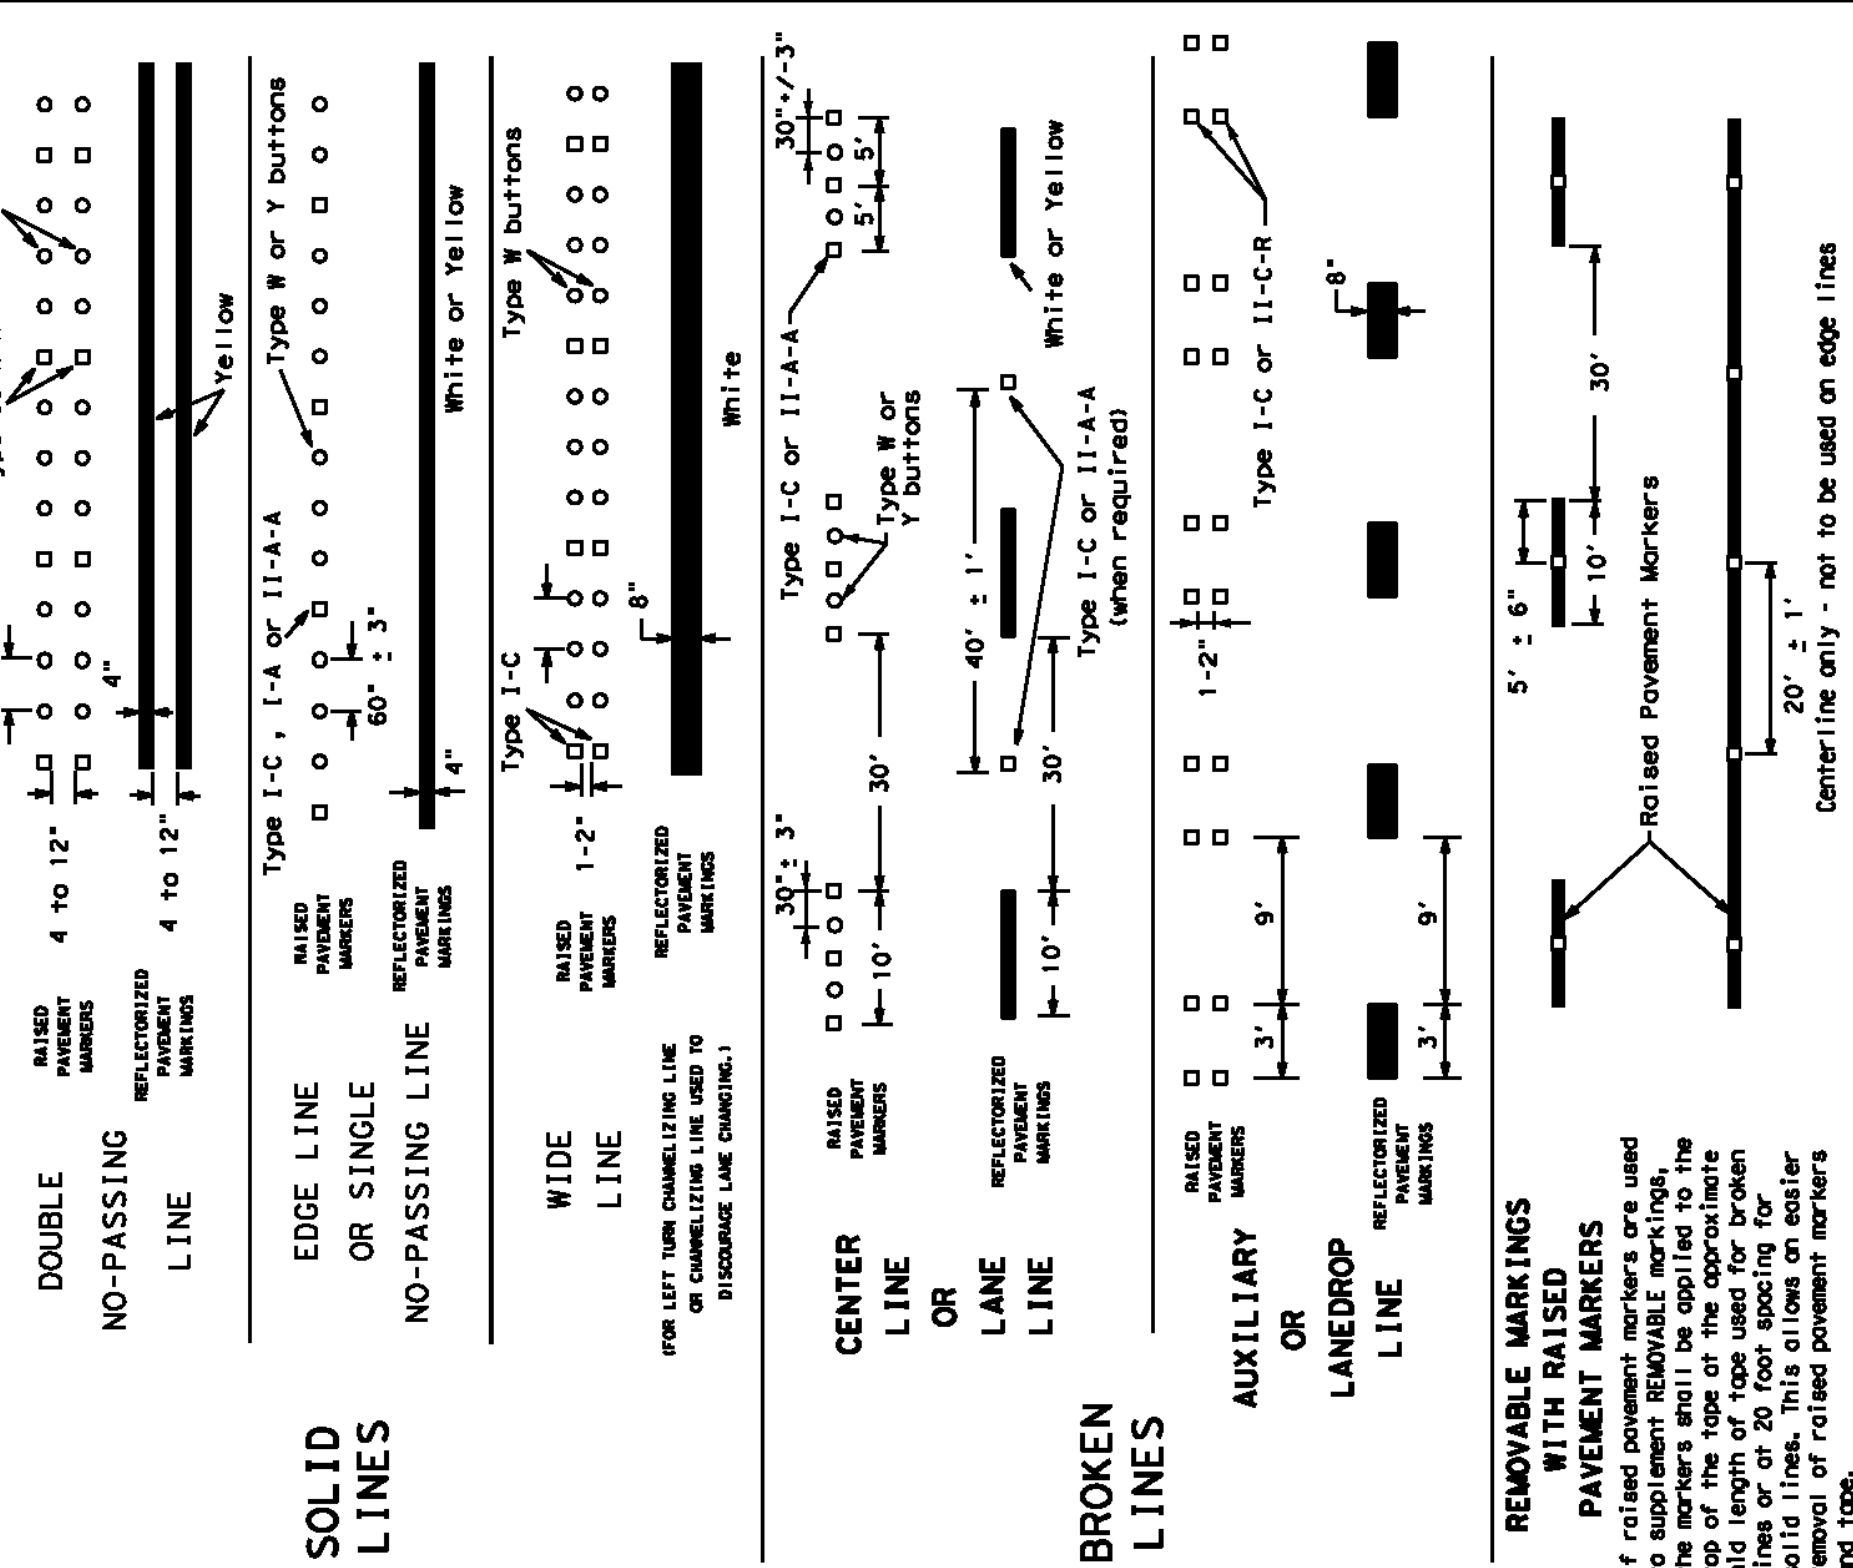

**SHEET 12 OF 12**

**BARRICADE AND CONSTRUCTION PAVEMENT MARKING PATTERNS**

**BC(12)-21**

FILED: DEC 21, 2021  
COUNTY: DALLAS  
PROJECT: 1-97  
SHEET NO.: 12 OF 12

DATE: JAN 12, 2022  
COUNTY: DALLAS  
PROJECT: 1-97  
SHEET NO.: 12 OF 12

Raised pavement markers used as standard construction markings shall meet the requirements of Item 672 "RAISED PAVEMENT MARKERS."

2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351

JARO NORTH SUBDIVISION

TXDOT DETAILS X



T27 OF T35

NO DATE ISSUES AND REVISIONS

NB DEAN, LLC  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

STATE OF TEXAS  
MELANIE NORRIS  
140721  
LICENSED PROFESSIONAL ENGINEER  
Melanie Norris 1/14/22



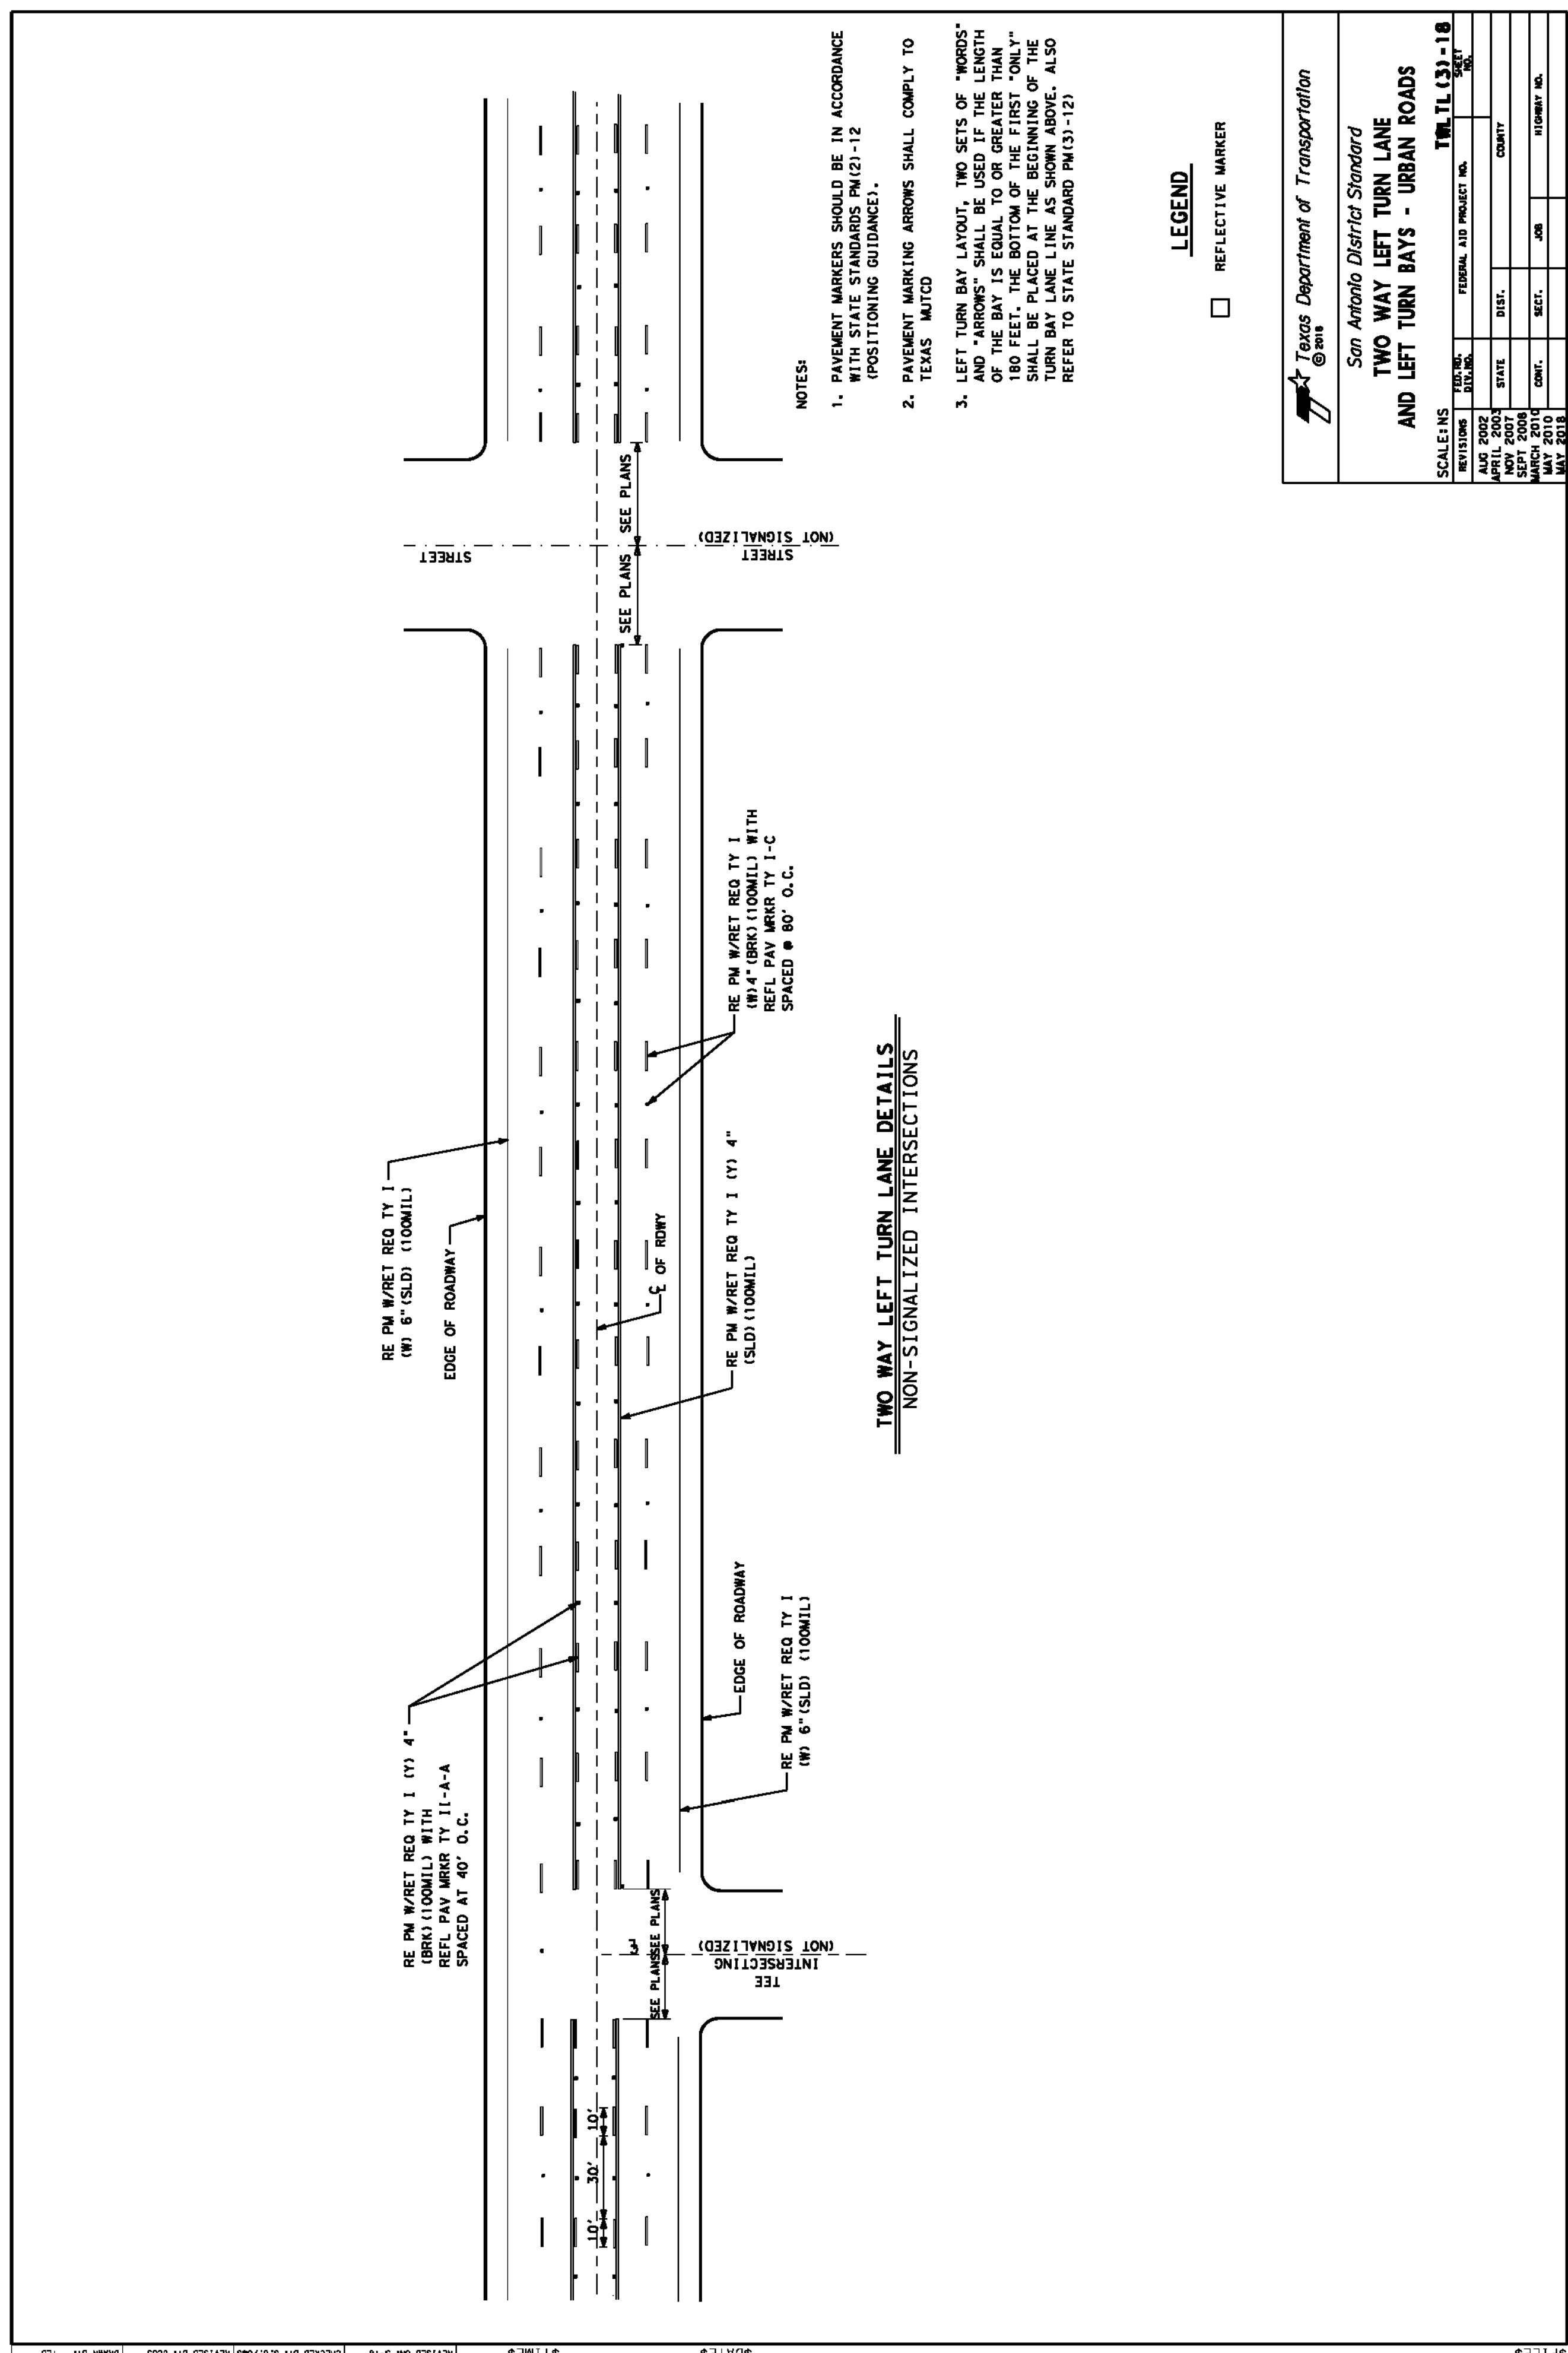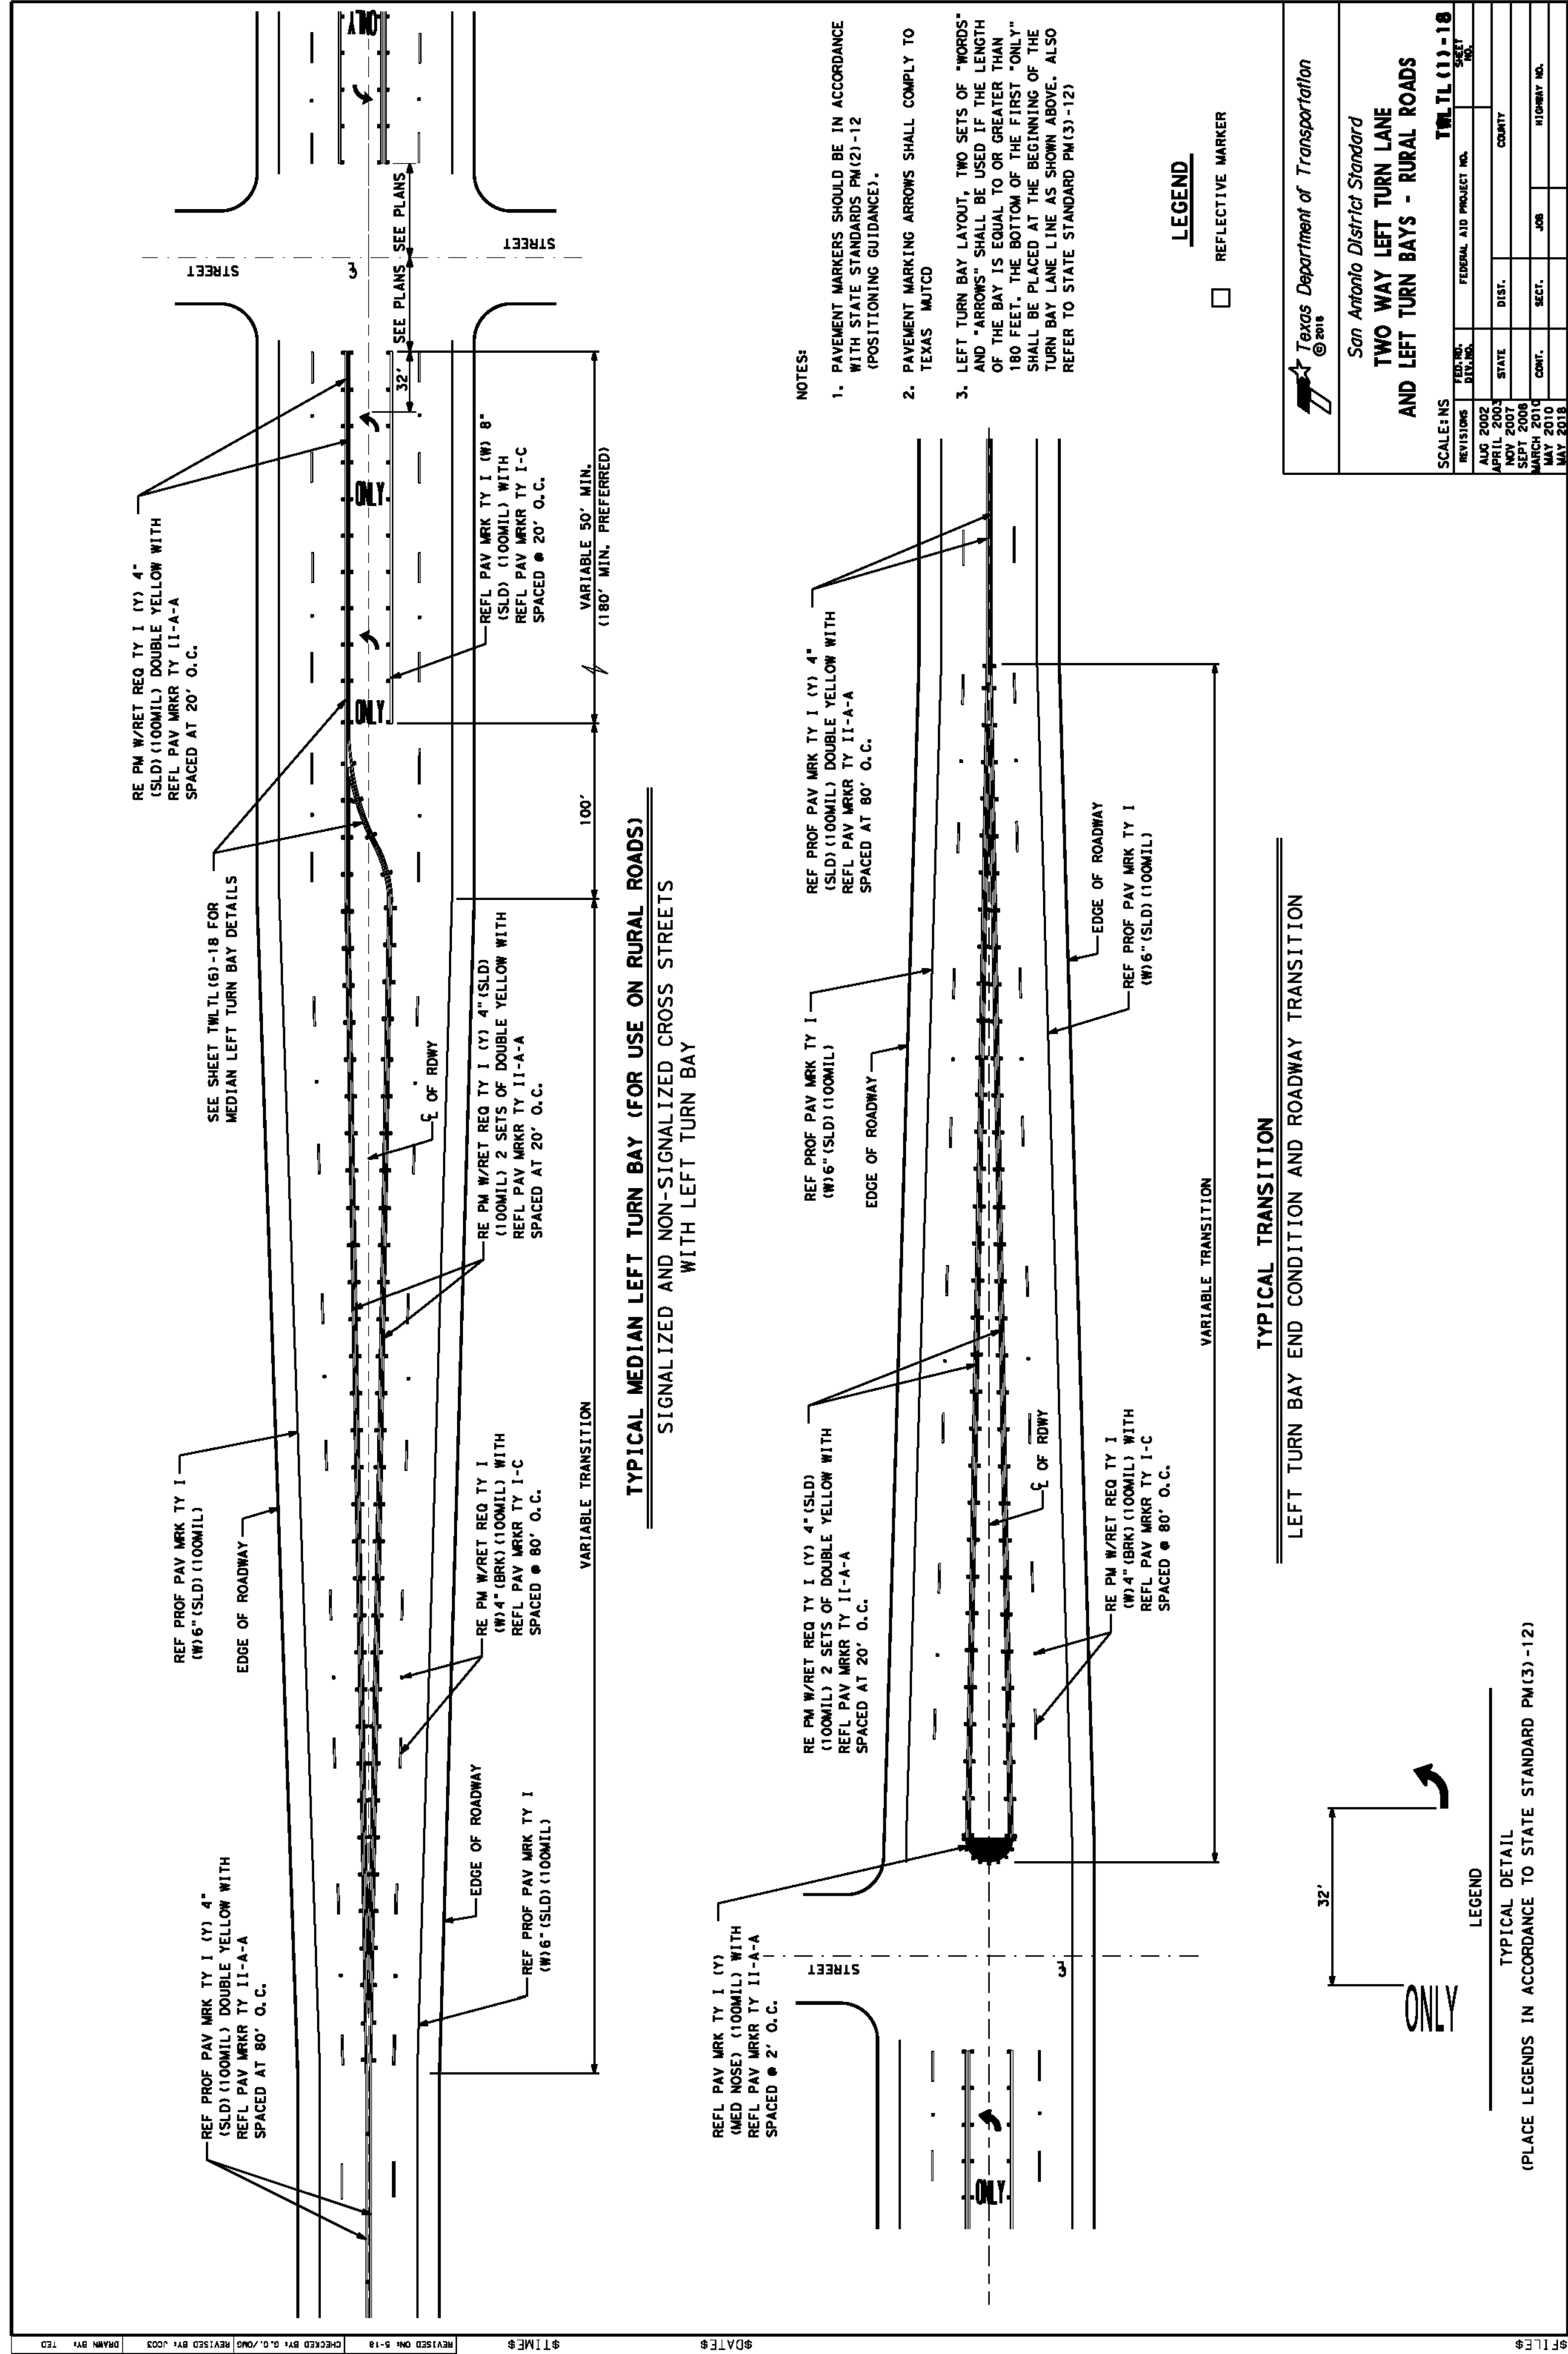

**NB DEAN, LLC**  
1286 RIVER RD  
W BRAUNFELS, TX 78130

JARO NORTH SUBDIVISION

TXDOT DETAILS XI

SHEET


T28 OF T35

NO	DATE	ISSUES AND REVISIONS
△		

The logo for INK CIVIL features the word "INK" in a large, bold, sans-serif font, enclosed within a thick black rounded rectangular border. Below this, the word "CIVIL" is written in a smaller, spaced-out, sans-serif font.

2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127      ink-civil.com  
TBPE FIRM F-13351




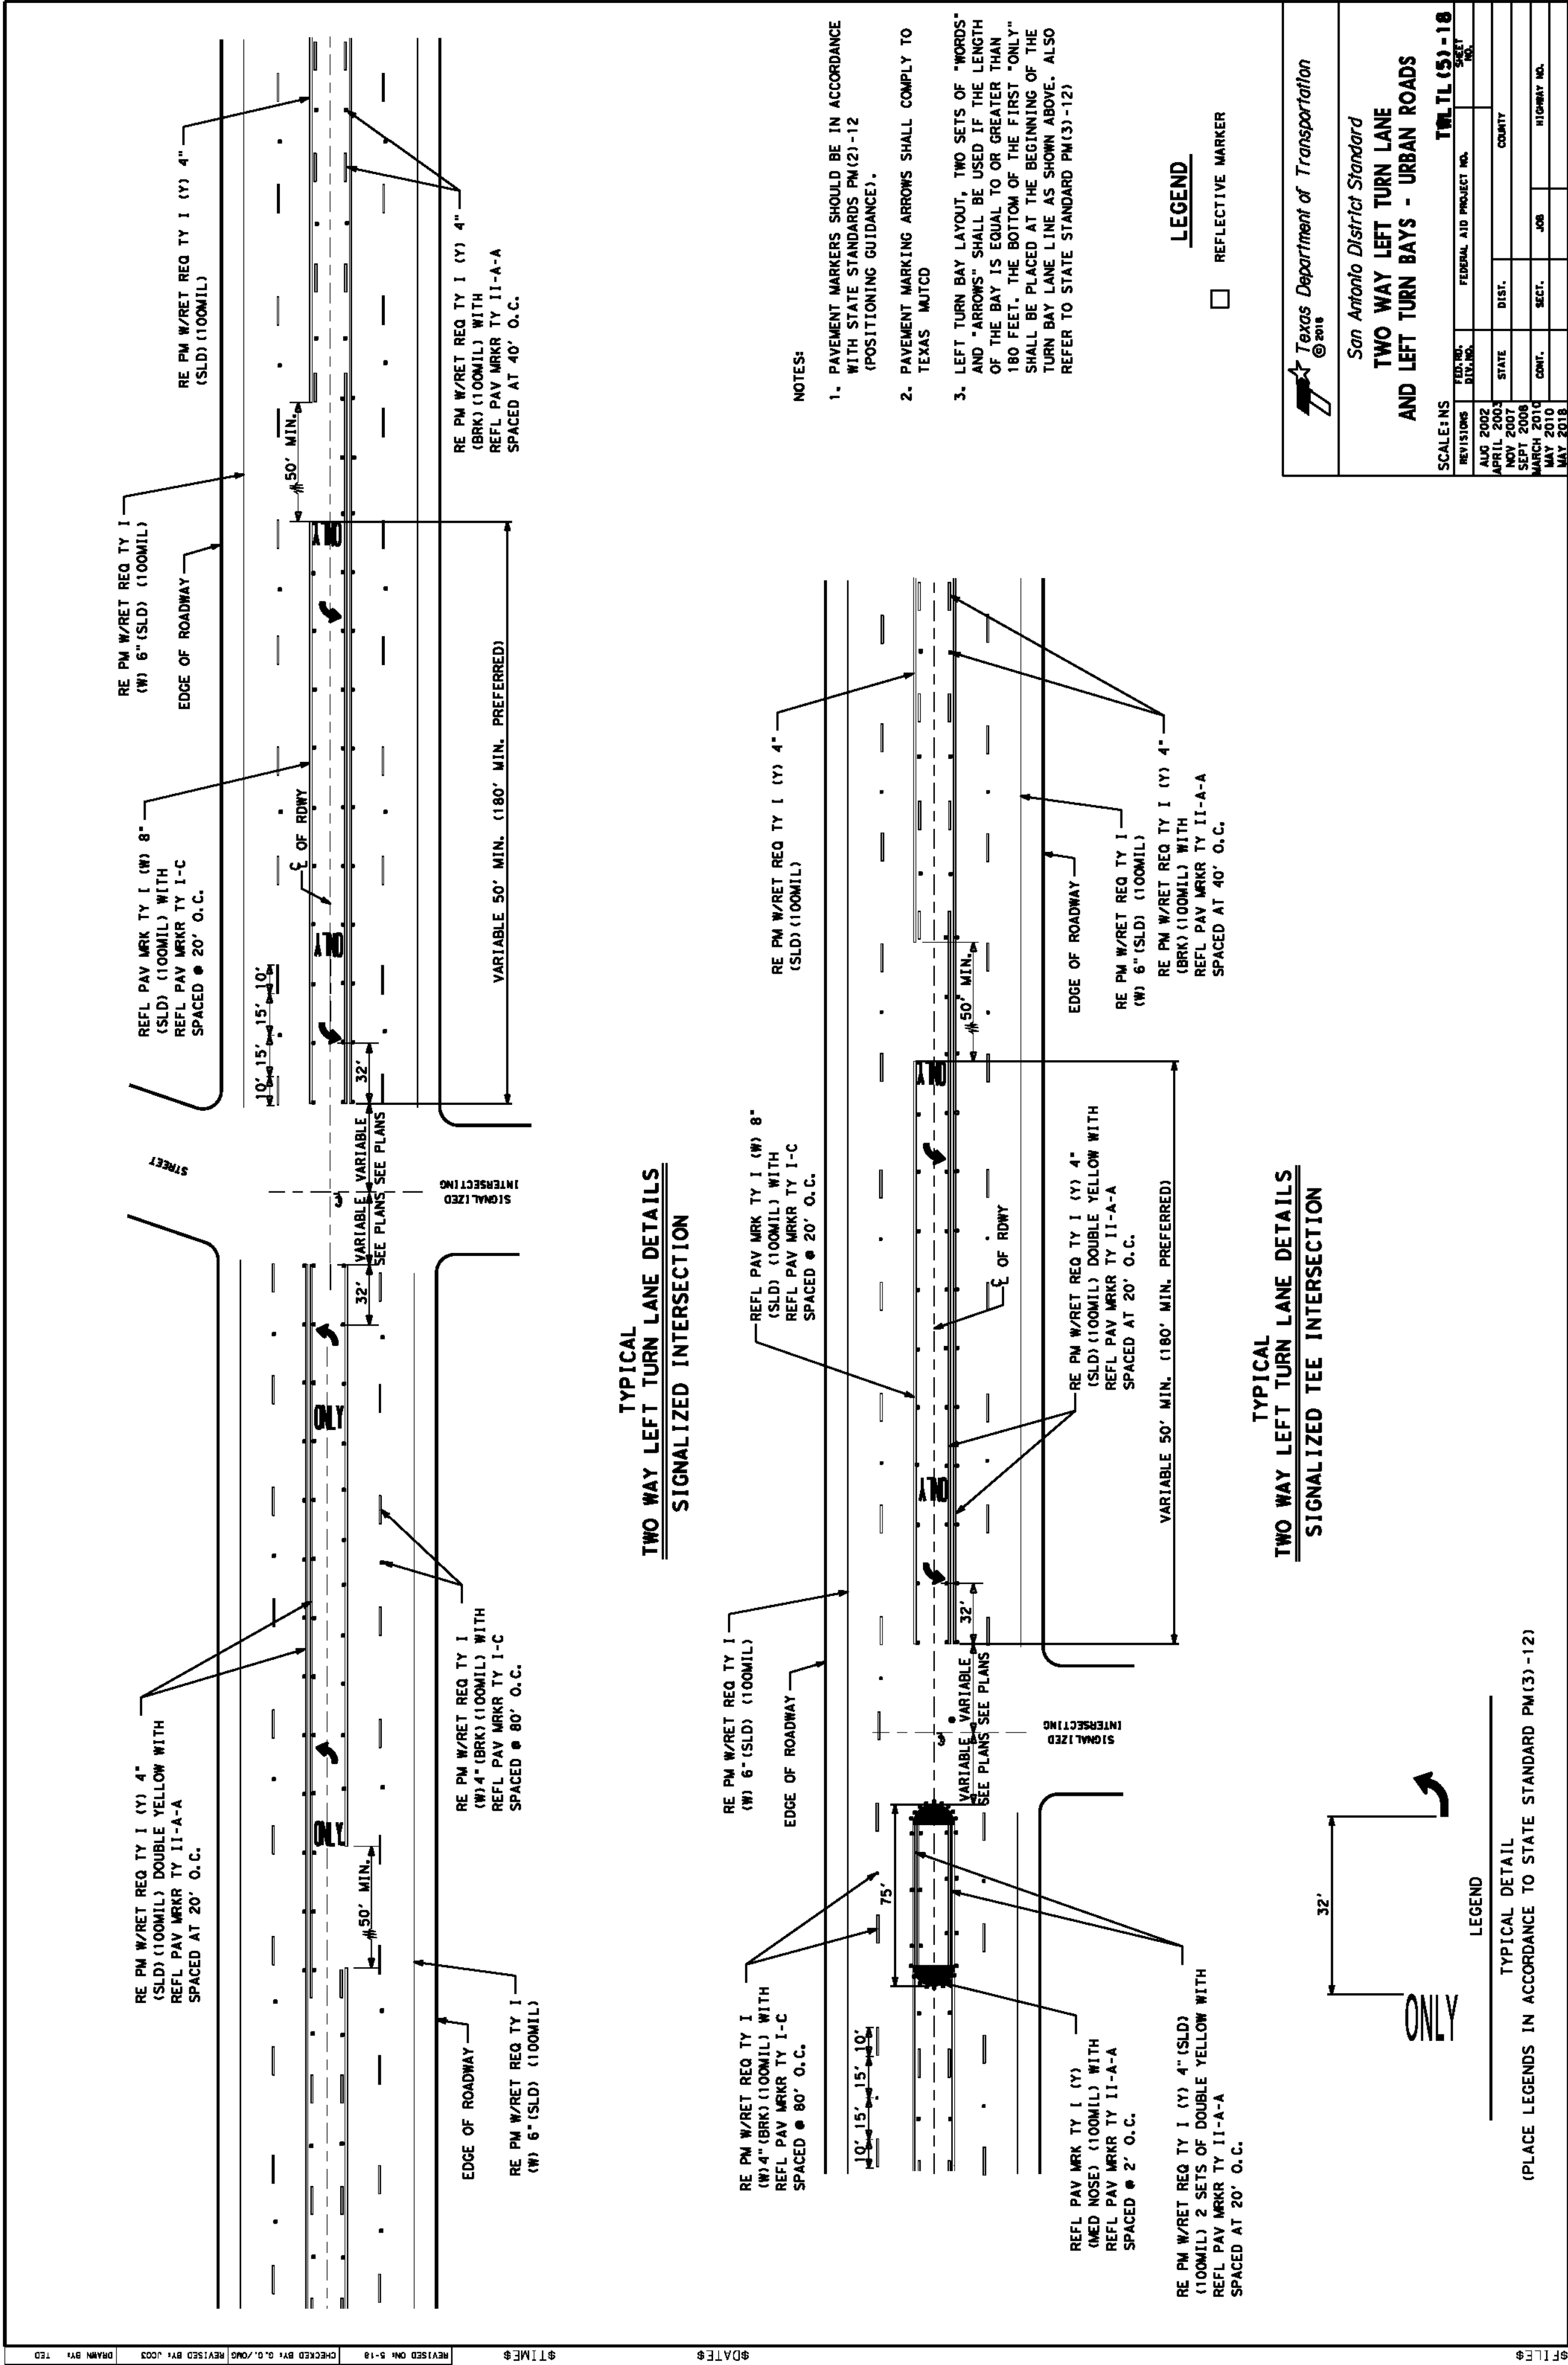

**Texas Department of Transportation**  
San Antonio District Standard  
**TWO WAY LEFT TURN LANE AND LEFT TURN BAYS - URBAN ROADS**  
TM TL 651-18

SCALE:	DATE:	BY:	CHKD:
1" = 20'	1-18	S. H.	S. H.
1" = 40'	1-18	S. H.	S. H.
1" = 80'	1-18	S. H.	S. H.
1" = 160'	1-18	S. H.	S. H.

DATE:	BY:	CHKD:	DATE:	BY:	CHKD:
1-18	S. H.	S. H.	1-18	S. H.	S. H.
1-18	S. H.	S. H.	1-18	S. H.	S. H.
1-18	S. H.	S. H.	1-18	S. H.	S. H.

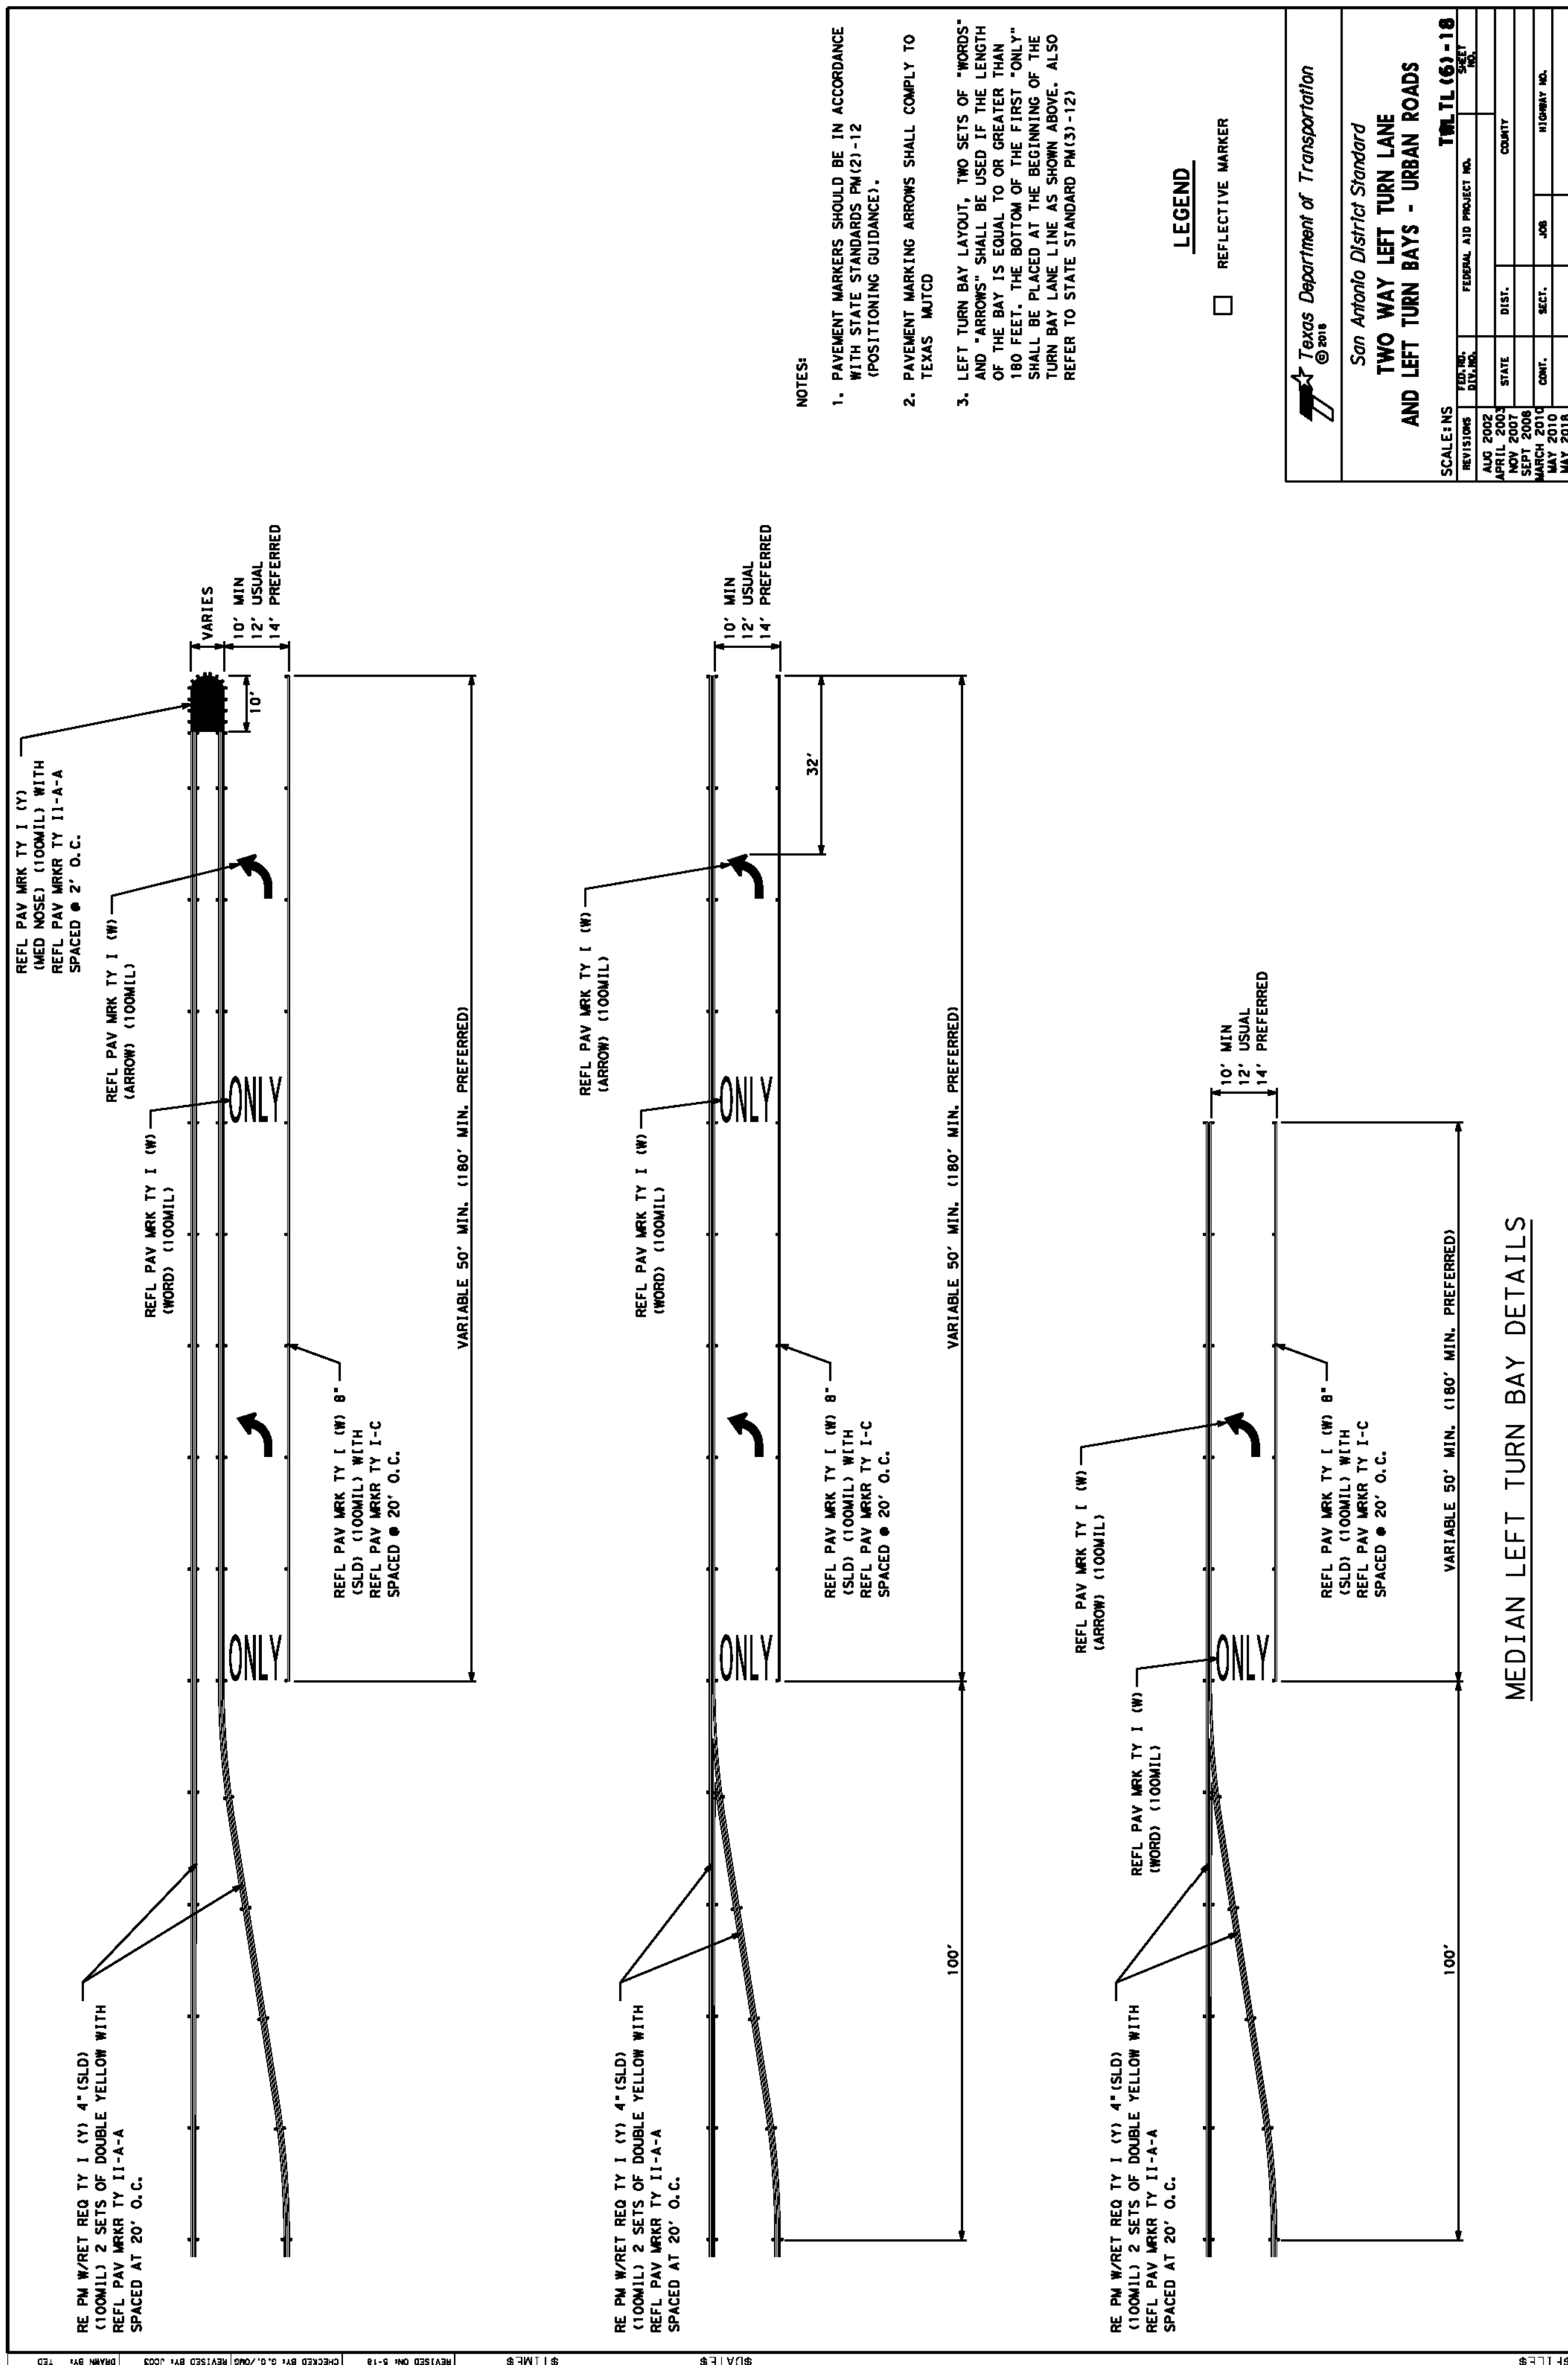

**Texas Department of Transportation**  
San Antonio District Standard  
**TWO WAY LEFT TURN LANE AND LEFT TURN BAYS - URBAN ROADS**  
TM TL 651-18

SCALE:	DATE:	BY:	CHKD:
1" = 20'	1-18	S. H.	S. H.
1" = 40'	1-18	S. H.	S. H.
1" = 80'	1-18	S. H.	S. H.
1" = 160'	1-18	S. H.	S. H.

DATE:	BY:	CHKD:	DATE:	BY:	CHKD:
1-18	S. H.	S. H.	1-18	S. H.	S. H.
1-18	S. H.	S. H.	1-18	S. H.	S. H.
1-18	S. H.	S. H.	1-18	S. H.	S. H.



**NB DEAN, LLC**  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

**JARO NORTH SUBDIVISION**

**TXDOT DETAILS XII**

**SHEET T29 OF T35**

NO	DATE	ISSUES AND REVISIONS
1		
2		
3		
4		
5		

**INK CIVIL**

2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351




















DISCLAIMER: The use of this standard is governed by the Texas Engineering Practice Act. No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

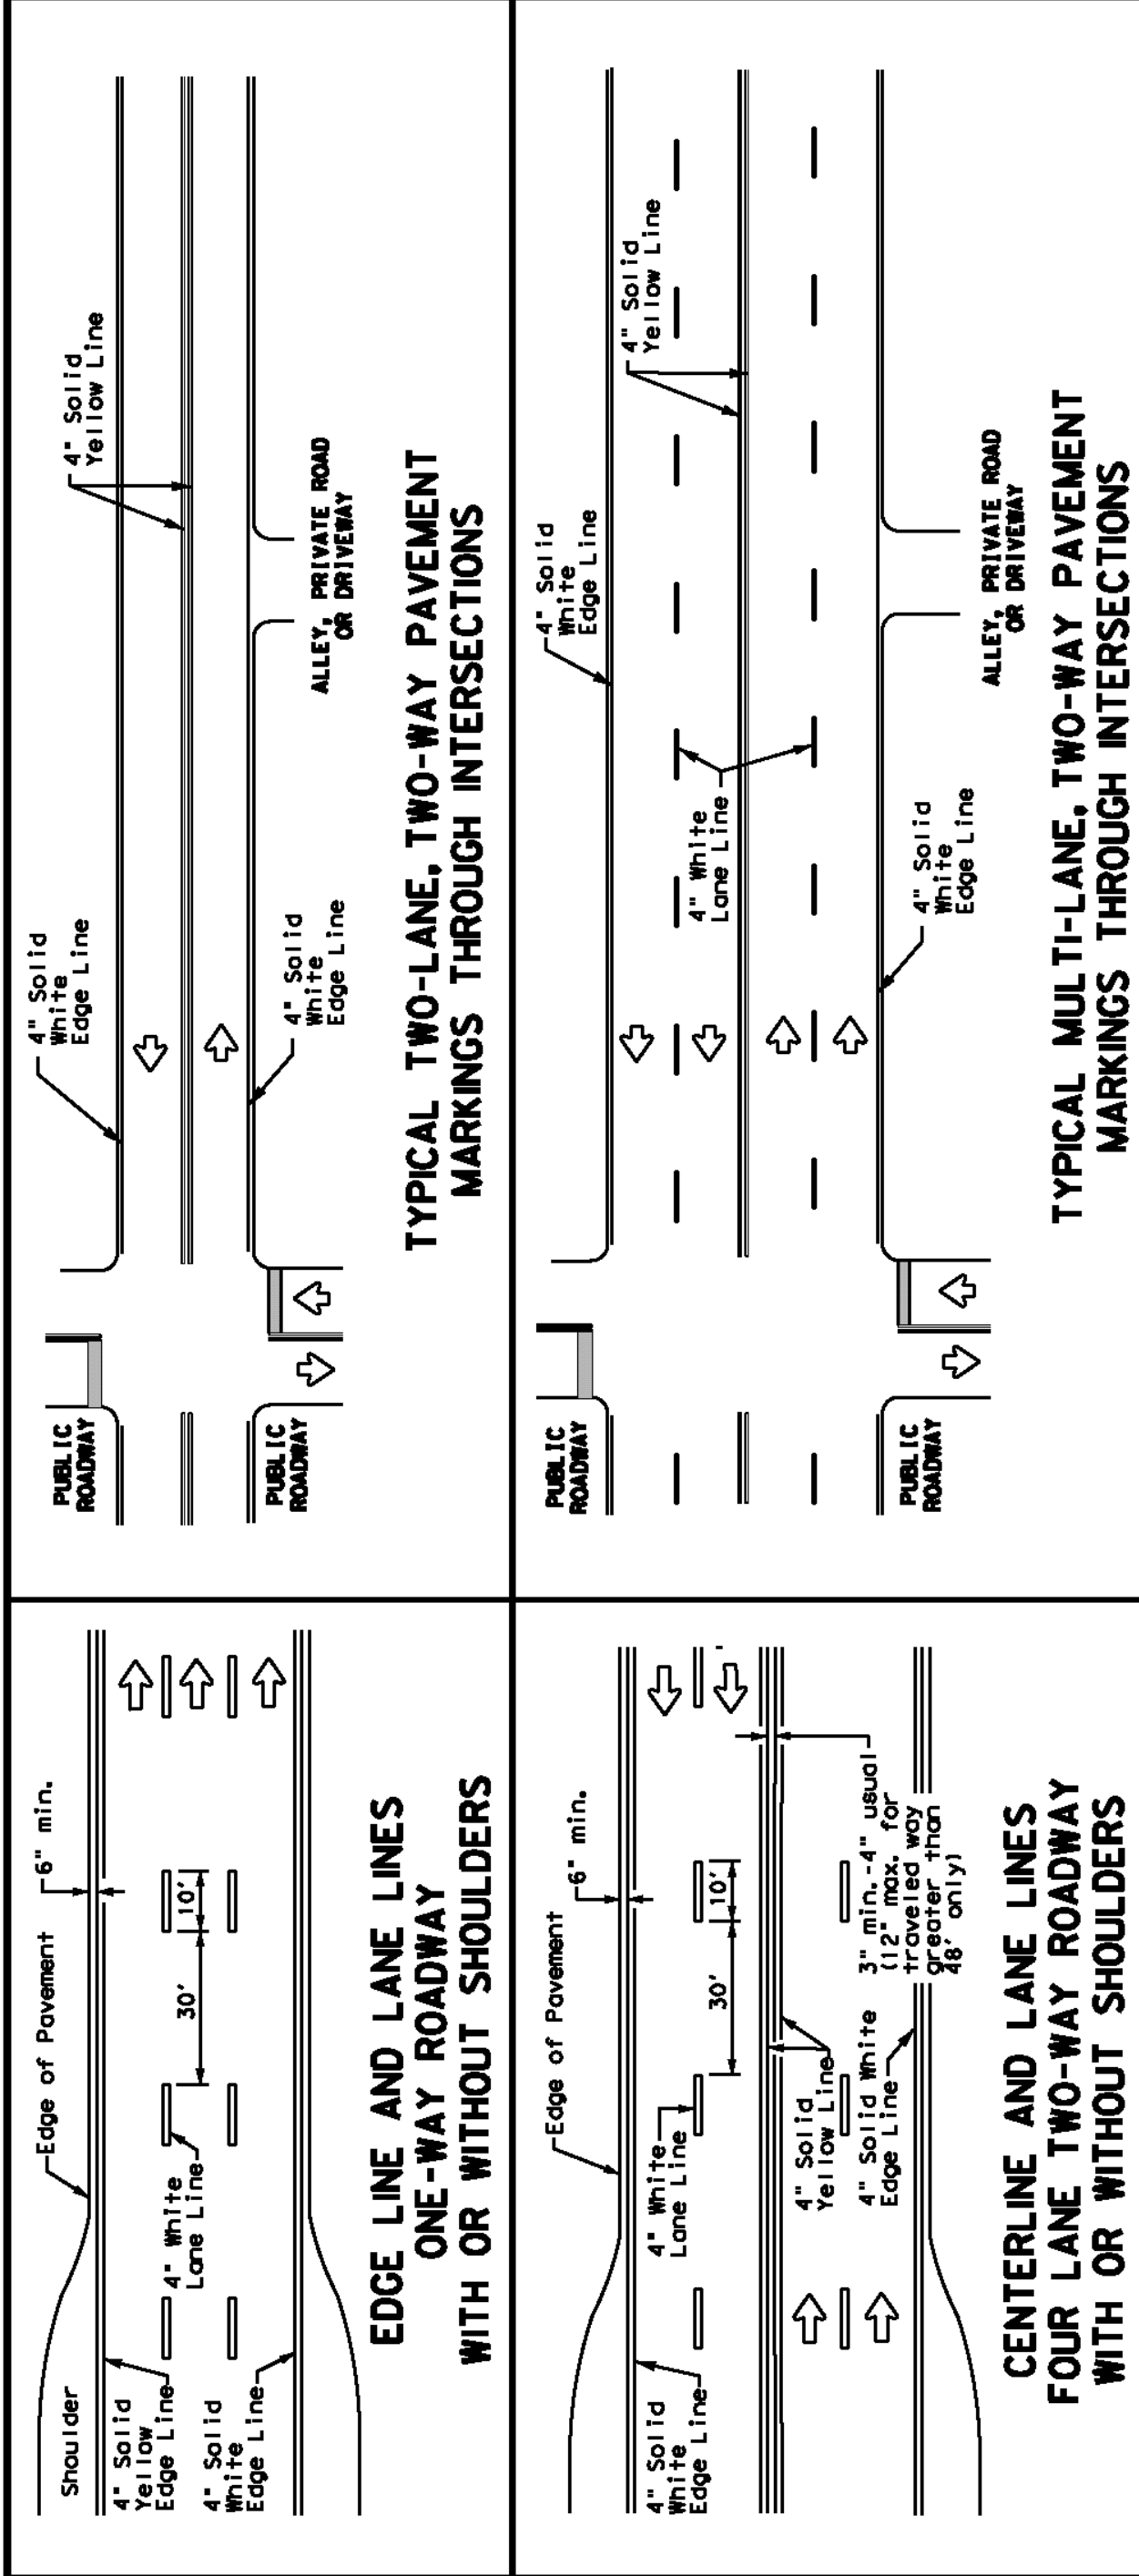


## TYPICAL MULTI-LANE, TWO-WAY PAVEMENT MARKINGS THROUGH INTERSECTIONS




## YIELD LINES



## TWO LANE TWO-WAY ROADWAY WITH OR WITHOUT SHOULDERS

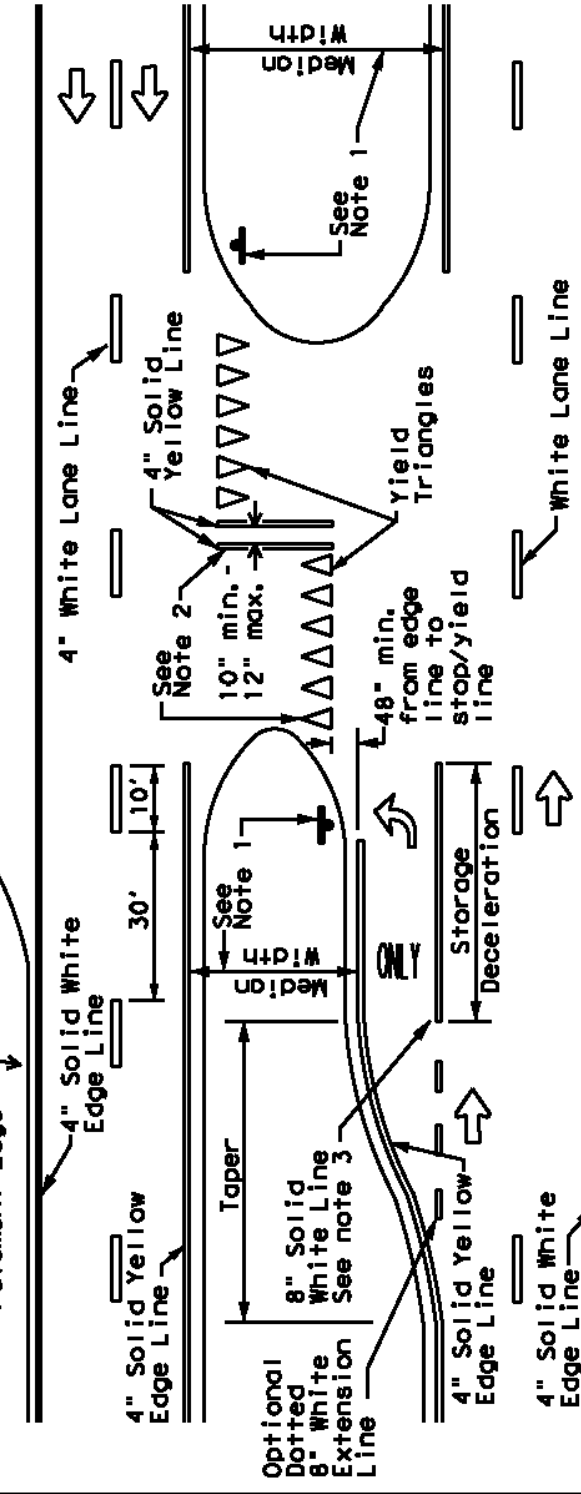

## FOUR LANE DIVIDED ROADWAY CROSSOVERS

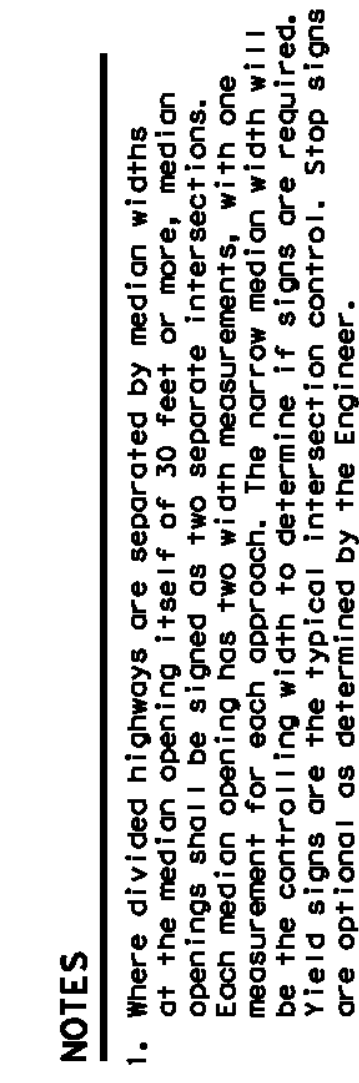

## NOTES

1. Where divided highways are separated by median widths of 50' or greater, the median openings shall be signed as two separate intersections. Each median opening has two width measurements, with one measurement for each approach. The narrow median width will be the controlling width to determine if signs are required. Yield signs are the typical Intersection control. Stop signs are optional as determined by the Engineer.
2. Install median striping (double yellow center lines and stop bars/median triangles) when a 50' or greater median centerline can be placed. Stop bars shall only be used with stop signs. Yield triangles shall only be used with yield signs.
3. Length of turn bays, including taper, deceleration, and storage lengths shall be as shown on the plans or as directed by the Engineer.

## GUIDE FOR PLACEMENT OF STOP LINES, FOCE LINE & CENTERLINE


### EDGE LINE & CENTERLINE




## TYPICAL STANDARD PAVEMENT MARKINGS

FILE#	pm1-20, 6pm	DNI	CLC	JOB	OW	CLC
10001	November 1978					H-CONWAY
8-95	3-03					
5-00	2-12					
8-00	6-20					
<div> <div>224</div> <div>224</div> </div>						

# REFLECTIVE RAISED PAVEMENT MARKERS FOR VEHICLE POSITIONING GUIDANCE

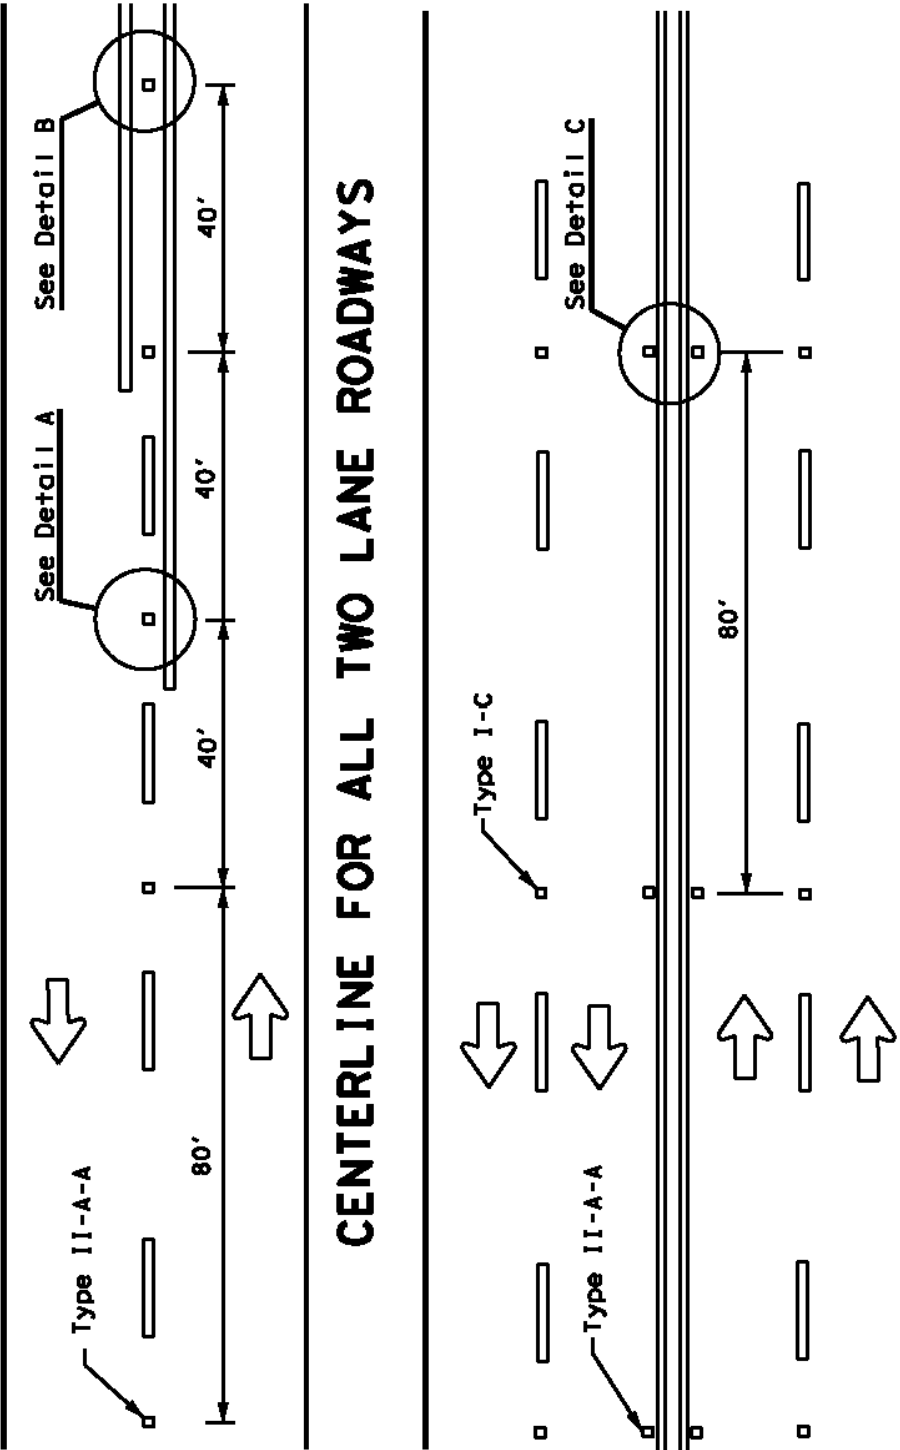


## CENTERLINE & LANE LINES FOR FOUR LANE TWO-WAY HIGHWAYS

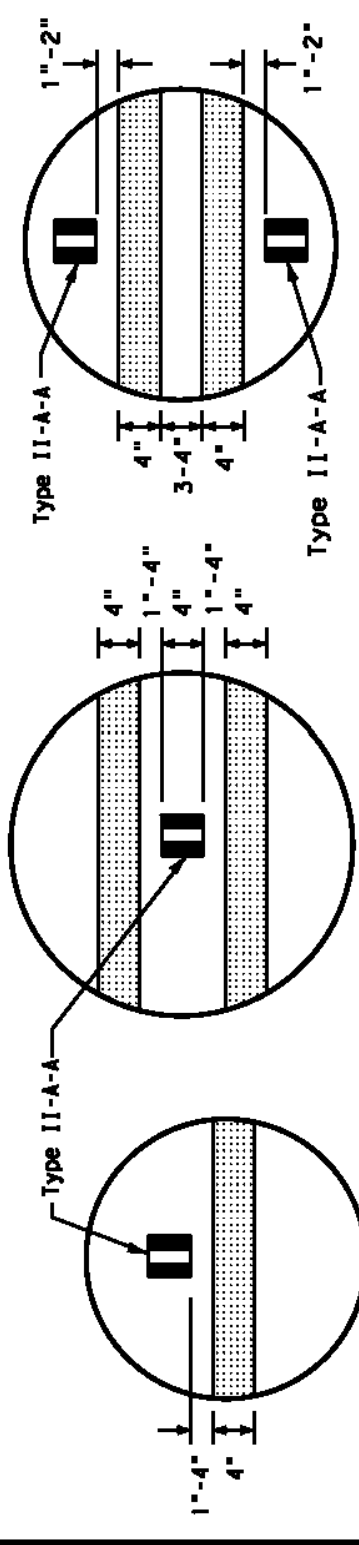


**DETAIL -A-**

## DETAIL

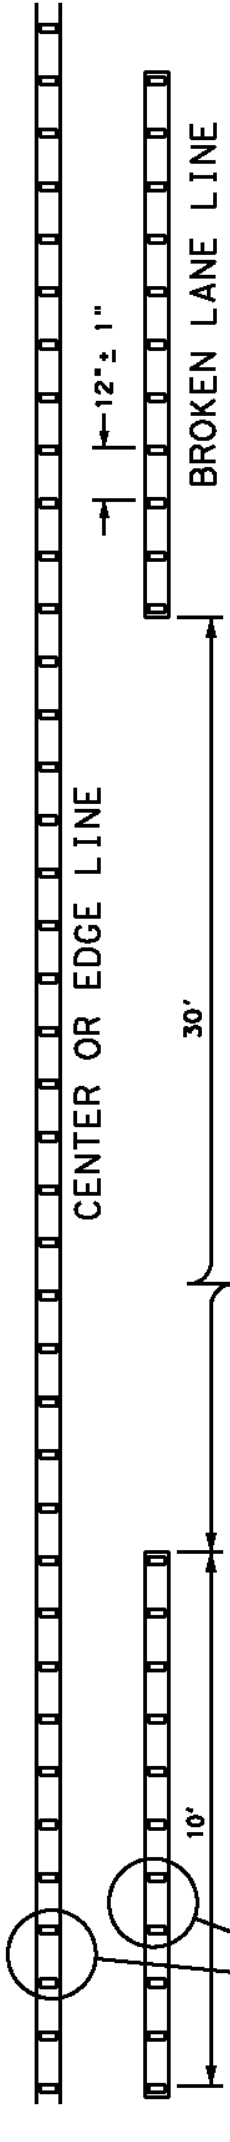

## REFLECTORIZED PROFILE PATTERN DETAIL

## USING REFLECTIVE PROFILE PAVEMENT MARKINGS

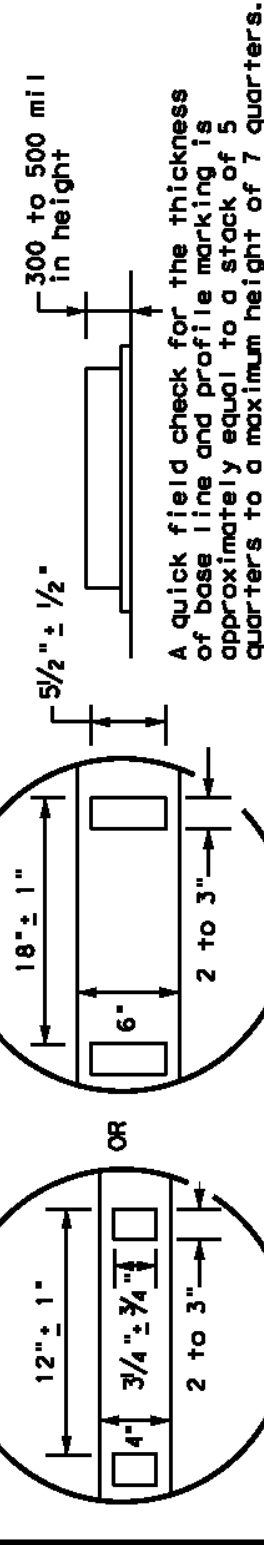

## NOTE

**Profile markings shall not be placed on roadways with a posted speed limit of 45 MPH or less.**

- 
- 
- 



**NB DEAN, LLC**  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

# JARO NORTH SUBDIVISION

TXDOT DETAILS XVII

SHEET

T34 OF T35


NO	DATE	ISSUES AND REVISIONS
----	------	----------------------

△		


The logo for INK CIVIL features the word "INK" in a large, bold, sans-serif font, enclosed within a thick black rounded rectangular border. Below this, the word "CIVIL" is written in a smaller, spaced-out, sans-serif font.

2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351




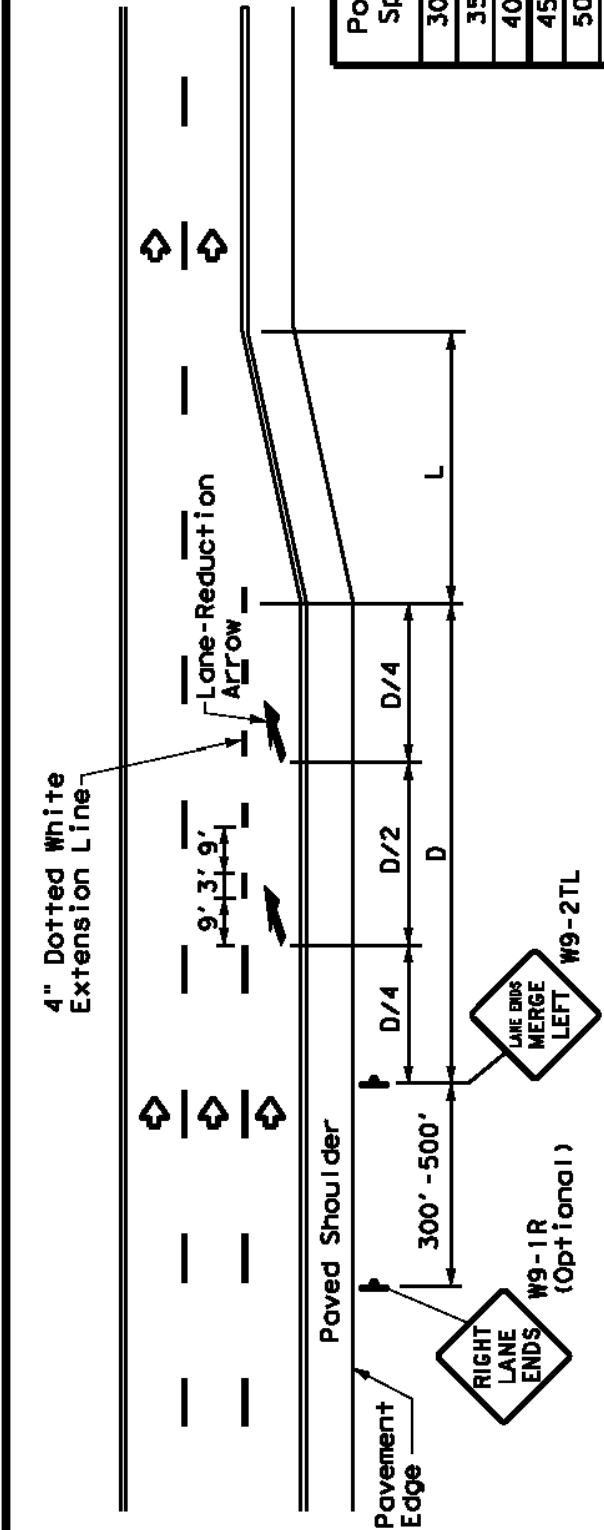

LANE REDUCTION

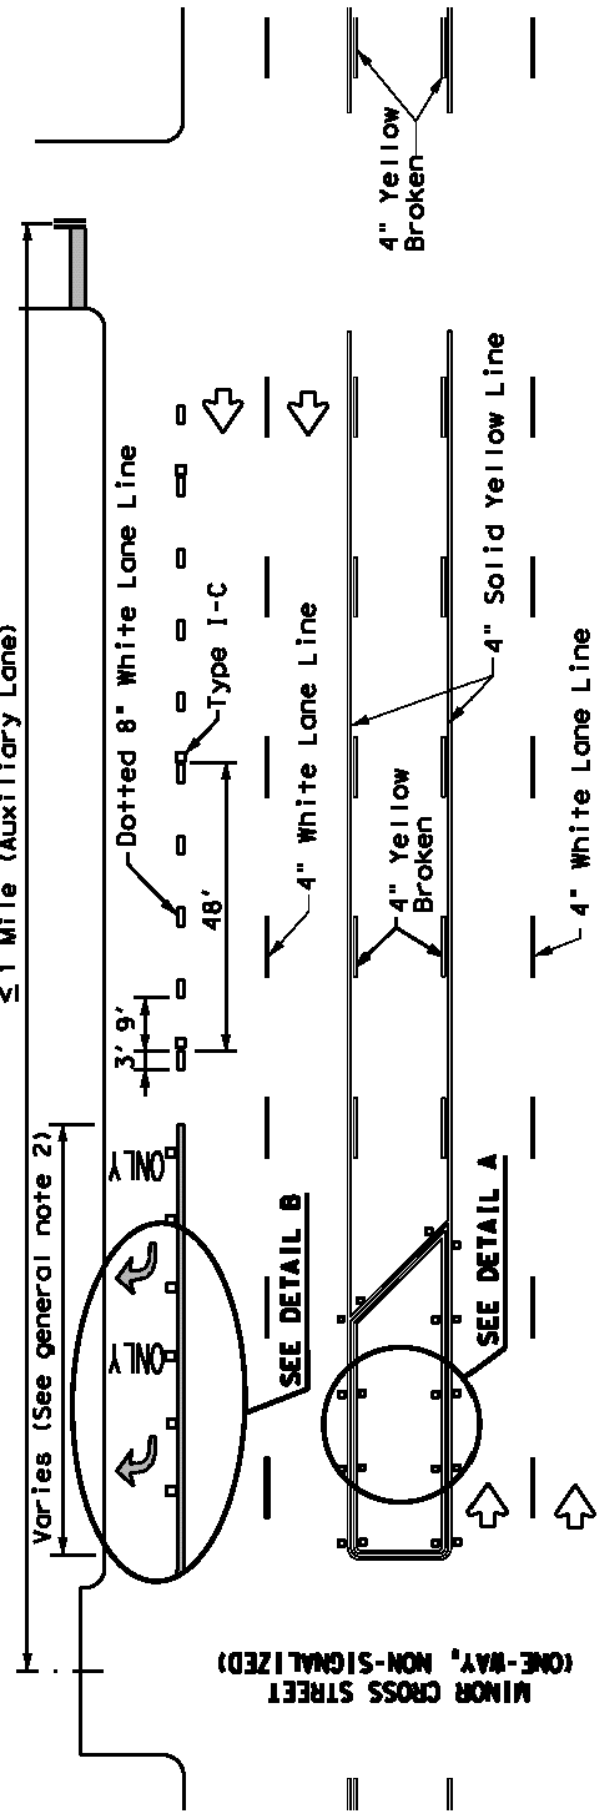


TYPICAL TWLTL AT ONE-WAY STREET AND RIGHT TURN AUXILIARY LANE

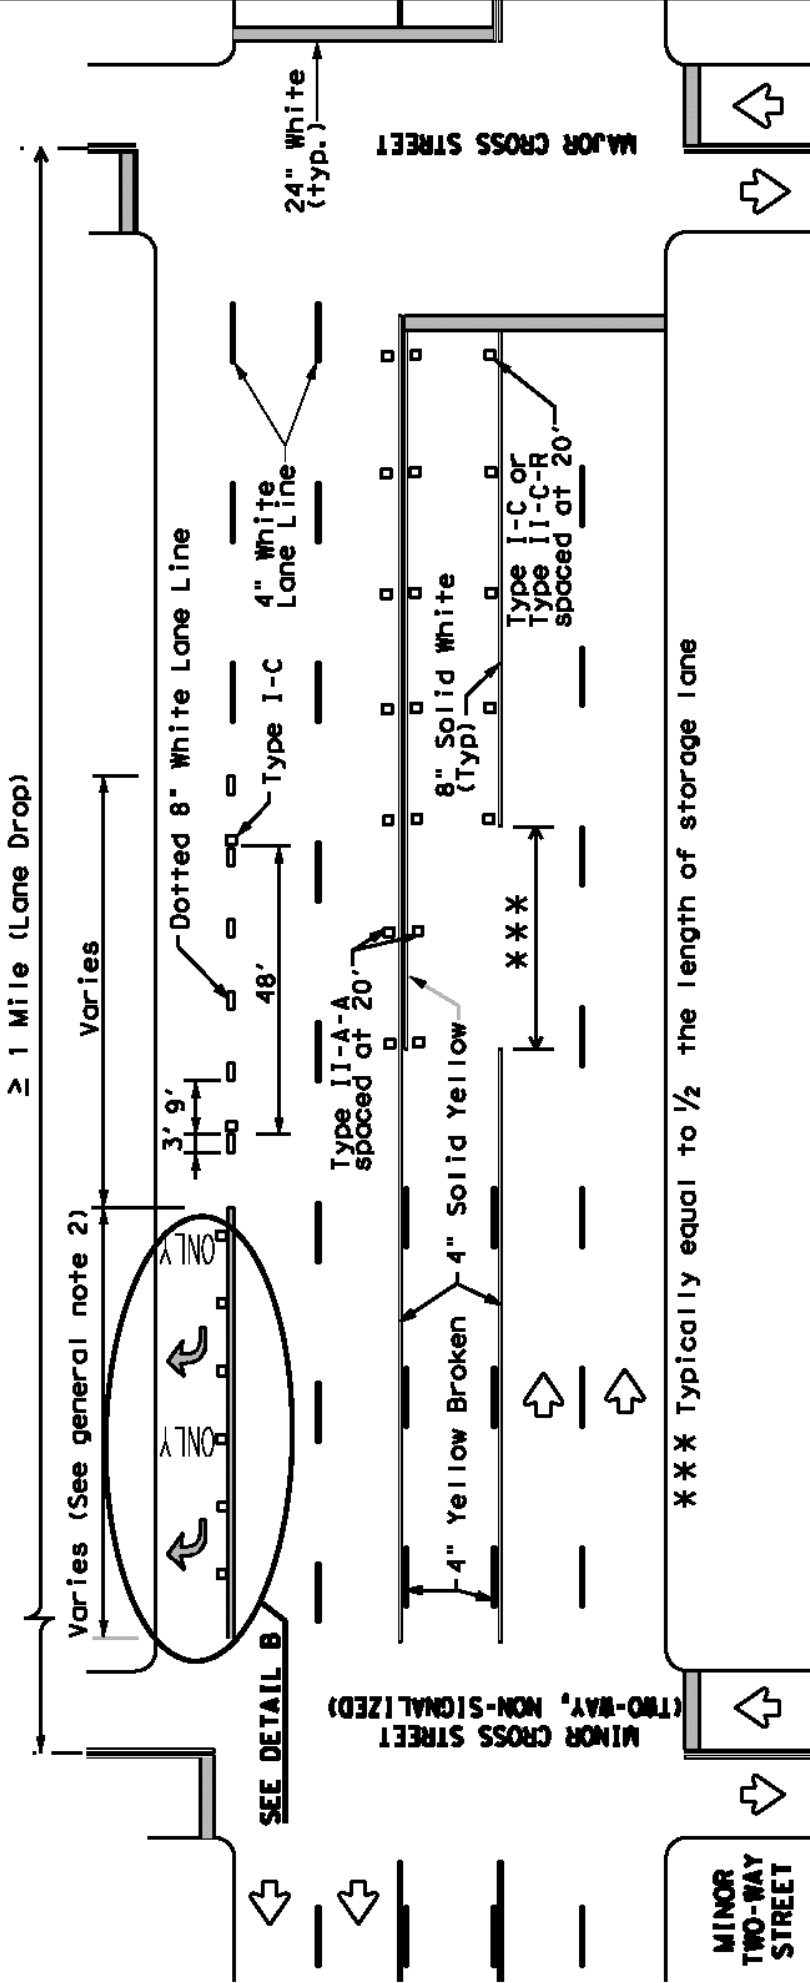


TYPICAL TWLTL AT TWO-WAY CROSS STREET AND RIGHT TURN LANE DROP

- NOTES**
- Lane reduction pavement markings are used where the number of lanes is reduced. They are used on one-way streets, two-way streets, and on-ramps. They are not used on freeways or expressways.
  - On one-way streets, the markings are used on the right side of the roadway. On two-way streets, they are used on both sides. On-ramps, they are used on the right side of the ramp.
  - Lane reduction arrows are required for speeds of 45 mph or greater. An optional third lane reduction arrow may be added to the right side of the roadway. The arrows should be placed at the beginning of the lane reduction and at the end of the lane reduction.
  - For lane reductions on freeways and expressways, signing shall conform to the TxDOT Freeway Signing Handbook.

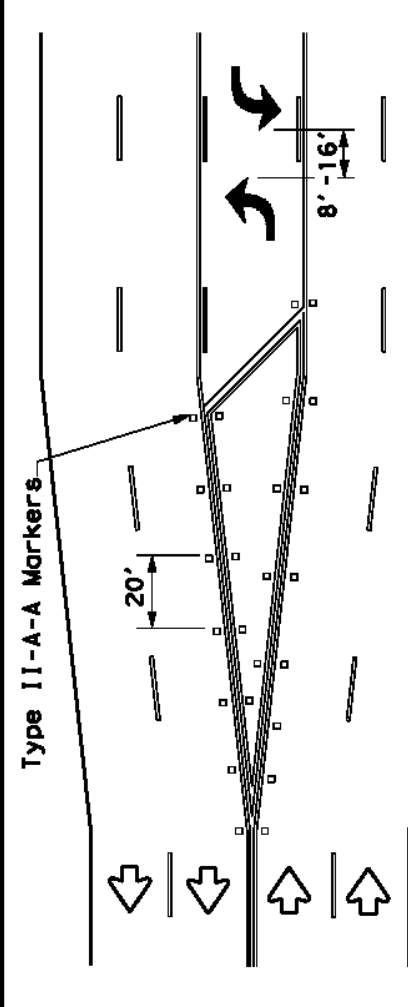


TYPICAL TRANSITION FOR TWLTL AND DIVIDED HIGHWAY

A two-way left-turn (TWLTL) lane-use arrow pavement marking should be used at or just downstream from the beginning of a two-way left-turn lane within a corridor. Repeating the marking at intervals of 1/4 mile is recommended. The marking is not required unless stated elsewhere in the plans.

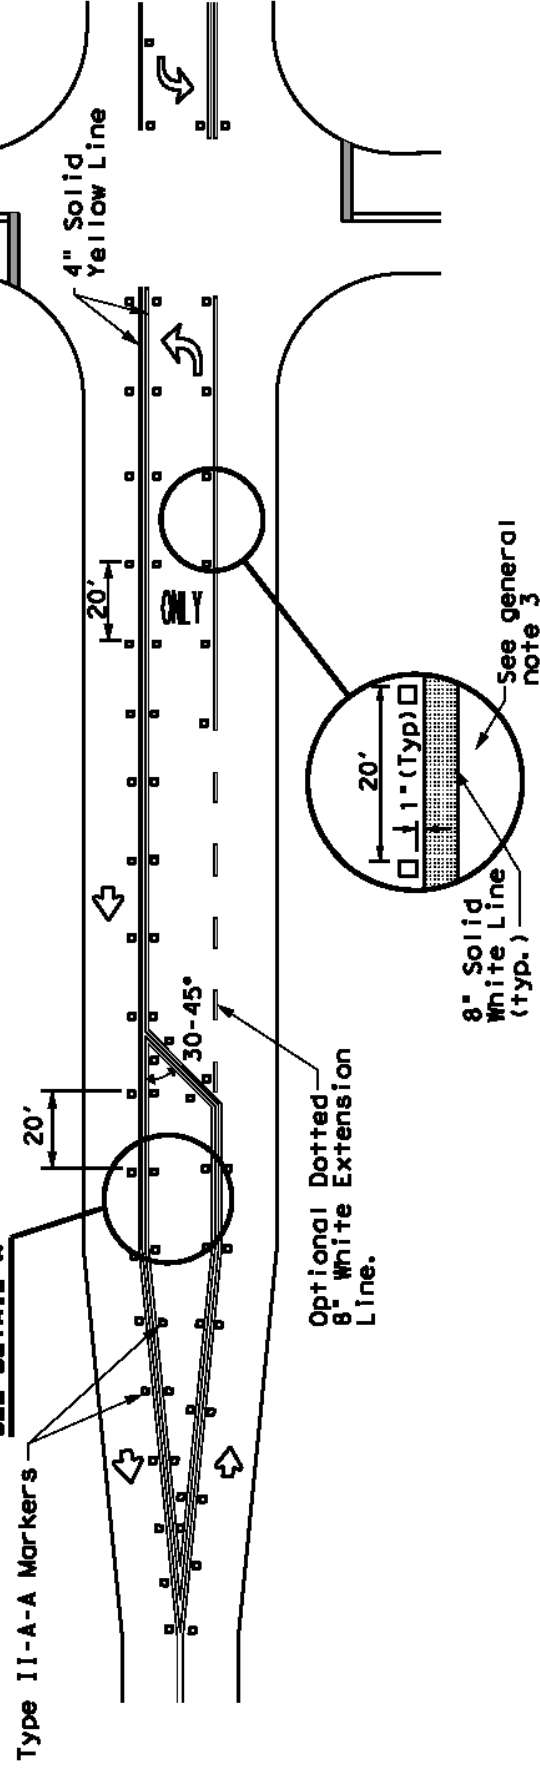

TYPICAL TWO-LANE HIGHWAY INTERSECTION WITH LEFT TURN BAYS

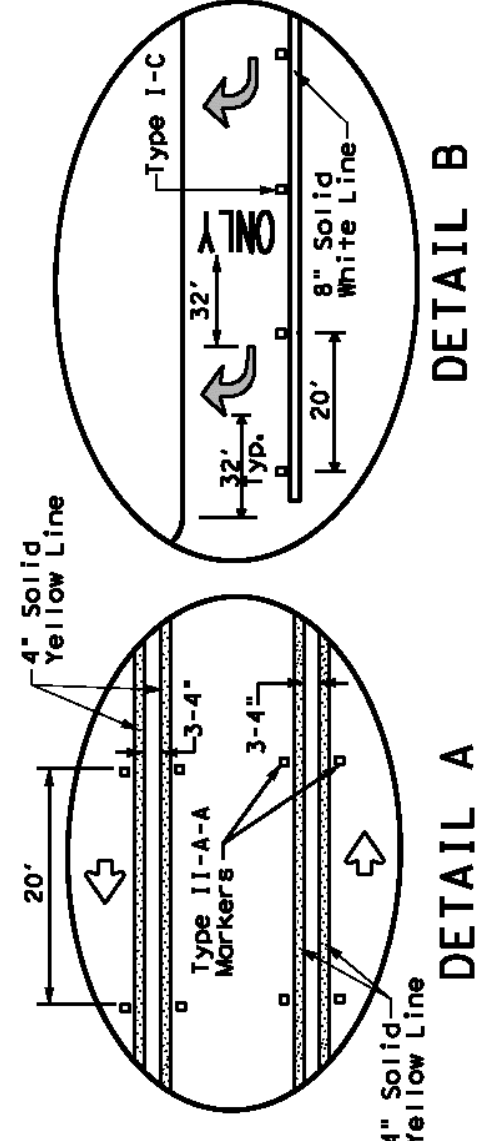

TWO-WAY LEFT TURN BAYS, RURAL LEFT TURN BAYS, AND LANE REDUCTION PAVEMENT MARKINGS PM(3) -20


FILES	PM(3) 20.dgn	DATE	SEP 11 1998	BY	MD	CHKD	MD	APP'D	MD
PROJECT	1-00 2-10	CONTRACT	1-00 2-10	SHEET NO.	1-00 2-10	1-00 2-10	1-00 2-10	1-00 2-10	1-00 2-10

GENERAL NOTES


- Lane use word and arrow markings shall be used where through lanes are approaching an intersection or a section of a through lane. Lane use word and arrow markings should be used in auxiliary lanes of substantial length. Lane use word and arrow markings should be used in auxiliary lanes of substantial length. Lane use word and arrow markings should be used in auxiliary lanes of substantial length.
- When lane-use words and arrow markings are used, of the lane use word and arrow markings should be used, of the lane use word and arrow markings should be used, of the lane use word and arrow markings should be used.
- Use raised pavement marker Type 1-C with undivided lanes. Use raised pavement marker Type 11-C with divided highways and raised medians.
- Length of turn bays, including taper, deceleration, and acceleration, shall be as shown on the plans or as directed by the Engineer.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-200
EPoxy AND ADHESIVES	DMS-5100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-5130
TRAFFIC PAINT	DMS-5200
NOT APPLIED THERMOPLASTIC	DMS-5220
PERMANENT PRECATRIBUTED PAVEMENT MARKINGS	DMS-5240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the Plans.

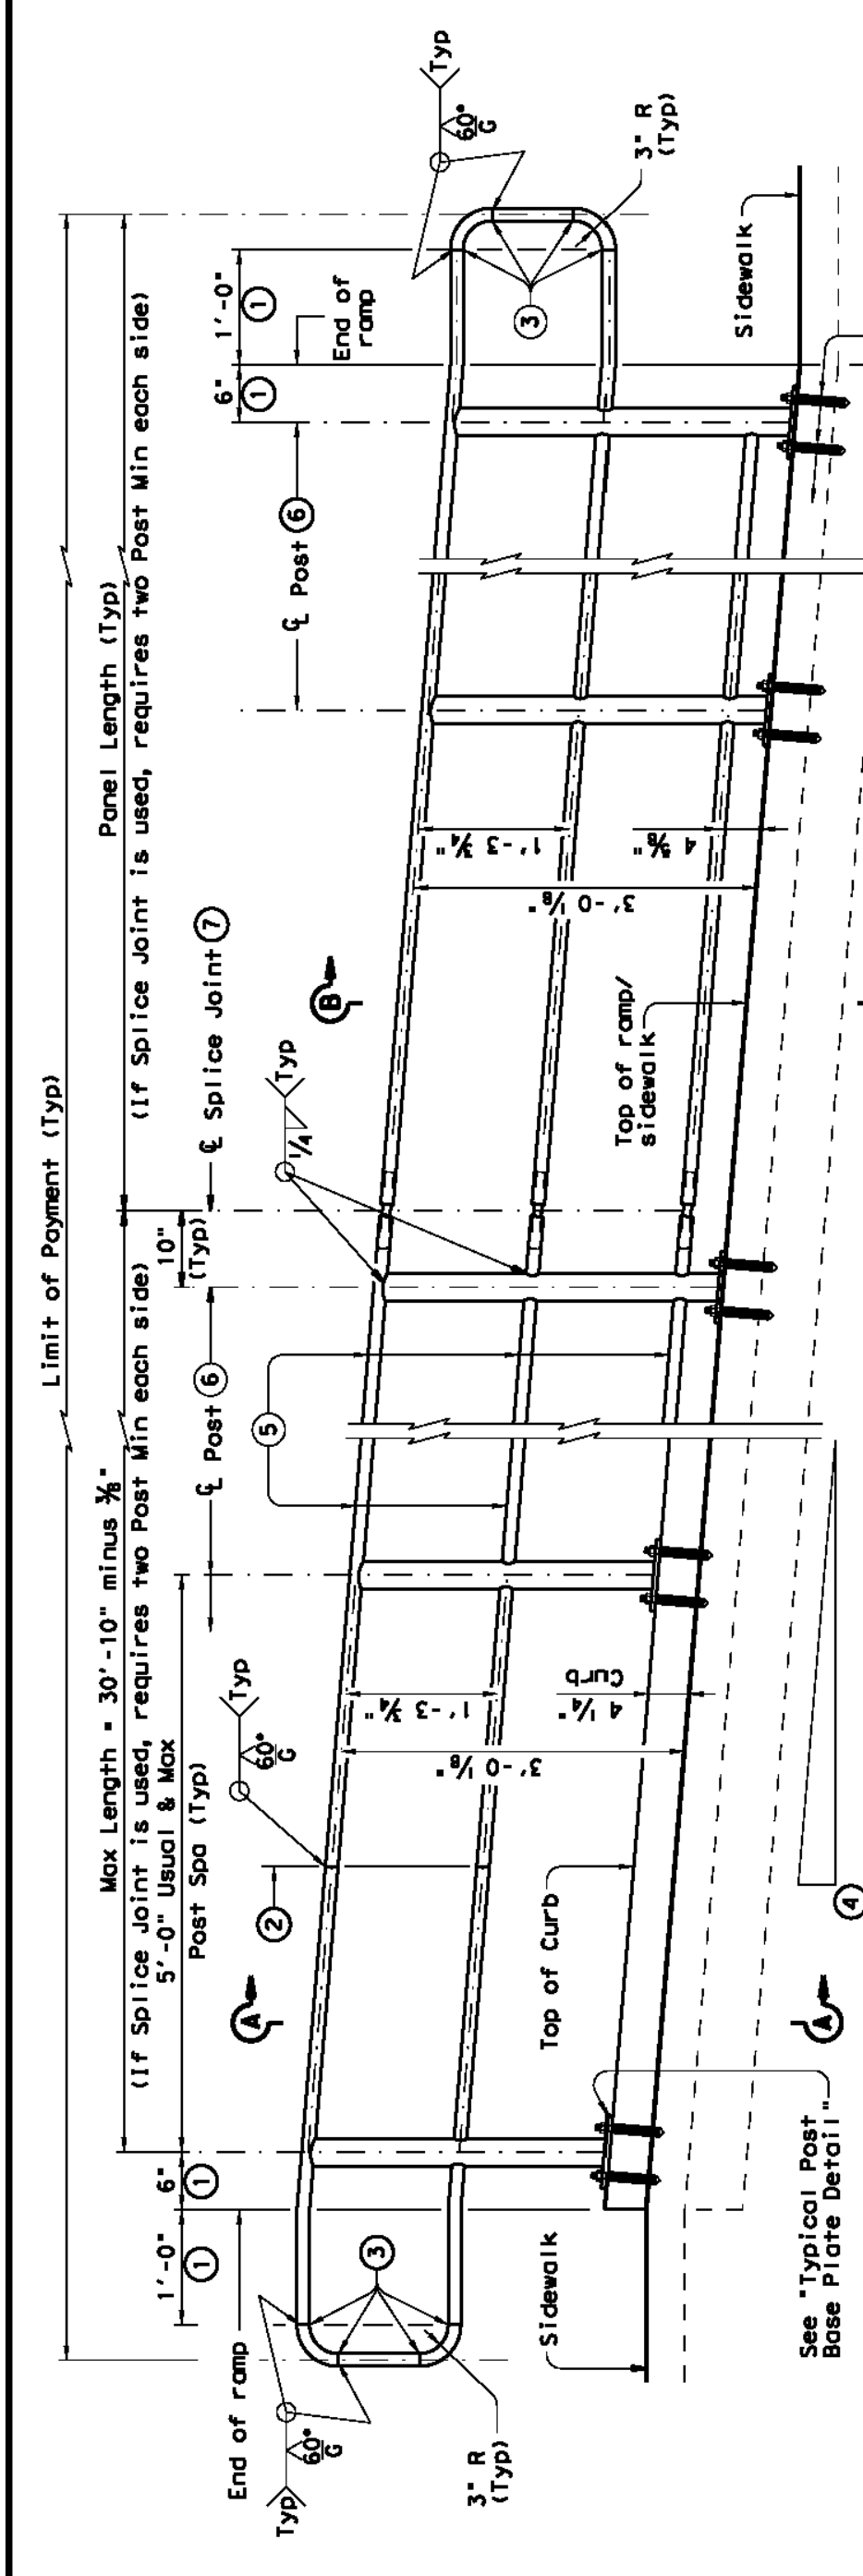


ELEVATION VIEW (Shop Splices and Splice Joints only shown on one Type for clarity)

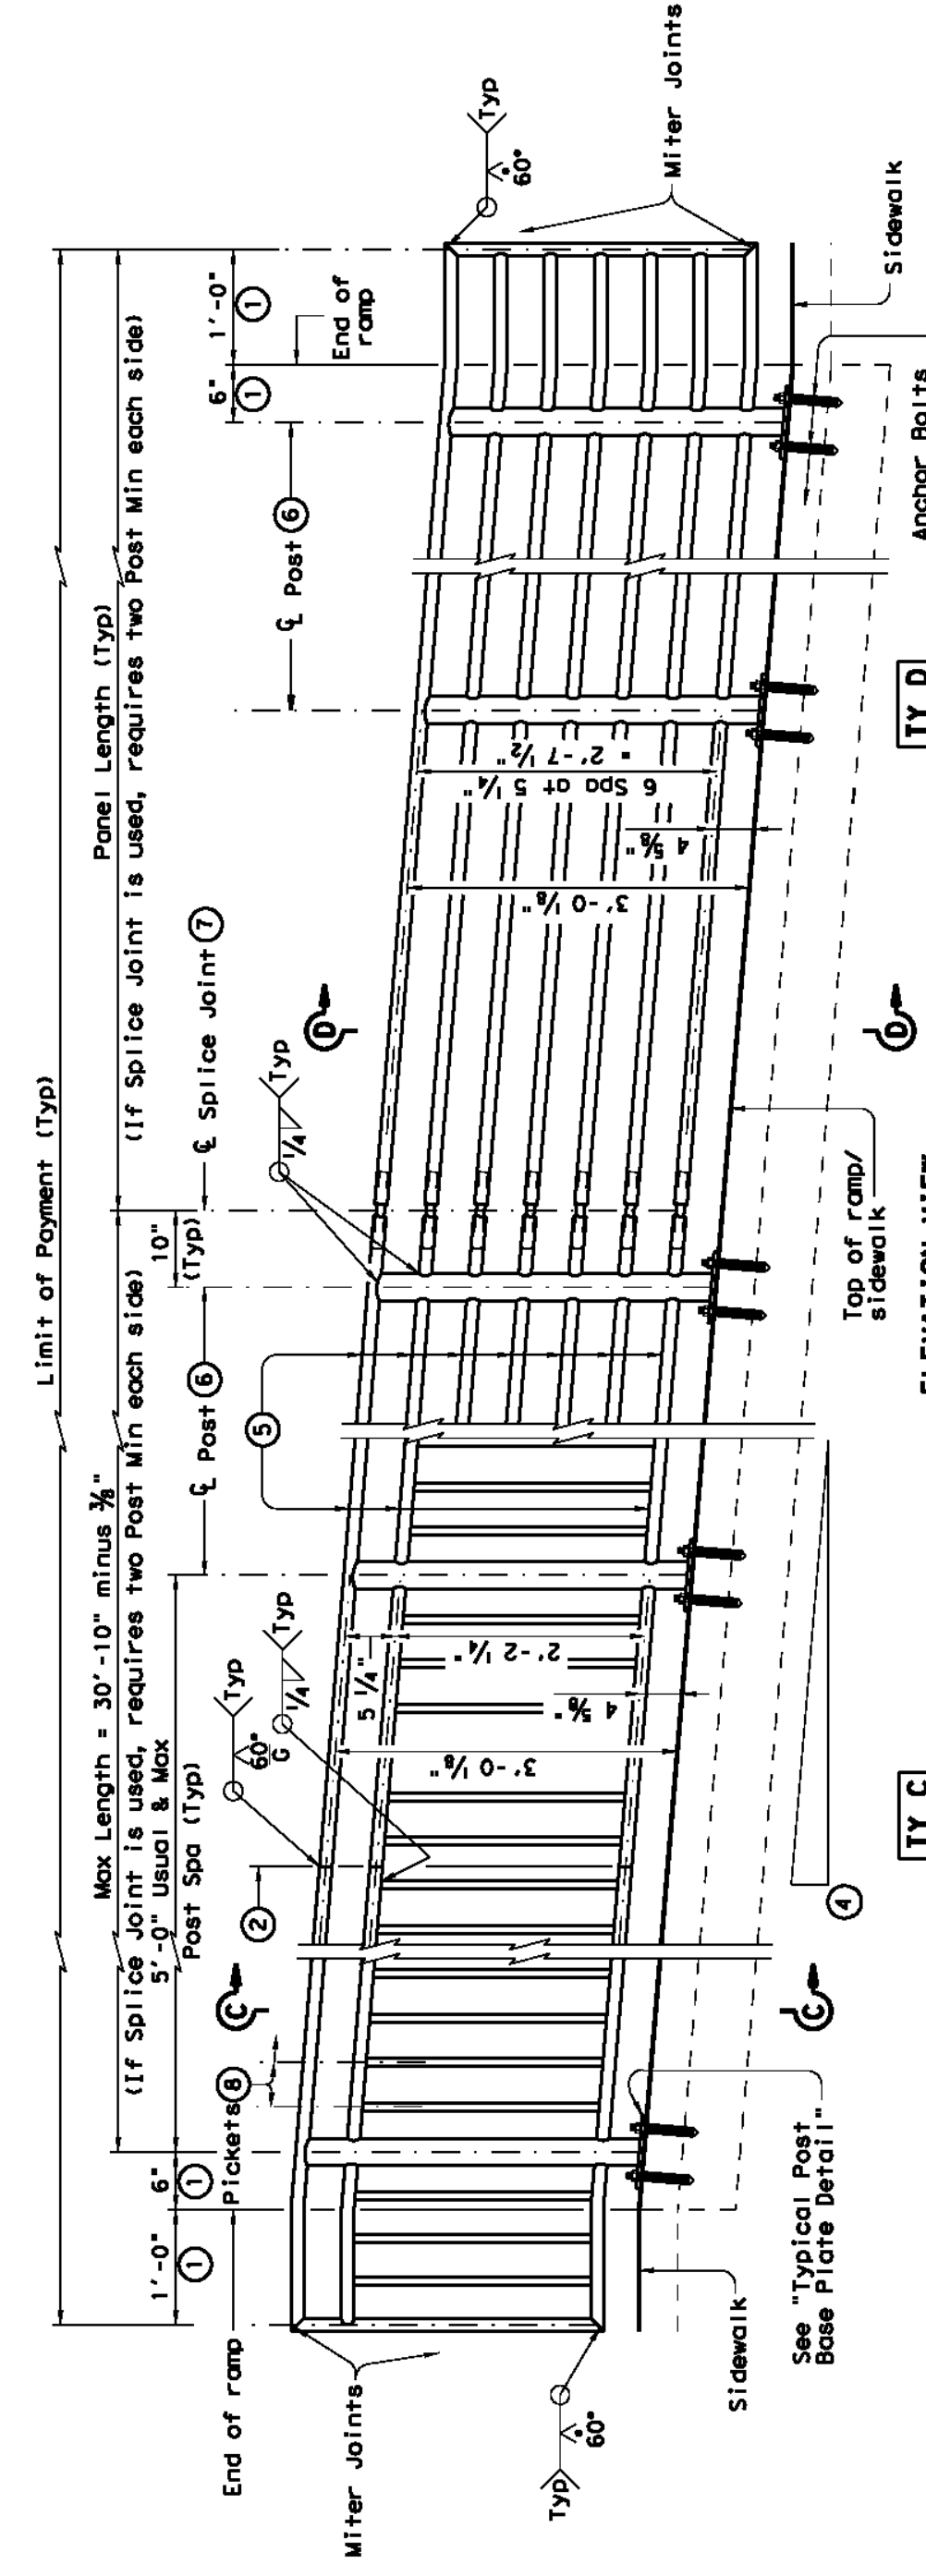

ELEVATION VIEW (Shop Splices and Splice Joints only shown on one Type for clarity)


- Parallel to ground.
- One shop splice per panel is permitted with minimum 85 percent penetration. The weld may be square groove or single vee groove. Grind smooth.
- Shop splice is permitted with minimum 85 percent penetration. The weld may be square groove or single vee groove. Grind smooth.
- See Ramp Details located elsewhere in plans for ramp slope and dimensions. Maximum ramp slope will not exceed 8.3 percent. Level landing required for each 30' rise if grade exceeds 5 percent.
- 1 1/2" Dia. Standard Pipe (1,900" O.D., 0.145" wall thickness). Parallel to road/sidewalk. Provide holes as needed in 1 1/2" Dia. Pipe for galvanizing drainage and venting.

RECOMMENDED USAGE	
Dropoff Condition	Recommended Rail Options
<30"	TY A, TY B, TY C, or TY D
>30"	TY E or TY F

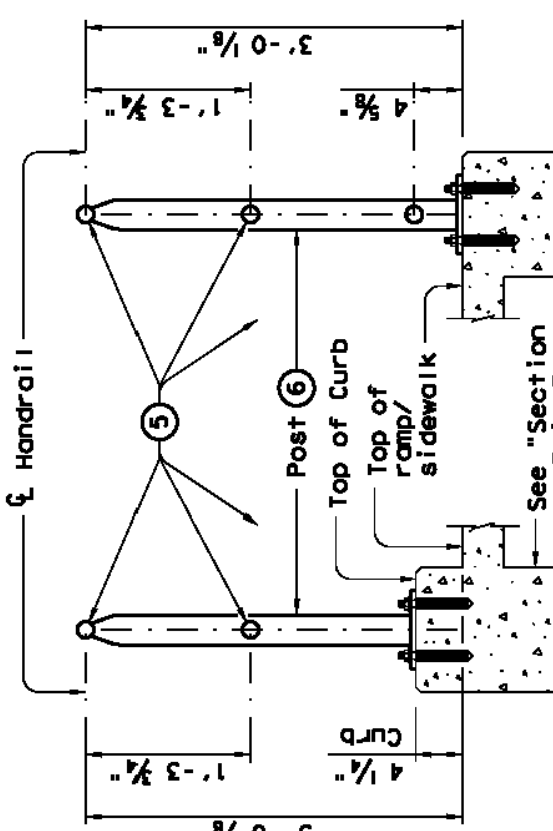

SECTION A-A (Showing Handrail TY A)

SECTION B-B (Showing Handrail TY B)

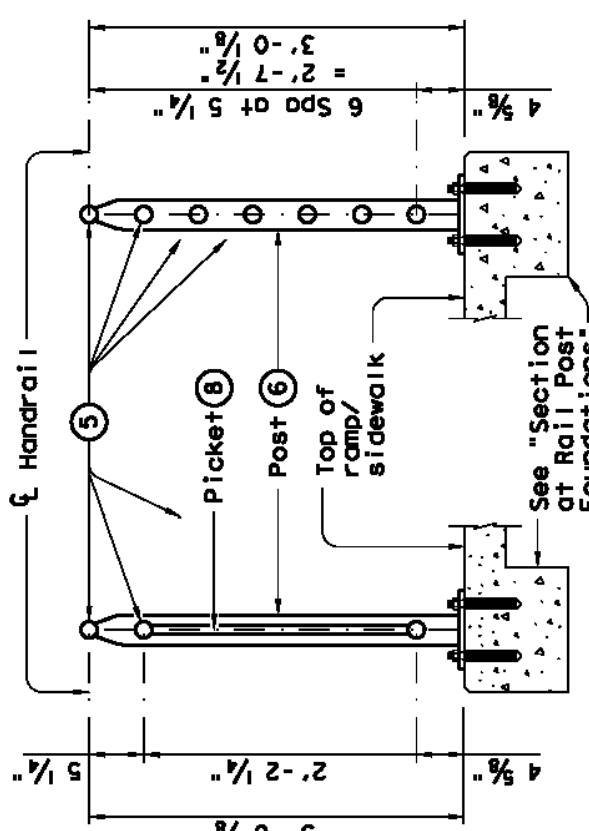

SECTION C-C (Showing Handrail TY C)

SECTION D-D (Showing Handrail TY D)

SHEET 1 OF 3

PEDESTRIAN HANDRAIL DETAILS

PRD-13

TXDOT December 2006

REVISED MAY, 2013 JPS

NB DEAN, LLC  
1286 RIVER RD  
NEW BRAUNFELS, TX 78130

JARO NORTH SUBDIVISION

TXDOT DETAILS XVIII

SHEET T35 OF T35

NO DATE ISSUES AND REVISIONS  
9/6/2022 UPDATED PER TXDOT COMMENTS

INK CIVIL

2021 W SH46, STE 105  
NEW BRAUNFELS, TX. 78132  
PH: 830-358-7127 ink-civil.com  
TBPE FIRM F-13351









FILENAME: c:\pwwork1\00212726\TOUR\_TRF\_QUAN.dgn  
PLOTTED: 9/13/2022 12:47:02

ESTIMATED QUANTITIES				
ITEM #	DESC CODE	DESCRIPTION	UNIT	QUANTITY
0416	6030	DRILL SHAFT (TRF SIG POLE) (24 IN) *	LF	24
0416	6032	DRILL SHAFT (TRF SIG POLE) (36 IN)	LF	39
0618	6046	CONDT (PVC) (SCH 80) (2")	LF	495
0618	6047	CONDT (PVC) (SCH 80) (2") (BORE)	LF	170
0618	6053	CONDT (PVC) (SCH 80) (3")	LF	530
0618	6054	CONDT (PVC) (SCH 80) (3") (BORE)	LF	340
0620	6009	ELEC CONDR (NO. 6) BARE	LF	1535
0620	6010	ELEC CONDR (NO. 6) INSULATED	LF	90
0621	6005	TRAY CABLE (4 CONDR) (12 AWG)	LF	130
0624	6009	GROUND BOX TY D (162922)	EA	1
0624	6010	GROUND BOX TY D (162922)W/APRON	EA	5
0628	6167	ELC SRV TY D 120/240 070(NS)AL(E)TP(O)	EA	1
0680	6002	INSTALL HWY TRF SIG (ISOLATED)	EA	1
0682	6001	VEH SIG SEC (12")LED(GRN)	EA	6
0682	6002	VEH SIG SEC (12")LED(GRN ARW)	EA	2
0682	6003	VEH SIG SEC (12")LED(YEL)	EA	14
0682	6004	VEH SIG SEC (12")LED(YEL ARW)	EA	1
0682	6005	VEH SIG SEC (12")LED(RED)	EA	10
0682	6006	VEH SIG SEC (12")LED(RED ARW)	EA	1
0682	6018	PED SIG SEC (LED) (COUNTDOWN)	EA	4
0682	6021	BACK PLATE (12") (1 SEC)	EA	12
0682	6049	BACKPLATE W/REFL BRDR (4 SEC)	EA	1
0682	6060	BACKPLATE W/REFL BRDR (3 SEC)	EA	7
0684	6007	TRF SIG CBL (TY A) (12 AWG) (2 CONDR)	LF	545
0684	6009	TRF SIG CBL (TY A) (12 AWG) (4 CONDR)	LF	565
0684	6012	TRF SIG CBL (TY A) (12 AWG) (7 CONDR)	LF	1019
0686	6039	INS TRF SIG PL AM(S) 1 ARM (36') LUM	EA	1
0686	6041	INS TRF SIG PL AM(S) 1 ARM (40')	EA	1
0686	6043	INS TRF SIG PL AM(S) 1 ARM (40') LUM	EA	1
0687	6001	PED POLE ASSEMBLY	EA	4
0687	6002	PEDESTRIAN PUSH BUTTON POLE	EA	4
0688	6001	PED DETECT PUSH BUTTON (APS)	EA	4
0688	6003	PED DETECTOR CONTROLLER UNIT	EA	1
6004	6031	ITS COM CBL (ETHERNET)	LF	80
6058	6001	BBU SYSTEM (EXTERNAL BATT CABINET)	EA	1
6292	6001	RVDS (PRESENCE DETECTION ONLY)	EA	3
6292	6002	RVDS (ADVANCE DETECTION ONLY)	EA	2
6292	*	RVDS POWER/COMM CABLE	LF	792
7193	6008	CCTV CAMERA (INCL PAN, TILT AND LENS)	EA	1

\* SUBSIDIARY TO ITEM 0687 6001  
\*\* SUBSIDIARY TO ITEM 6292

Kimley»Horn

F-928

© 2022

Texas Department of Transportation

SH 123 & PANTHER RIDGE


QUANTITIES SUMMARY

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.	
6		SH 123	
STATE	DIST.	COUNTY	SHEET NO.
TEXAS	SAT	GUAD	T 36
CONT.	SECT.	JOB	
--	--	--	




FILENAME: c:\pwwork1\0212726\TOUR\_TRF\_102.dgn  
PLOTED: 9/13/2022 12:47:15


### PHASING DIAGRAM

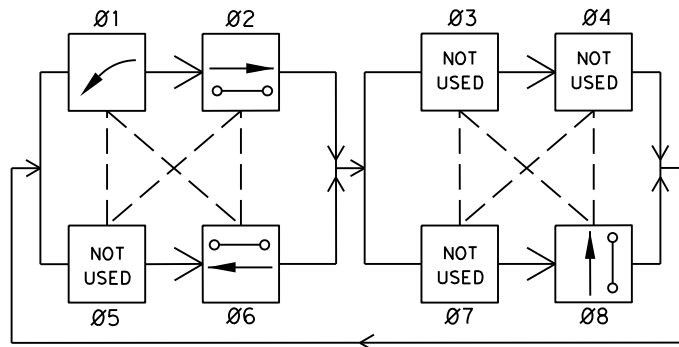



### PROPOSED LED SIGNAL HEADS

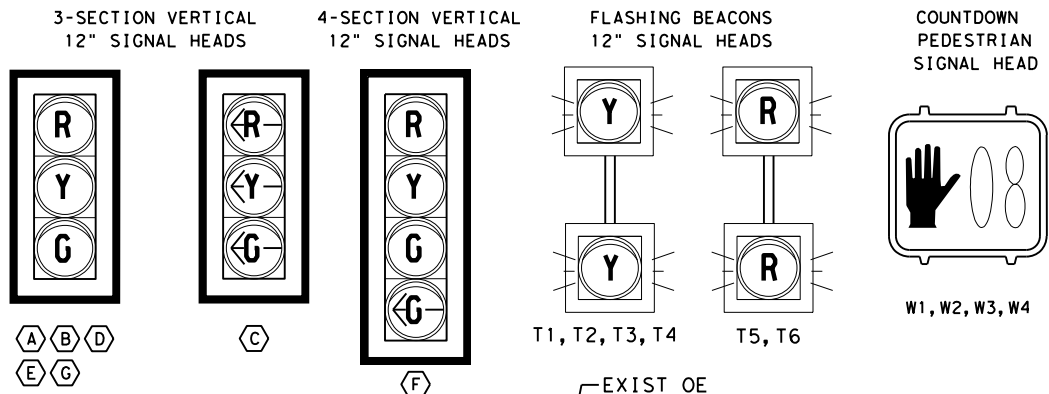


### FLASH SEQUENCE



### LEGEND

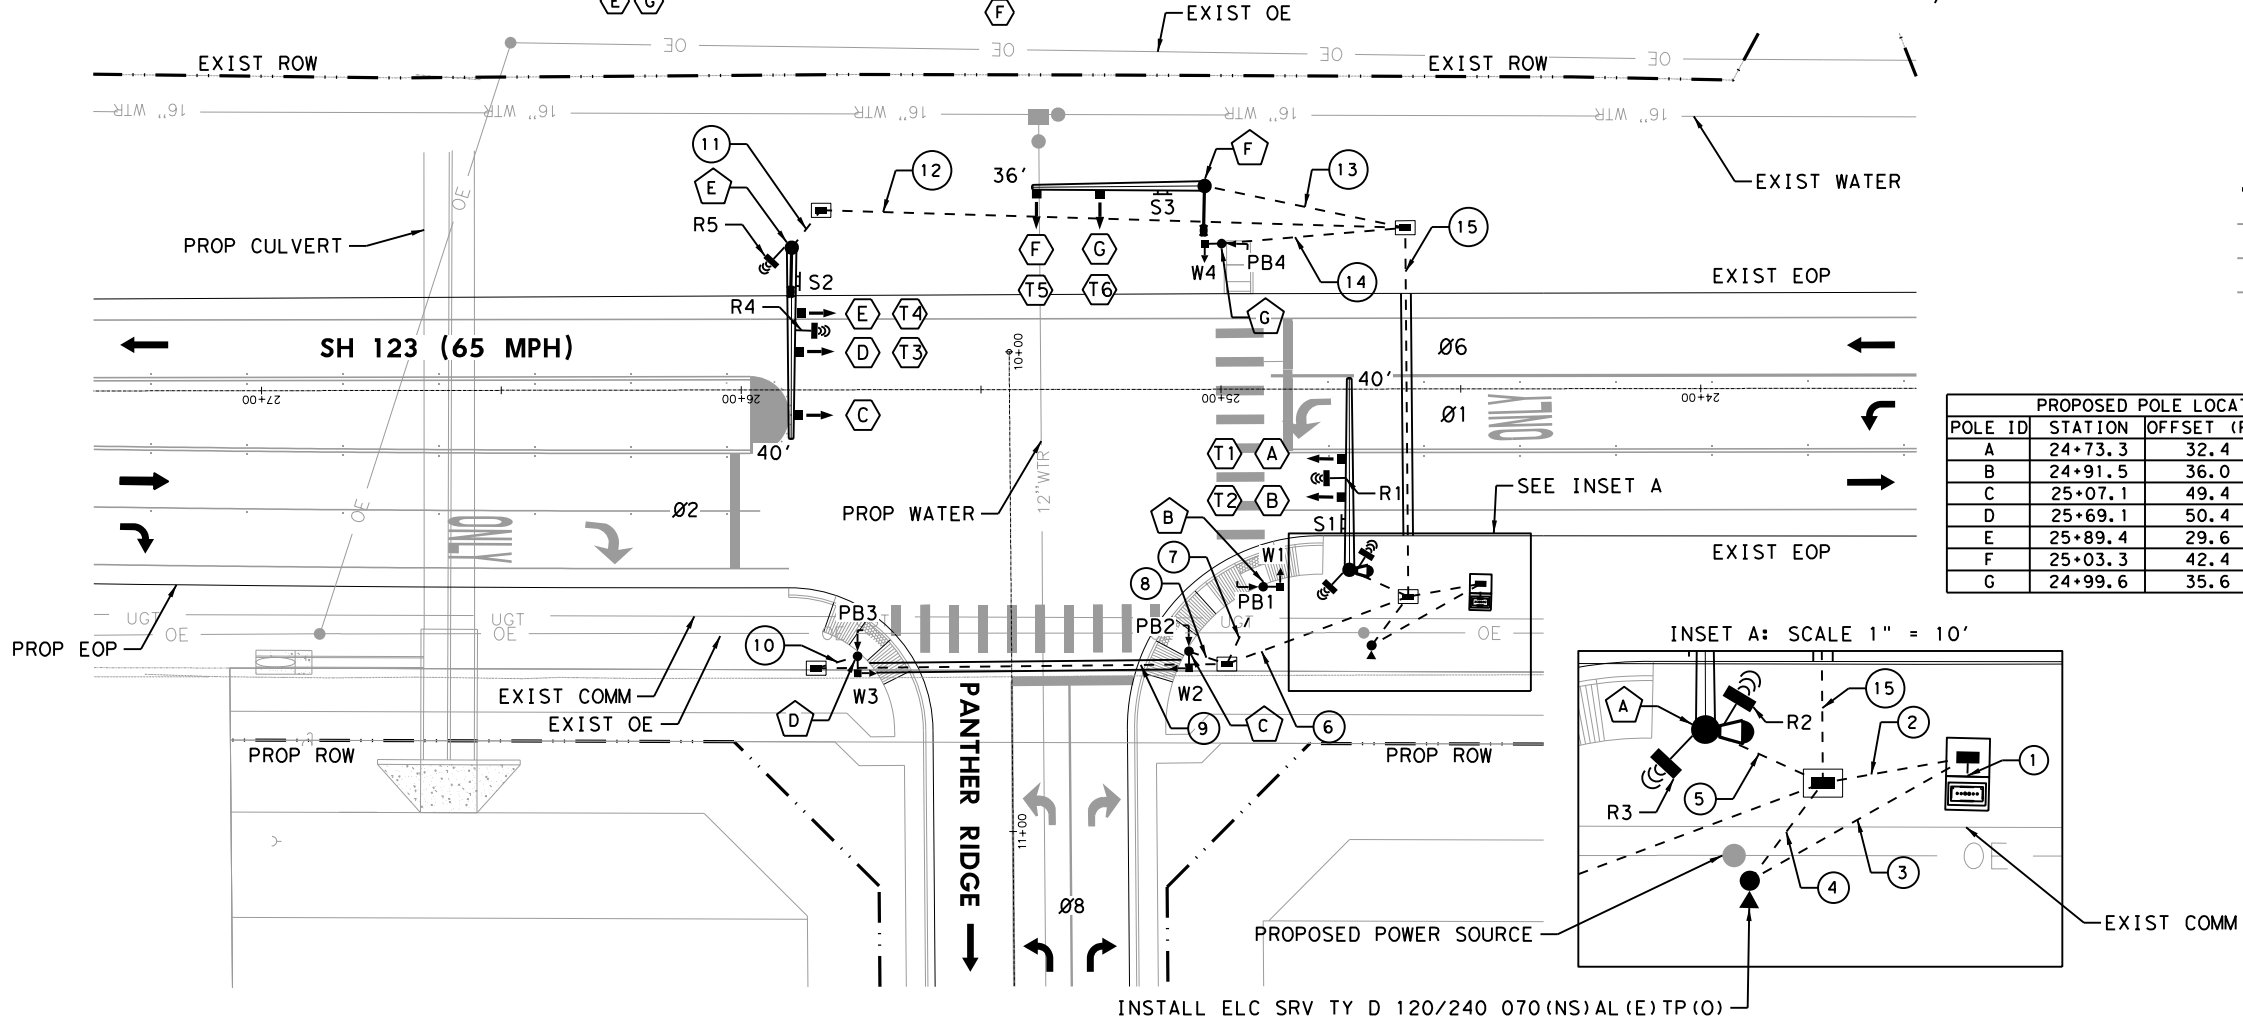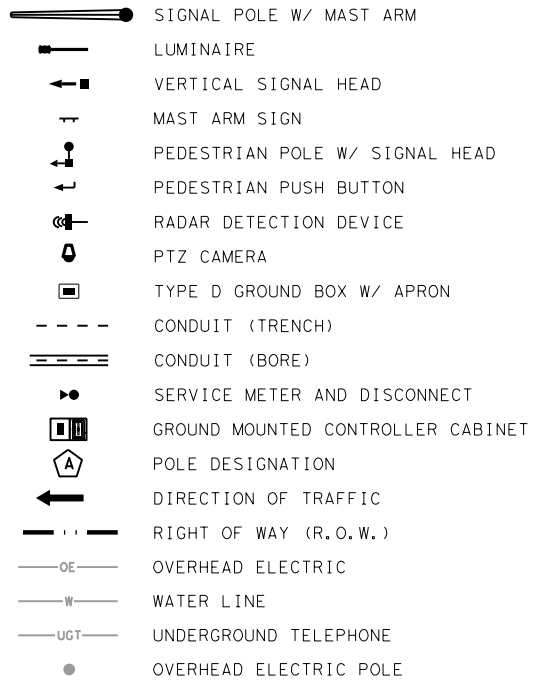



PROPOSED POLE LOCATIONS			
POLE ID	STATION	OFFSET (FT)	DIRECTION
A	24+73.3	32.4	LEFT
B	24+91.5	36.0	LEFT
C	25+07.1	49.4	LEFT
D	25+69.1	50.4	LEFT
E	25+89.4	29.6	RIGHT
F	25+03.3	42.4	RIGHT
G	24+99.6	35.6	RIGHT

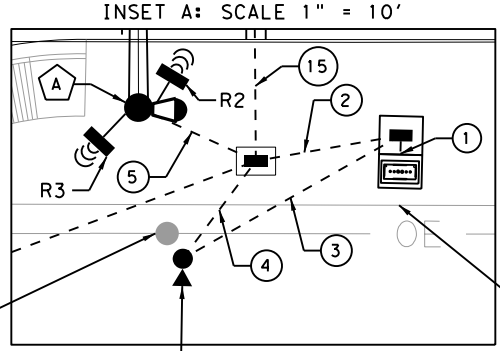

### NOTES

1. THE CONTRACTOR SHALL VERIFY AND DETERMINE THE EXACT LOCATION OF UTILITIES PRIOR TO CONSTRUCTION.
2. THE CONTRACTOR SHALL CALL UTILITY LOCATOR SERVICE AT LEAST 48 HOURS PRIOR TO COMMENCING WORK TEXAS "ONE-CALL" SYTEM: 1-800-345-4545.
3. THE CONTRACTOR IS FULLY RESPONSIBLE FOR ANY DAMAGES CAUSED BY THE FAILURE TO LOCATE AND PRESERVE THE UNDERGROUND FACILITIES.
4. LOCATION OF SIGNAL POLES, CABINET, AND ELECTRICAL SERVICE SHALL BE VERIFIED AND APPROVED BY TXDOT PRIOR TO CONSTRUCTION.
5. CONTRACTOR SHALL CONNECT FIELD WIRING TO CONTROLLER.
6. SIGNAL HEADS SHALL HAVE A MINIMUM OF 18.5 FEET CLEARANCE ABOVE ROADWAY SURFACE.
7. CONTRACTOR SHALL POTHOLE ALL SIGNAL POLE FOUNDATION LOCATIONS NEAR UNDERGROUND UTILITIES PRIOR TO INSTALLING POLE FOUNDATIONS.
8. CONTRACTOR SHALL CONTACT TXDOT TRAFFIC ENGINEER A MINIMUM OF SEVEN (7) DAYS PRIOR TO BEGINNING OF CONSTRUCTION.
9. CONTRACTOR SHALL CONTACT TXDOT TRAFFIC ENGINEER A MINIMUM OF FOURTEEN (14) DAYS PRIOR TO THE TRAFFIC SIGNAL TURN-ON.
10. CONTRACTOR TO COORDINATE WITH GUADALUPE VALLEY ELECTRIC COOPERATIVE TO ESTABLISH ELECTRICAL SERVICE.
11. CONTRACTOR TO INSTALL EQUIPMENT REQUIRED FOR A FLASHING BEACON OPERATION.
12. CONTRACTOR TO FURNISH AND DELIVER SIGNAL HEADS, TRAFFIC CONTROLLER, RADAR DETECTION EQUIPMENT, PEDESTRIAN HEADS AND PEDESTRIAN PUSH BUTTON ASSEMBLIES TO SAN ANTONIO DISTRICT TRAFFIC OFFICE.

### PROPOSED SIGNS

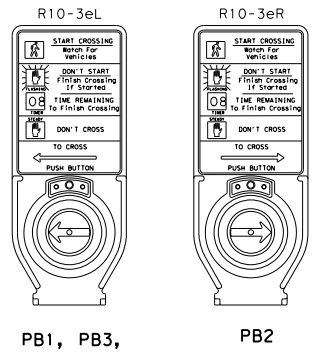

**Kimley»Horn** F-928

© 2022  
Texas Department of Transportation

SH 123 & PANTHER RIDGE

**PROPOSED TRAFFIC  
SIGNAL LAYOUT**

SHEET 1 OF 4

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6		SH 123
STATE	DIST.	COUNTY
TEXAS	SAT	GUAD
CONT.	SECT.	JOB
--	--	--

SHEET NO.  
T37



Santiago A. Araque Rojas  
9/13/2022



PROPOSED CONDUIT & CONDUCTOR SCHEDULE

CONDUIT AND CABLE CHART																
WIRE SIZE AND TYPE																
RUN #	ACTION	ITEM 618 CONDUIT SIZE AND TYPE				ACTION	ITEM 620 ELECTRICAL CONDUCTORS		ITEM 621 TRAY CABLE	ITEM 684 SIGNAL CABLE			ITEM 6292 RADAR COMM CABLE	ITEM SS1020-C 5E CAT 5 ETHERNET	LENGTH OF RUN	RUN #
		2" PVC (TRENCHED)	3" PVC (TRENCHED)	2" PVC (BORED)	3" PVC (BORED)		NO. 6 BARE	NO. 6 INSULATED	4 CNDR NO. 12	TYPE A						
										2 CNDR NO. 12	4 CNDR NO. 12	7 CNDR NO. 12				
1	I	3	2			I	5	2		4	4	5	5	1	5	1
2	I	1	2			I	3			4	4	5	5	1	20	2
3	I	1				I	1	2							30	3
4	I	2				I	2		2						15	4
5	I	1	2			I	3					2	3	1	15	5
6	I	1	2			I	3			3	3				45	6
7	I	2				I	2			1	1				20	7
8	I	2				I	2			1	1				10	8
9	I			1	2	I	3			1	1				90	9
10	I	2				I	2			1	1				10	10
11	I	1	2			I	3		1			2	2		10	11
12	I	1	2			I	3		1			2	2		125	12
13	I	1	2			I	3		1			1			45	13
14	I	2				I	2			1	1				40	14
15	I			1	2	I	3		2	1	1	3	2		80	15
SUBTOTAL (LF)		495	530	170	340	-	1535	70	40	485	485	710	600	40	SUBTOTAL (LF)	

NOTE: TRAY CABLE TO BE RUN IN A SEPARATE 2" CONDUIT

INSIDE POLES

INSIDE POLES	TRAY CABLE ILLUMINATIO	12 AWG			RADAR	CCTV CAT 5E
		2C	4C	7C		
A	30			40	60	30
B		5	10			
C		5	10			
D		5	10			
E	30			40	40	
F	30			20		
G		5	10			
TOTAL QTY (LF)		90	20	40	100	30


INSIDE ARMS

INSIDE ARMS	12 AWG		RADAR
	7C	6C	
A	66	24	
B	PED POLE		
C	PED POLE		
D	PED POLE		
E	57	18	
F	36		
G	PED POLE		
TOTAL QTY		159	42

INSIDE CABINET

INSIDE CABINET	12 AWG			RADAR	CAT 5E	#6 INSULATED
	2C	4C	7C			
TOTAL QTY	40	40	50	50	10	20

ORIENTATION DIAGRAM

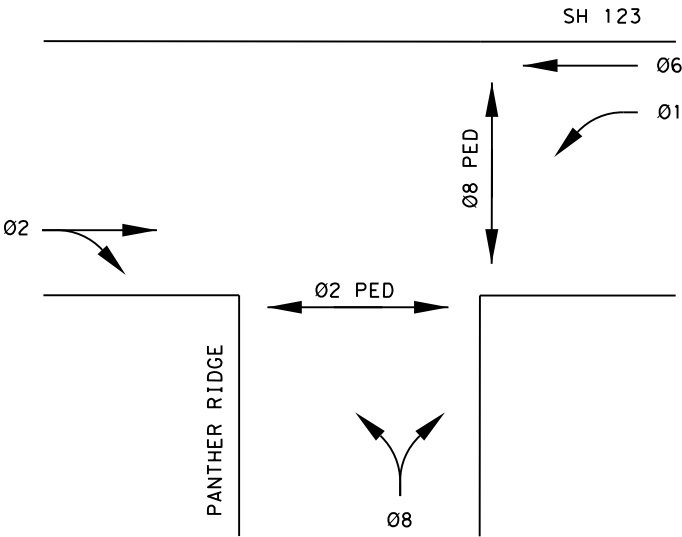


RADAR DETECTION ZONE

RADAR DETECTION ZONE DETAILS			
DETECTOR	APPROACH	TYPE	MOUNTING LOCATION
R1	SOUTHBOUND	ADVANCED	POLE A MAST ARM
R2	NORTHBOUND	PRESENCE	POLE A
R3	EASTBOUND	PRESENCE	POLE A
R4	NORTHBOUND	ADVANCED	POLE E MAST ARM
R5	SOUTHBOUND	PRESENCE	POLE E


PROPOSED ELECTRICAL SERVICE DATA

ELECTRICAL SERVICE DATA									
ELECTRICAL SERVICE DESCRIPTION	SERVICE CONDUIT SIZE	SERVICE CONDUCTORS NO./SIZE	SAFETY SWITCH AMPS	MAIN CKT. BRK. POLE/AMPS	TWO-POLE CONTRACTOR AMPS	PANE I BD/LOADCENTER AMP RATING	BRANCH CIRCUIT ID	BRANK CKT. BRK. POLE/AMPS	KVA LOAD
ELC SRV TY D 120/240 070 (NS) AL (E) TP (O)	1 1/4"	3 / #6	N/A	2P/70	30	100	SIG. CONTROLLER LUMINAIRES	1P/30 2P/20	<7.1

PROPOSED STREET SIGNS

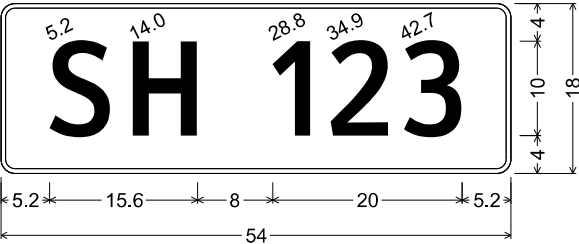

D3-1G(6) 10in;  
1.5" Radius, 0.5" Border, White on Green;  
"SH 123", ClearviewHwy-3-W;

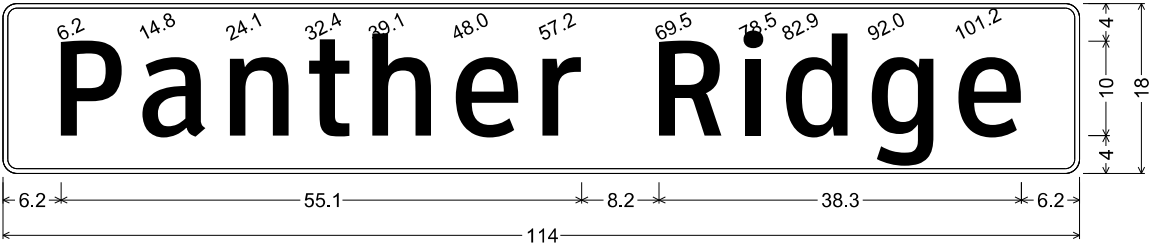

D3-1G(6) 10in;  
1.5" Radius, 0.5" Border, White on Green;  
"Panther Ridge", ClearviewHwy-3-W;

*Santiago A. Araque Rojas*  
9/13/2022  
STATE OF TEXAS  
SANTIAGO A. ARAQUE ROJAS  
125247  
LICENSED PROFESSIONAL ENGINEER

Kimley»Horn  
F-928


© 2022  
Texas Department of Transportation

SH 123 & PANTHER RIDGE


PROPOSED TRAFFIC  
SIGNAL DETAILS

SHEET 2 OF 4			
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.	
6		SH 123	
STATE	DIST.	COUNTY	SHEET NO.
TEXAS	SAT	GUAD	T38
CONT.	SECT.	JOB	
--	--	--	




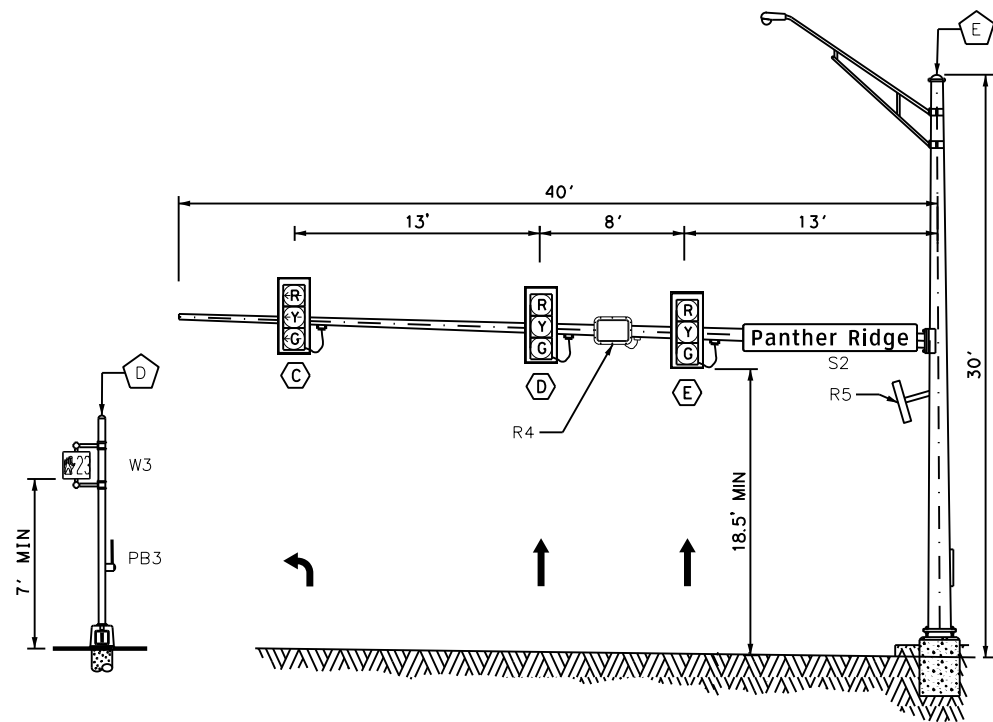

LOOKING NORTH ON SH 123

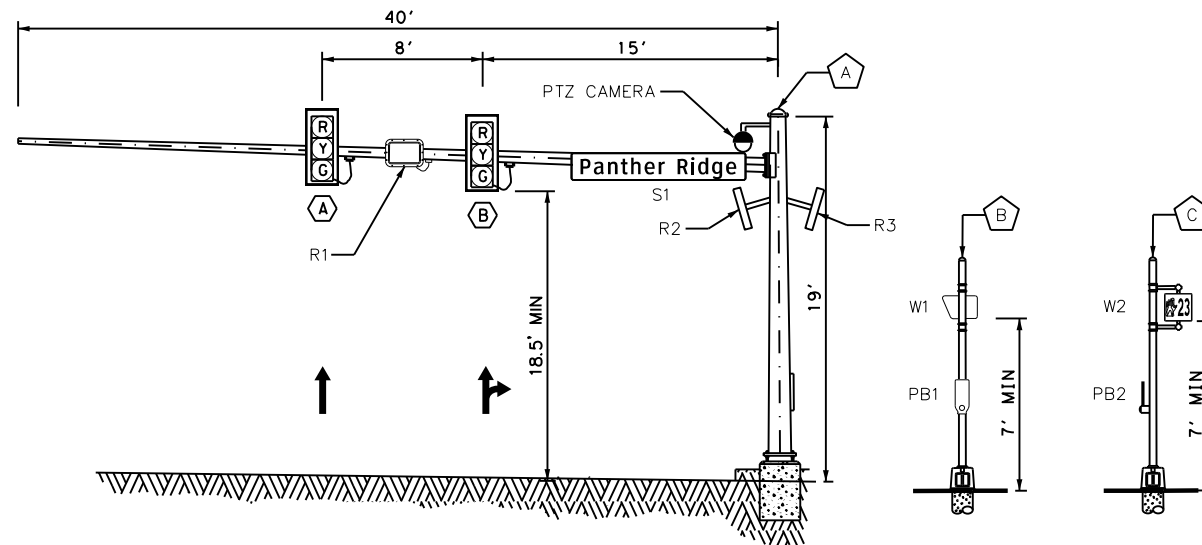

LOOKING SOUTH ON SH 123

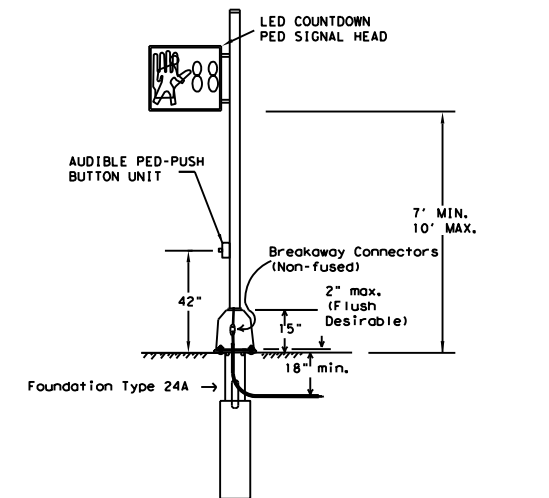


PEDESTRIAN POLE DETAILS  
POLES A (PB1), D (PB3), F (PB4), H (PB6)

NOTES:

- HEADS WILL BE INSTALLED PER T&MUTCD 2011.
- FOUNDATIONS WILL BE ADJUSTED IN THE FIELD IN ORDER TO MEET CLEARANCE.
- LOCATION OF MAST ARMS IS APPROXIMATE. ANY CHANGES WILL BE APPROVED BY THE ENGINEER.
- MAST ARM ATTACHMENT HEIGHT WILL BE CALCULATED BY THE ENGINEER IN THE FIELD AND APPROVED BY THE ENGINEER.
- ALL ELEVATIONS ARE NOT TO SCALE.


PROPOSED LED SIGNAL HEADS

3-SECTION VERTICAL  
12" SIGNAL HEADS



A B D  
E G

4-SECTION VERTICAL  
12" SIGNAL HEAD



C F

PROPOSED MAST ARM SIGNS

D3-1G (6)  
(54"x18")


SH 123

S3

D3-1G (6)  
(114"x18")

Panther Ridge

S1, S2

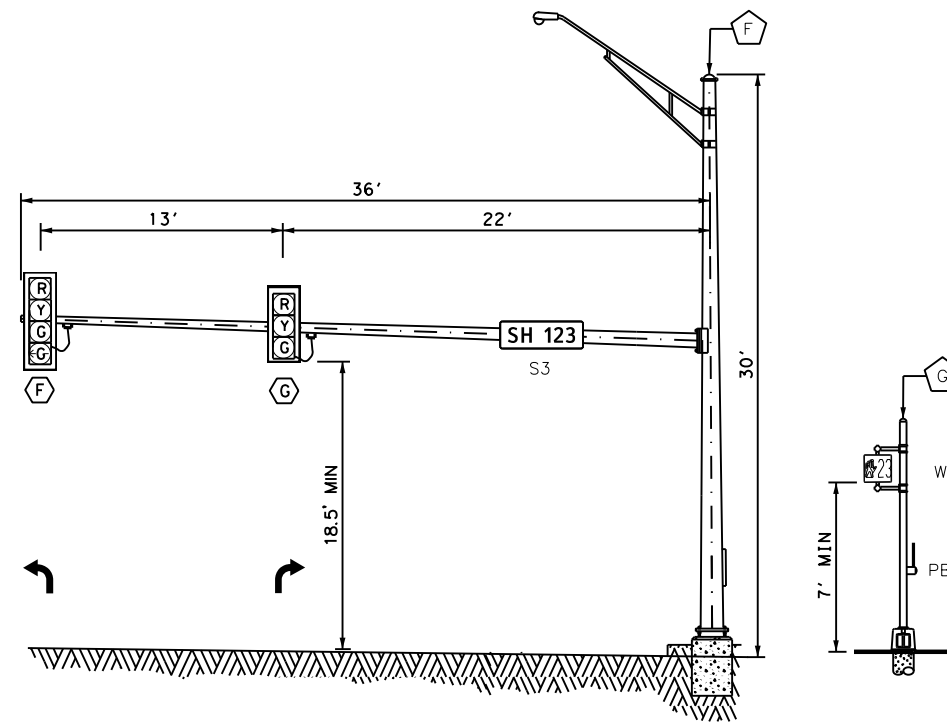

LOOKING EAST ON PANTHER RIDGE

Santiago A. Araque Rojas  
9/13/2022  
SANTIAGO A. ARAQUE ROJAS  
125247  
LICENSED PROFESSIONAL ENGINEER

Kimley»Horn F-928

© 2022  
Texas Department of Transportation


SH 123 & PANTHER RIDGE

PROPOSED TRAFFIC  
SIGNAL ELEVATIONS


SHEET 3 OF 4

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6		SH 123
STATE	DIST.	COUNTY
TEXAS	SAT	GUAD
CONT.	SECT.	JOB
--	--	--
		T39





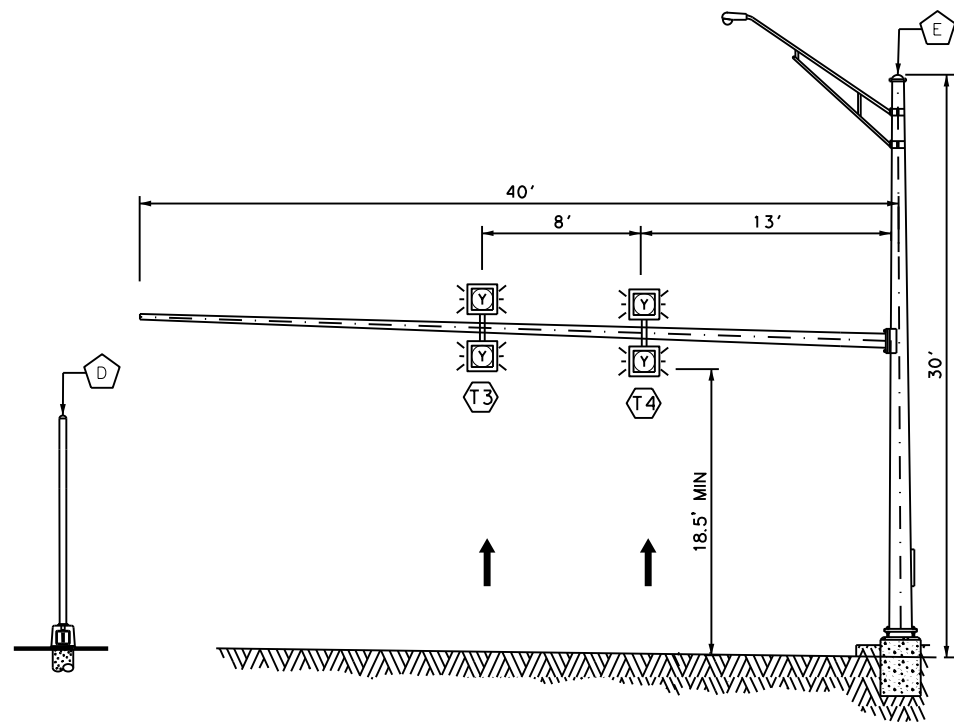

**LOOKING NORTH ON SH 123**

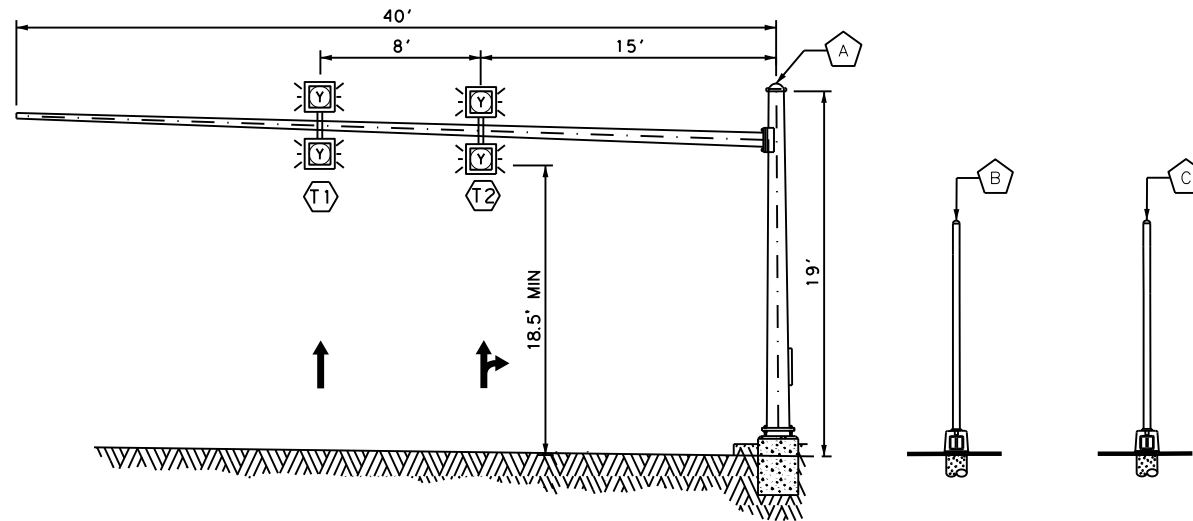

**LOOKING SOUTH ON SH 123**

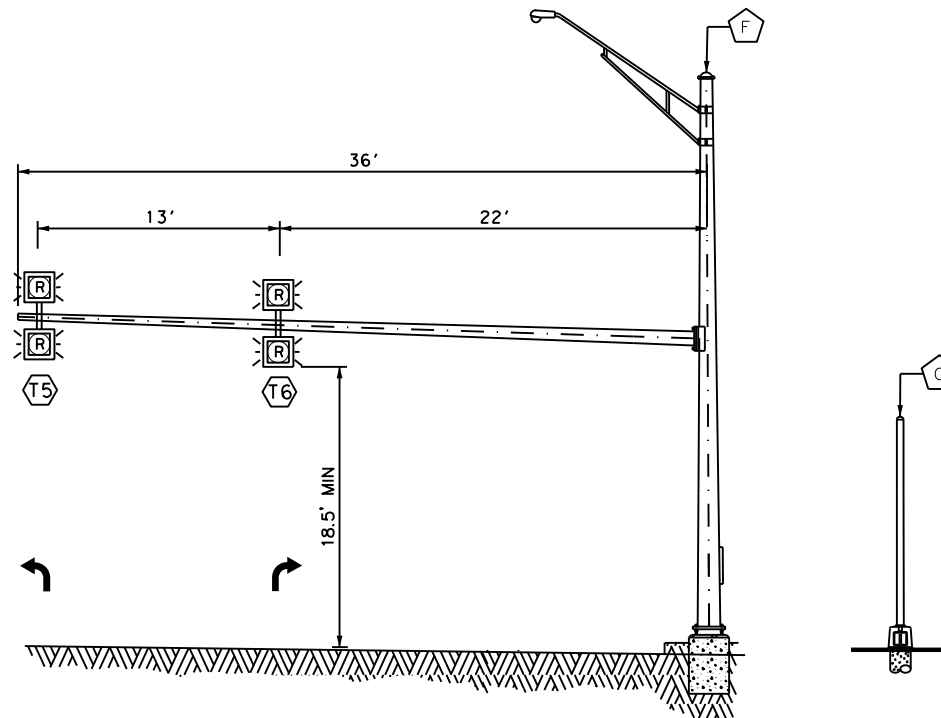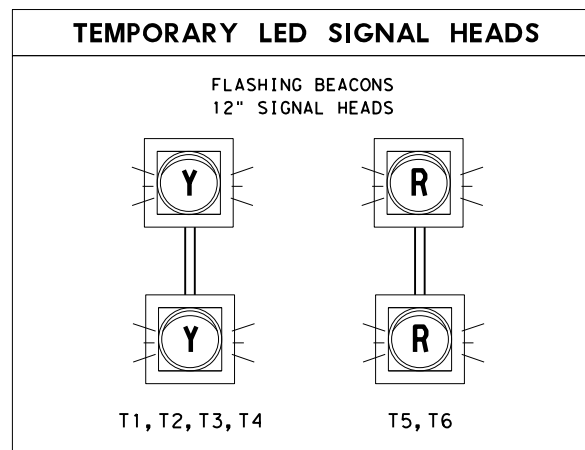

**LOOKING EAST ON PANTHER RIDGE**

**NOTES:**

- HEADS WILL BE INSTALLED PER T&MUTCD 2011.
- FOUNDATIONS WILL BE ADJUSTED IN THE FIELD IN ORDER TO MEET CLEARANCE.
- LOCATION OF MAST ARMS IS APPROXIMATE. ANY CHANGES WILL BE APPROVED BY THE ENGINEER.
- MAST ARM ATTACHMENT HEIGHT WILL BE CALCULATED BY THE ENGINEER IN THE FIELD AND APPROVED BY THE ENGINEER.
- ALL ELEVATIONS ARE NOT TO SCALE.
- 18.5' MINIMUM SIGNAL HEAD CLEARANCE SHALL BE MAINTAINED FOR FINAL SIGNAL HEADS.

*Santiago A. Araque Rojas*  
9/13/2022

STATE OF TEXAS  
SANTIAGO A. ARAQUE ROJAS  
125247  
LICENSED PROFESSIONAL ENGINEER

**Kimley»Horn** F-928

© 2022  
Texas Department of Transportation

SH 123 & PANTHER RIDGE

**TEMPORARY FLASHING  
BEACON  
ELEVATIONS**

SHEET 4 OF 4

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
6		SH 123
STATE	DIST.	COUNTY
TEXAS	SAT	GUAD
CONT.	SECT.	JOB
--	--	--

SHEET NO.  
T40



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 9/13/2022 12:47:52  
FILE: c:\pw\kh1\00213778\BC(1-12)-21.dgn

BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:

- 1. The Barricade and Construction Standard Sheets (BC sheets) are intended to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- 2. The development and design of the Traffic Control Plan (TCP) is the responsibility of the Engineer.
- 3. The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop, sign and seal Contractor proposed changes.
- 4. The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
- 5. Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
- 6. When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
- 7. The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
- 8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
- 9. The temporary traffic control devices shown in the illustrations of the BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
- 10. Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown on BC(2). The OBEY WARNING SIGNS STATE LAW sign, STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES, CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, CSJ limit signs are not required.
- 11. Traffic control devices should be in place only while work is actually in progress or a definite need exists.
- 12. The Engineer has the final decision on the location of all traffic control devices.
- 13. Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travel lanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.


WORKER SAFETY NOTES:

- 1. Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility Apparel," or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
- 2. Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.

COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES

- 1. Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
- 2. Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).

THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT http://www.txdot.gov
COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD)
DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS)
MATERIAL PRODUCER LIST (MPL)
ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS)"
STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD)
TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD)
TRAFFIC ENGINEERING STANDARD SHEETS

Texas Department of Transportation

Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION  
GENERAL NOTES  
AND REQUIREMENTS

BC (1) - 21


FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		--	--	--	SH 123				
4-03	7-13	DIST	COUNTY		SHEET NO.				
9-07	8-14	SAT	GUAD		T41				
5-10	5-21								

95



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


#### TYPICAL LOCATION OF CROSSROAD SIGNS

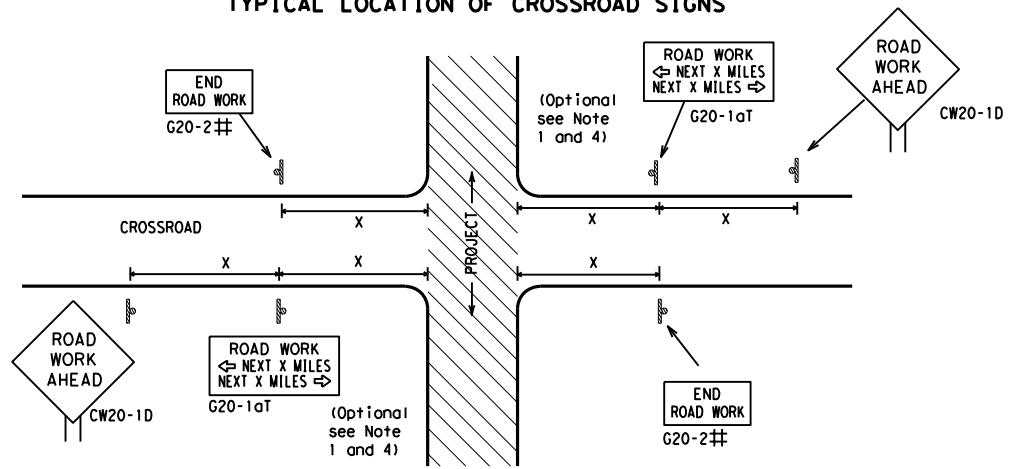

## May be mounted on back of "ROAD WORK AHEAD" (CW20-1D) sign with approval of Engineer. (See note 2 below)

1. The typical minimum signing on a crossroad approach should be a "ROAD WORK AHEAD" (CW20-1D) sign and a (G20-2) "END ROAD WORK" sign, unless noted otherwise in plans.
2. The Engineer may use the reduced size 36" x 36" ROAD WORK AHEAD (CW20-1D) sign mounted back to back with the reduced size 36" x 18" "END ROAD WORK" (G20-2) sign on low volume crossroads (See Note 4 under "Typical Construction Warning Sign Size and Spacing"). See the "Standard Highway Sign Designs for Texas" manual for sign details. The Engineer may omit the advance warning signs on low volume crossroads. The Engineer will determine whether a road is low volume as per TMUTCD Part 5. This information shall be shown in the plans.
3. Based on existing field conditions, the Engineer/Inspector may require additional signs such as FLAGGER AHEAD, LOOSE GRAVEL, or other appropriate signs. When additional signs are required, these signs will be considered part of the minimum requirements. The Engineer/Inspector will determine the proper location and spacing of any sign not shown on the BC sheets, Traffic Control Plan sheets or the Work Zone Standard Sheets.
4. The "ROAD WORK NEXT X MILES" (G20-1aT) sign shall be required at high volume crossroads to advise motorists of the length of construction in either direction from the intersection. The Engineer will determine whether a roadway is considered high volume.
5. Additional traffic control devices may be shown elsewhere in the plans for higher volume crossroads.
6. When work occurs in the intersection area, appropriate traffic control devices, as shown elsewhere in the plans or as determined by the Engineer/Inspector, shall be in place.

#### T-INTERSECTION

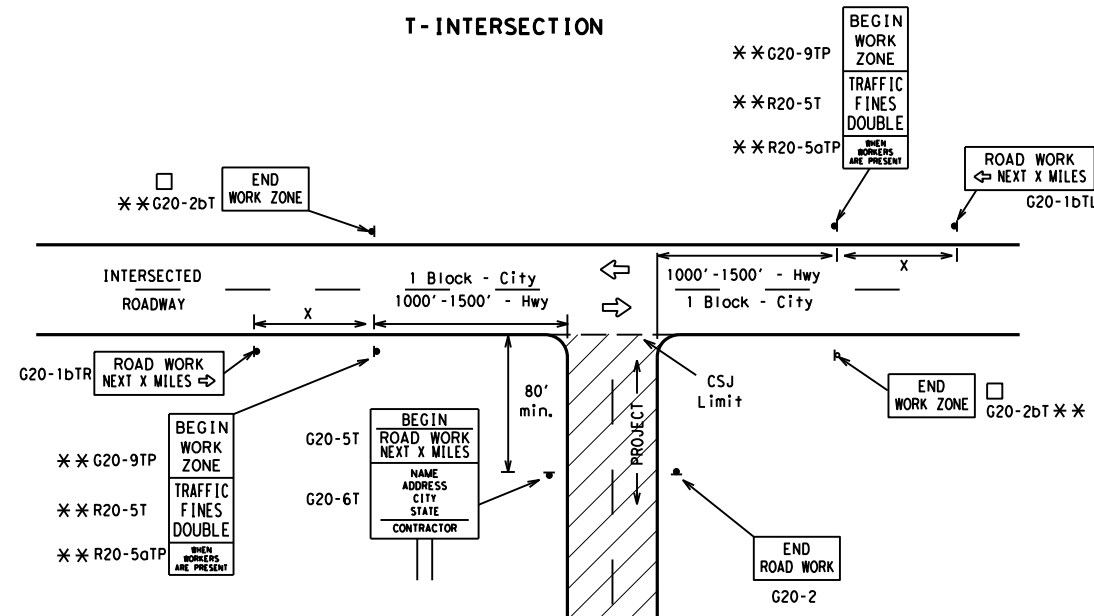

#### CSJ LIMITS AT T-INTERSECTION

1. The Engineer will determine the types and location of any additional traffic control devices, such as a flagger and accompanying signs, or other signs, that should be used when work is being performed at or near an intersection.
2. If construction closes the road at a T-intersection, the Contractor shall place the "CONTRACTOR NAME" (G20-6T) sign behind the Type 3 Barricades for the road closure (see BC(10) also). The "ROAD WORK NEXT X MILES" left arrow (G20-1bTL) and "ROAD WORK NEXT X MILES" right arrow (G20-1bTR) signs shall be replaced by the detour signing called for in the plans.

#### TYPICAL CONSTRUCTION WARNING SIGN SIZE AND SPACING<sup>1,5,6</sup>

Sign Number or Series	SIZE		SPACING	
	Conventional Road	Expressway/Freeway	Posted Speed MPH	Sign $\Delta$ Spacing "x" Feet (Apprx.)
CW20 <sup>4</sup>	48" x 48"	48" x 48"	30	120
CW21			35	160
CW22			40	240
CW23			45	320
CW25			50	400
CW1, CW2, CW7, CW8, CW9, CW11, CW14	36" x 36"	48" x 48"	55	500 <sup>2</sup>
CW3, CW4, CW5, CW6, CW8-3, CW10, CW12	48" x 48"	48" x 48"	60	600 <sup>2</sup>
			65	700 <sup>2</sup>
			70	800 <sup>2</sup>
			75	900 <sup>2</sup>
			80	1000 <sup>2</sup>
			*	*


\* For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.

$\Delta$  Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

#### GENERAL NOTES


1. Special or larger size signs may be used as necessary.
2. Distance between signs should be increased as required to have 1500 feet advance warning.
3. Distance between signs should be increased as required to have 1/2 mile or more advance warning.
4. 36" x 36" "ROAD WORK AHEAD" (CW20-1D) signs may be used on low volume crossroads at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
5. Only diamond shaped warning sign sizes are indicated.
6. See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design sizes.

#### WORK AREAS IN MULTIPLE LOCATIONS WITHIN CSJ LIMITS

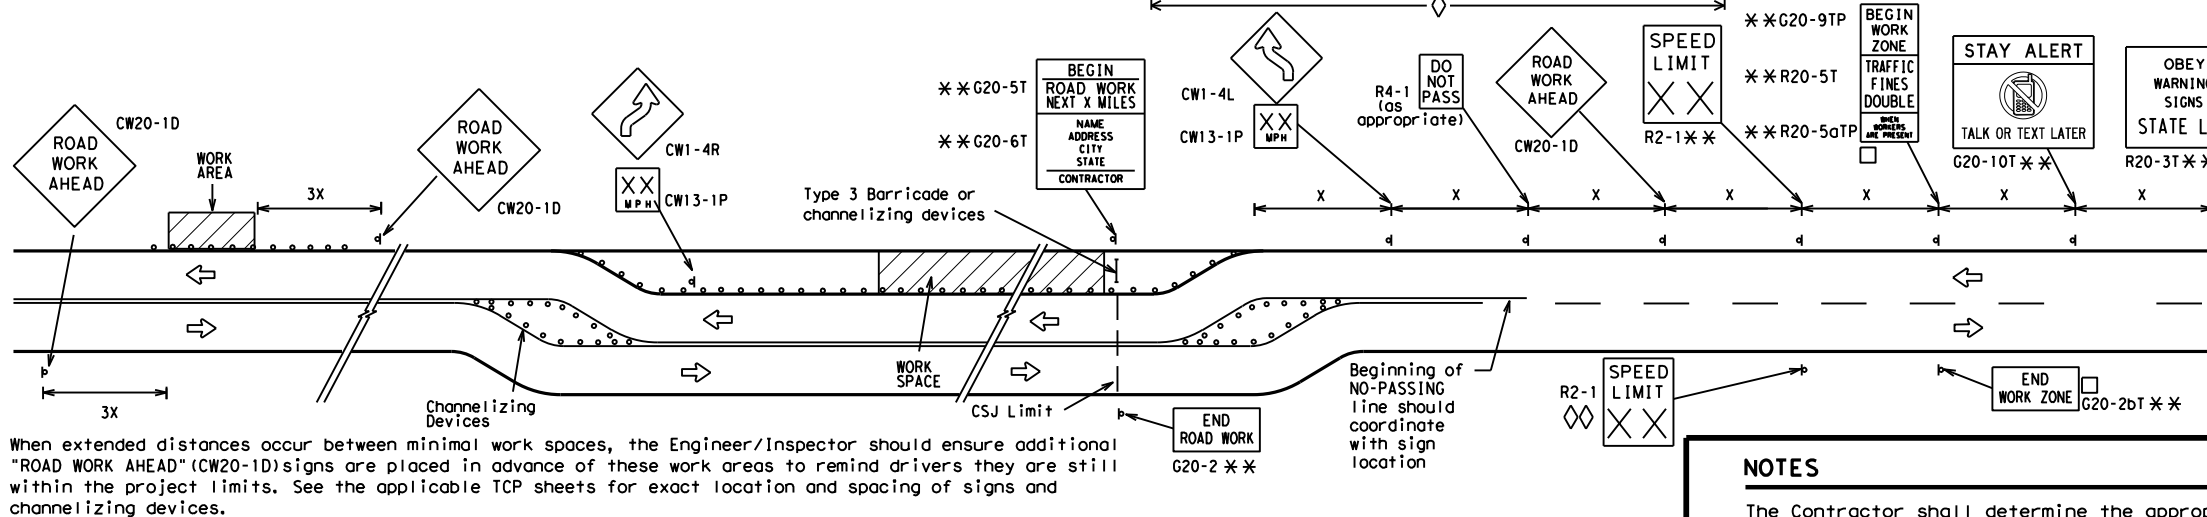

When extended distances occur between minimal work spaces, the Engineer/Inspector should ensure additional "ROAD WORK AHEAD" (CW20-1D) signs are placed in advance of these work areas to remind drivers they are still within the project limits. See the applicable TCP sheets for exact location and spacing of signs and channelizing devices.

#### SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING DOWNSTREAM OF THE CSJ LIMITS

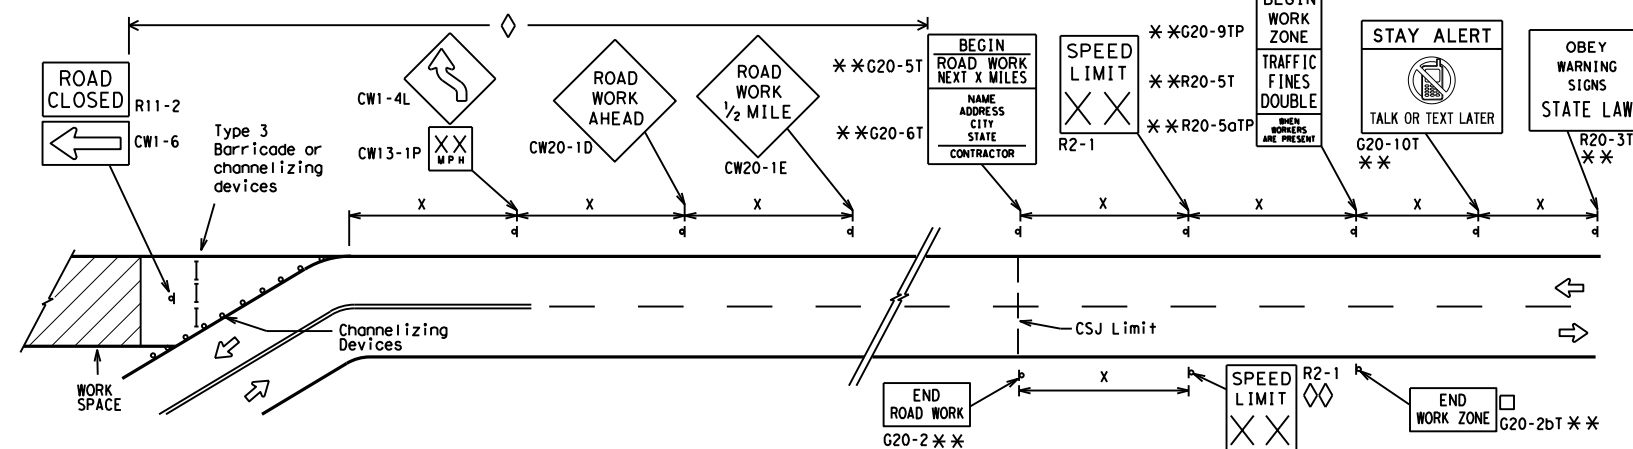

#### NOTES

The Contractor shall determine the appropriate distance to be placed on the G20-1 series signs and "BEGIN ROAD WORK NEXT X MILES" (G20-5T) sign for each specific project. This distance shall replace the "X" and shall be rounded to the nearest whole mile with the approval of the Engineer. No decimals shall be used.

- The "BEGIN WORK ZONE" (G20-9TP) and "END WORK ZONE" (G20-2bT) shall be used as shown on the sample layout when advance signs are required outside the CSJ Limits. They inform the motorist of entering or leaving a part of the work zone lying outside the CSJ Limits where traffic fines may double if workers are present.

\*\* CSJ limit signing is required for highway construction and maintenance work, with the exception of mobile operations.

- ◇ Area for placement of "ROAD WORK AHEAD" (CW20-1D) sign and other signs or devices as called for on the Traffic Control Plan.

◇◇ Contractor will install a regulatory speed limit sign at the end of the work zone.

#### LEGEND

—	Type 3 Barricade
○ ○ ○	Channelizing Devices
—	Sign
X	See Typical Construction Warning Sign Size and Spacing chart or the TMUTCD for sign spacing requirements.

SHEET 2 OF 12



## BARRICADE AND CONSTRUCTION PROJECT LIMIT

BC (2) - 21


FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	--	--	--	SH 123
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	SAT	GUAD	T42	



# TYPICAL APPLICATION OF WORK ZONE SPEED LIMIT SIGNS

Work zone speed limits shall be regulatory, established in accordance with the "Procedures for Establishing Speed Zones," and approved by the Texas Transportation Commission, or by City Ordinance when within Incorporated City Limits.

Reduced speeds should only be posted in the vicinity of work activity and not throughout the entire project. Regulatory work zone speed signs (R2-1) shall be removed or covered during periods when they are not needed.

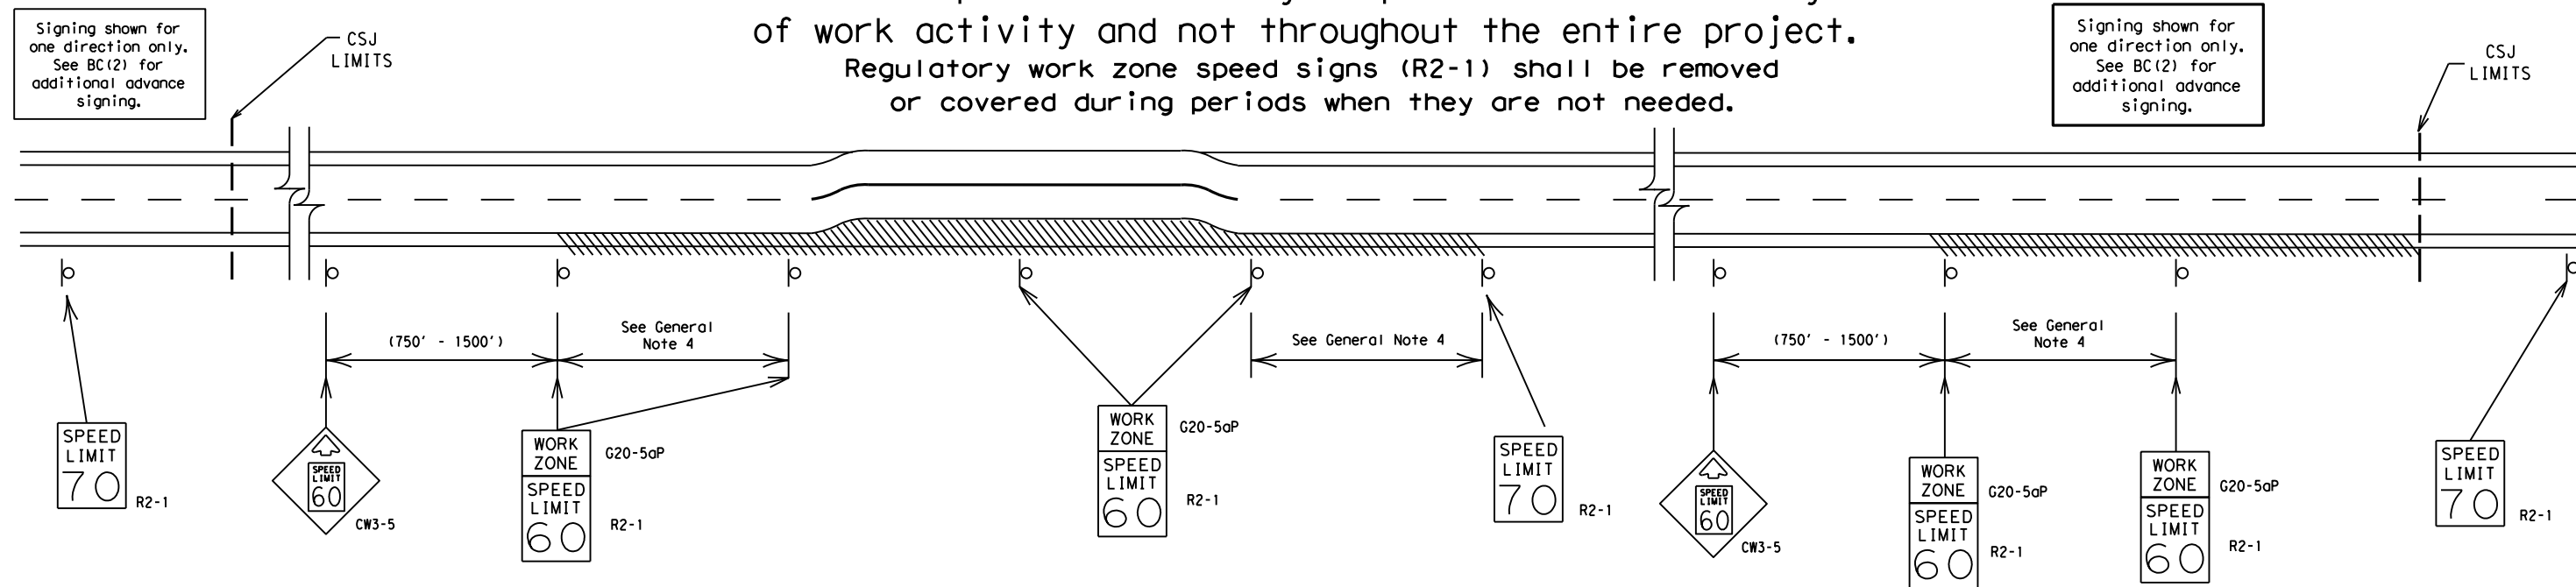

## GUIDANCE FOR USE:

### LONG/INTERMEDIATE TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit should be included on the design of the traffic control plans when restricted geometrics with a lower design speed are present in the work zone and modification of the geometrics to a higher design speed is not feasible.

Long/Intermediate Term Work Zone Speed Limit signs, when approved as described above, should be posted and visible to the motorist when work activity is present. Work activity may also be defined as a change in the roadway that requires a reduced speed for motorists to safely negotiate the work area, including:

- rough road or damaged pavement surface
- substantial alteration of roadway geometrics (diversions)
- construction detours
- grade
- width
- other conditions readily apparent to the driver

As long as any of these conditions exist, the work zone speed limit signs should remain in place.

### SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit may be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, when work activity is within 10 feet of the traveled way or actually in the traveled way.

Short Term Work Zone Speed Limit signs should be posted and visible to the motorists only when work activity is present. When work activity is not present, signs shall be removed or covered. (See Removing or Covering on BC(4)).

## GENERAL NOTES

- Regulatory work zone speed limits should be used only for sections of construction projects where speed control is of major importance.
- Regulatory work zone speed limit signs shall be placed on supports at a 7 foot minimum mounting height.
- Speed zone signs are illustrated for one direction of travel and are normally posted for each direction of travel.
- Frequency of work zone speed limit signs should be:

40 mph and greater	0.2 to 2 miles
35 mph and less	0.2 to 1 mile
- Regulatory speed limit signs shall have black legend and border on a white reflective background (See "Reflective Sheeting" on BC(4)).
- Fabrication, erection and maintenance of the "ADVANCE SPEED LIMIT" (CW3-5) sign, "WORK ZONE" (G20-5aP) plaque and the "SPEED LIMIT" (R2-1) signs shall not be paid for directly, but shall be considered subsidiary to Item 502.
- Turning signs from view, laying signs over or down will not be allowed, unless as otherwise noted under "REMOVING OR COVERING" on BC(4).
- Techniques that may help reduce traffic speeds include but are not limited to:
  - Law enforcement.
  - Flagger stationed next to sign.
  - Portable changeable message sign (PCMS).
  - Low-power (drone) radar transmitter.
  - Speed monitor trailers or signs.
- Speeds shown on details above are for illustration only. Work Zone Speed Limits should only be posted as approved for each project.
- For more specific guidance concerning the type of work, work zone conditions and factors impacting allowable regulatory construction speed zone reduction see TxDOT form #1204 in the TxDOT e-form system.

SHEET 3 OF 12



## BARRICADE AND CONSTRUCTION WORK ZONE SPEED LIMIT

BC(3) - 21

FILE:	bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS					
9-07	8-14	--	--	--	SH 123
7-13	5-21	DIST	COUNTY	SHEET NO.	
		SAT	GUAD	T43	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 9/13/2022 12:47:53  
FILE: c:\pwworking\tdot\project\BC(1-12)-21.dgn



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 9/13/2022 12:47:53  
FILE: c:\pwn\khl\0213778\BC(1-12)-21.dgn


## TYPICAL MINIMUM CLEARANCES FOR LONG TERM AND INTERMEDIATE TERM SIGNS

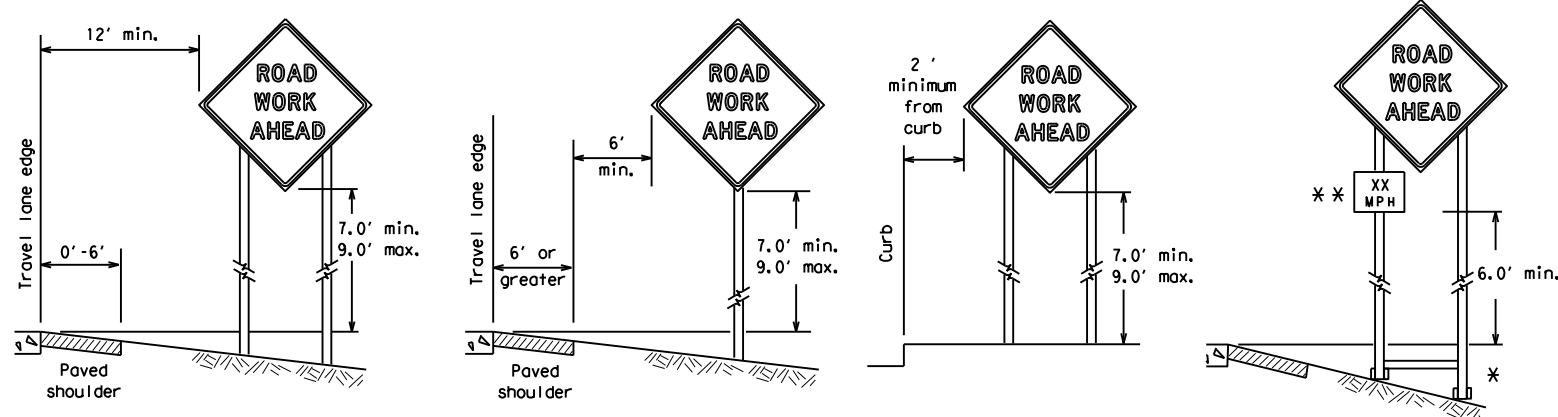

\* When placing skid supports on uneven ground, the leg post lengths must be adjusted so the sign appears straight and plumb. Objects shall NOT be placed under skids as a means of leveling.

\*\* When plaques are placed on dual-leg supports, they should be attached to the upright nearest the travel lane. Supplemental plaques (advisory or distance) should not cover the surface of the parent sign.

## ATTACHMENT FOR SIGN SUPPORTS

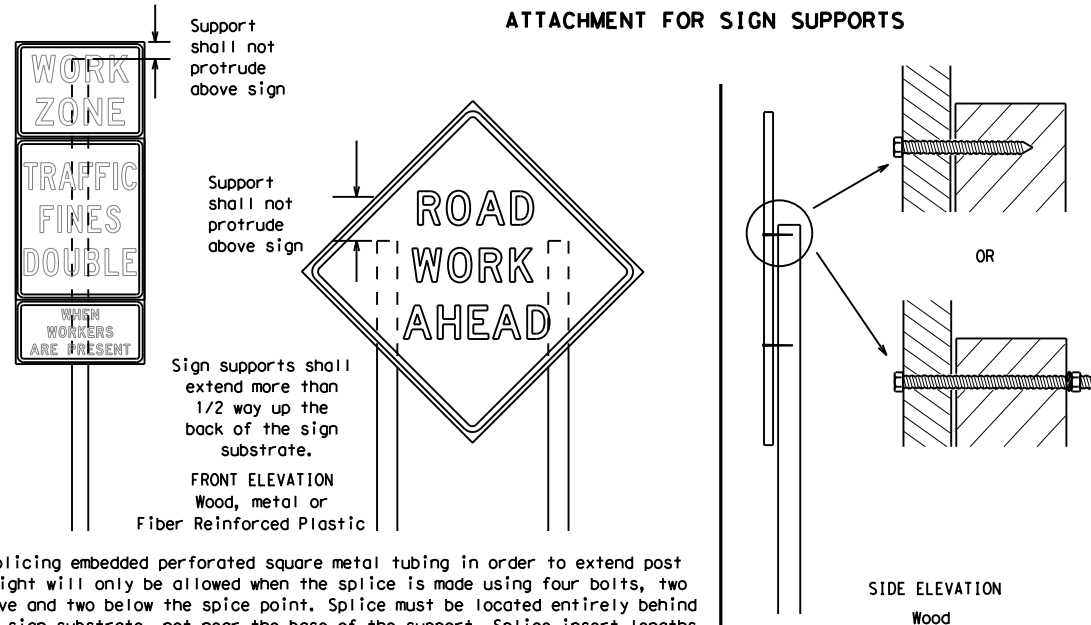


Attachment to wooden supports will be by bolts and nuts or screws. Use TxDOT's or manufacturer's recommended procedures for attaching sign substrates to other types of sign supports

Nails shall NOT be allowed. Each sign shall be attached directly to the sign support. Multiple signs shall not be joined or spliced by any means. Wood supports shall not be extended or repaired by splicing or other means.

Splicing embedded perforated square metal tubing in order to extend post height will only be allowed when the splice is made using four bolts, two above and two below the splice point. Splice must be located entirely behind the sign substrate, not near the base of the support. Splice insert lengths should be at least 5 times nominal post size, centered on the splice and of at least the same gauge material.

## STOP/SLOW PADDLES

- STOP/SLOW paddles are the primary method to control traffic by flaggers. The STOP/SLOW paddle size should be 24" x 24".
- STOP/SLOW paddles shall be retroreflectORIZED when used at night.
- STOP/SLOW paddles may be attached to a staff with a minimum length of 6' to the bottom of the sign.
- Any lights incorporated into the STOP or SLOW paddle faces shall only be as specifically described in Section 6E.03 Hand Signaling Devices in the TMUTCD.

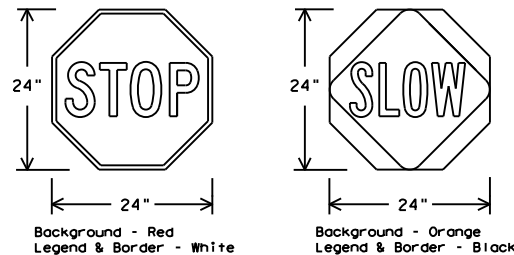

SHEETING REQUIREMENTS (WHEN USED AT NIGHT)		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	ORANGE	TYPE B <sub>FL</sub> OR C <sub>FL</sub> SHEETING
LEGEND & BORDER	WHITE	TYPE B OR C SHEETING
LEGEND & BORDER	BLACK	ACRYLIC NON-REFLECTIVE FILM

## CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS

- Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, specific service (LOGO), or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
- When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition. For details for covering large guide signs see the TS-CD standard.
- When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
- If existing signs are to be relocated on their original supports, they shall be installed on crashworthy bases as shown on the SMD Standard sheets. The signs shall meet the required mounting heights shown on the BC Sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
- If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use crashworthy supports as shown on the BC standard sheets, TLRs standard sheets or the CWZTCD list. The signs shall meet the required mounting heights shown on the BC, or the SMD standard sheets during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
- Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper guidance for the motorists. This will be subsidiary to Item 502.

## GENERAL NOTES FOR WORK ZONE SIGNS

- Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
- Wooden sign posts shall be painted white.
- Barricades shall NOT be used as sign supports.
- All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and guide the traveling public safely through the work zone.
- The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
- The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so the Engineer can verify the correct procedures are being followed.
- The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
- Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1 inch.
- The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

## DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)

- The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in regard to crashworthiness and duration of work requirements.
  - Long-term stationary - work that occupies a location more than 3 days.
  - Intermediate-term stationary - work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than one hour.
  - Short-term stationary - daytime work that occupies a location for more than 1 hour in a single daylight period.
  - Short, duration - work that occupies a location up to 1 hour.
  - Mobile - work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

## SIGN MOUNTING HEIGHT

- The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except as shown for supplemental plaques mounted below other signs.
- The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above the ground.
- Long-term/Intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.
- Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to appropriate Long-term/Intermediate sign height.
- Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

## SIZE OF SIGNS

- The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

## SIGN SUBSTRATES

- The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZTCD lists each substrate that can be used on the different types and models of sign supports.
- "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave.
- All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign face.

## REFLECTIVE SHEETING

- All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300 for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).
- White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background.
- Orange sheeting, meeting the requirements of DMS-8300 Type B<sub>FL</sub> or Type C<sub>FL</sub>, shall be used for rigid signs with orange backgrounds.

## SIGN LETTERS

- All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

## REMOVING OR COVERING

- When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
- Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
- Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
- When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting.
- Burlap shall NOT be used to cover signs.
- Duct tape or other adhesive material shall NOT be affixed to a sign face.
- Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

## SIGN SUPPORT WEIGHTS

- Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand should be used.
- The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
- Rock, concrete, iron, steel or other solid objects shall not be permitted for use as sign support weights.
- Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
- Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall NOT be used.
- Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCD list.
- Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
- Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

## FLAGS ON SIGNS

- Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall NOT be allowed to cover any portion of the sign face.



SHEET 4 OF 12

		Traffic Safety Division Standard	
<b>BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES</b>			
<b>BC(4) - 21</b>			
FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT
© TxDOT November 2002	CONT	SECT	JOB
REVISIONS	--	--	SH 123
9-07 8-14	DIST	COUNTY	SHEET NO.
7-13 5-21	SAT	GUAD	T44




DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 9/13/2022 12:47:54  
FILE: c:\pwworkh1\0213778\BC(1-12)-21.dgn

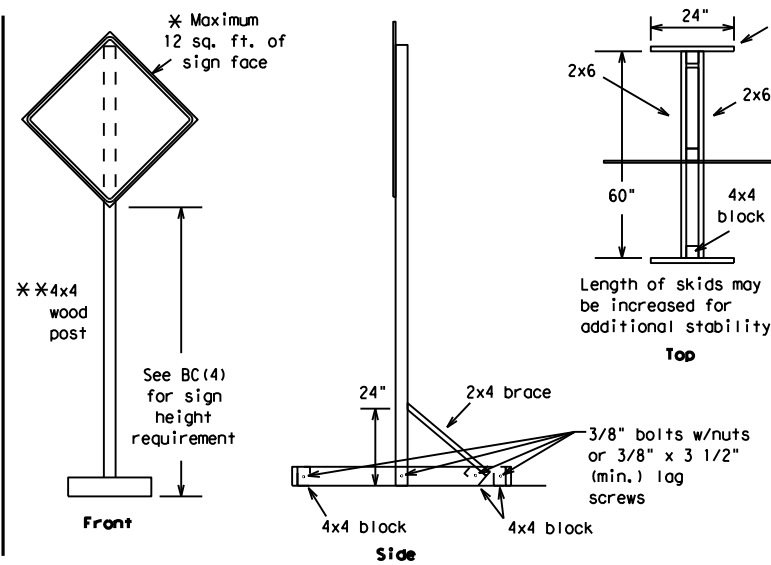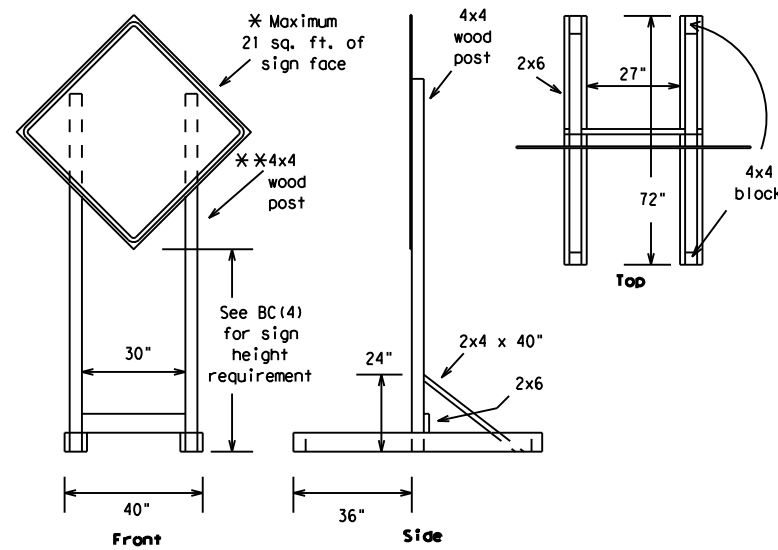





### SKID MOUNTED WOOD SIGN SUPPORTS

\* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

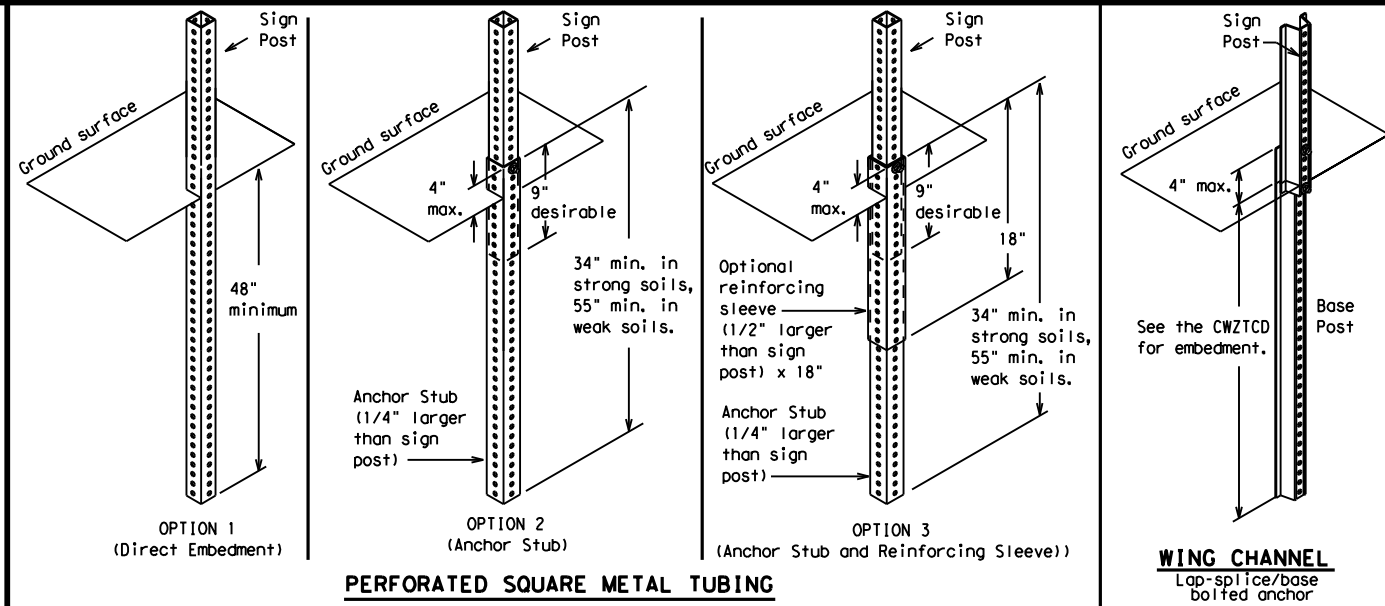

### GROUND MOUNTED SIGN SUPPORTS

Refer to the CWZTCD and the manufacturer's installation procedure for each type sign support.  
The maximum sign square footage shall adhere to the manufacturer's recommendation.  
Two post installations can be used for larger signs.

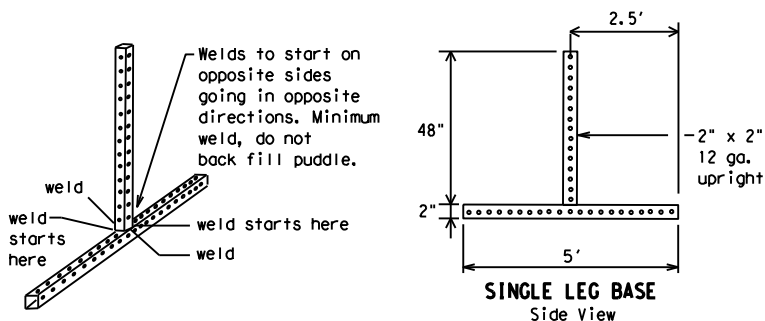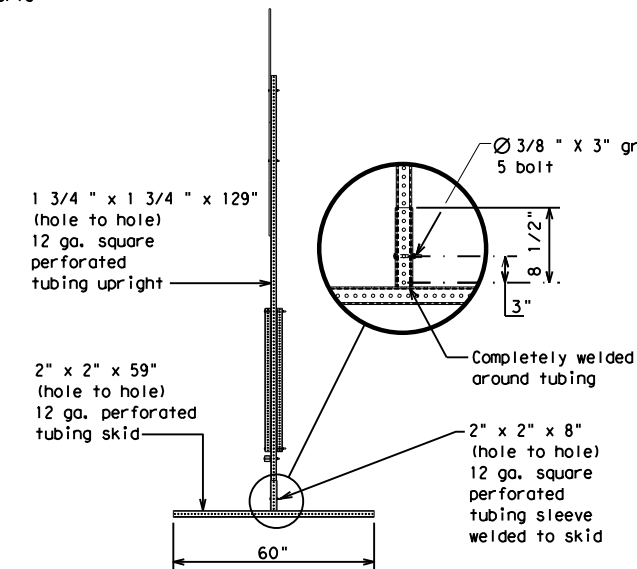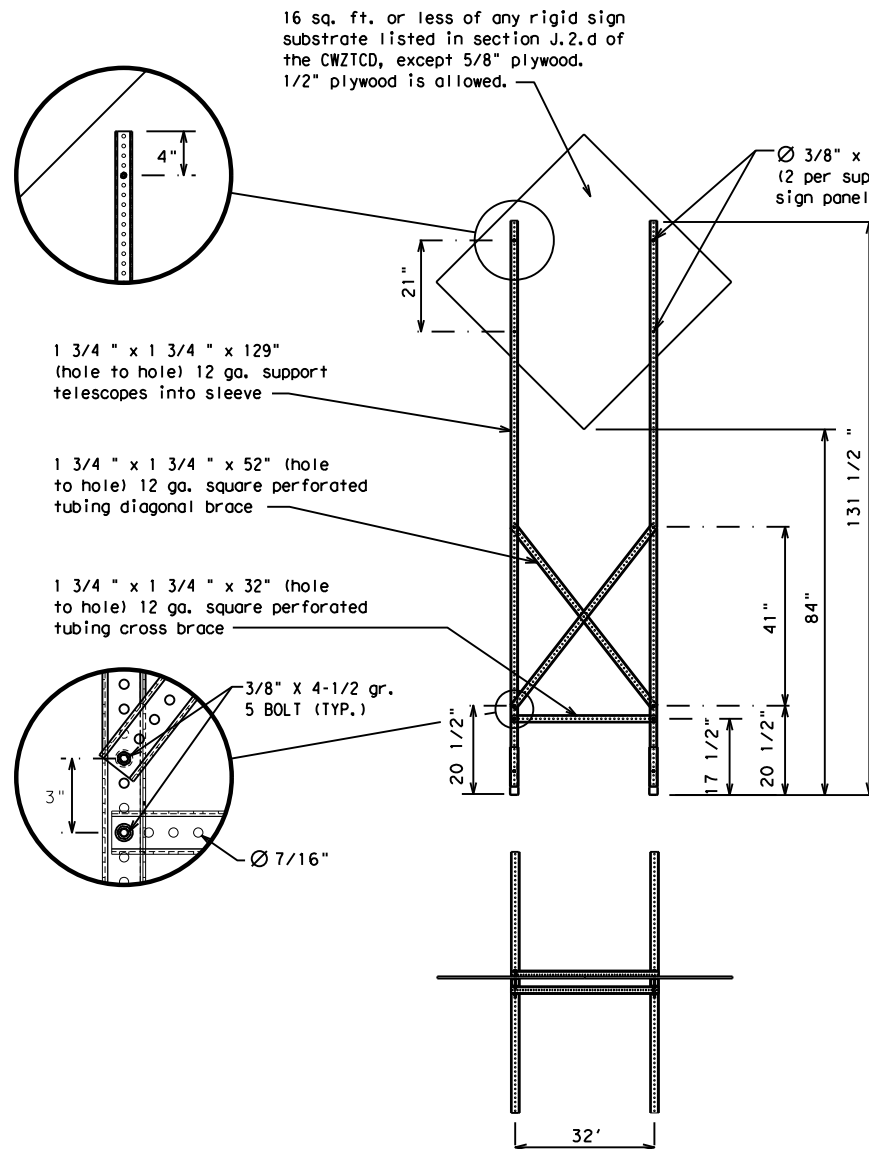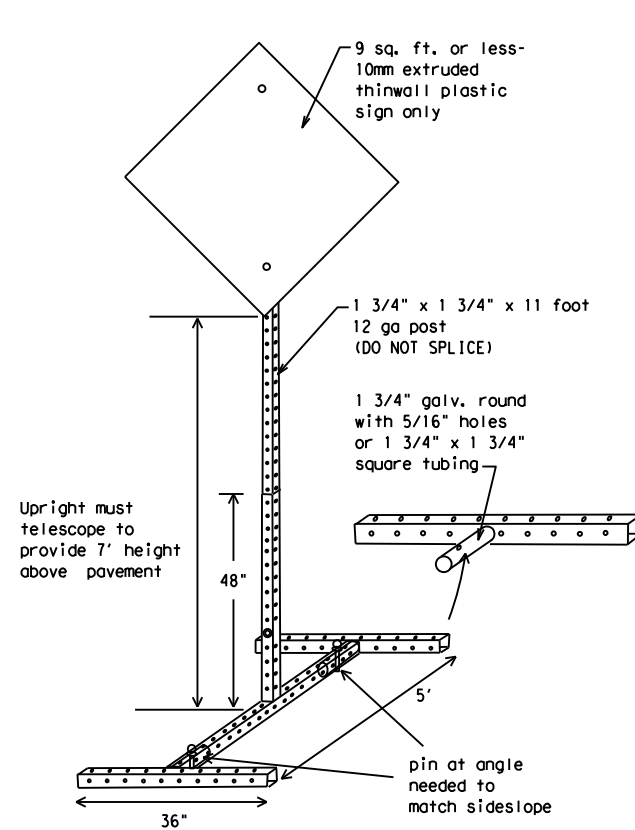

### SKID MOUNTED PERFORATED SQUARE STEEL TUBING SIGN SUPPORTS

\* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

### WEDGE ANCHORS

Both steel and plastic Wedge Anchor Systems as shown on the SMD Standard Sheets may be used as temporary sign supports for signs up to 10 square feet of sign face. They may be set in concrete or in sturdy soils if approved by the Engineer. (See web address for "Traffic Engineering Standard Sheets" on BC(1)).

### OTHER DESIGNS

MORE DETAILS OF APPROVED LONG/INTERMEDIATE AND SHORT TERM SUPPORTS CAN BE FOUND ON THE CWZTCD LIST. SEE BC(1) FOR WEBSITE LOCATION.

### GENERAL NOTES

1. Nails may be used in the assembly of wooden sign supports, but 3/8" bolts with nuts or 3/8" x 3 1/2" lag screws must be used on every joint for final connection.
2. No more than 2 sign posts shall be placed within a 7 ft. circle, except for specific materials noted on the CWZTCD List.
3. When project is completed, all sign supports and foundations shall be removed from the project site. This will be considered subsidiary to Item 502.

- \* See BC(4) for definition of "Work Duration."
- \*\* Wood sign posts MUST be one piece. Splicing will NOT be allowed. Posts shall be painted white.
- See the CWZTCD for the type of sign substrate that can be used for each approved sign support.

SHEET 5 OF 12



### BARRICADE AND CONSTRUCTION TYPICAL SIGN SUPPORT

BC(5) - 21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	REVISIONS	SH	123		
9-07	8-14	DIST	COUNTY	SHEET NO.					
7-13	5-21	SAT	GUAD	T45					



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act." No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 9/13/2022 12:47:54  
FILE: c:\pwworking\dot\3778\BC(1-12)-21.dgn

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

PORTABLE CHANGEABLE MESSAGE SIGNS

- The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- Messages on PCMS should contain no more than 8 words (about four to eight characters per word), not including simple words such as "TO," "FOR," "AT," etc.
- Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by itself.
- Use the word "EXIT" to refer to an exit ramp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- Always use the route or interstate designation (IH, US, SH, FM) along with the number when referring to a roadway.
- When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible.
- The message term "WEEKEND" should be used only if the work is to start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- The Engineer/Inspector may select one of two options which are available for displaying a two-phase message on a PCMS. Each phase may be displayed for either four seconds each or for three seconds each.
- Do not "flash" messages or words included in a message. The message should be steady burn or continuous while displayed.
- Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- Do not use the word "Danger" in message.
- Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- Do not display messages that scroll horizontally or vertically across the face of the sign.
- The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be abbreviated, unless shown in the T MUTCD.
- PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.
- Each line of text should be centered on the message board rather than left or right justified.
- If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid bars is appropriate.

WORD OR PHRASE	ABBREVIATION
Access Road	ACCS RD
Alternate	ALT
Avenue	AVE
Best Route	BEST RTE
Boulevard	BLVD
Bridge	BRDG
Cannot	CANT
Center	CTR
Construction Ahead	CONST AHD
CROSSING	XING
Detour Route	DETOUR RTE
Do Not	DONT
East	E
Eastbound	(route) E
Emergency	EMER
Emergency Vehicle	EMER VEH
Entrance, Enter	ENT
Express Lane	EXP LN
Expressway	EXPWY
XXXX Feet	XXXX FT
Fog Ahead	FOG AHD
Freeway	FRWY, FWY
Freeway Blocked	FWY BLKD
Friday	FRI
Hazardous Driving	HAZ DRIVING
Hazardous Material	HAZMAT
High-Occupancy	HOV
Vehicle	HWY
Highway	HR, HRS
Hour(s)	HR, HRS
Information	INFO
It Is	ITS
Junction	JCT
Left	LFT
Left Lane	LFT LN
Lane Closed	LN CLOSED
Lower Level	LWR LEVEL
Maintenance	MAINT

Roadway designation # IH-number, US-number, SH-number, FM-number

WORD OR PHRASE	ABBREVIATION
Major	MAJ
Miles	MI
Miles Per Hour	MPH
Minor	MNR
Monday	MON
Normal	NORM
North	N
Northbound	(route) N
Parking	PKING
Road	RD
Right Lane	RT LN
Saturday	SAT
Service Road	SERV RD
Shoulder	SHLDR
Slippery	SLIP
South	S
Southbound	(route) S
Speed	SPD
Street	ST
Sunday	SUN
Telephone	PHONE
Temporary	TEMP
Thursday	THURS
To Downtown	TO DWNTN
Traffic	TRAF
Travelers	TRVLRS
Tuesday	TUES
Time Minutes	TIME MIN
Upper Level	UPR LEVEL
Vehicles (s)	VEH, VEHS
Warning	WARN
Wednesday	WED
Weight Limit	WT LIMIT
West	W
Westbound	(route) W
Wet Pavement	WET PVMT
Will Not	WONT

RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES

(The Engineer may approve other messages not specifically covered here.)

Phase 1: Condition Lists

Road/Lane/Ramp Closure List

FREEWAY  
CLOSED  
X MILE

ROAD  
CLOSED  
AT SH XXX

ROAD  
CLSD AT  
FM XXXX

RIGHT X  
LANES  
CLOSED

CENTER  
LANE  
CLOSED

NIGHT  
LANE  
CLOSURES

VARIOUS  
LANES  
CLOSED

EXIT  
CLOSED

MALL  
DRIVEWAY  
CLOSED

XXXXXXXX  
BLVD  
CLOSED

FRONTAGE  
ROAD  
CLOSED

SHOULDER  
CLOSED  
XXX FT

RIGHT LN  
CLOSED  
XXX FT

RIGHT X  
LANES  
OPEN

DAYTIME  
LANE  
CLOSURES

I-XX SOUTH  
EXIT  
CLOSED

EXIT XXX  
CLOSED  
X MILE

RIGHT LN  
TO BE  
CLOSED

X LANES  
CLOSED  
TUE - FRI

Other Condition List

ROADWORK  
XXX FT

LANE  
NARROWS  
XXXX FT

RIGHT LN  
NARROWS  
XXXX FT

MERGING  
TRAFFIC  
XXXX FT

LOOSE  
GRAVEL  
XXXX FT

DETOUR  
X MILE

ROADWORK  
PAST  
SH XXXX

BUMP  
XXXX FT

TRAFFIC  
SIGNAL  
XXXX FT

ROAD  
REPAIRS  
XXXX FT

LANE  
NARROWS  
XXXX FT

TWO-WAY  
TRAFFIC  
XX MILE

CONST  
TRAFFIC  
XXX FT

UNEVEN  
LANES  
XXXX FT

ROUGH  
ROAD  
XXXX FT

ROADWORK  
NEXT  
FRI-SUN

US XXX  
EXIT  
X MILES

LANES  
SHIFT

\* LANES SHIFT in Phase 1 must be used with STAY IN LANE in Phase 2.

APPLICATION GUIDELINES

- Only 1 or 2 phases are to be used on a PCMS.
- The 1st phase (or both) should be selected from the "Road/Lane/Ramp Closure List" and the "Other Condition List".
- A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS shall be limited to two phases, and should be understandable by themselves.
- For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC, THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.

FULL MATRIX PCMS SIGNS

- When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" above.
- When symbol signs, such as the "Flagger Symbol" (CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above.
- When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute for, or replace that sign.
- A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the same size arrow.

Phase 2: Possible Component Lists

Action to Take/Effect on Travel  
List

MERGE  
RIGHT

DETOUR  
NEXT  
X EXITS

USE  
EXIT XXX

STAY ON  
US XXX  
SOUTH

TRUCKS  
USE  
US XXX N

WATCH  
FOR  
TRUCKS

EXPECT  
DELAYS

REDUCE  
SPEED  
XXX FT

USE  
OTHER  
ROUTES

STAY  
IN  
LANE

FORM  
X LINES  
RIGHT

USE  
XXXXX  
RD EXIT

USE EXIT  
I-XX  
NORTH

USE  
I-XX E  
TO I-XX N

WATCH  
FOR  
TRUCKS

EXPECT  
DELAYS

PREPARE  
TO  
STOP

END  
SHOULDER  
USE

WATCH  
FOR  
WORKERS

Location  
List

AT  
FM XXXX

BEFORE  
RAILROAD  
CROSSING

NEXT  
X  
MILES

PAST  
US XXX  
EXIT

XXXXXXXX  
TO  
XXXXXXXX

US XXX  
TO  
FM XXXX

Warning  
List

SPEED  
LIMIT  
XX MPH

MAXIMUM  
SPEED  
XX MPH

MINIMUM  
SPEED  
XX MPH

ADVISORY  
SPEED  
XX MPH

RIGHT  
LANE  
EXIT

USE  
CAUTION

DRIVE  
SAFELY

DRIVE  
WITH  
CARE

\*\* Advance  
Notice List

TUE-FRI  
XX AM-  
X PM

APR XX-  
XX  
X PM-X AM

BEGINS  
MONDAY

BEGINS  
MAY XX

MAY X-X  
XX PM -  
XX AM

NEXT  
FRI-SUN


XX AM  
TO  
XX PM

NEXT  
TUE  
AUG XX

TONIGHT  
XX PM-  
XX AM

\*\* See Application Guidelines Note 6.

SHEET 6 OF 12



Texas Department of Transportation

Traffic  
Safety  
Division  
Standard

BARRICADE AND CONSTRUCTION  
PORTABLE CHANGEABLE  
MESSAGE SIGN (PCMS)

BC (6) - 21


FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		--	--	--	SH 123				
9-07	8-14	DIST		COUNTY	SHEET NO.				
7-13	5-21	SAT		GUAD	T46				



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 9/13/2022 12:47:55  
FILE: c:\pwn\kh1\02013778\BC(1-12)-21.dgn

- Barrier Reflectors shall be pre-qualified, and conform to the color and reflectivity requirements of DMS-8600. A list of prequalified Barrier Reflectors can be found at the Material Producer List web address shown on BC(1).
- Color of Barrier Reflectors shall be as specified in the TMUTCD. The cost of the reflectors shall be considered subsidiary to Item 512.

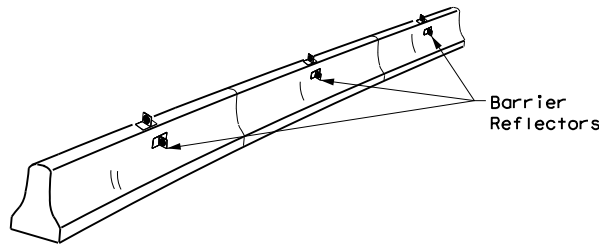

#### CONCRETE TRAFFIC BARRIER (CTB)

- Where traffic is on one side of the CTB, two (2) Barrier Reflectors shall be mounted in approximately the midsection of each section of CTB. An alternate mounting location is uniformly spaced at one end of each CTB. This will allow for attachment of a barrier grapple without damaging the reflector. The Barrier Reflector mounted on the side of the CTB shall be located directly below the reflector mounted on top of the barrier, as shown in the detail above.
- Where CTB separates two-way traffic, three barrier reflectors shall be mounted on each section of CTB. The reflector unit on top shall have two yellow reflective faces (Bi-Directional) while the reflectors on each side of the barrier shall have one yellow reflective face, as shown in the detail above.
- When CTB separates traffic traveling in the same direction, no barrier reflectors will be required on top of the CTB.
- Barrier Reflector units shall be yellow or white in color to match the edgeline being supplemented.
- Maximum spacing of Barrier Reflectors is forty (40) feet.
- Pavement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- Attachment of Barrier Reflectors to CTB shall be per manufacturer's recommendations.
- Missing or damaged Barrier Reflectors shall be replaced as directed by the Engineer.
- Single slope barriers shall be delineated as shown on the above detail.

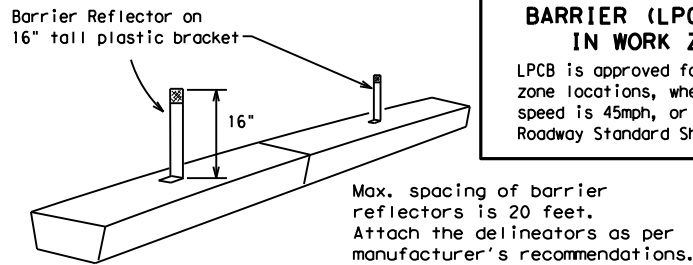


#### LOW PROFILE CONCRETE BARRIER (LPCB)

##### LOW PROFILE CONCRETE BARRIER (LPCB) USED IN WORK ZONES

LPCB is approved for use in work zone locations, where the posted speed is 45mph, or less. See Roadway Standard Sheet LPCB.

Max. spacing of barrier reflectors is 20 feet. Attach the delineators as per manufacturer's recommendations.

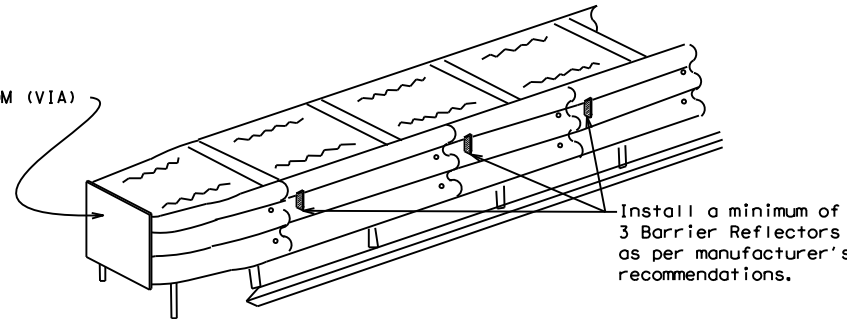

#### DELINEATION OF END TREATMENTS

##### END TREATMENTS FOR CTB'S USED IN WORK ZONES

End treatments used on CTB's in work zones shall meet the appropriate crashworthy standards as defined in the Manual for Assessing Safety Hardware (MASH). Refer to the CWZTCD List for approved end treatments and manufacturers.

### BARRIER REFLECTORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS

#### WARNING LIGHTS


- Warning lights shall meet the requirements of the TMUTCD.
- Warning lights shall NOT be installed on barricades.
- Type A-Low Intensity Flashing Warning Lights are commonly used with drums. They are intended to warn of or mark a potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type B<sub>FL</sub> or C<sub>FL</sub> Sheeting meeting the requirements of Departmental Material Specification DMS-8300.
- Type-C and Type D 360 degree Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB".
- The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the warning lights meet the requirements of the latest ITE Purchase Specifications for Flashing and Steady-Burn Warning Lights.
- When used to delineate curves, Type-C and Type D Steady Burn Lights should only be placed on the outside of the curve, not the inside.
- The location of warning lights and warning reflectors on drums shall be as shown elsewhere in the plans.

#### WARNING LIGHTS MOUNTED ON PLASTIC DRUMS


- Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- Type A random flashing warning lights are not intended for delineation and shall not be used in a series.
- A series of sequential flashing warning lights placed on channelizing devices to form a merging taper may be used for delineation. If used, the successive flashing of the sequential warning lights should occur from the beginning of the taper to the end of the merging taper in order to identify the desired vehicle path. The rate of flashing for each light shall be 65 flashes per minute, plus or minus 10 flashes.
- Type C and D steady-burn warning lights are intended to be used in a series to delineate the edge of the travel lane on detours, on lane changes, on lane closures, and on other similar conditions.
- Type A, Type C and Type D warning lights shall be installed at locations as detailed on other sheets in the plans.
- Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- The maximum spacing for warning lights on drums should be identical to the channelizing device spacing.

#### WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C (STEADY BURN) WARNING LIGHTS

- A warning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn warning light at the discretion of the Contractor unless otherwise noted in the plans.
- The warning reflector shall be yellow in color and shall be manufactured using a sign substrate approved for use with plastic drums listed on the CWZTCD.
- The warning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- Round reflectors shall be fully reflectorized, including the area where attached to the drum.
- Square substrates must have a minimum of 30 square inches of reflectorized sheeting. They do not have to be reflectorized where it attaches to the drum.
- The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type B or Type C.
- When used near two-way traffic, both sides of the warning reflector shall be reflectorized.
- The warning reflector should be mounted on the side of the handle nearest approaching traffic.
- The maximum spacing for warning reflectors should be identical to the channelizing device spacing requirements.




Type C Warning Light or approved substitute mounted on a drum adjacent to the travel way.



Warning reflector may be round or square. Must have a yellow reflective surface area of at least 30 square inches

Arrow Boards may be located behind channelizing devices in place for a shoulder taper or merging taper, otherwise they shall be delineated with four (4) channelizing devices placed perpendicular to traffic on the upstream side of traffic.

- The Flashing Arrow Board should be used for all lane closures on multi-lane roadways, or slow moving maintenance or construction activities on the travel lanes.
- Flashing Arrow Boards should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Board.
- The Flashing Arrow Board should be able to display the following symbols:

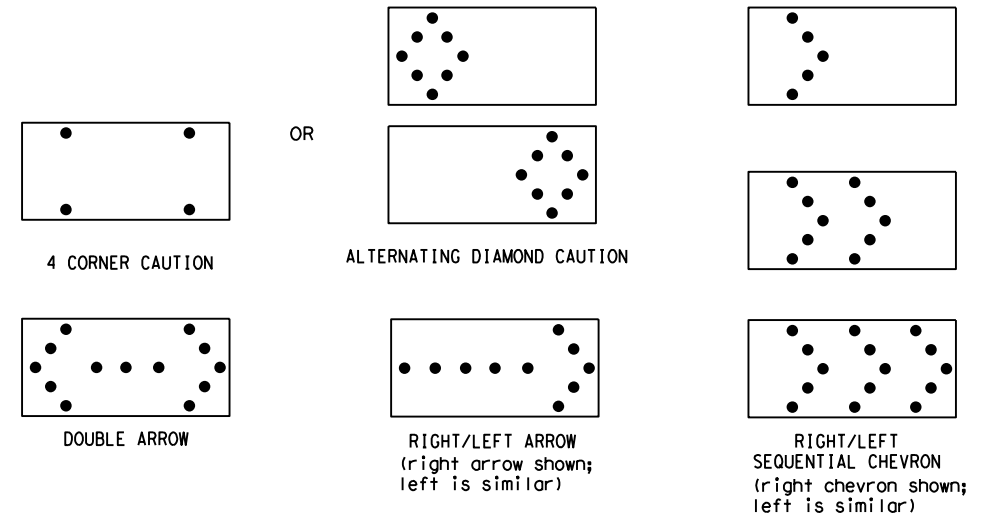

- The "CAUTION" display consists of four corner lamps flashing simultaneously, or the Alternating Diamond Caution mode as shown.
- The straight line caution display is NOT ALLOWED.
- The Flashing Arrow Board shall be capable of minimum 50 percent dimming from rated lamp voltage. The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.
- Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal intervals of 25 percent for each sequential phase of the flashing chevron.
- The sequential arrow display is NOT ALLOWED.
- The flashing arrow display is the TxDOT standard; however, the sequential chevron display may be used during daylight operations.
- The Flashing Arrow Board shall be mounted on a vehicle, trailer or other suitable support.
- A Flashing Arrow Board SHALL NOT BE USED to laterally shift traffic.
- A full matrix PCMS may be used to simulate a Flashing Arrow Board provided it meets visibility, flash rate and dimming requirements on this sheet for the same size arrow.
- Minimum mounting height of trailer mounted Arrow Boards should be 7 feet from roadway to bottom of panel.

REQUIREMENTS			
TYPE	MINIMUM SIZE	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE
B	30 x 60	13	3/4 mile
C	48 x 96	15	1 mile

#### ATTENTION

Flashing Arrow Boards shall be equipped with automatic dimming devices.

WHEN NOT IN USE, REMOVE THE ARROW BOARD FROM THE RIGHT-OF-WAY OR PLACE THE ARROW BOARD BEHIND CONCRETE TRAFFIC BARRIER OR GUARDRAIL.

### FLASHING ARROW BOARDS

SHEET 7 OF 12

#### TRUCK-MOUNTED ATTENUATORS

- Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the Manual for Assessing Safety Hardware (MASH).
- Refer to the CWZTCD for the requirements of Level 2 or Level 3 TMAs.
- Refer to the CWZTCD for a list of approved TMAs.
- TMAs are required on freeways unless otherwise noted in the plans.
- A TMA should be used anytime that it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the work performance.
- The only reason a TMA should not be required is when a work area is spread down the roadway and the work crew is an extended distance from the TMA.

		Traffic Safety Division Standard			
<b>BARRICADE AND CONSTRUCTION ARROW PANEL, REFLECTORS, WARNING LIGHTS &amp; ATTENUATOR</b>					
<b>BC(7)-21</b>					
FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT		
© TxDOT November 2002	CONT	SECT	JOB		
REVISIONS	--	--	SH 123		
9-07 8-14	DIST	COUNTY	SHEET NO.		
7-13 5-21	SAT	GUAD	T47		



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 9/13/2022 12:47:56  
FILE: c:\pwworkh1\0213778\BC(1-12)-21.dgn

## GENERAL NOTES

- For long term stationary work zones on freeways, drums shall be used as the primary channelizing device.
- For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in tangent sections by vertical panels, or 42" two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
- For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
- Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

## GENERAL DESIGN REQUIREMENTS

Pre-qualified plastic drums shall meet the following requirements:



- Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
- The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
- Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
- Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
- The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved compliant sign.
- The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectORIZED space between any two adjacent stripes shall not exceed 2 inches in width.
- Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
- Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material.
- Drum body shall have a maximum unballasted weight of 11 lbs.
- Drum and base shall be marked with manufacturer's name and model number.

## RETROREFLECTIVE SHEETING

- The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Sign Face Materials." Type A or Type B reflective sheeting shall be supplied unless otherwise specified in the plans.
- The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.



## BALLAST

- Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
- Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
- The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- Ballast shall not be placed on top of drums.
- Adhesives may be used to secure base of drums to pavement.

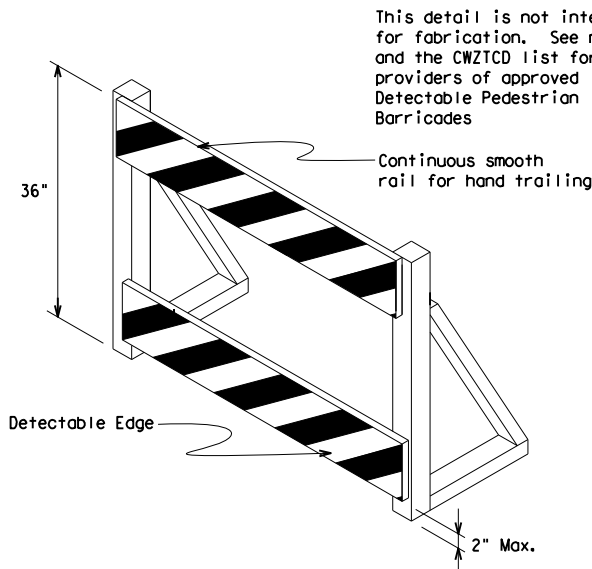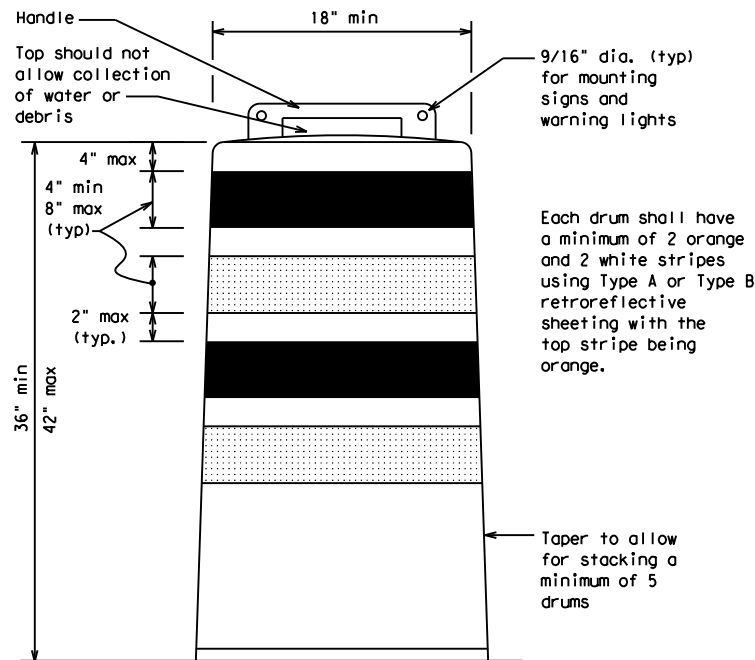

## DETECTABLE PEDESTRIAN BARRICADES

- When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures.
- Where pedestrians with visual disabilities normally use the closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade.
- Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian path.
- Tape, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian movements.
- Warning lights shall not be attached to detectable pedestrian barricades.
- Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.

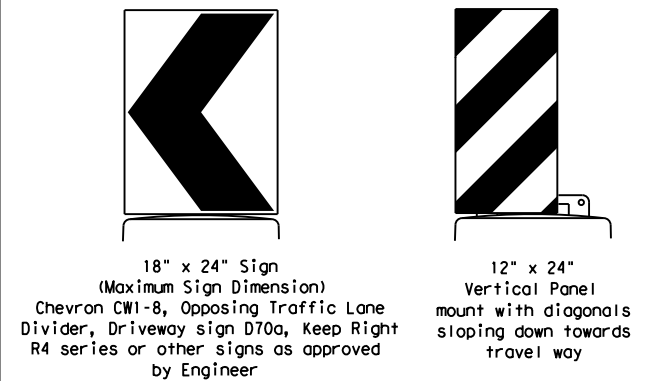

Plywood, Aluminum or Metal sign substrates shall NOT be used on plastic drums

## SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS

- Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- Chevrons and other work zone signs with an orange background shall be manufactured with Type B<sub>FL</sub> or Type C<sub>FL</sub> Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
- Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below.
- Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection.
- Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.
- Chevrons may be placed on drums on the outside of curves, on merging tapers or on shifting tapers. When used in these locations, they may be placed on every drum or spaced not more than on every third drum. A minimum of three (3) should be used at each location called for in the plans.
- R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.

SHEET 8 OF 12



## BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC(8) - 21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	SH	123			
	REVISIONS	--	--	--					
4-03	8-14								
9-07	5-21	DIST	COUNTY						
7-13		SAT	GUAD						T48



DATE: 9/13/2022 12:47:56  
FILE: c:\pw\kh1\d0213778\BC(1-12)-21.dgn

FILE: bc-21.dgn		DN: TxDOT		CK: TxDOT		DW: TxDOT		CK: TxDO	
© TxDOT November 2002		CONT SECT		JOB			HIGHWAY		
REVISONS		-- --		--			SH 123		
9-07	8-14	DIST		COUNTY			SHEET NO.		
7-13	5-21	SAT		GUAD			T49		

















DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 9/13/2022 12:48:03  
FILE: c:\pw\khl\d0213778\CFA-12.dgn

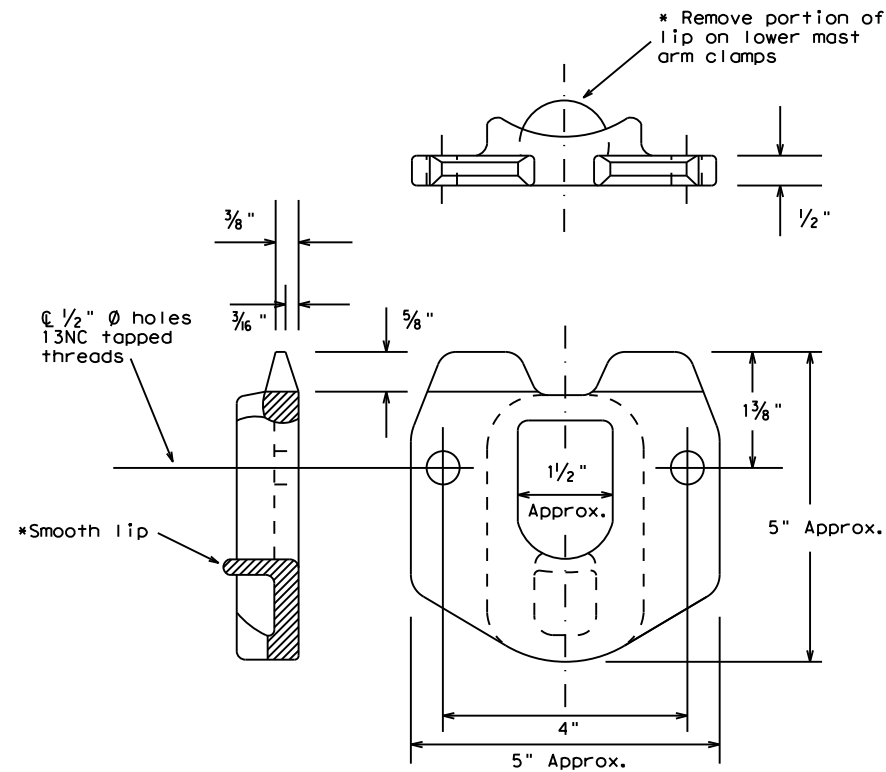

POLE SIMPLEX DETAILS

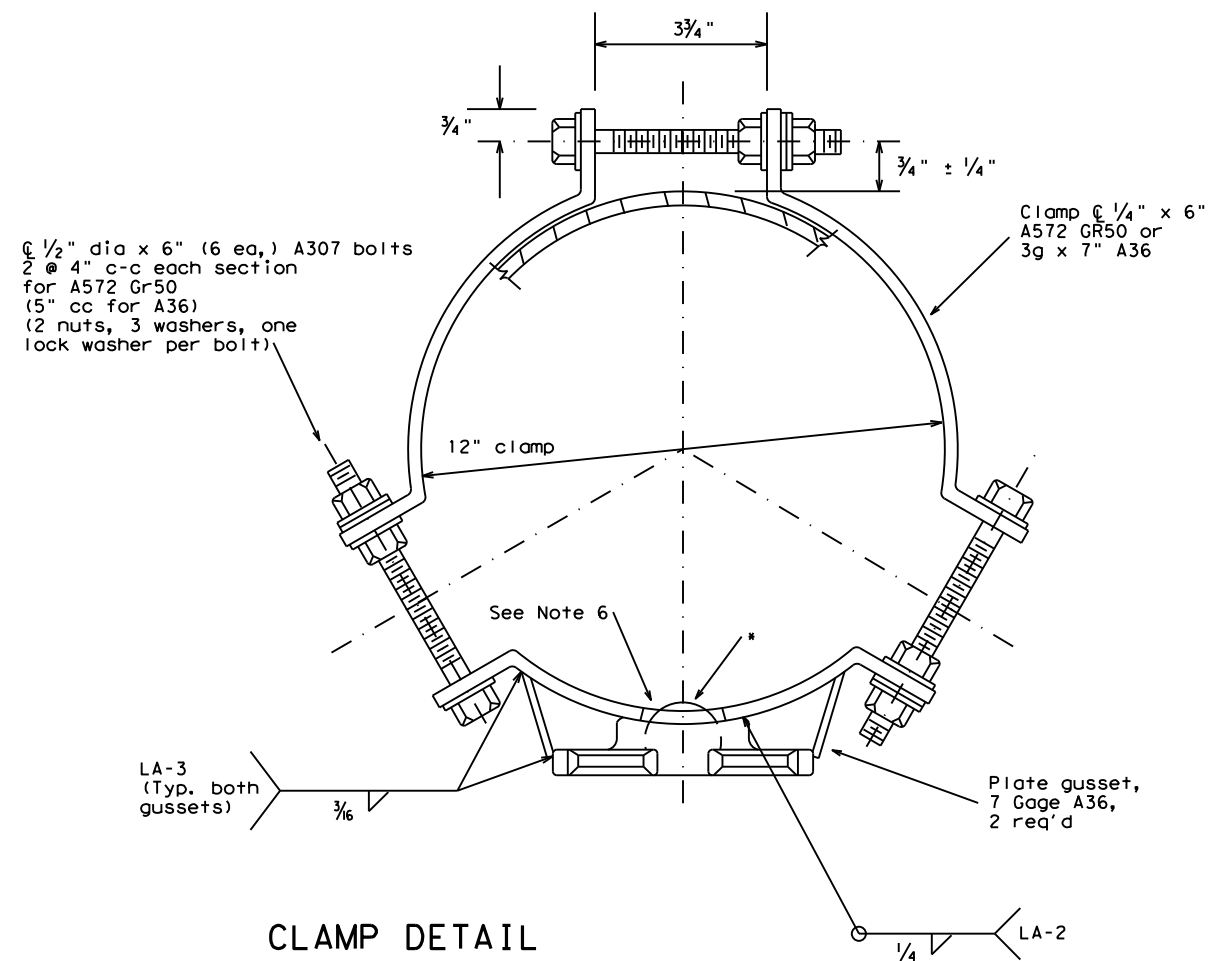

CLAMP DETAIL

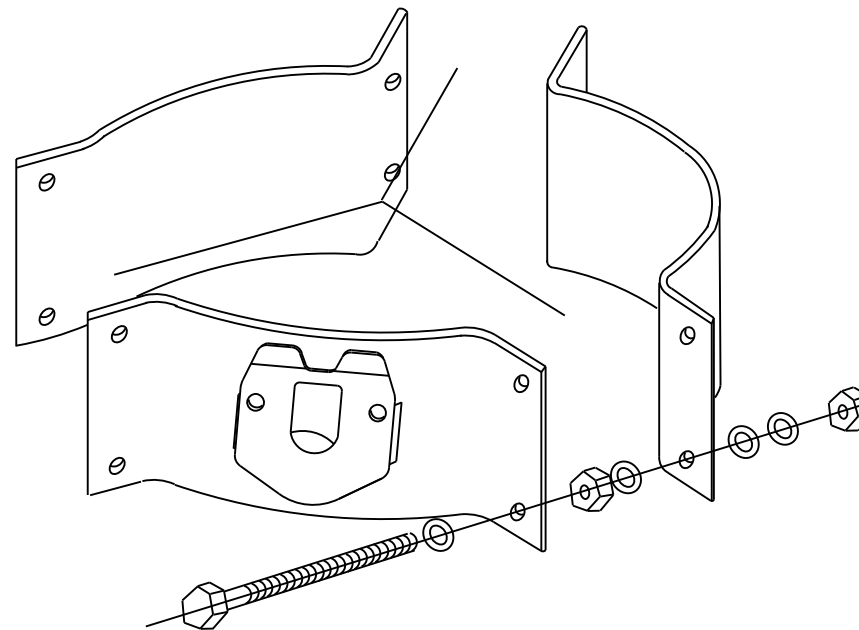

For 8.9 - 12 inch diameter Signal Poles  
(Two req'd for each mast arm)

OTHER MATERIALS:

1. Pole simplex shall be ASTM A27 GR65-35 or A148 GR80-50 or A576 GR1021. ASTM A576 must be suitable for forging and also meet minimum tensile of 65ksi, minimum yield of 35ksi, and a minimum elongation of 22 percent in 2 inches.
2. Welded tabs and backplates shall be ASTM A-36 steel or better.
3. Nylon insert locknuts shall conform to ASTM A563.

GENERAL NOTES:

1. Materials and fabrication shall be in accordance with Standard Sheet "MA-C" and with the details, dimensions, and weld procedures shown herein. Weld references call for preapproved weld procedures which the Fabricator must obtain prior to fabrication. In the absence of specified fabrication tolerances, dimensions shall be within the tolerances generally obtainable in normal fabrication practice.
2. All parts shall be galvanized after fabrication in accordance with Item 445, "Galvanizing". The throat of the Simplex shall be made free of all rough or sharp edges resulting from the galvanizing process.
3. Each simplex fitting shall be supplied with 2 ASTM A325 bolts, 1/2 in. X 1 1/2 in. and 2 lock washers. The bolts and lock washers shall be secured to the clamp with the other hardware items. The Fabricator shall ship clamp assembly together in a single package, including all bolts, nuts, and washers required for the clamp and simplex fitting.
4. Design conforms to 1994 AASHTO "Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals" and interim revisions thereto. Design Wind Speed equals 80 mph plus a 1.3 gust factor. Clamps are designed to support a 60 lb. luminaire having an effective projected area (actual area times drag coefficient) of 1.6 sq. ft., 12 ft. maximum arm length.
5. Each assembly shall consist of one upper piece simplex fitting having a smooth lip and one lower piece simplex fitting with the lip removed.
6. Approximately 2 in. diameter hole in upper mast arm clamp.



CLAMP ON  
FITTING ASSEMBLY FOR  
LUMINAIRE MAST ARM

CFA-12

© TxDOT		DN: KAB	CK: RES	DW: FDN	CK: CAL
REVISIONS		CONT	SECT	JOB	HIGHWAY
11-99	--	--	--	--	SH 123
1-12	--	--	--	--	SH 123
		DIST	COUNTY		SHEET NO.
		SAT	GUAD		T53



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

9/13/2022 12:48:09 \$\$\$SCALE\$\$\$ BY: Justin Kinne  
PLOTTED: c:\pwwork1\ed0213778\ED(1) - 14.dgn  
FILENAME:

GENERAL NOTES FOR ALL ELECTRICAL WORK

1. The location of all conduits, junction boxes, ground boxes, and electrical services is diagrammatic and may be shifted to accommodate field conditions.
2. Provide new and unused materials. Ensure that all materials and installations comply with the applicable articles of the National Electrical Code (NEC), TxDOT standards and specifications, National Electrical Manufacturers Association (NEMA), and are listed by Underwriters Laboratories (UL) or a Nationally Recognized Testing Lab (NRTL). NRTLs such as Canadian Standard Association (CSA), Intertek Testing Services NA Inc., or FM Approvals LLC can be considered equivalent to UL. Where reference is made to NEMA listed devices, International Electrotechnical Commission (IEC) listed devices will not be considered an acceptable equal to a NEMA listed device. Acceptable devices may have both a NEMA and IEC listing. Faulty fabrication or poor workmanship in any material, equipment, or installation is justification for rejection. Replace or reinstall rejected material or equipment at no additional cost to the Department.
3. Miscellaneous nuts, bolts and hardware, except for high strength bolts, may be stainless steel when plans specify galvanized, provided the bolt size is 1/2 in. or less in diameter.
4. Provide the following test equipment as required by the Engineer to confirm compliance with the contract and the NEC: voltmeter, ammeter, megohm meter (1000 volt DC), ground resistance tester, torque wrenches, and torque screwdrivers. Ensure all equipment has been properly calibrated within the last year. Provide calibration certification to the Engineer upon request. Operate test equipment during inspection as requested by the Engineer.
5. Install grounding as shown on the plans and in accordance with the NEC. Ensure all metallic conduits; metal poles; luminaires; and metal enclosures are bonded to the equipment grounding conductor. Provide stranded bare copper or green insulated grounding conductors. Ground rods, connectors, and bonding jumpers are subsidiary to the various bid items.
6. When required by the Engineer, notify the Department in writing of materials from the Material Producers List (MPL) intended for use on each project. Prequalified materials are listed on the MPL on TxDOT's website under "Roadway Illumination and Electrical Supplies." No substitutions will be allowed for materials on this list.

CONDUIT

A. MATERIALS

1. Provide conduit, junction boxes, fittings, and hardware as per TxDOT Departmental Material Specification (DMS) 11030 "Conduit" and Item 618 "Conduit" of TxDOT's "Standard Specifications For Construction And Maintenance Of Highways, Streets, And Bridges," latest edition. Provide conduits listed under Item 618 on the MPL under "Roadway Illumination and Electrical Supplies." Provide conduit types according to the descriptive code or as shown on the plans. Do not substitute other types of conduits for those shown. Provide liquidtight flexible metal conduit (LFMC) when flexible conduit is called for on galvanized steel rigid metallic conduit (RMC) systems. Provide liquidtight flexible nonmetallic conduit (LFNC) when flexible conduit is called for on polyvinyl chloride (PVC) systems.
2. Provide galvanized steel RMC for all exposed conduits, unless otherwise shown on the plans. Properly bond all metal conduits.
3. Unless otherwise shown on the plans, provide junction boxes with a minimum size as shown in the following table, which applies to the greatest number of conductors entering the box through one conduit with no more than four conduits per box. When a mixture of conductor sizes is present, count the conductors as if all are of the larger size. For situations not applicable to the table, size junction boxes in accordance with NEC.


AWG	3 CONDUCTORS	5 CONDUCTORS	7 CONDUCTORS
#1	10" x 10" x 4"	12" x 12" x 4"	16" x 16" x 4"
#2	8" x 8" x 4"	10" x 10" x 4"	12" x 12" x 4"
#4	8" x 8" x 4"	10" x 10" x 4"	10" x 10" x 4"
#6	8" x 8" x 4"	8" x 8" x 4"	10" x 10" x 4"
#8	8" x 8" x 4"	8" x 8" x 4"	8" x 8" x 4"

4. Junction boxes with an internal volume of less than 100 cu. in. and supported by entering raceways must have threaded entries or hubs identified for the intended purpose and supported by connection of two or more rigid metal conduits. Secure conduit within 3 ft. of the enclosure or within 18 in. of the enclosure if all conduit entries are on the same side. Mechanically secure all junction boxes with an internal volume greater than 100 cu. inches.
5. Provide hot dipped galvanized cast iron or sand cast aluminum outlet boxes for junction boxes containing only 10 AWG or 12 AWG conductors. Do not use die cast aluminum boxes. Size outlet boxes according to the NEC.
6. Do not use intermediate metal conduit (IMC) or electrical metallic tubing (EMT) unless specifically required by the plan sheets. When EMT is called for, provide junction boxes made from galvanized steel sheeting, listed and approved for outdoor use, unless otherwise noted on the plans. Size all galvanized steel junction boxes in accordance with the NEC. Provide junction boxes for IMC conduit systems that meet the same requirements for junction boxes used with RMC systems.
7. Provide PVC junction boxes intended for outdoor use on PVC conduit systems, unless otherwise noted on the plans.

8. Provide PVC elbows in PVC conduit systems, unless otherwise shown on the plans. Use only a flat, high tensile strength polyester fiber pull tape for pulling conductors through the PVC conduit system. When galvanized steel RMC elbows are specifically called for in the plans and any portion of the RMC elbow is buried less than 18 in., ground the RMC elbow by means of a grounding bushing on a rigid metal extension. Grounding of the rigid metal elbow is not required if the entire RMC elbow is encased in a minimum of 2 in. of concrete. PVC extensions are allowed on these concrete encased rigid metal elbows. RMC or PVC elbows are subsidiary to various bid items.
9. When required, provide High-Density Polyethylene (HDPE) conduit with factory installed internal conductors according to Item 622 "Duct Cable." At the Contractor's request and with approval by the Engineer, substitute HDPE conduit with no conductors for bored schedule 40 or schedule 80 PVC conduit bid under Item 618. Ensure bored HDPE substituted for PVC is schedule 40 and of the same size PVC called for in the plans. Ensure the substituted HDPE meets the requirements of Item 622, except that the conduit is supplied without factory-installed conductors. Make the transition of the HDPE conduit to PVC (or RMC elbow when required) at the bore pit. Provide conduit of the size and schedule as shown on the plans. Do not extend substituted conduit into ground boxes or foundations. Provide PVC or galvanized steel RMC elbows as called for at all ground boxes and foundations.
10. Use two-hole straps when supporting 2 in. and larger conduits. On electrical service poles, properly sized stainless steel or hot dipped galvanized one-hole standoff straps are allowed on the service riser conduit.

B. CONSTRUCTION METHODS

1. Provide and install expansion joint conduit fittings on all structure-mounted conduits at the structure's expansion joints to allow for movement of the conduit. In addition, provide and install expansion joint fittings on all continuous runs of galvanized steel RMC conduit externally exposed on structures such as bridges at maximum intervals of 150 ft. When requested by the project Engineer, supply manufacturer's specification sheet for expansion joint conduit fittings. Repair or replace expansion joint fittings that do not allow for movement at no additional cost to the Department. Provide the method of determining the amount of expansion to the Engineer upon request. Do not use LFMC or LFNC as a substitute for the required expansion conduit fittings.
2. Space all conduit supports at maximum intervals of 5 ft. Install conduit spacers when attaching metal conduit to surface of concrete structures. See "Conduit Mounting Options" on ED(2). Install conduit support within 3 ft. of all enclosures and conduit terminations.
3. Do not attach conduit supports directly to pre-stressed concrete beams except as shown specifically in the plans or as approved by the Engineer.
4. Unless otherwise shown on the plans, jack or bore conduit placed beneath existing roadways, driveways, sidewalks, or after the base or surfacing operation has begun. Backfill and compact the bore pits below the conduit per Item 476 "Jacking, Boring, or Tunneling Pipe or Box" prior to installing conduit or duct cable to prevent bending of the connections.
5. When placing conduit in the sub-grade of new roadways, backfill all trenches with excavated material unless otherwise noted on the plans. When placing conduit in the sub-base of new roadways, backfill all trenches with cement-stabilized base as per requirements of Items 110 "Excavation", 400 "Excavation and Backfill for Structures", 401 "Flowable Backfill", 402 "Trench Excavation Protection", and 403 "Temporary Special Shoring."
6. Provide and place warning tape approximately 10 in. above all trenched conduit as per Item 618.
7. During construction, temporarily cap or plug open ends of all conduit and raceways immediately after installation to prevent entry of dirt, debris and animals. Temporary caps constructed of durable duct tape are allowed. Tightly fix the tape to the conduit opening. Clean out the conduit and prove it clear in accordance with Item 618 prior to installing any conductors.
8. Ensure conduit entry into the top of any enclosure is waterproof by installing conduit sealing hubs or using boxes with threaded bosses. This includes surface mounted safety switches, meter cans, service enclosures, auxiliary enclosures and junction boxes. Grounding bushings on water tight sealing hubs are not required.
9. Fit the ends of all PVC conduit terminations with bushings or bell end fittings. Provide and install a grounding type bushing on all metal conduit terminations.
10. Install a bonding jumper from each grounding bushing to the nearest ground rod, grounding lug, or equipment grounding conductor. Ensure all bonding jumpers are the same size as the equipment grounding conductor. Bonding of conduit used as a casing under roadways for duct cable is not required, if the duct extends the full length through the casing.
11. At all electrical services, install a 6 AWG solid copper grounding electrode conductor.
12. Place conduits entering ground boxes so that the conduit openings are between 3 in. and 6 in. from the bottom of the box. See the ground box detail on sheet ED(4).
13. Seal ends of all conduits with duct seal, expandable foam, or by other methods approved by the Engineer. Seal conduit immediately after completion of conductor installation and pull tests. Do not use duct tape as a permanent conduit sealant. Do not use silicone caulk as a conduit sealant.
14. File smooth the cut ends of all mounting strut and conduit. Before installing, paint the field cut ends of all mounting strut and RMC (threaded or non-threaded) with zinc rich paint (94% or more zinc content) to alleviate overspray. Use zinc rich paint to touch up galvanized material as allowed under Item 445 "Galvanizing." Do not paint non-galvanized material with a zinc rich paint as an alternative for materials required to be galvanized.



Texas Department of Transportation

Traffic  
Operations  
Division  
Standard

ELECTRICAL DETAILS  
CONDUITS & NOTES

ED(1) - 14

FILE:	ed1-14.dgn	DN:		CK:		DW:		CK:	
© TxDOT	October 2014	CONT	SECT	JOB		HIGHWAY			
REVISIONS		--	--	--		SH 123			
		DIST	COUNTY			SHEET NO.			
		SAT	GUAD			T54			



ELECTRICAL CONDUCTORS

A. MATERIAL INFORMATION

1. Provide Type XHHW insulated conductors in accordance with Departmental Material Specification (DMS)11040 "Conductors" and Item 620 "Electrical Conductors." Provide conductors as listed on the Material Producers List (MPL) on the Department web site under "Roadway Illumination and Electrical Supplies" Item 620. Color code insulated conductors in conformance with the NEC. Identify grounded (neutral) conductors with white insulation. Identify grounding conductors (ground wires) with green insulation or bare conductors. Identify ungrounded (hot) conductors with any color insulation except green, white, or gray. Keep color scheme consistent throughout the wiring system. Identify conductors 6 American Wire Gauge (AWG) and smaller by continuous color jacket. Identify electrical conductors 4 AWG and larger by continuous color jacket or by colored tape. When identifying conductors with colored tape, mark at least 6 in. of the conductor's insulation with half laps of tape.
2. Provide a solid copper 6 AWG grounding electrode conductor to bond the electrical service equipment to the concrete encased grounding electrode or the ground rod at the service location. Connect the grounding electrode conductor to the ground rod with a UL listed connector in accordance with DMS 11040. Connect the grounding electrode conductor to the concrete encased grounding electrode as shown in the plans.
3. Where two or more circuits are present in one conduit or enclosure, permanently identify the conductors of each branch circuit by attaching a non-metallic tag around both circuit conductors at each accessible location. Provide tags with two straps, large enough to indicate circuit number, letter, or other identification as shown in the plans. Print circuit identification on the tag with a permanent marker.
4. Use listed compression or screw type pressure connectors, terminal blocks, or split bolt connectors for splicing as specified in DMS 11040. Use hot melt adhesive tape to fill the gap and seal the ends of heat shrink tubing. Provide UL listed gel-filled insulating splice covers. Splicing materials, insulating materials, breakaway disconnects, splice covers, and fuse holders are subsidiary to various bid items.

B. CONSTRUCTION METHODS

1. Use only a flat, high tensile strength polyester fiber pull tape for pulling conductors through the conduit system. After installing conductors in conduit, perform conductor pull test. If a conductor cannot be freely pulled, make any needed alterations or repairs at no additional cost to the department. Perform insulation resistance tests in accordance with Item 620. Coordinate with the Engineer to witness the tests.
2. Leave 2 ft. minimum, 3 ft. maximum length for each conductor up to the splice in ground boxes. Leave 3 ft. minimum, 4 ft. maximum length of conductor in ground boxes when pulled through with no splice. Leave 1 ft. minimum, 1.5 ft. maximum length of conductor at enclosures, weatherheads and pole bases.
3. Make splices only in junction boxes, ground boxes, pole bases, or electrical enclosures and use only listed compression or screw type pressure connectors, terminal blocks, or split bolt connectors. Insulate splices with heavy wall heat shrink tubing or gel-filled insulating splice covers to provide a watertight splice. Overlap conductor insulation with heat shrink tubing a minimum of 2 in. past both sides of the splice. Where heat shrink tubing may not shrink sufficiently to provide a watertight seal around the individual conductors, prior to heating the tubing, increase the diameter of the conductor insulation using hot melt adhesive tape to provide a watertight seal between the individual conductors and the heat shrink tubing. Ensure the tape extends past the heat shrink tubing. Use hot melt adhesive tape to fill the gap and seal the ends of heat shrink tubing. Heat shrink tubing that appears to have been burned, or overheated, is considered defective and must be replaced.
4. Size and install gel-filled insulating splice covers according to manufacturer's specifications when used in place of heat shrink tubing.
5. Wire nuts with factory applied waterproof sealant may be used for 8 AWG or smaller conductors in above ground junction boxes, but not in pole bases or ground boxes. Install wire nuts in an upright position to prevent the accumulation of water.
6. Support conductors in illumination poles with a J-hook at the top of the pole.
7. When terminating conductors, remove the insulation and jacketing material without nicking the individual strands of the conductor. Conductors with nicked individual conductor strands or removed strands will be considered damaged.
8. Replace conductors and cables that are damaged beyond repair or that fail an insulation resistance test at no additional cost to the department.
9. Do not repair damaged conductors with duct tape, electrical tape, or wire nuts. Use only approved splicing methods.
10. Do not terminate more than one conductor under a single connector, unless the connector is rated for multiple conductors. Do not exceed the pressure connector's listing for maximum number and size of conductors allowed.
11. Install breakaway connectors on conductors bid under Item 620 whenever those conductors pass through a breakaway support device. Follow manufacturer's instructions when terminating conductors to breakaway connectors. Properly torque threaded connections. Proper terminations are critical to the safe operation of breakaway devices. Trim waterproofing boots on breakaway connectors to fit snugly around the conductor to ensure waterproof connection. Only one conductor may enter a single opening in a boot. Provide waterproof boots with the correct number of openings. Leave unused openings factory sealed. Use prequalified breakaway connectors as shown on the MPL.

12. Provide and install a separate stranded equipment grounding conductor (EGC) in all conduits that contain circuit wiring of 50 volts or more. Unless shown elsewhere, size the EGC to be the same size as the largest current carrying conductor contained in the conduit. Ensure all EGCs are bonded together at every accessible location. For traffic signal installations, provide a minimum size 8 AWG EGC. The EGC is paid for under Item 620.

C. TEMPORARY WIRING

1. Install temporary conductors and electrical equipment in accordance with the NEC article "Temporary Installations" and Department standard sheets.
2. Provide a ground fault circuit interrupter (GFCI) for power outlets for portable electrical equipment, power tools, ice machines, ice storage bins and refrigerators located outdoors at grade. GFCI may be any one of the following: molded cord and plug set, receptacle, or circuit breaker type.
3. Use listed wire nuts with factory applied sealant for temporary wiring where approved.
4. Enclose conductor splices within a listed enclosure or ground box, or ensure the splices are more than 10 ft. above grade vertically and more than 5 ft. horizontally from any metal structure. Where installing temporary conductors in areas subject to vehicle traffic or mobile construction equipment, ensure the vertical clearance to ground is at least 18 ft. when measured at the lowest point. Ground messenger wires that support power conductors in conformance with the NEC.
5. Protect and when necessary repair any existing electrical conduits uncovered during the construction process in a timely manner and in conformance with the NEC.


GROUND RODS & GROUNDING ELECTRODES

A. MATERIAL INFORMATION


1. Provide and install a grounding electrode at electrical services. Provide ground rods according to DMS 11040 and the plans. Larger diameter or longer length rods may be called for in some specific locations, see the individual plans sheets. Concrete encased grounding electrodes may be called for in specific locations including electrical service, see individual plan sheets.

B. CONSTRUCTION METHODS


1. Furnish auxiliary ground rods for lightning protection and install in soil, concrete, or both, as called for in the plans. For ground rods installed in concrete, ensure the connection of the conductor to the ground rod is readily accessible for inspection or repairs. For ground rods installed in soil, ensure that the upper end is between 2 to 4 in. below finished grade.
2. Do not place ground rods in the same drilled hole as a timber pole.
3. Install ground rods so the imprinted part number is at the upper end of the rod.
4. Remove all non-conductive coatings such as concrete splatter from the rod at the clamp location.
5. Route all conductors as short and straight as possible for connection to lightning protection ground rods. When a bend is required, ensure a minimum radius bend of four inches for these conductors.
6. Unless otherwise called for in the plans, protect grounding electrode conductors with non-metallic conduit. When protecting grounding electrode conductors with metal conduit, provide and install a grounding type bushing and properly sized bonding jumper on each end of the metal conduit.
7. Written authorization is required before installing a ground rod in a horizontal trench for rocky soil or a solid rock bottom.

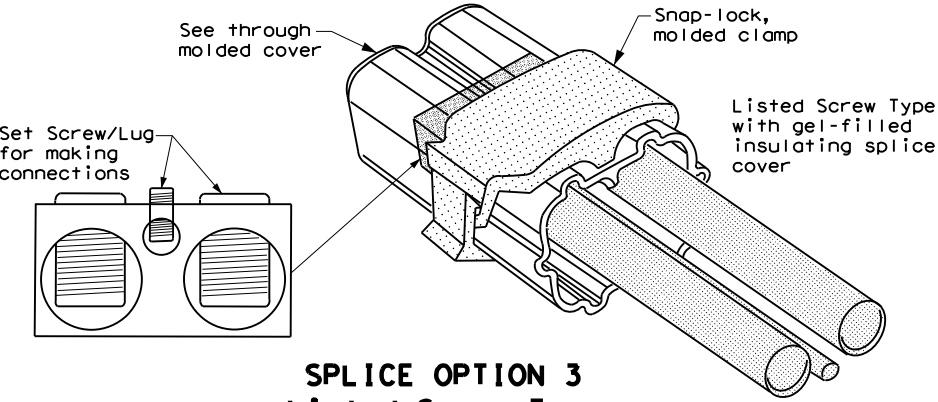

SPLICE OPTION 3  
Listed Screw Type

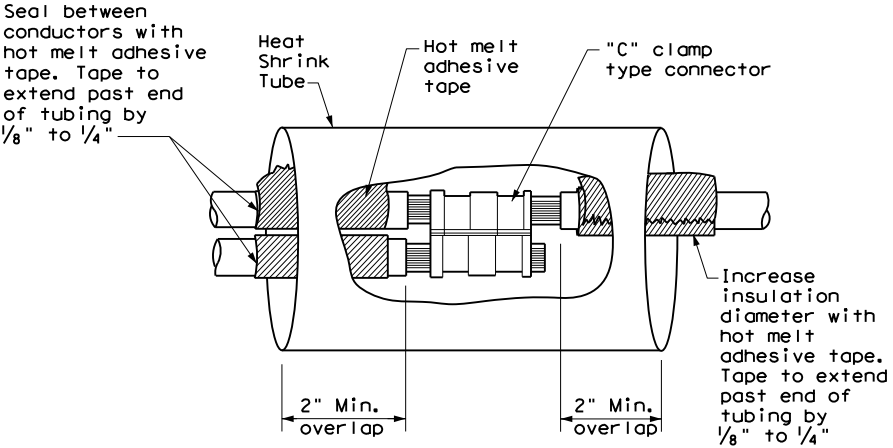

SPLICE OPTION 1  
Compression Type

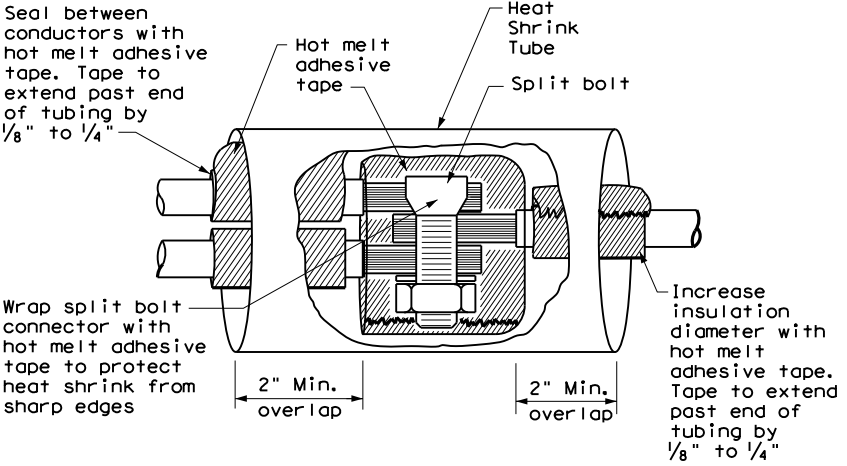

SPLICE OPTION 2  
Split Bolt Type

Traffic Operations Division Standard

# ELECTRICAL DETAILS CONDUCTORS

## ED(3) - 14

FILE: ed3-14.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	--	--	--	SH 123
	DIST	COUNTY	SHEET NO.	
	SAT	GUAD	T55	



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

BY: Justin Kinne


\$\$\$SCALES\$\$\$

12:48:21

9/13/2022

PLOTTED:

FILENAME: c:\pwworkh1\d0213778\ED(4)-14.dgn

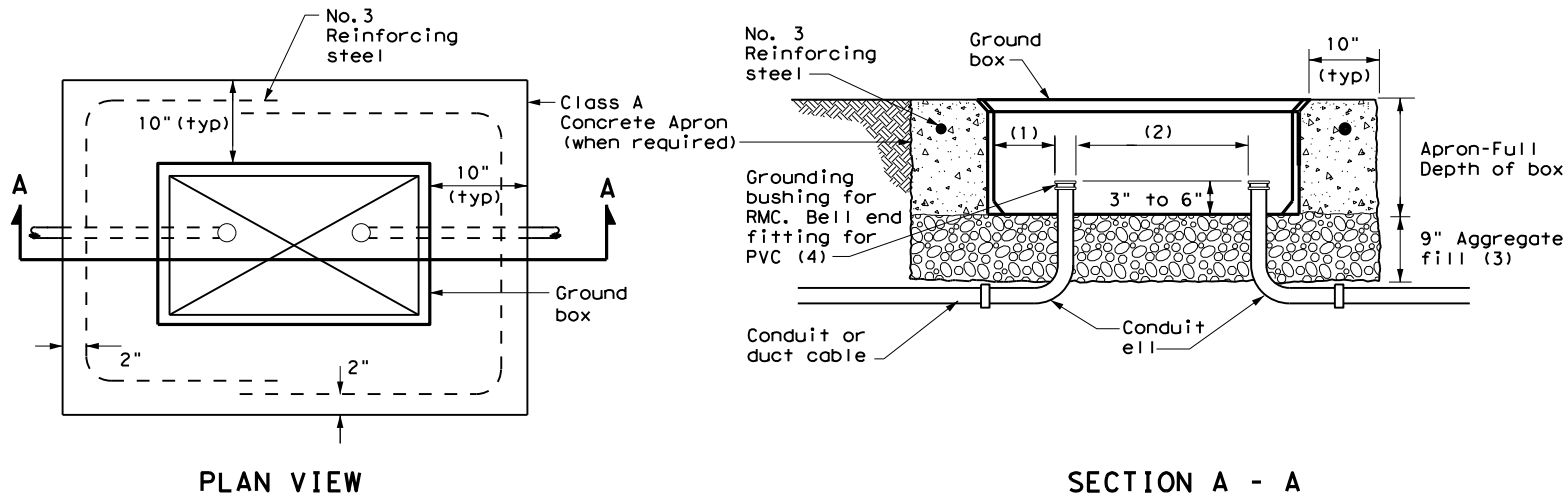

### APRON FOR GROUND BOX


- (1) Uniformly space ends of conduits within the ground box. Position ends of conduits so that ground box walls do not interfere with the installation of grounding bushings or bell end fittings.
- (2) Maintain sufficient space between conduits to allow for proper installation of bushings.
- (3) Place aggregate under the box, not in the box. Aggregate should not encroach on the interior volume of the box.
- (4) Install a grounding bushing on the upper end of all RMC terminating in a ground box. Ground RMC elbows when any part of the elbow is less than 18 in. below the bottom of the ground box. Install a PVC bushing or bell end fitting on the upper end of all PVC conduits terminating in a ground box.

### GROUND BOX DIMENSIONS


TYPE	OUTSIDE DIMENSIONS (INCHES) (Width x Length X Depth)
A	12 X 23 X 11
B	12 X 23 X 22
C	16 X 29 X 11
D	16 X 29 X 22
E	12 X 23 X 17

### GROUND BOX COVER DIMENSIONS


TYPE	DIMENSIONS (INCHES)							
	H	I	J	K	L	M	N	P
A, B & E	23 1/4	23	13 3/4	13 1/2	9 7/8	5 1/8	1 3/8	2
C & D	30 1/2	30 1/4	17 1/2	17 1/4	13 1/4	6 3/4	1 3/8	2

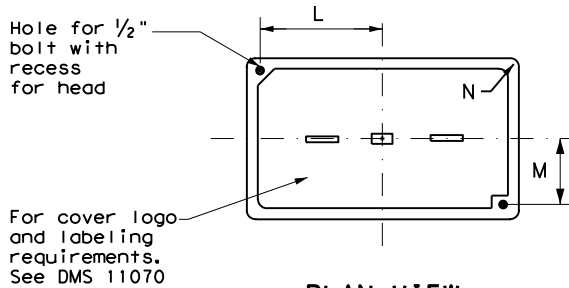

PLAN VIEW



END



SIDE

### GROUND BOX COVER

### GROUND BOXES

#### A. MATERIALS

1. Provide polymer concrete ground boxes measuring 16x30x24 in. (WxLxD) or smaller in accordance with Departmental Material Specification (DMS) 11070 "Ground Boxes" and Item 624 "Ground Boxes."
2. Provide Type A, B, C, D, and E ground boxes as shown in the plans, and as listed on the Material Producers List (MPL) on the Department web site under "Roadway Illumination and Electrical Supplies," Item 624.
3. Ensure ground box cover is correctly labeled in accordance with DMS 11070.
4. Provide larger ground boxes in accordance with Item 624 and as shown in the plans.

#### B. CONSTRUCTION METHODS

1. Remove all gravel and dirt from conduit. Cap all conduits prior to placing aggregate and setting ground box. Provide Grade 3 or 4 coarse aggregate as shown on Table 2 of Item 302 "Aggregates for Surface Treatments." Ensure aggregate bed is in place and at least 9 inches deep, prior to setting the ground box. Install ground box on top of aggregate.
2. Cast ground box aprons in place. Reinforcing steel may be field bent. Ensure the depth of concrete for the apron extends from finished grade to the top of the aggregate bed under the box. Ground box aprons, including concrete and reinforcing steel, are subsidiary to ground boxes when called for by descriptive code.
3. Keep bolt holes in the box clear of dirt. Bolt covers down when not working in ground boxes.
4. Install all conduits and ells in a neat and workmanlike manner. Uniformly space conduits so grounding bushings and bell end fittings can easily be installed.
5. Temporarily seal all conduits in the ground box until conductors are installed.
6. Permanently seal conduits immediately after the completion of conductor installation and pull tests. Permanently seal the ends of all conduits with duct seal, expandable foam, or other method as approved. Do not use duct tape as a permanent conduit sealant. Do not use silicone caulk as a sealant.
7. When a ground rod is present in a ground box, bond all equipment grounding conductors together and to the ground rod with listed connectors.
8. When a type B or D ground box is stacked to meet volume requirements, it is allowable to cut an appropriately sized hole for conduit entry in the side wall at least 18 inches below grade.
9. If an existing ground box in the contract has a metal cover, bond the cover to the equipment grounding conductor with a 3 ft. long stranded bonding jumper the same size as the grounding conductor. The bonding jumper is subsidiary to various bid items. Verify existing ground boxes with metal covers are shown on the plans, with notes fully describing the work required.
10. If other ground boxes with metal covers are within the project limits but are not part of the contract, the Engineer may direct the Contractor to bond the metal covers, identifying the specific boxes in writing. This work will be paid for separately.
11. Bond metal ground box covers to the grounding conductor with a tank ground type lug.

Traffic Operations Division Standard

## ELECTRICAL DETAILS GROUND BOXES

### ED(4) - 14

FILE: ed4-14.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	--	--	--	SH 123
	DIST	COUNTY	SHEET NO.	
	SAT	GUAD	T56	



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

9/13/2022 12:48:27 \$\$\$SCALE\$\$\$ BY: Justin Kinne  
PLOTTED: c:\pwworking\dot13778\ED(5)-14.dgn  
FILENAME:

ELECTRICAL SERVICES NOTES

1. Provide new materials. Ensure installation and materials comply with the applicable provisions of the National Electrical Code (NEC) and National Electrical Manufacturers Association (NEMA) standards. Ensure material is Underwriters Laboratories (UL) listed. Provide and install electrical service conduits, conductors, disconnects, contactors, circuit breaker panels, and branch circuit breakers as shown on the Electrical Service Data chart in the plans. Faulty fabrication or poor workmanship in material, equipment, or installation is justification for rejection. Where manufacturers provide warranties and guarantees as a customary trade practice, furnish these to the State.
2. Provide electrical services in accordance with Electrical Details standard sheets, Departmental Material Specification (DMS) 11080 "Electrical Services," DMS 11081 "Electrical Services-Type A," DMS 11082 "Electrical Services-Type C," DMS 11083 "Electrical Services-Type D," DMS 11084 "Electrical Services-Type T," DMS 11085 "Electrical Services-Pedestal (PS)", and Item 628 "Electrical Services" of the Standard Specifications. Provide electrical service types A, C, and D, as listed on the Material Producers List (MPL) on the Department web site under "Roadway Illumination and Electrical Supplies," Item 628. Provide other service types as detailed on the plans.
3. Provide all work, materials, services, and any incidentals needed to install a complete electrical service as specified in the plans.
4. Coordinate with the Engineer and the utility provider for metering and compliance with utility requirements. Primary line extensions, connection charges, meter charges, and other charges by the utility company to provide power to the location are paid for in accordance with Item 628. Get approval for the costs associated with these charges prior to engaging the utility company to do the work. Consult with the utility provider to determine costs and requirements, and coordinate the work as approved.
5. The enclosure manufacturer will provide Master Lock Type 2 with brass tumblers keyed #2195 for all custom electrical enclosures. Installing Contractor is to provide Master Lock #2195 Type 2 with brass tumblers for "off the shelf" enclosures. Master Lock #2195 keys and locks become property of the State. Unless otherwise approved, do not energize electrical service equipment until locks are installed.
6. Enclosures with external disconnects that de-energize all equipment inside the enclosure do not need a dead front trim. Protect incoming line terminations from incidental contact as required by the NEC.
7. When galvanized is specified for nuts, screws, bolts or miscellaneous hardware, stainless steel may be used.
8. Provide wiring and electrical components rated for 75°C. Provide red, black, and white colored XHHW service entrance conductors of minimum size 6 American Wire Gauge (AWG). Identify size 6 AWG conductors by continuous color jacket. Identify electrical conductors sized 4 AWG and larger by continuous color jacket or by colored tape. Mark at least 6 inches of the conductor's insulation with half laps of colored tape, when identifying conductors. Ensure each service entrance conductor exits through a separately bushed non-metallic opening in the weatherhead. The lengths of the conductors outside the weatherhead are to be 12 inches minimum, 18 inches maximum, or as required by utility.
9. All electrical service conduit and conductors attached to the electrical service including the riser or the elbow below ground are subsidiary to the electrical service. For an underground utility feed, all service conduit and conductors after the elbow, including service conduit and conductors for the utility pole riser when furnished by the Contractor, will be paid for separately.
10. Provide rigid metal conduit (RMC) for all conduits on service, except for the 1/2 in. PVC conduit containing the electrical service grounding electrode conductor. Size the service entrance conduit as shown in the plans. Ensure conduit for branch circuit entry to enclosure is the same size as that shown on the layout sheets for branch circuit conduit. Extend all rigid metal conduits a minimum of 6 inches underground and then couple to the type and schedule of the conduit shown on the layout for that particular branch circuit. Install a grounding bushing on the RMC where it terminates in the service enclosure.
11. Use of liquidtight flexible metal conduit (LFMC) is allowed between the meter and service enclosure when they are mounted 90 to 180 degrees to each other. Size the LFMC the same size as service entrance conduit. LFMC must not exceed 3 feet in length. Strap LFMC within 1 foot of each end. LFMC less than 12 inches in length need not be strapped. Each end of LFMC must have a grounding bushing or be terminated with a grounding fitting. The LFMC must contain a grounded (neutral) conductor. Ensure any bend in LFMC never exceeds 180 degrees. A pull test is required on all installed conductors, with at least six inches of free conductor movement demonstrated to the satisfaction of the Engineer.
12. Ensure all mounting hardware and installation details of services conform to utility company specifications.
13. For all electrical service enclosures listed under Item 628 on the MPL, the UL 508 enclosure manufacturers will prepare and submit a schematic drawing unique to each service. Before shipment to the job site, place the applicable laminated schematic drawings and the laminated plan sheet showing the electrical service data chart used to build the enclosure in the enclosure's data pocket. The installing contractor will copy and laminate the actual project plan sheets detailing all equipment and branch circuits supplied by that service. The laminated plan sheets are to be placed in the service enclosure's document pocket. Reduce 11 in. x 17 in. plan sheets to 8 1/2 in. x 11 in. before laminating. If the installation differs from the plan sheets, the installing contractor is to redline plan sheets before laminating.
14. When providing an "Off The Shelf" Type D or Type T service, provide laminated plan sheets detailing equipment and branch circuits supplied by that service. Reduce 11 in. x 17 in. plan sheets to 8 1/2 in. x 11 in before laminating. Deliver these drawings before completion of the work to the Engineer, instead of placing in enclosure that has no door pocket.
15. Do not install conduit in the back wall of a service enclosure where it would penetrate the equipment mounting panel inside the enclosure. Provide grounding bushings on all metal conduits, and terminate bonding jumpers to grounding bus. Grounding bushings are not required when the end of the metal conduit is fitted with a conduit sealing hub or threaded boss, such as a meter base hub.

SERVICE ASSEMBLY ENCLOSURE

1. Provide threaded hub for all conduit entries into the top of enclosure.
2. Type galvanized steel (GS) enclosures may be used for Type C panelboards and for Type D and T services that do not use an enclosure mounted photocell or lighting contactor. Provide GS enclosures in accordance with DMS 11080, 11082, 11083, and 11084.
3. Provide aluminum (AL) and stainless steel (SS) enclosures for Types A, C, and D in accordance with DMS 11080, 11081, 11082, 11083, and 11084. Do not paint stainless steel.
4. Provide pedestal service (PS) enclosures in accordance with ED(9) and DMS 11080 and 11085. Do not provide GS pedestal services. If GS is shown in the PS descriptive code, provide an AL enclosure.

MAIN DISCONNECT & BRANCH CIRCUIT BREAKERS

1. Field drill flange-mounted remote operator handle if needed, to ensure handle is lockable in both the "On" and "Off" positions.
2. When the utility company provides a transformer larger than 50 KVA, verify that the available fault current is less than the circuit breaker's ampere interrupting capacity (AIC) rating and provide documentation from the electric utility provider to the Engineer.

PHOTOELECTRIC CONTROL

1. Provide photocell as listed on the MPL. Move, adjust, or shield the photocell from stray or ambient night time light to ensure proper operation. Mount photocell facing north when practical. Mount top of pole photocells as shown on Top Mounted Photocell Detail.



* ELECTRICAL SERVICE DATA												
Elec. Service ID	Plan Sheet Number	Electrical Service Description	Service Conduit **Size	Service Conductors No./Size	Safety Switch Amps	Main Ckt. Bkr. Pole/Amps	Two-Pole Contractor Amps	Panelbd/ Loadcenter Amp Rating	Branch Circuit ID	Branch Ckt. Bkr. Pole/Amps	Branch Circuit Amps	KVA Load
SB 183	289	ELC SRV TY A 240/480 100(SS)AL(E)SF(U)	2"	3/#2	100	2P/100	100	N/A	Lighting NB	2P/40	26	28.1
									Lighting SB	2P/40	25	
									Underpass	1P/20	15	
NB Access	30	ELC SRV TY D 120/240 060(NS)SS(E)TS(O)	1 1/4"	3/#6	N/A	2P/60		100	Sig. Controller	1P/30	23	5.3
							30		Luminares	2P/20	9	
									CCTV	1P/20	3	
2nd & Main	58	ELC SRV TY T 120/240 000(NS)GS(N)SP(O)	1 1/4"	3/#6	N/A	N/A	N/A	70	Flashing Beacon 1	1P/20	4	1.0
									Flashing Beacon 2	1P/20	4	

\* Example only, not for construction. All new electrical services must have electrical service data chart specific to that service as shown in the plans.

\*\* Verify service conduit size with utility. Size may change due to utility meter requirements. Ensure conduit size meets the National Electrical Code.

EXPLANATION OF ELECTRICAL SERVICE DESCRIPTIVE CODE

ELEC SERV TY X XXX/XXX XXX (XX) XX (X) XX (X)

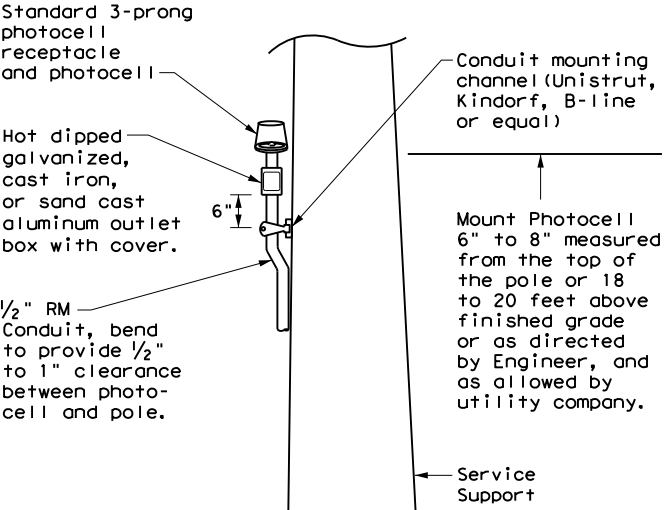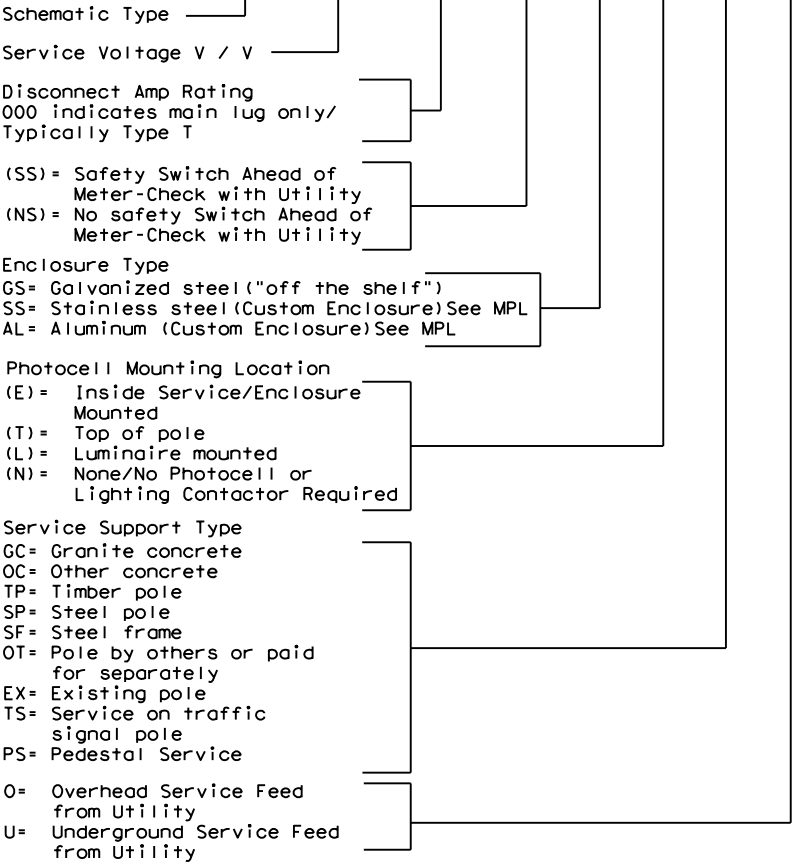

TOP MOUNTED PHOTOCELL

Install conduit strap maximum 3 feet from box. 5 foot maximum spacing between straps supporting conduit.

Traffic Operations Division Standard

ELECTRICAL DETAILS  
SERVICE NOTES & DATA


ED(5) - 14

FILE: ed5-14.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	--	--	--	SH 123
	DIST	COUNTY		SHEET NO.
	SAT	GUAD		T57




DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


PLOTTED: 9/13/2022 12:48:33 \$\$\$SCALE\$\$\$ BY: Justin Kinne  
FILENAME: c:\pwwork1\021378\ED(6)-14.dgn

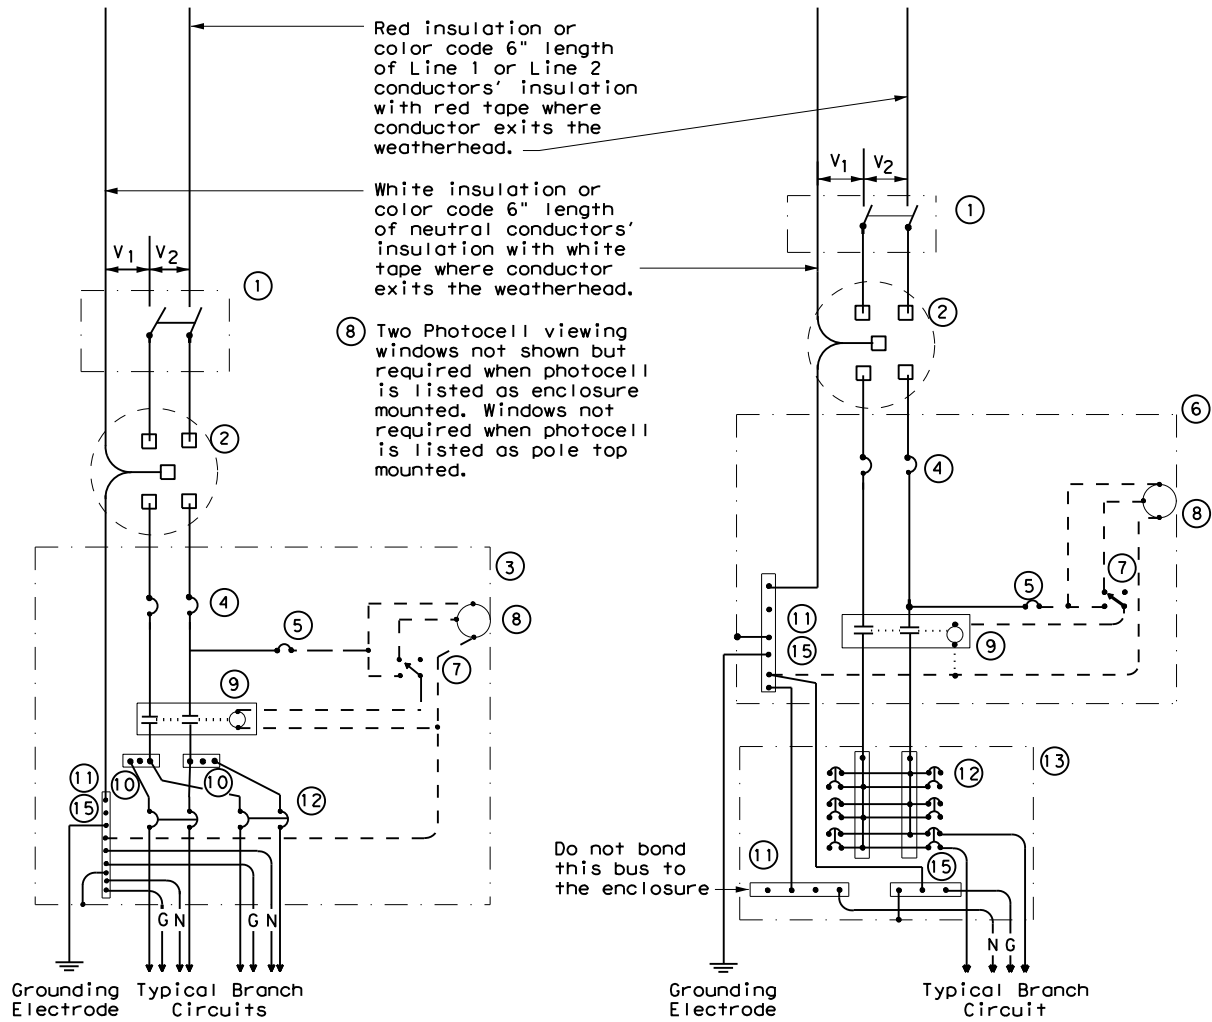

WIRING LEGEND	
————	Power Wiring
- - - -	Control Wiring
—N—	Neutral Conductor
—G—	Equipment grounding conductor-always required

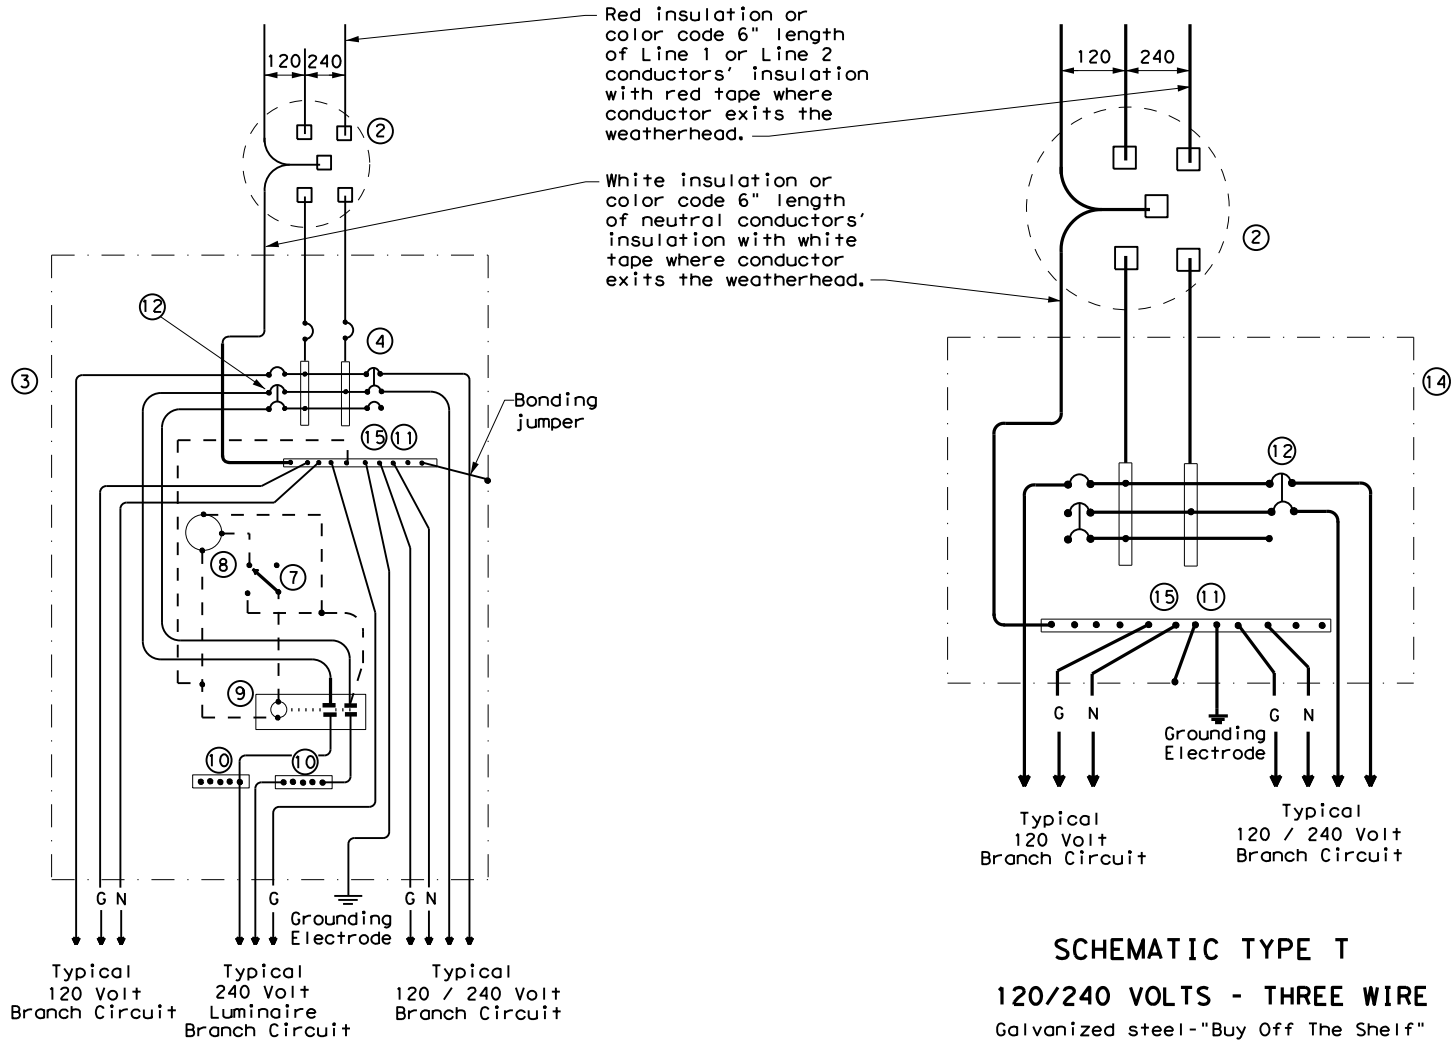

SCHEMATIC LEGEND	
1	Safety Switch (when required)
2	Meter (when required-verify with electric utility provider)
3	Service Assembly Enclosure
4	Main Disconnect Breaker (See Electrical Service Data)
5	Circuit Breaker, 15 Amp (Control Circuit)
6	Auxiliary Enclosure
7	Control Station ("H-O-A" Switch)
8	Photo Electric Control (enclosure-mounted shown)
9	Lighting Contactor
10	Power Distribution Terminal Blocks
11	Neutral Bus
12	Branch Circuit Breaker (See Electrical Service Data)
13	Separate Circuit Breaker Panelboard
14	Load Center
15	Ground Bus

 <div>Texas Department of Transportation</div>				<div>Traffic Operations Division Standard</div>	
<div>ELECTRICAL DETAILS</div> <div>SERVICE ENCLOSURE</div> <div>AND NOTES</div> <div>ED(6) - 14</div>					
FILE: ed6-14.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT	
© TxDOT October 2014	CONT	SECT	JOB	HIGHWAY	
REVISIONS	--	--	--	SH 123	
	DIST	COUNTY		SHEET NO.	
	SAT	GUAD		T58	




DISCLAIMER: This standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

9/13/2022 12:48:38 \$\$\$SCALE\$\$\$ BY: Justin, Kinne  
PLOTTER: c:\pwwork1\0213778\ED(8)-14.dgn

TRAFFIC SIGNAL NOTES

1. Do not pass luminaire conductors through the signal controller cabinet.
2. Include an equipment grounding conductor in all conduits throughout the electrical system. Bond all exposed metal parts to the grounding conductor.
3. Provide roadway luminaires, when required, in accordance with the material and construction sections of Item 610, "Roadway Illumination Assemblies," except for performance testing of luminaires. Test installed roadway luminaires for proper operation as a part of the associated traffic signal system test.
4. If internally illuminated street name signs are approved for use, ground the fixture to the pole with a 12 AWG green XHHW conductor.
5. Bond anchor bolts to rebar cage in two locations using #3 bars or 6 AWG stranded copper conductors. Use listed mechanical connectors rated for embedment in concrete. See TxDOT standard TS-FD for further details.
6. Drill and tap signal poles for 1/2 in. X 13 UNC tank ground fitting. Provide and install tank ground fitting 4 in. to 6 in. directly below electrical service enclosure. Provide properly sized hole through the bottom of the enclosure for the service grounding electrode conductor. Connect the electrical service grounding electrode conductor to the tank ground fitting. Ensure electrical service grounding electrode conductor is as short and straight as possible from the enclosure to the tank ground fitting. See Inset A detail for further information. Size service entrance conduit and branch circuit conduit as shown in the plans.
7. Mount electrical service enclosure and meter to signal pole with stainless steel bands. Ensure bands are a minimum width of 3/4 in. Secure enclosures to bands using two-bolt brackets. Install brackets near top and bottom of each enclosure. Install properly sized stainless steel washers on each bolt in the enclosure. Band or drill and tap properly sized stand-off straps to signal pole for attaching conduit.
8. Conduct pull tests and insulation resistance tests on all illumination and power conductors as required in Item 620 "Electrical Conductors" and ED(3). To prevent electronics damage, do not conduct insulation resistance tests on traffic signal cables after termination.
9. Lock all enclosures and bolt down all ground box covers before applying power to the signal installation.
10. Terminate conduits entering the top of enclosures with a conduit-sealing hub or threaded boss such as meter hub. Install a grounding bushing on all metal conduits not connected to conduit-sealing hub or threaded boss. Bond the grounding bushing to the ground bus with a bonding jumper. Seal all conduits entering enclosures with duct seal or expanding foam. Do not use silicone to seal conduit ends.
11. For all conduits, ensure the burial depth is a minimum of 18". Ensure the minimum burial depth for conduit placed under a roadway is 24".

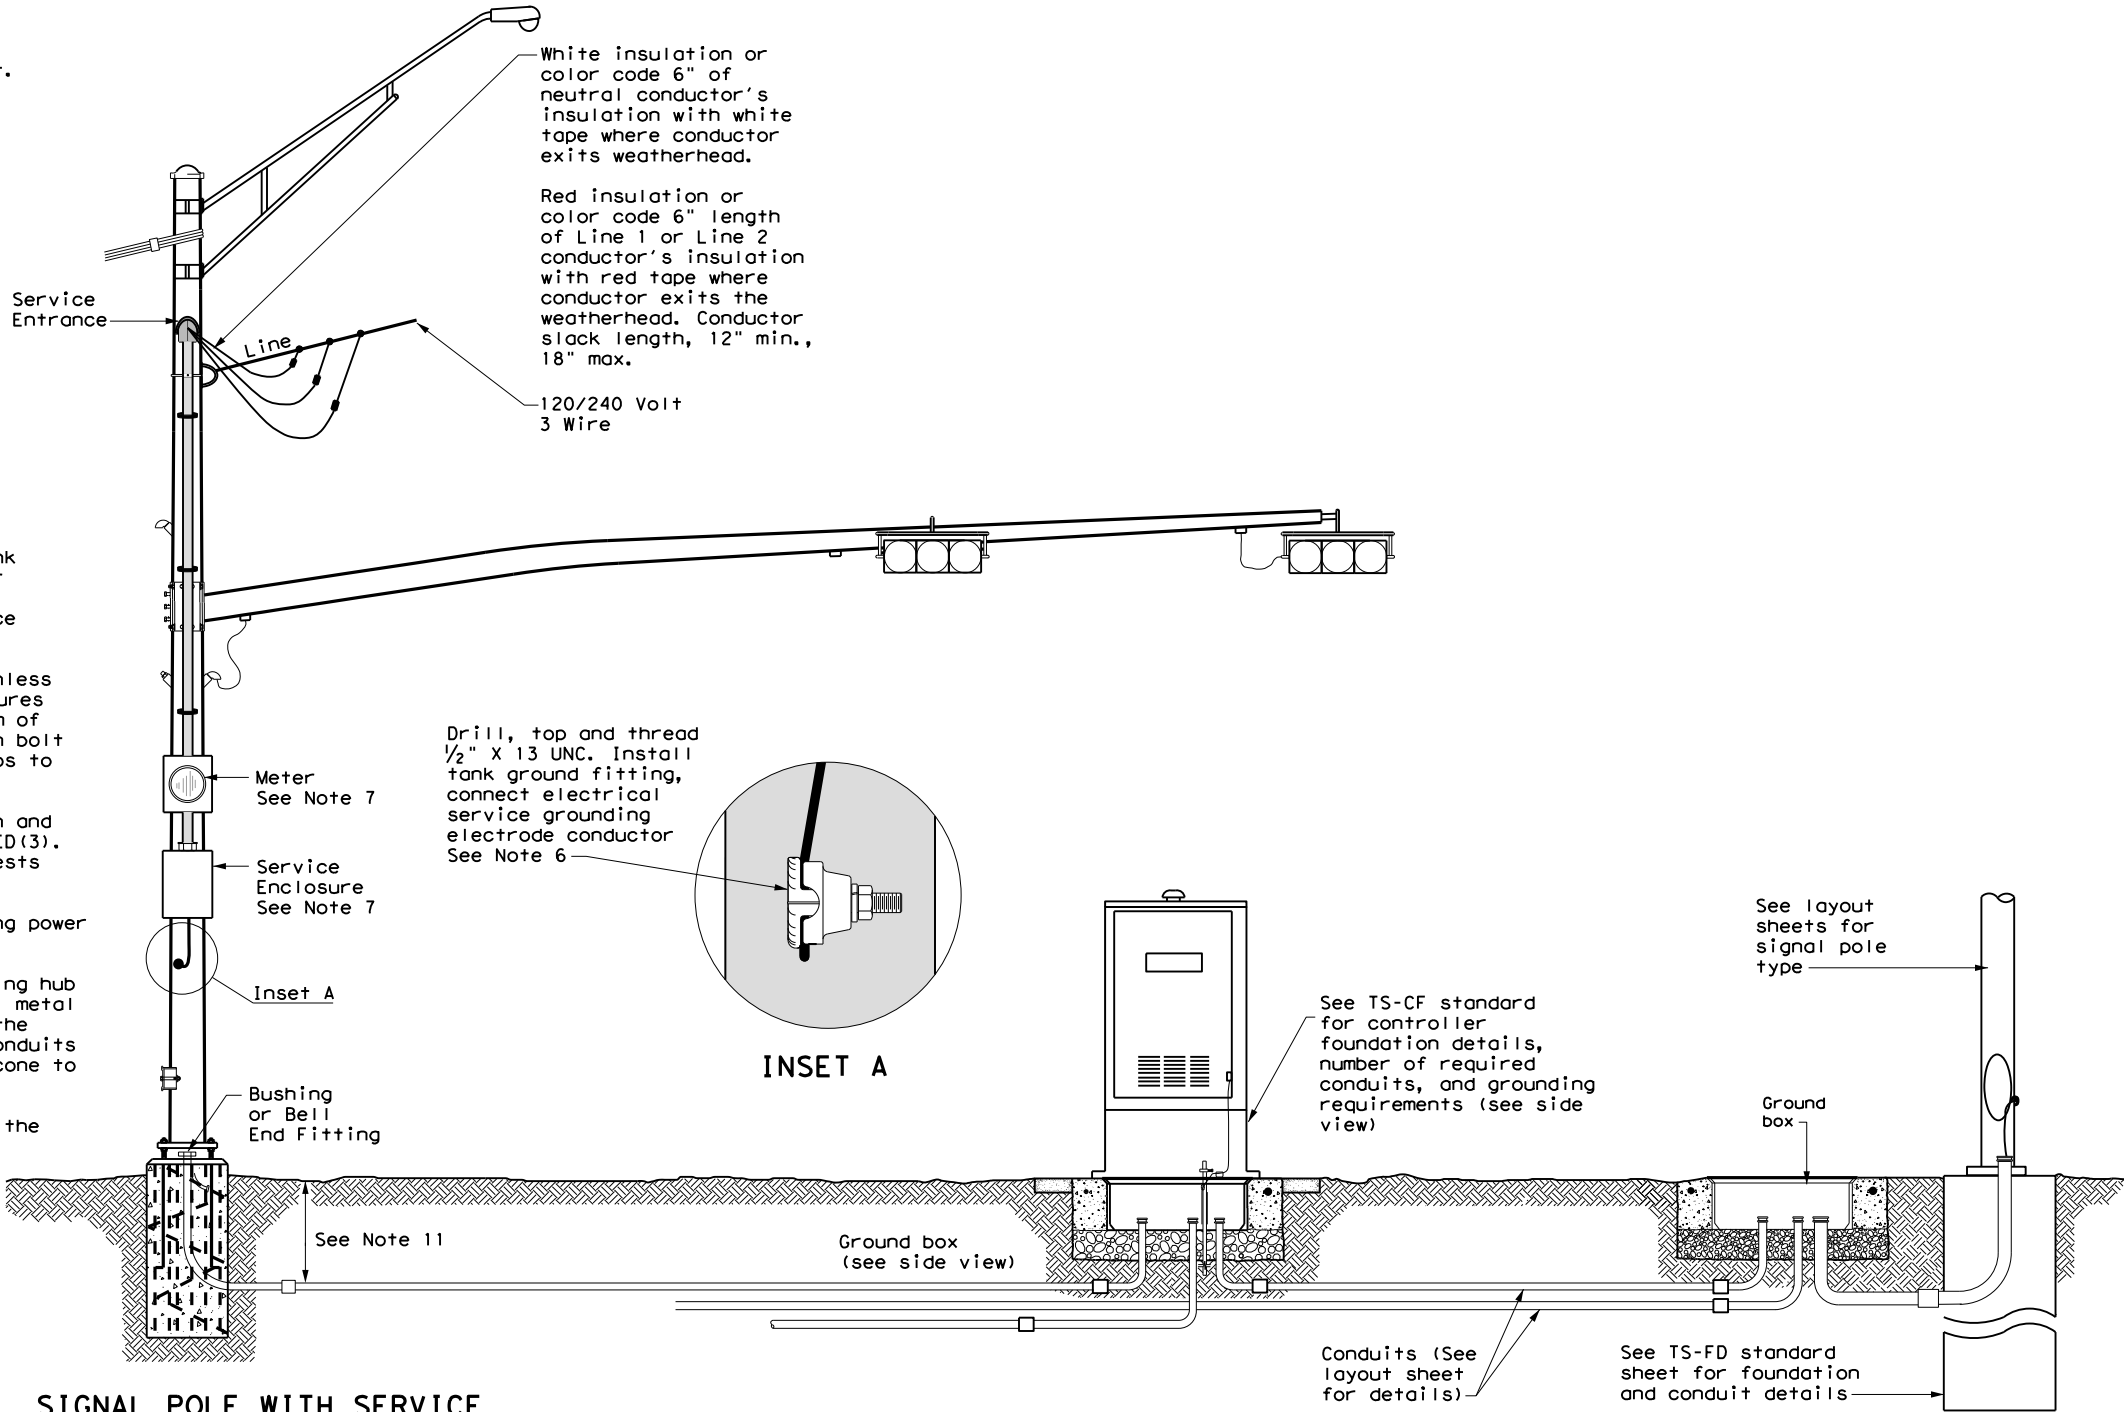


SIGNAL POLE WITH SERVICE

Type T electrical service mounted on signal pole shown as an example. See electrical details, layout sheets, and electrical service data chart for additional details.

SIGNAL CONTROLLER FRONT VIEW

SIGNAL POLE

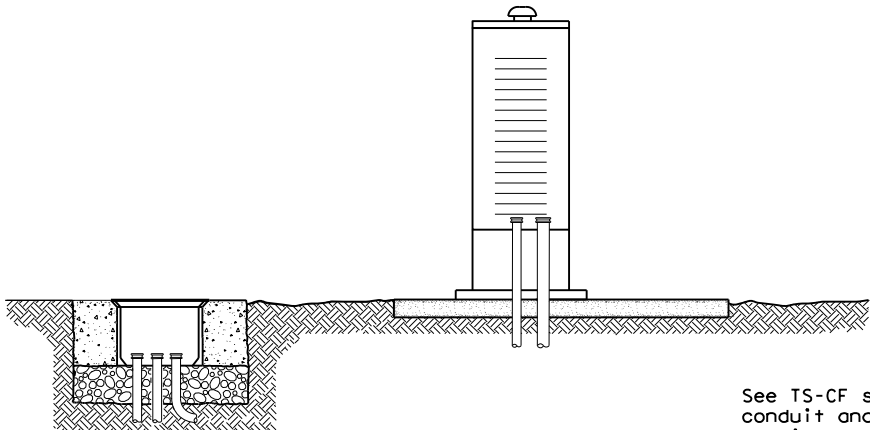

SIGNAL CONTROLLER SIDE VIEW

See TS-CF standard for conduit and grounding requirements. See layout sheets for ground box locations and any additional conduits that are required.

Texas Department of Transportation

Traffic Operations Division Standard

ELECTRICAL DETAILS  
TYPICAL TRAFFIC SIGNAL  
SYSTEM DETAILS

ED(8) - 14

FILE: ed8-14.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	--	--	--	SH 123
	DIST	COUNTY	SHEET NO.	
	SAT	GUAD	T59	




DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

9/13/2022 12:48:44 \$\$\$Scales\$\$\$ BY: Justin Kinne  
PLOTED: 9/13/2022 12:48:44 \$\$\$Scales\$\$\$  
FILENAME: c:\pwworkh1\dot21378\ED(10)-14.dgn

## TIMBER POLE (TP) SERVICE SUPPORT NOTES

1. Ensure electrical service support is a class 5 treated timber pole as per Item 627 "Treated Timber Poles." Embed timber pole to depth required in Item 627.
2. Conduit and electrical conductors attached to the electrical service pole and underground within 12 in. of service pole are not paid for directly but are subsidiary to the electrical service.
3. Install pole-top mounted photocell (T) on north side of pole, or in service enclosure (E) as required. See Electrical Service Data chart in plan set.
4. Gain pole as required to provide flat surface for each channel. Gain timber pole to  $\frac{3}{8}$  in. max. depth and  $1\frac{1}{8}$  in. max. height. Gain pole in a neat and workmanlike manner.
5. Mount meter and service equipment on stainless steel or galvanized channel (Unistrut, Kindorf, or equal). Provide channel sized 1 in. to  $3\frac{3}{4}$  in. maximum depth, and  $1\frac{1}{2}$  in. to  $1\frac{5}{8}$  in. maximum width. File smooth the cut ends of galvanized channel and paint with zinc rich paint before installing on pole. Secure each channel section to timber pole with two galvanized or SS lag bolts,  $\frac{1}{4}$  in. minimum diameter by  $1\frac{1}{2}$  in. minimum length. Use a galvanized or SS flat washer on each lag bolt. Do not stack channel.
6. When excess length must be trimmed from poles, trim from the top end only.

- ① Class 5 pole, height as required
- ② Service drop from utility company (attached below weatherhead)
- ③ Service conduit (RMC) and service entrance conductors - One Red, One Black, One White (See Electrical Service Data)
- ④ Safety switch (when required)
- ⑤ Meter (when required)
- ⑥ Service enclosure
- ⑦ 6 AWG bare grounding electrode conductor in  $\frac{1}{2}$  in. PVC to ground rod - extend  $\frac{1}{2}$  in. PVC 6 in. underground.
- ⑧  $\frac{5}{8}$  in. x 8 ft. Copper clad ground rod - drive ground rod to a depth of 2 in. to 4 in. below grade.
- ⑨ RMC same size as branch circuit conduit.
- ⑩ See pole-top mounted photocell detail on ED(5).
- ⑪ When required by the serving utility provide bare 6 AWG copper conductor. Run wire from pole top to butt wrap or copper butt plate. Protect conductor with non-conductive material to a height of 8 ft. above finished grade.
- ⑫ When required by utility, cut top of pole at an angle to enhance rain run off.

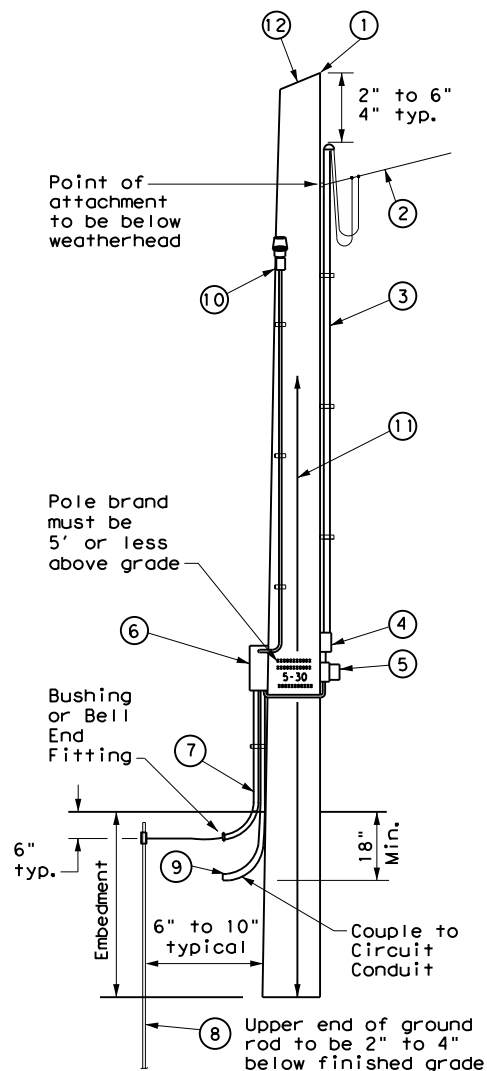


SERVICE SUPPORT TYPE TP (O)


## GRANITE CONCRETE (GC) & OTHER CONCRETE (OC) NOTES

Ensure electrical service support structures bid as type Granite Concrete (GC) or Other Concrete (OC) meet the following requirements.


1. Provide GC and OC poles that meet the requirements of DMS 11080 "Electrical Services."
2. Provide prestressed concrete poles suitable for direct embedment into the ground without special foundations.
3. Verify poles are marked as required on DMS 11080. Location of marking should be approximately 4' above final grade. Use the two-point pickup locations when handling pole in horizontal position, and one-point pickup location for use in raising the pole to a vertical position. These marks are small but conspicuous.
4. Embed poles 42 in. or 10% of the length plus 2 ft., whichever is greater.
5. Ensure all installation details of services are in accordance with utility company specifications.
6. Install a one point rack or eye bolt bracket 6 inches to 12 inches below the weatherhead as an overhead service drop anchoring point for the electric utility.
7. Furnish and install galvanized or stainless steel channel strut  $1\frac{1}{2}$  in. or  $1\frac{5}{8}$  in. wide by 1 in. up to  $3\frac{3}{4}$  in. deep (Unistrut, Kindorf, B-line or equal). Attach channel strut with stainless steel concrete anchors (max. 1" depth), square U-bolts or back to back channel strut with long bolts, or other secure mounting as approved by the Engineer. Ensure bolts are galvanized in accordance with ASTM A153. Do not stack channel struts.
8. Backfill the holes thoroughly by tamping in 6 in. lifts. After tamping to grade, place additional backfill material in a 6 inch high cone around the pole to allow for settling. Use material equal in composition and density to the surrounding area. Backfilling will not be paid for directly but is subsidiary to various bid items.

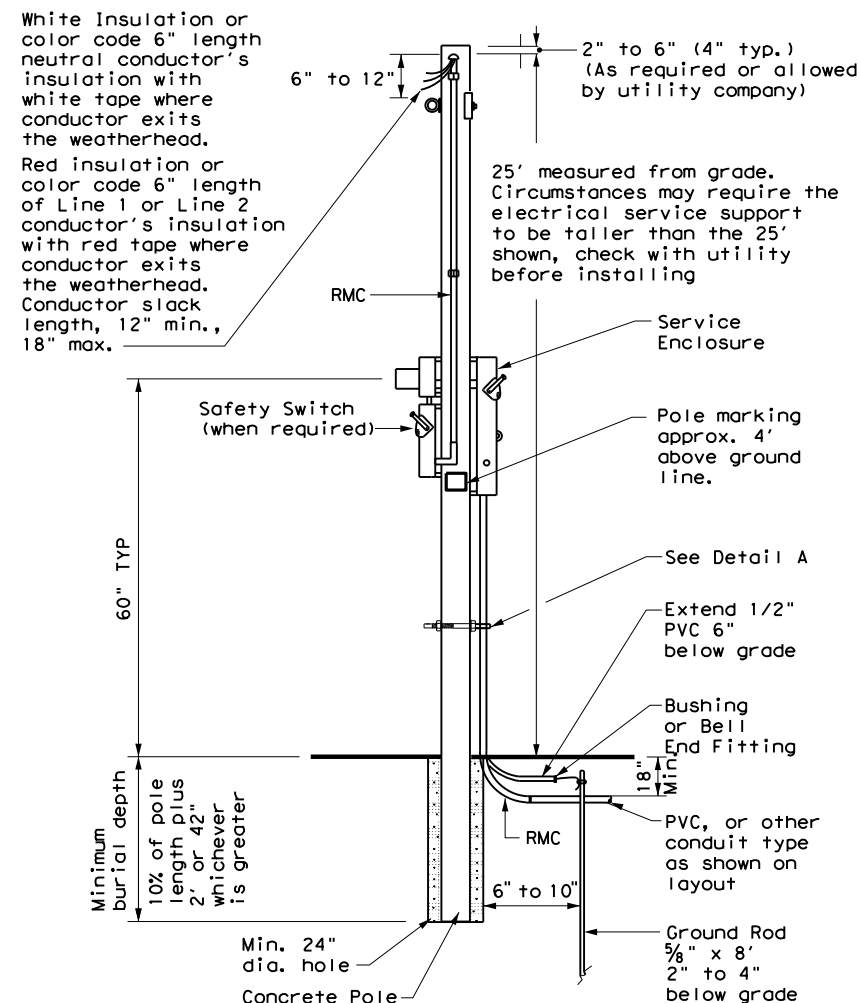

CONCRETE SERVICE SUPPORT  
Overhead (O)

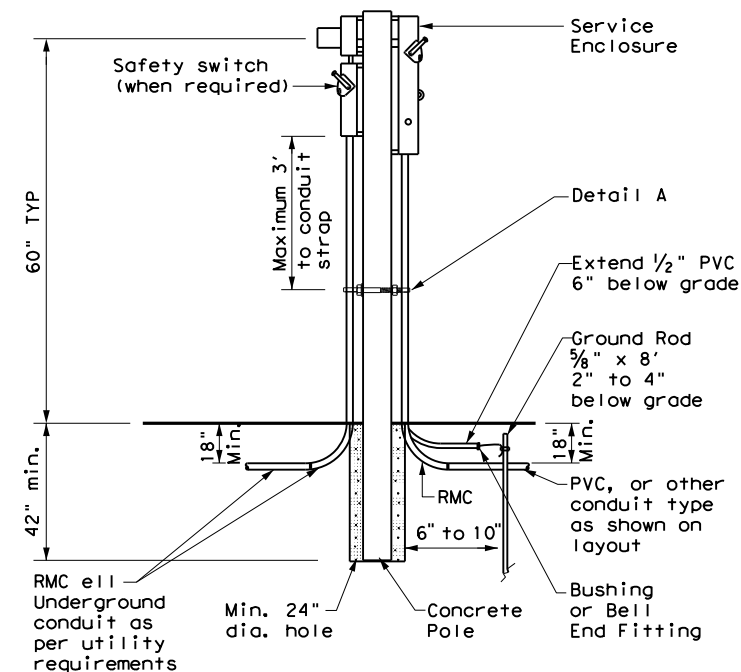


CONCRETE SERVICE SUPPORT  
Underground (U)

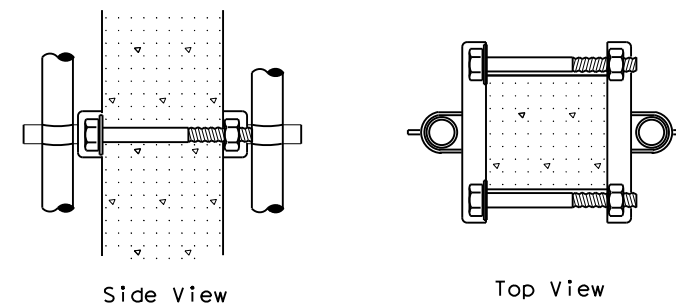

### DETAIL A

See Note 7. Before installing channel that has been cut, file sharp edges and paint with zinc-rich paint. Ensure there is no paint splatter on the pole.



Texas Department of Transportation

Traffic Operations Division Standard

ELECTRICAL DETAILS

SERVICE SUPPORT

TYPES GC, OC, & TP

ED(10) - 14


FILE: ed10-14.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	--	--	--	SH 123
	DIST	COUNTY		SHEET NO.
	SAT	GUAD		T60



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 9/13/2022 12:48:50  
FILE: c:\pwworking\0213778\MA-C-12.DGN

ARM SIZE		A	B	C	D	E	CONN. BOLT DIA
D <sub>1</sub>	#	in.	in.	in.	in.	in.	in.
6.5	.179	12	9	9	6	1 3/4	1
7.5	.179	13	9	10	6	1 3/4	1
8.0	.179	14	10	11	7	2	1 1/4
9.0	.179	16	11	13	8	2	1 1/4
9.5	.179	17	12	14	9	2	1 1/4
9.5	.239	18	12	15	9	2	1 1/4
10.0	.239	18	12	15	9	2	1 1/4
10.5	.239	18	13	15	10	3	1 1/2
11.0	.239	18	13	15	10	3	1 1/2

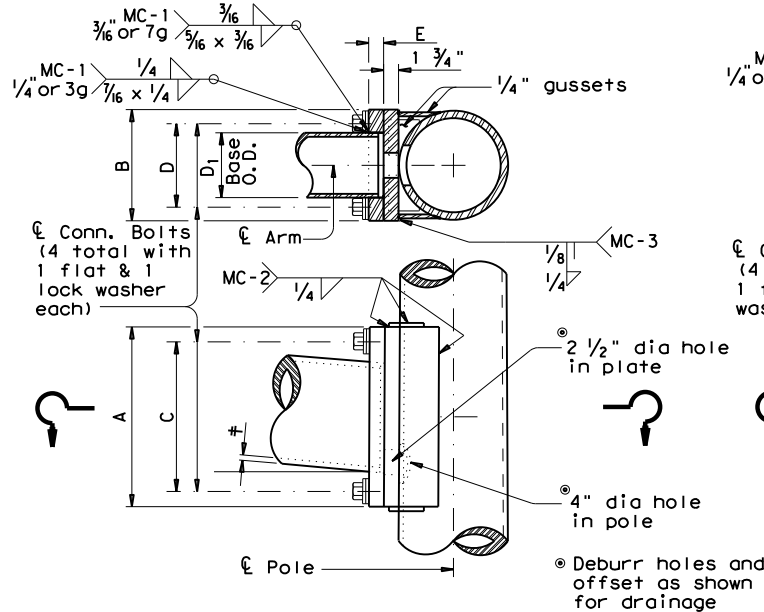


**FIXED MOUNT DETAIL 1**

ARM SIZE		A	F	CONN. BOLTS		PIN BOLTS	
D <sub>1</sub>	#	in.	in.	No.	Dia	No.	Dia
6.5	.179	12	6	4	1	2	5/8
7.5	.179	14	8	4	1	2	5/8
8.0	.179	14	8	4	1	2	5/8
9.0	.179	16	10	4	1	2	5/8
9.5	.179	18	12	4	1 1/4	3	5/8
9.5	.239	18	12	4	1 1/4	3	5/8
10.0	.239	18	12	4	1 1/4	3	5/8

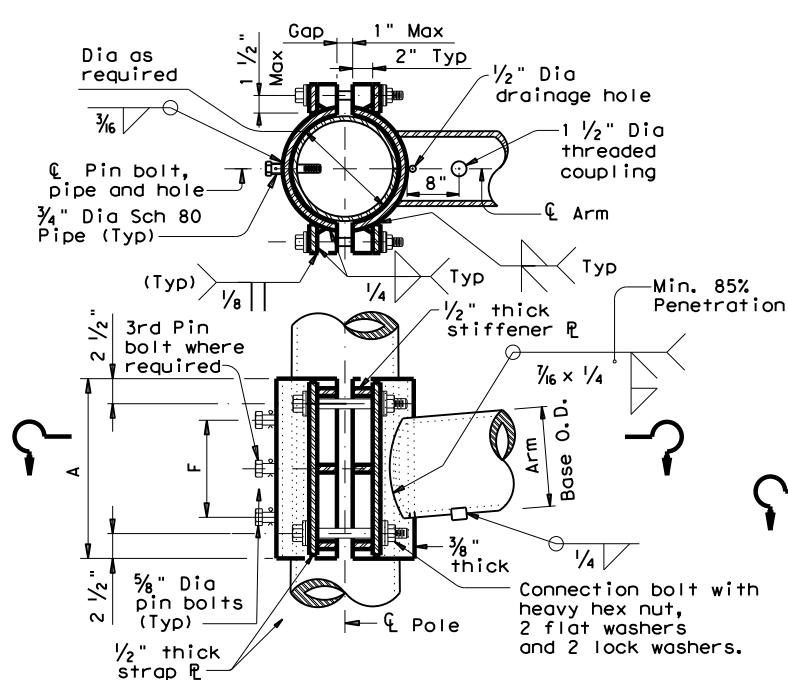


**CLAMP-ON DETAIL 1**

ARM SIZE		A	B	C	D	E	CONN. BOLT DIA
D <sub>1</sub>	#	in.	in.	in.	in.	in.	in.
6.5	.179	11	11	8	8	1 3/4	1 1/4
7.5	.179	11	11	8	8	1 3/4	1 1/4
8.0	.179	11	11	8	8	2	1 1/4
9.0	.179	13	13	10	10	2	1 1/4
10.0	.179	13	13	10	10	2	1 1/4
9.5	.239	13	13	10	10	2	1 1/4
10.0	.239	14	14	11	11	2	1 1/2
11.0	.239	14	14	11	11	3	1 1/2
11.5	.239	14	14	11	11	3	1 1/2

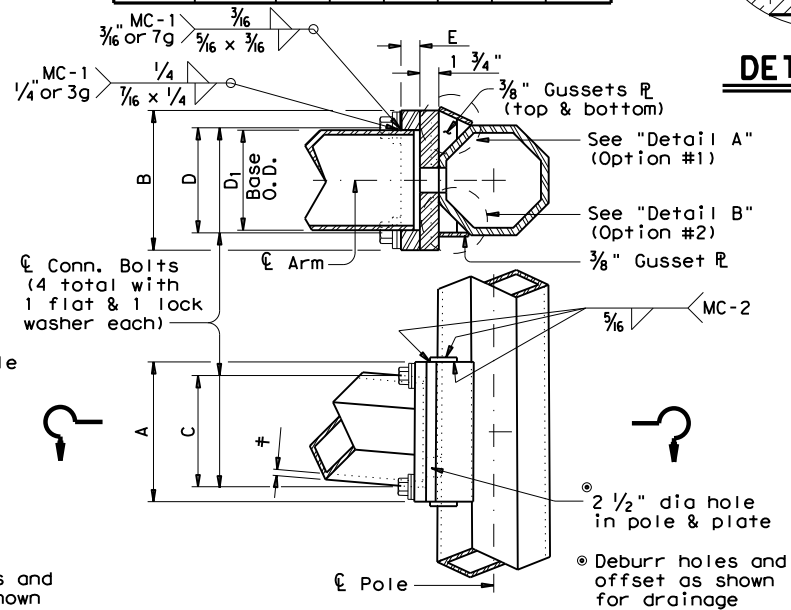


**FIXED MOUNT DETAIL 2**

ARM SIZE		A	F	T	CONN. BOLTS		PIN BOLTS	
D <sub>1</sub>	#	in.	in.	in.	No.	Dia	No.	Dia
6.5	.179	12	6	3/4	4	3/4	2	5/8
7.5	.179	14	8	3/4	4	3/4	2	5/8
8.0	.179	14	8	3/4	4	3/4	2	5/8
9.0	.179	16	10	7/8	4	1	2	5/8
10.0	.179	18	10	7/8	4	1	2	5/8
9.5	.239	18	10	1	6	1	3	5/8
10.0	.239	18	10	1	6	1	3	5/8

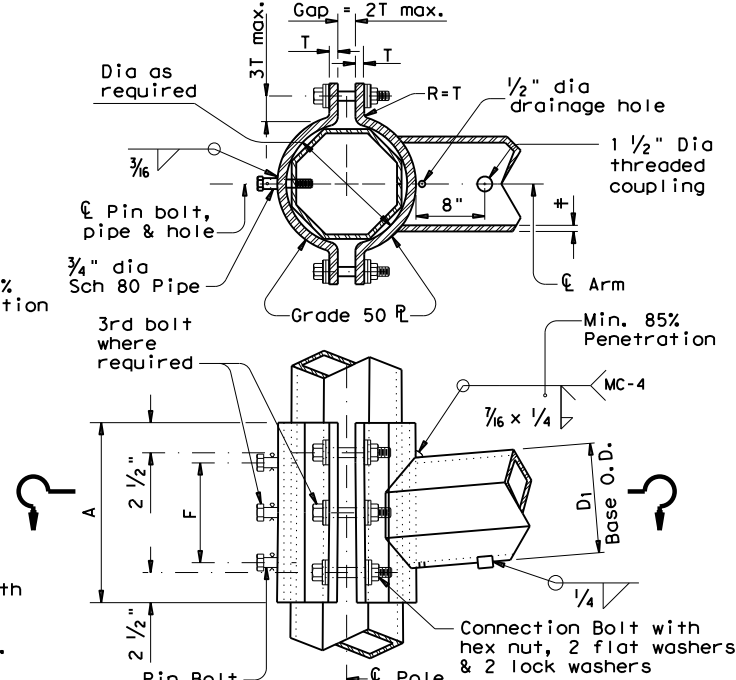


**CLAMP-ON DETAIL 2**

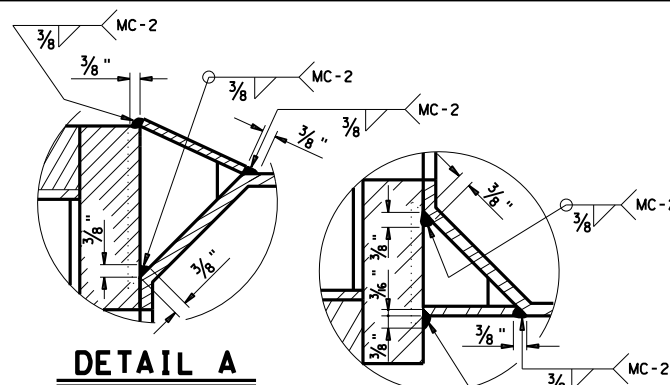


**DETAIL A**

**DETAIL B**

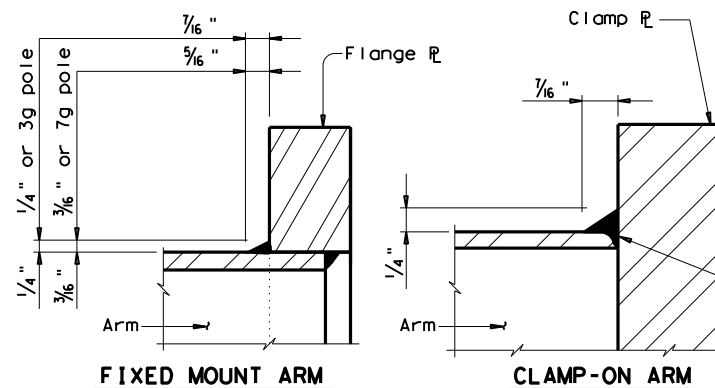

**ARM BASE WELD DETAILS**

ARM SIZE		A	F	CONN. BOLTS		PIN BOLTS	
D <sub>1</sub>	#	in.	in.	No.	Dia	No.	Dia
6.5	.179	12	6	4	1	2	5/8
7.5	.179	14	8	4	1	2	5/8
8.0	.179	14	8	4	1	2	5/8
9.0	.179	16	10	4	1	2	5/8
9.5	.179	18	12	6	1	3	5/8
9.5	.239	18	12	6	1	3	5/8
10.0	.239	18	12	6	1	3	5/8

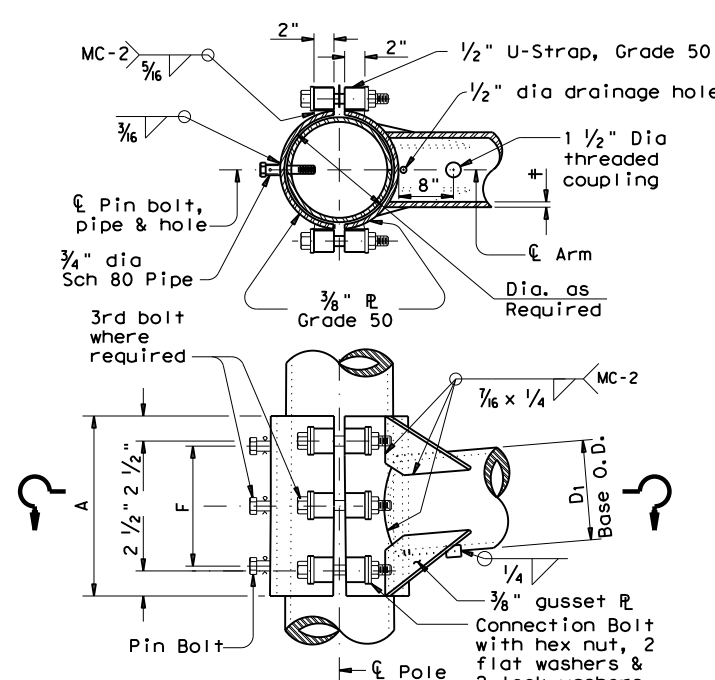

**CLAMP-ON DETAIL 3**

## MATERIALS

Round Shafts or Polygonal Shafts <sup>①</sup>	ASTM A595 Gr.A, A588, A1008 HSLAS Gr.50 Class 2, A1011 HSLAS Gr.50 Class 2, A572 Gr.50 or A1011 SS Gr.50 <sup>②</sup>
Plates <sup>①</sup>	ASTM A36, A588, or A572 Gr.50
Connection Bolts	ASTM A325 or A449, except where noted
Pin Bolts	ASTM A325
Pipe <sup>①</sup>	ASTM A53 Gr.B, A501, A1008 HSLAS-F Gr.50, A1011 HSLAS-F Gr.50
Misc. Hardware	Galvanized steel or stainless steel or as noted

- ① ASTM A572, A1008 HSLAS, A1011 HSLAS, A1008 HSLAS-F, A1011 HSLAS-F or A1011 SS may have higher yield strengths but shall not have less elongation than the grade indicated.
- ② ASTM A1011 SS Gr.50 material shall also have a minimum elongation of 18 percent in 8 inches or 23 percent in 2 inches. Material thickness in excess of those stipulated under A1011 SS will be acceptable providing the material meets all other A1011 SS requirements and the requirements of this item.

## GENERAL NOTES:

Clamp-on details are used for the second arm on dual mast arm assemblies. A Maximum 1 1/2" wide vertical slotted hole shall be cut in the front clamp plate to facilitate drainage during galvanizing. The slot shall be centered behind the arm and shall be no longer than the arm diameter minus 1"

Fixed mount details are used for single mast arm assemblies and for the first arm on dual mast arm assemblies.

Where duplicate parts occur on a detail, welds shown for one part shall apply to all similar parts on the detail.

Pin bolts are required to prevent rotation of clamp-on arms under design wind forces.

## NOTE:

Pin bolts shall be A325 with threads excluded from the shear plane. Pin bolt and 3/4" dia pipe shall have 3/8" dia holes for a 1/8" dia galvanized cotter pin. Back clamp plate shall be furnished with a 3/4" dia hole for each pin bolt. An 1/8" dia hole for each pin bolt shall be field drilled through the pole after arm orientations have been approved by the Engineer.

**Texas Department of Transportation**  
Traffic Operations Division



## STANDARD ASSEMBLY FOR TRAFFIC SIGNAL SUPPORT STRUCTURES

### MAST ARM CONNECTIONS

### MA-C-12

© TxDOT August 1995	DN: MS	CK: JSY	DW: MMF	CK: JSY
REVISIONS	CONT	SECT	JOB	HIGHWAY
5-96	--	--	--	SH 123
5-09	--	--	--	SHEET NO.
1-12	SAT	COUNTY	GUAD	T61



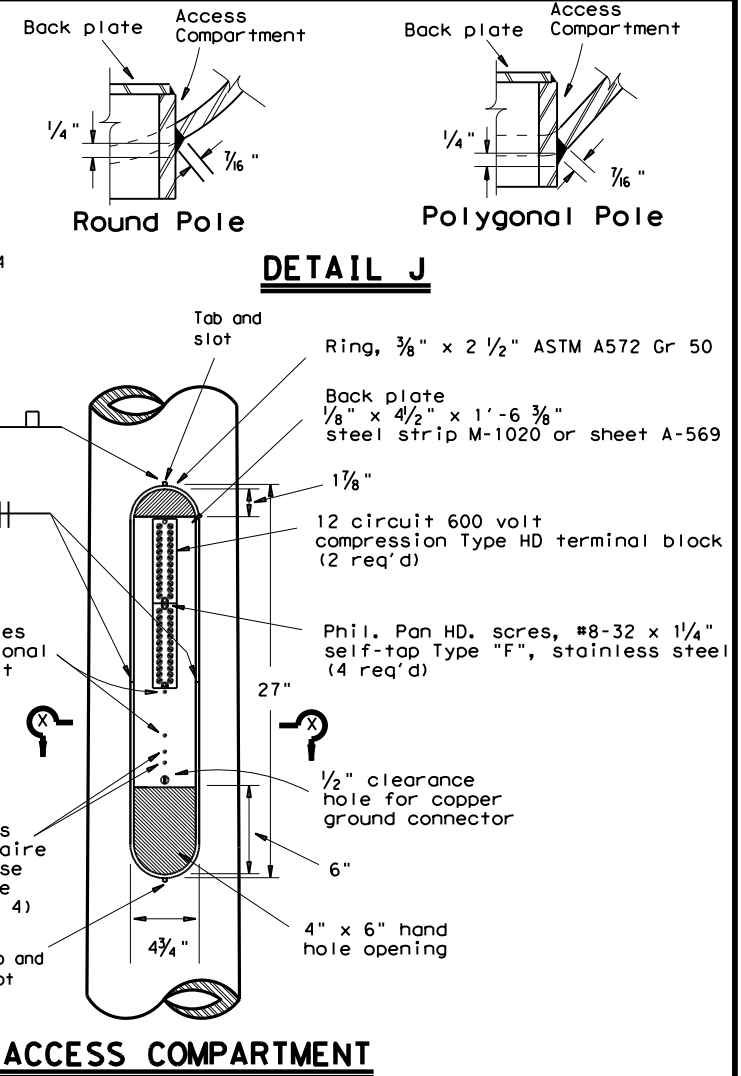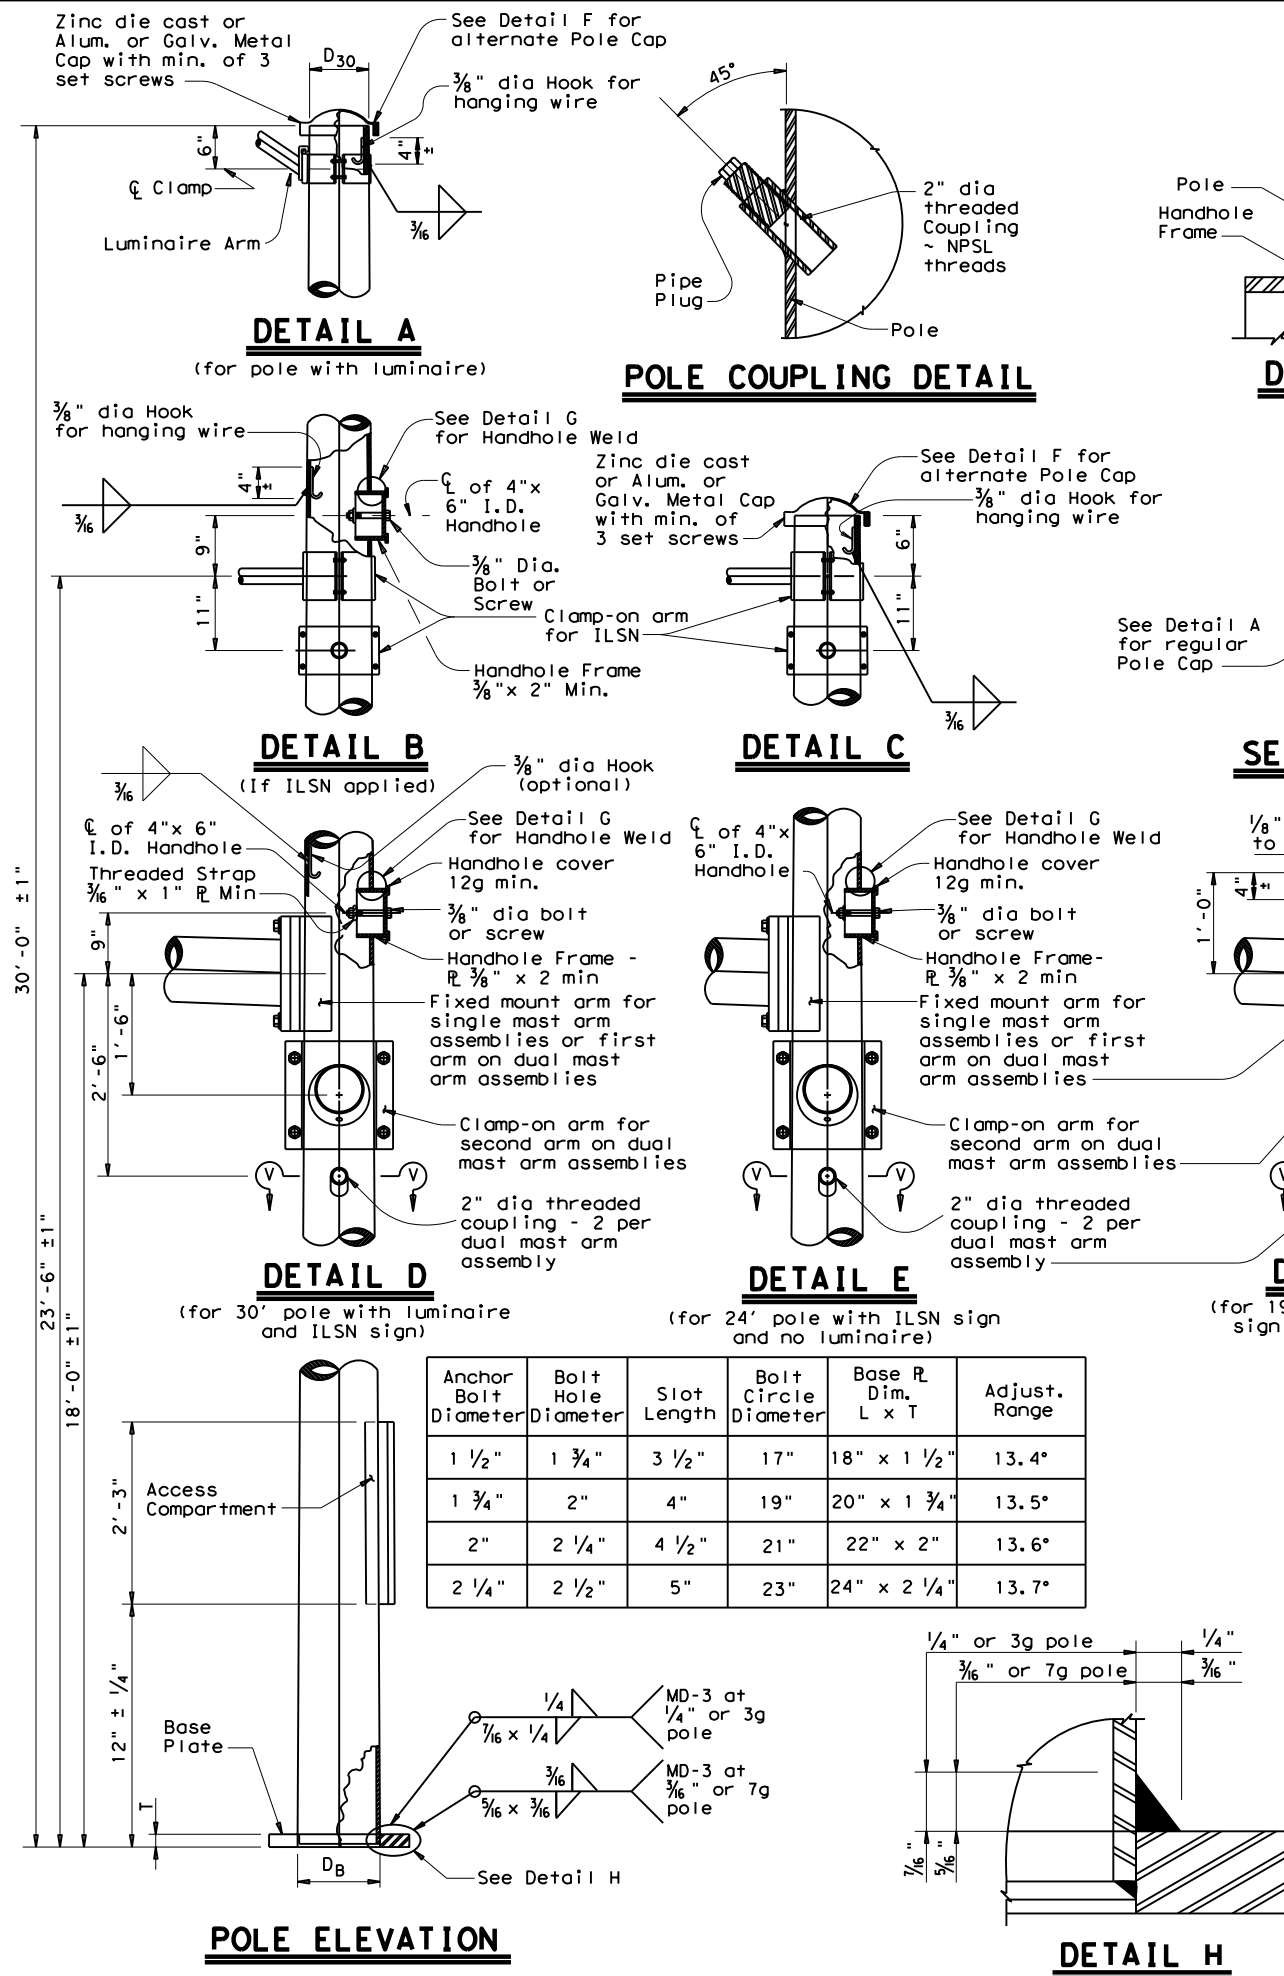

**NOTES:**

- The cover shall be one piece formed from ABS plastic, shall be a pearl gray color, and shall be suitable for exposure to harsh sunlight and extreme weather. Cover shall latch with two screw latches and shall fit tightly to the enclosure ring to create a rainproof seal. Latch screws shall be 1/4-20 stainless flat socket head screws with tamper proof feature.
- The pole manufacturer shall provide with each pole a separate kit consisting of: one cover with two latching assemblies, two terminal strips (Marathon #985GP12CU or approved equal), four #8-32 x 1 1/4" self tapping type "F" stainless steel pan head screws, and one ground connector (Blackburn TTC, Burndy KC22J12T13, or Ilco SSS-5). The traffic signal contractor shall install the kit items in the field.
- The screw hole spacing on the enclosure back plate shall be for two Marathon #985GP12 terminal strips, one Marathon #985GP06CU terminal strip, and one Bussmann #BM6032B fuse block.
- Install one Bussmann #BM6032B, Littelfuse #L60030M-2C, or Ferraz-Shawmut #30352 fuse block for poles where luminaires are to be installed.




12:49:02  
9/13/2022  
C:\DW\KNT\00213778\MTS.dgn


LEVELS DISPLAYED

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48
49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	

ACC:

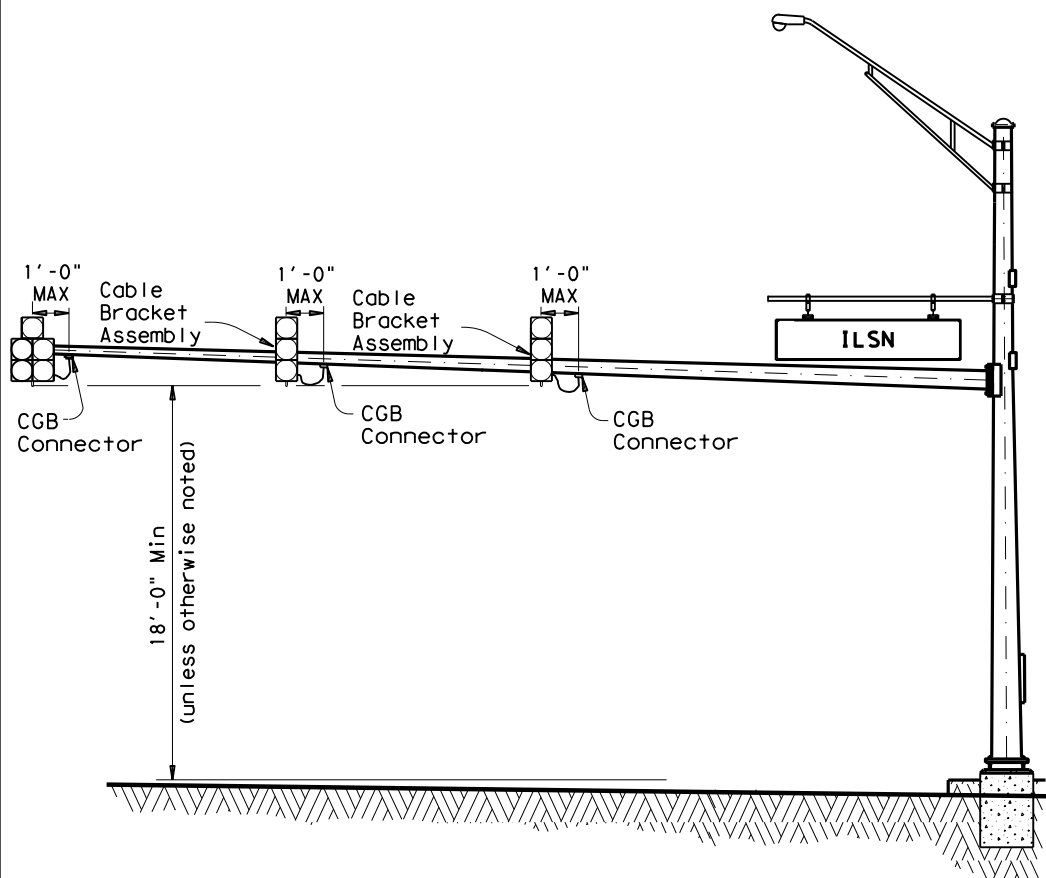


**TYPICAL MAST ARM INSTALLATION**  
BACKPLATES ARE NOT SHOWN FOR CLARITY

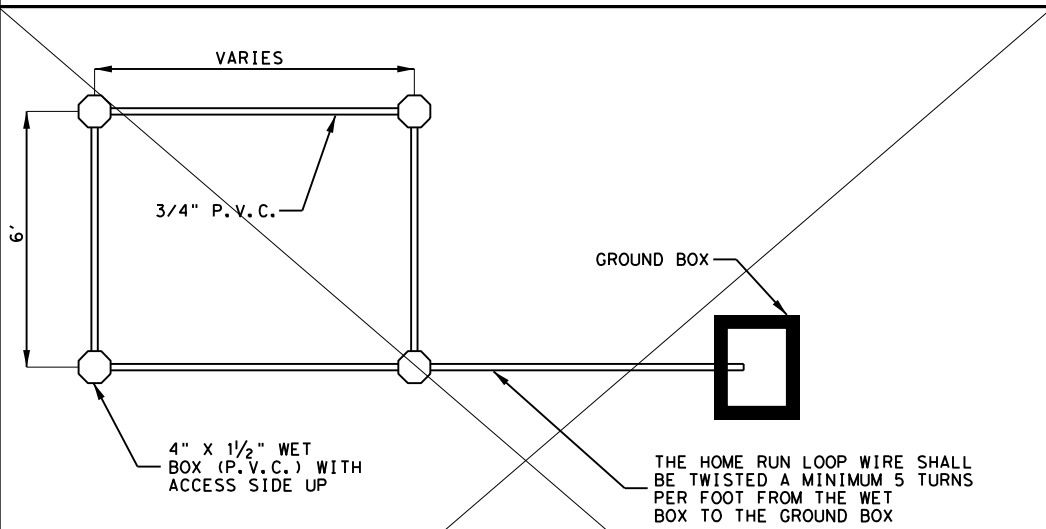


**NOTES:**  
SHALL INSTALL CONDUIT ENCASED LOOPS AT THE LOCATIONS SHOWN ON THE PLANS USING 3/4" DIAMETER PVC SCHEDULE 40 OR AT NO ADDITIONAL COST 1" DIAMETER PVC SCHEDULE 80.  
LOOP LOCATIONS MAY BE STAGGERED SLIGHTLY (6") TO ACCOMMODATE HOME RUN PLACEMENT.  
INDIVIDUAL HOME RUN CONDUITS SHALL BE EXTENDED TO THE GROUND BOX SHOWN ON THE PLANS FOR EACH LOOP INSTALLED.  
THE NUMBER OF LOOP WIRE TURNS SHALL BE AS SHOWN ON THE TYPICAL LOOP DETECTOR DETAILS.

**CONDUIT ENCASED LOOPS**

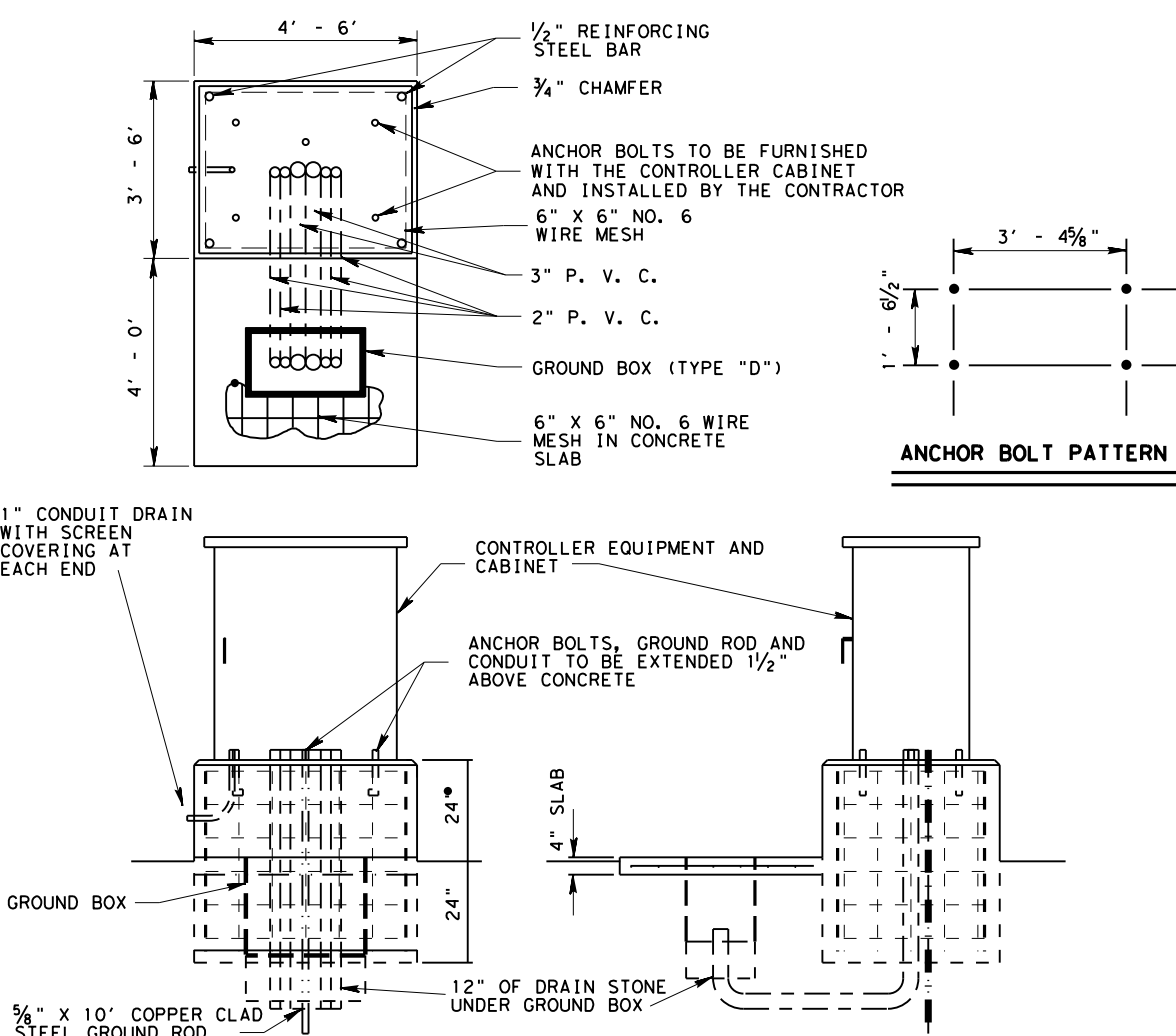


**CONTROLLER MOUNT NOTES :**  
ALL WIRING TERMINATING IN THE CONTROLLER SHALL BE LABELED IN A MANNER THAT CAN BE IDENTIFIED WHEN THE CONTROLLER IS INSTALLED THE CONTRACTOR SHALL CONNECT THE FIELD WIRING TO THE CONTROLLER  
ONE 2" PVC SHALL REMAIN EMPTY FOR FUTURE USE  
CONCRETE SHALL BE TESTED AS MISCELLANEOUS CONCRETE  
ALL MATERIALS SHOWN AND LABOR TO INSTALL THE CONTROLLER FOUNDATION SHALL BE CONSIDERED SUBSIDIARY TO PERTINENT ITEMS  
CONTROLLER FOUNDATION SHALL BE AS SHOWN ON THE PLANS, UNLESS OTHERWISE DIRECTED BY THE ENGINEER.

**TYPICAL CONTROLLER MOUNT DETAILS**

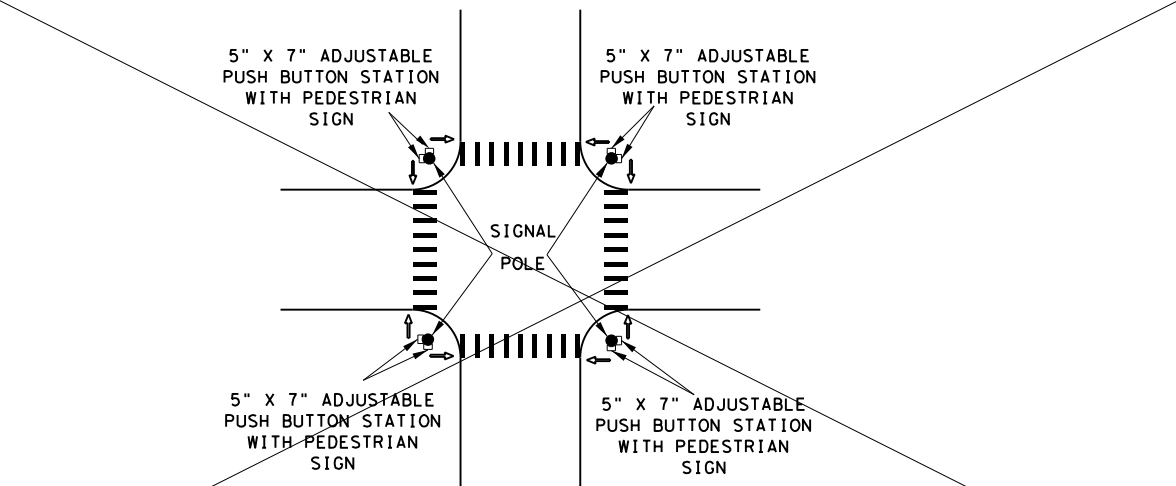

**TYPICAL PED PUSH BUTTON LOCATION**

THE ENGINEER SHALL VERIFY ALL PEDESTRIAN SIGNAL AND PEDESTRIAN PUSH BUTTON LOCATIONS PRIOR TO INSTALLATION.

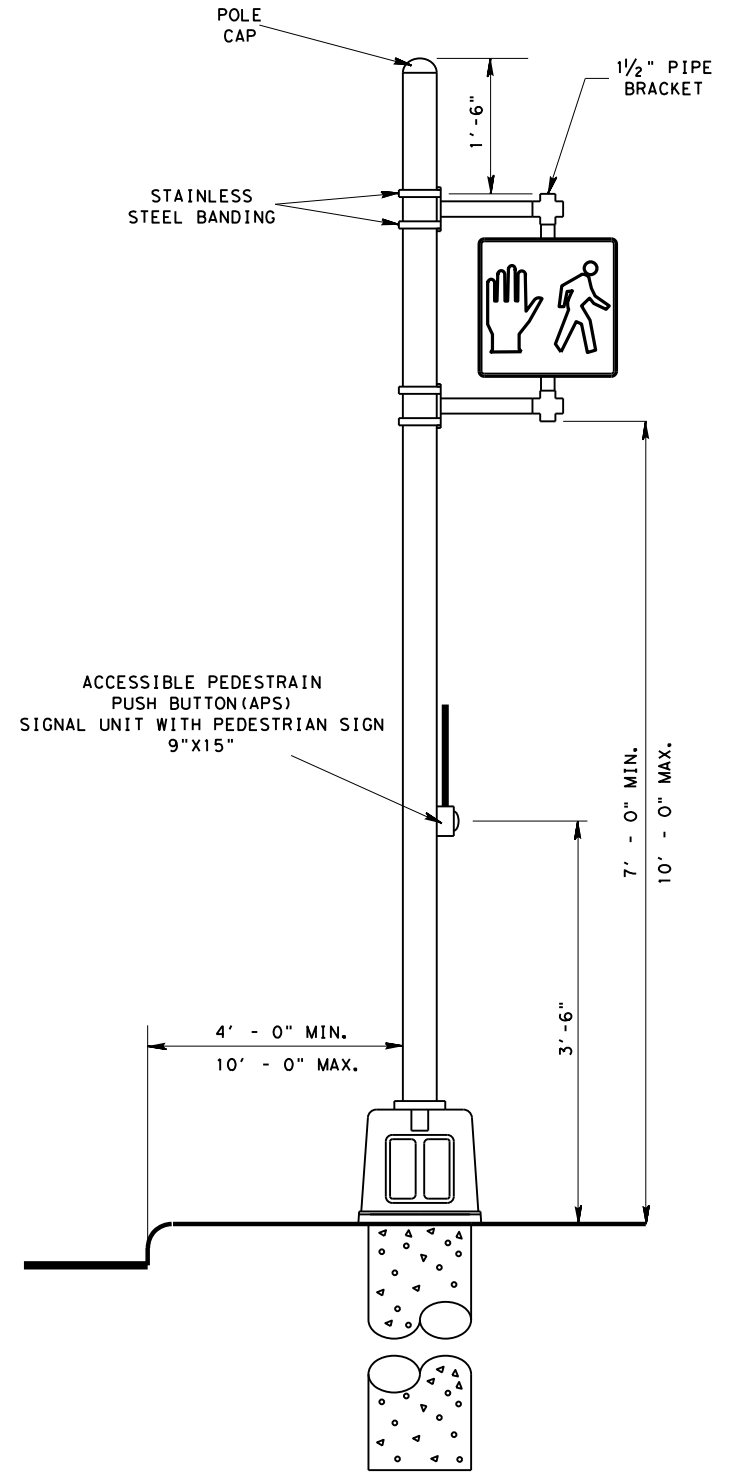

**TYPICAL PEDESTAL POLE ASSEMBLY**

San Antonio District Standard  
**MISCELLANEOUS TRAFFIC SIGNAL DETAILS**

MTS  
© 2006 Texas Department of Transportation

REVISIONS	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	SHEET NO.
FEB. 2006 OCT. 2007	6	---	T63
STATE	DIST.	COUNTY	
TX	SAT	GUAD	
CONT.	SECT.	JOB	HIGHWAY NO.
--	--	--	SH 123







MOUNTING LOCATIONS

PRESENCE (RPDD)

- ① PREFERRED PLACEMENT FOR MAST ARMS, STRAIN POLES AND TIMBER POLES. ON MAST ARM POLES, MOUNT BELOW CONNECTION OF MAST ARM TO A MINIMUM OF 15 FT., MOUNT AS HIGH AS POSSIBLE TO A MAXIMUM OF 30 FT ON STRAIN AND TIMBER POLES.
- ② PREFERRED PLACEMENT FOR MAST ARMS. MOUNT ON AND BELOW MAST ARM ON NEAR SIDE OF ARM.
- ③ ALTERNATE PLACEMENT LOCATION. MOUNT AS HIGH AS POSSIBLE TO A MAXIMUM OF 30 FT TO PREVENT OCCLUSION OF THE LEFT TURN LANES. THIS PLACEMENT TO BE USED ONLY IF RPDD CANNOT BE MOUNTED IN THE PREFERRED PLACEMENT LOCATIONS.

ADVANCE (RADD)

- Ⓐ PREFERRED PLACEMENT FOR MAST ARMS. ALIGN RADD WITH CENTER OF TRAVEL LANES.
- Ⓑ ALTERNATE PLACEMENT FOR MAST ARMS. MOUNT ON BACK SIDE OF OPPOSING MAST ARM.
- Ⓒ STRAIN OR TIMBER POLE PLACEMENT. MOUNT ON NEAR SIDE POLE.
- Ⓓ ALTERNATE STRAIN OR TIMBER POLE PLACEMENT. MOUNT LUMINAIRE ARM ON NEAR SIDE POLE WITH A MAXIMUM 40 FT MOUNTING HEIGHT.

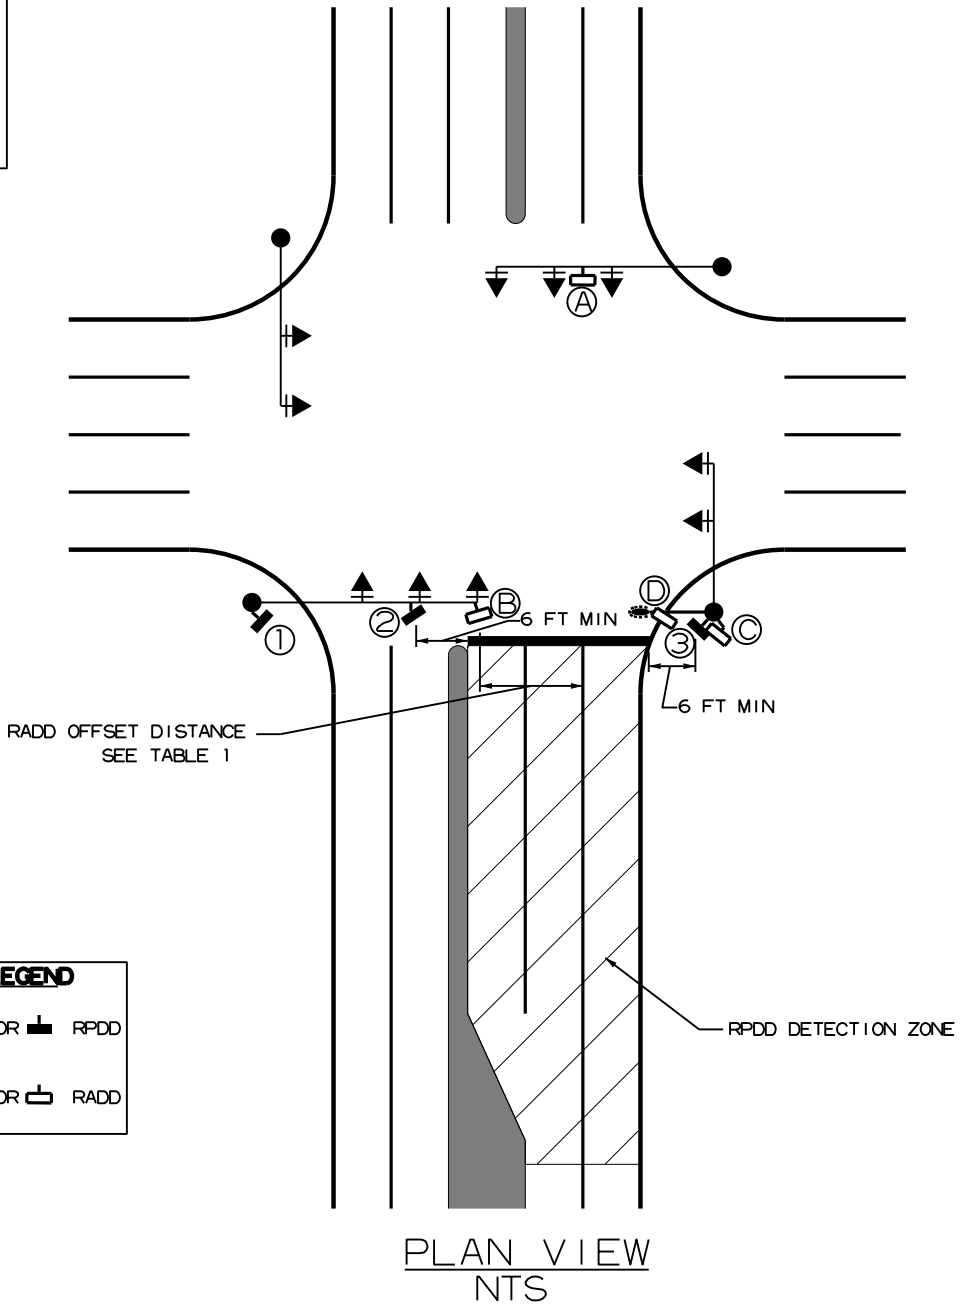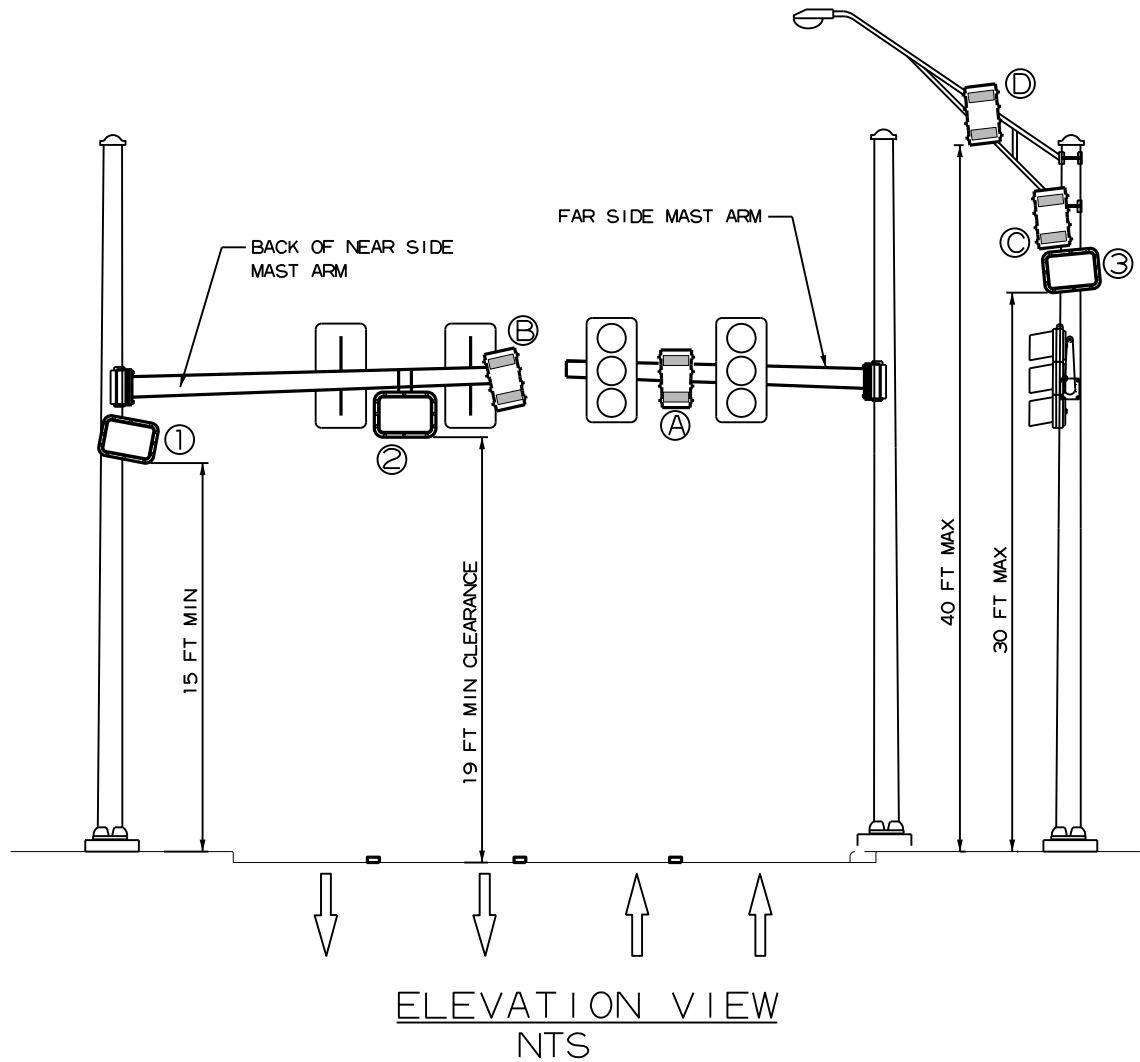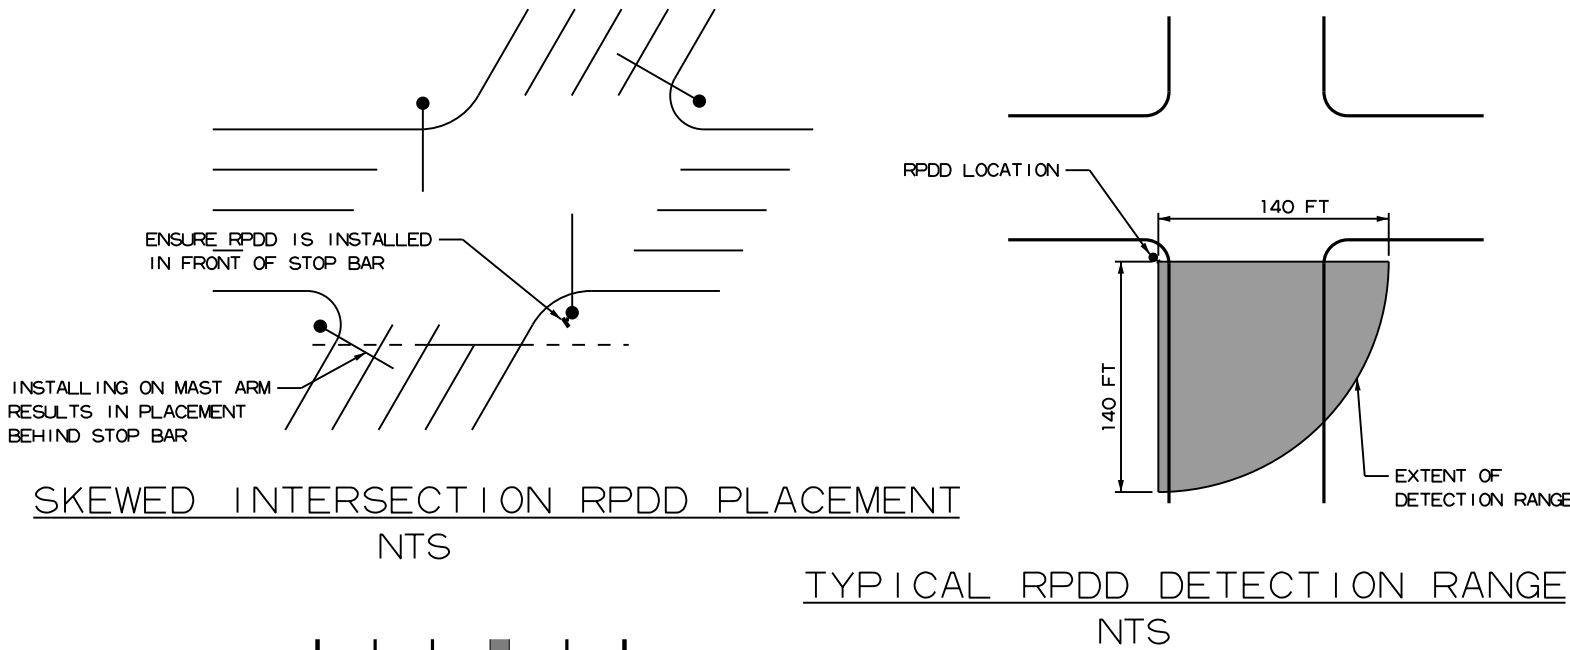

- NOTES:
- 1) A MINIMUM 6 FT HORIZONTAL OFFSET MUST BE MAINTAINED BETWEEN THE RPDD AND THE DETECTION ZONE
  - 2) THE RPDD SHALL BE MOUNTED SUCH THAT AT LEAST 20 FT ALONG THE FARTHEST LANE TO BE MONITORED IS WITHIN THE FIELD OF VIEW OF THE RPDD
  - 3) AIM RPDD AT THE CENTER OF THE LANES TO BE MONITORED, APPROXIMATELY 50 FT FROM THE RPDD UNIT
  - 4) MOUNT RPDD SO THAT ITS FIELD OF VIEW IS NOT OCCLUDED BY POLES, SIGNS, OR OTHER STRUCTURES
  - 5) RADD MOUNTING HEIGHT SHALL NOT BE LESS THAN 17 FT OR GREATER THAN 40 FT. RADD MOUNTING LOCATION SHALL HAVE A MAXIMUM 50 FT LATERAL OFFSET FROM CENTER OF TRAVEL LANES TO BE MONITORED

LEVELS DISPLAYED  
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16  
17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32  
33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48  
49 50 51 52 53 54 55 56 57 58 59 60 61 62 63  
ACC: 12149107  
9/13/2022  
C: \\DW\KHI\00213778\RAD-20.dgn

Texas Department of Transportation © 2020			
San Antonio District Standard RADAR PRESENCE DETECTOR (RPDD) RADAR ADVANCED DETECTION DEVICE (RADD) PLACEMENT			
SCALE: NS		RPDD-RADD-20	
REVISIONS	FED. RD. DIV. NO.	PROJECT NO.	SHEET NO.
MAR 2020	6		T64
STATE	DIST.	COUNTY	
TX	SAT	GUAD	
CONT.	SECT.	JOB	HIGHWAY NO.
--	--	--	SH 123




DATE: 9/13/2022 12:49:13  
FILE: c:\pw\kh1\d0213778\SMA-80 (1)-12.dgn

D<sub>8</sub> = Pole Base O.D.  
D<sub>19</sub> = Pole Top O.D. with no Luminaire  
and no ILSN  
D<sub>24</sub> = Pole Top O.D. with ILSN  
w/out Luminaire  
D<sub>30</sub> = Pole Top O.D. with Luminaire  
D<sub>i</sub> = Arm Base O.D.

D<sub>2</sub> = Arm End O.D.  
L<sub>1</sub> = Shaft Length  
L = Nominal Arm Length

① Thickness shown are minimums, thicker materials may be used.

② D<sub>2</sub> may be increased by up to 1" for polygonal arms.

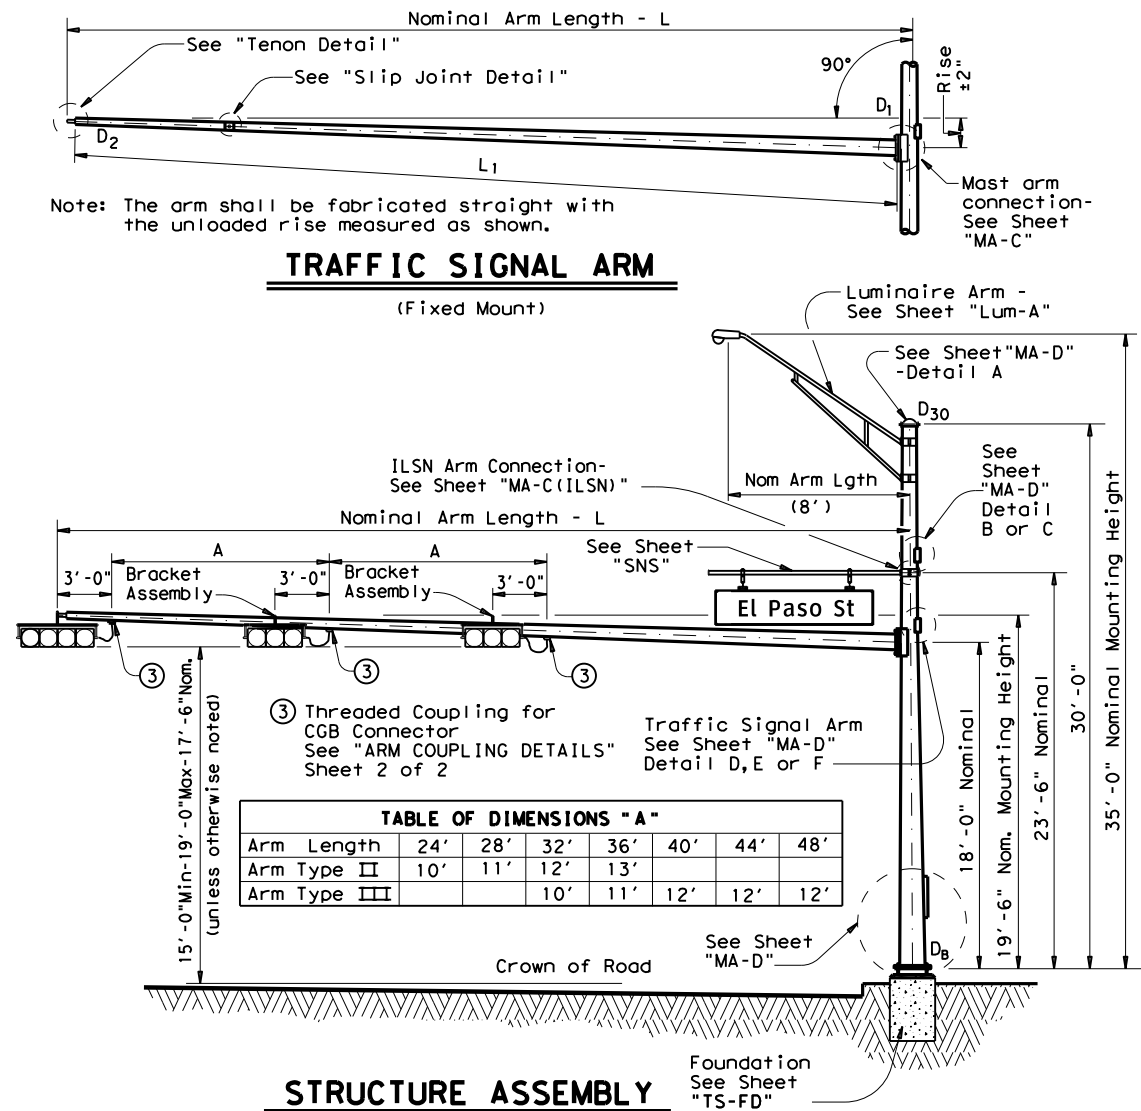

## SHIPPING PARTS LIST

Ship each pole with the following attached: enlarged hand hole, pole cap, fixed-arm connection bolts and washers and any additional hardware listed in the table.

Nominal Arm Length	30' Poles With Luminaire		24' Poles With ILSN		19' Poles With No Luminaire and No ILSN	
	Above hardware plus: One (or two if ILSN attached) small hand hole, clamp-on simplex		Above hardware plus one small hand hole		See note above	
	ft	Designation	Quantity	Designation	Quantity	Designation
20	20L-80		20S-80		20-80	
24	24L-80		24S-80		24-80	
28	28L-80		28S-80		28-80	
32	32L-80		32S-80		32-80	
36	36L-80	1	36S-80		36-80	
40	40L-80	1	40S-80		40-80	1
44	44L-80		44S-80		44-80	
48	48L-80		48S-80		48-80	

Traffic Signal Arms (1 per Pole)

Ship each arm with the listed equipment attached

Nominal Arm Length	Type I Arm (1 Signal)		Type II Arm (2 Signals)		Type III Arm (3 Signals)	
	1 CGB connector		1 Bracket Assembly and 2 CGB Connectors		2 Bracket Assemblies and 3 CGB Connectors	
ft	Designation	Quantity	Designation	Quantity	Designation	Quantity
20	20I-80					
24	24I-80		24II-80			
28	28I-80		28II-80			
32			32II-80		32III-80	
36			36II-80		36III-80	1
40					40III-80	2
44					44III-80	
48					48III-80	

Luminaire Arms	(1 per 30' pole)
----------------	------------------

Nominal Arm Length	Quantity
8' Arm	2

ILSN Arm (Max. 2 per pole) Ship with clamps, bolts and washers

Nominal Arm Length	Quantity
7' Arm	
9' Arm	

Anchor Bolt Assemblies (1 per pole)	
-------------------------------------	--


Anchor Bolt Diameter	Anchor Bolt Length	Quantity
1 1/2"	3' - 4"	
1 3/4"	3' - 10"	3

Each anchor bolt assembly consists of the following:  
Top and Bottom templates, 4 anchor bolts, 8 nuts,  
8 flat washers, and 4 nut anchor devices (Type 2)  
per Standard Drawing "TS-FD".

Templates may be removed for shipment.

**SHEET 1 OF 2**



 *Texas Department of Transportation*  
*Traffic Operations Division*

**TRAFFIC SIGNAL  
SUPPORT STRUCTURES**

**SINGLE MAST ARM ASSEMBLY  
(80 MPH WIND ZONE)**

**SMA-80(1)-12**


© TxDOT August 1995		DN: MS		CK: JSY		DW: MMF		CK: JSY		
5-96 11-99 1-12	REVISIONS		CONT	SECT	JOB			HIGHWAY		
			--	--	--			SH 123		
			DIST		COUNTY				SHEET NO.	
			SAT		GUAD				T65	

122A




DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 9/13/2022 12:49:19  
FILE: c:\pwworking\tdot\projects\smas-80 (2)-12.dgn

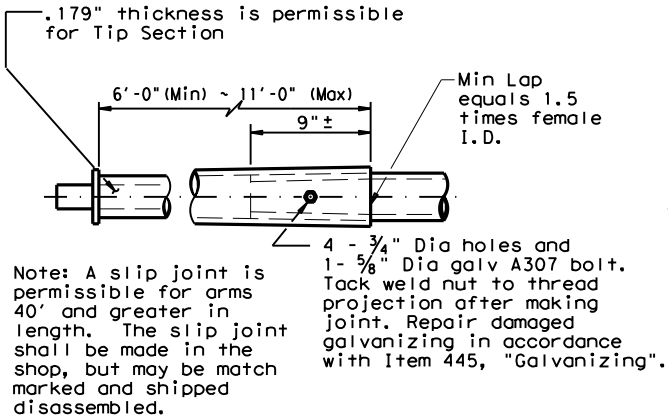


**SLIP JOINT DETAIL**

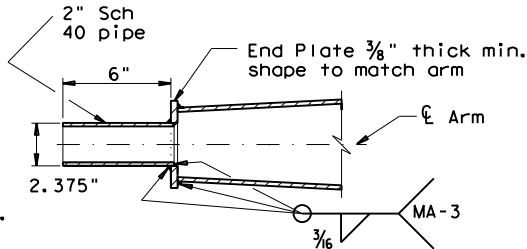

**TENON DETAIL**


Stainless steel bands (or Cables) and cast bracket as in "Astro-Brac", "Sky Bracket" or "Easy Bracket" with 1 1/2" Dia Threaded Coupling.

**BRACKET ASSEMBLY**

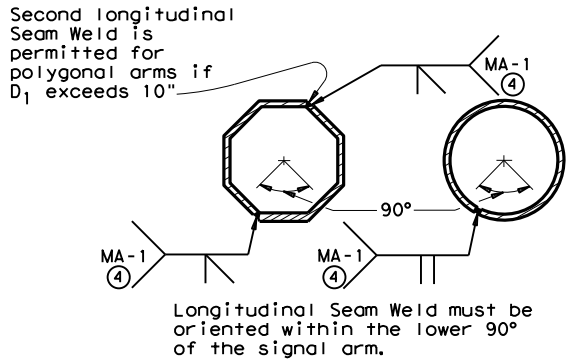

**ARM WELD DETAIL**

④ 60% Min. penetration  
100% penetration within 6" of circumferential base welds.

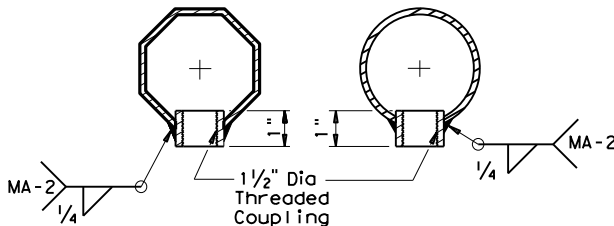

**ARM COUPLING DETAILS**

**VIBRATION WARNING**

Mast Arms of SMA and DMA structures and clamp-on Arms of LMA structures of approximately 40 ft or longer are subject to harmonic vertical vibrations in light wind conditions due to the aeroelastic characteristics of a few of the myriads of possible combinations of the following: signal numbers, weights and positions; existence/solidity of backplates; presence of additional attachments to the arm, such as signs and cameras; arm-wind orientation; and arm-pole stiffness.

Such vibrations may cause fatigue damage to the structure and may lead to galloping in moderate wind conditions which may further damage the structure and alarm the public. Tests have indicated that when wind is blowing toward the back side of signal heads having un-vented backplates attached the probability of unacceptable harmonic vibration and/or galloping is rather high.

If backplates are not required for improved visibility they should not be applied to the signal heads or, if they must be applied, they should be vented as a first and inexpensive measure to mitigate vibrations.

The traffic signal mast arms shall be visually inspected in 5 to 20 mph wind conditions after installation of signal heads and any attachments, including any required backplates. If vertical movements with a total excursion (maximum upward excursion to maximum downward excursion) of more than approximately 8" are observed at the arm tip, a damping plate shall be fitted to the arm. See "Damping Plate Mounting Details" on standard sheet, MA-DPD-10.

This visual inspection shall be repeated after each modification of the structure that could affect its aeroelastic response. Excessive vibrations shall not be allowed to continue for more than two days.

**GENERAL NOTES:**

Design conforms to 1994 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals and Interim Specifications thereto. Design Wind Speed equals 80 mph plus a 1.3 gust factor.

Poles are designed to support one 8'-0" luminaire arm, one 9'-0" internally lighted street name sign and one traffic signal arm with a length as tabulated. The specified luminaire load applied at the end of the luminaire arm equals 60 lbs vertical dead load plus the horizontal wind load on an effective projected area of 1.6 sq ft. The specified internally lighted street name sign load applied 4.5 ft from the centerline of the pole equals 85 lbs vertical dead load plus horizontal wind load on an effective projected area of 11.5 sq ft. The specified signal load applied at the end of the traffic signal arm equals 180 lbs vertical dead load plus the horizontal wind load on an effective projected area of 32.4 sq ft (actual area times drag coefficient).

See Standard Sheet "MA-D" for pole details, "MA-C" for traffic signal arm connection details, "MA-C (ILSN)" for internally lighted street name sign arm connection details, "LUM-A" for luminaire arm and connection details, "SNS" for internally lighted street name sign details, and "TS-FD" for anchor bolt and foundation details. See "MA-C" for material specifications.

Fabrication shall be in accordance with Item 686, "Traffic Signal Pole Assemblies (Steel)" and with the details, dimensions, and weld procedures shown herein. Weld references call for preapproved weld procedures which the Fabricator must obtain prior to fabrication. Materials, fabrication tolerances, and shipping practices shall meet the requirements of this sheet and Item 686, "Traffic Signal Pole Assemblies (Steel)".

Unless otherwise noted, all parts shall be galvanized in accordance with Item 445, "Galvanizing", after fabrication.

Deviation from the details and dimensions shown herein require submission of shop drawings in accordance with Item 441, "Steel Structures". Alternate designs are not acceptable.

SHEET 2 OF 2

 **Texas Department of Transportation**  
Traffic Operations Division

**TRAFFIC SIGNAL  
SUPPORT STRUCTURES  
SINGLE MAST ARM ASSEMBLY  
(80 MPH WIND ZONE)**

**SMA-80 (2) - 12**


© TxDOT August 1995		DN: MS	CK: JSY	DW: MMF	CK: JSY
REVISIONS		CONT	SECT	JOB	HIGHWAY
5-96		--	--	--	SH 123
1-12		DIST	COUNTY		SHEET NO.
		SAT	GUAD		T66

122B




DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 9/13/2022 12:49:25  
FILE: c:\pwworking\tdot\13778\TS-BP-20.dgn

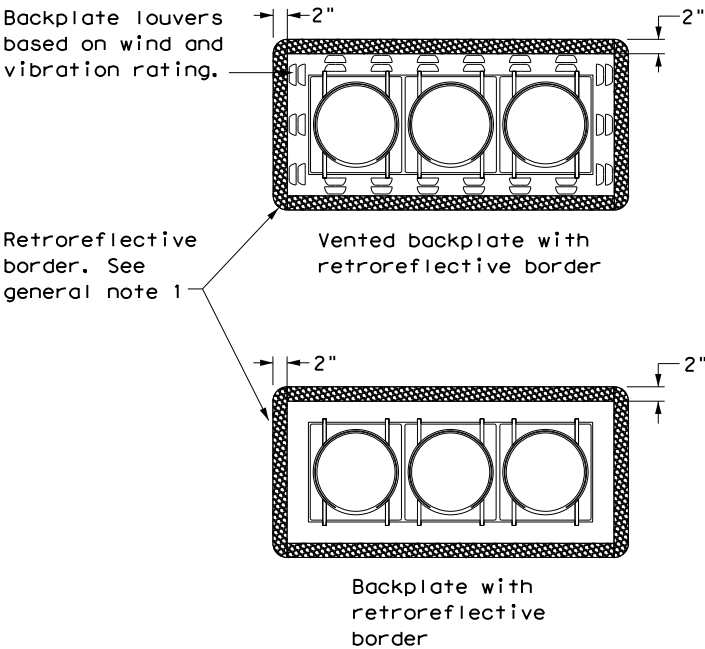


**THREE-SECTION HEAD**  
**HORIZONTAL OR VERTICAL**

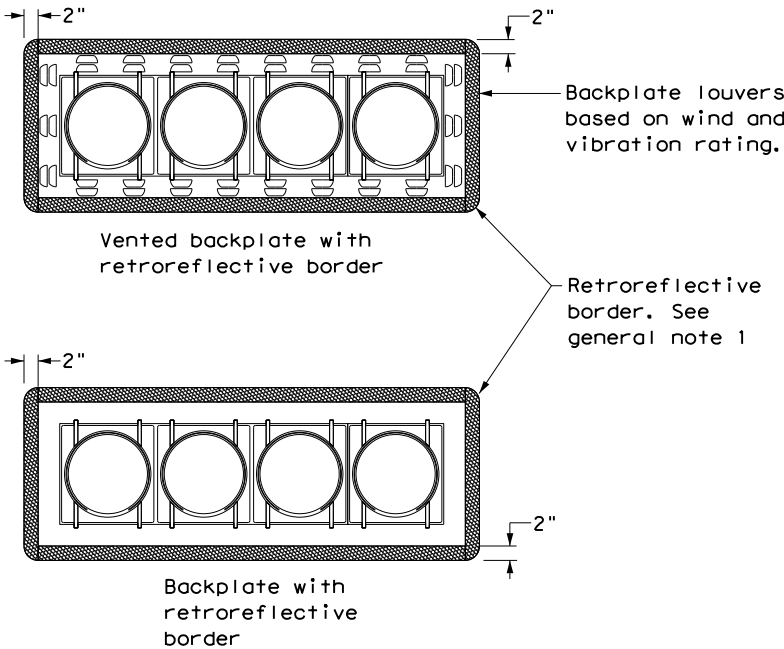


**FOUR-SECTION HEAD**  
**HORIZONTAL OR VERTICAL**

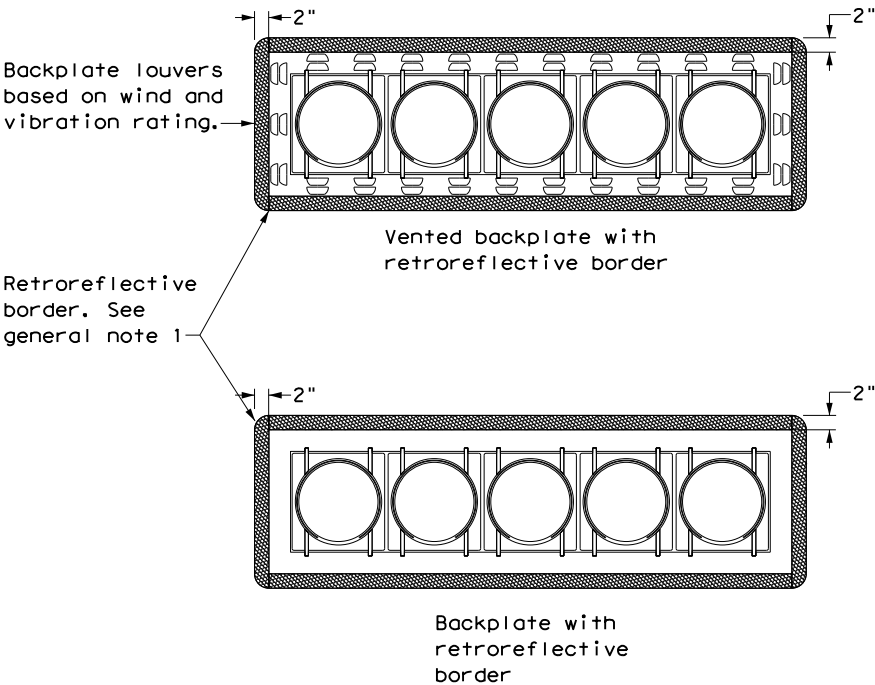

**FIVE-SECTION HEAD**  
**HORIZONTAL OR VERTICAL**

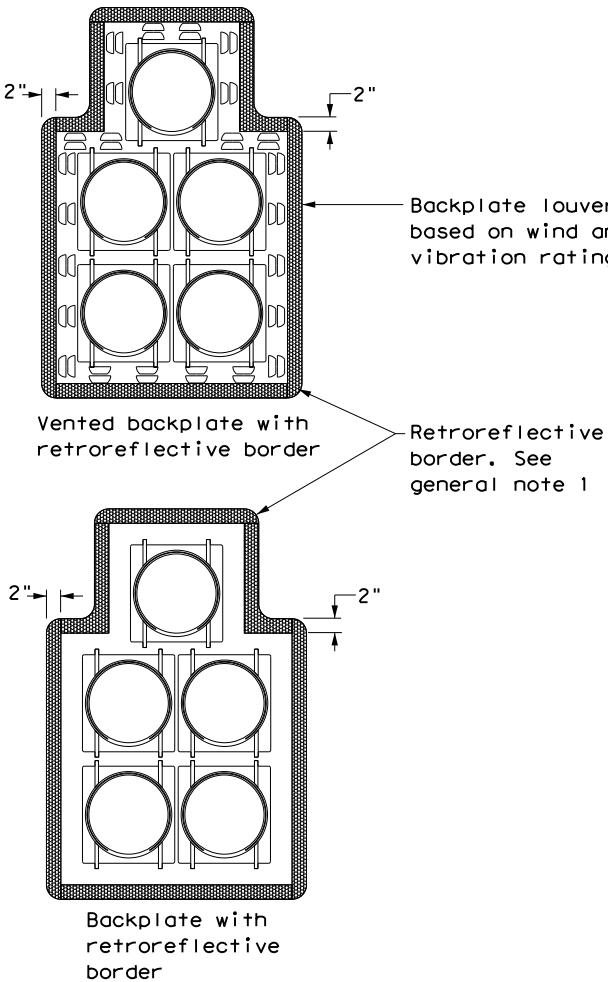


**FIVE-SECTION HEAD**  
**CLUSTER**

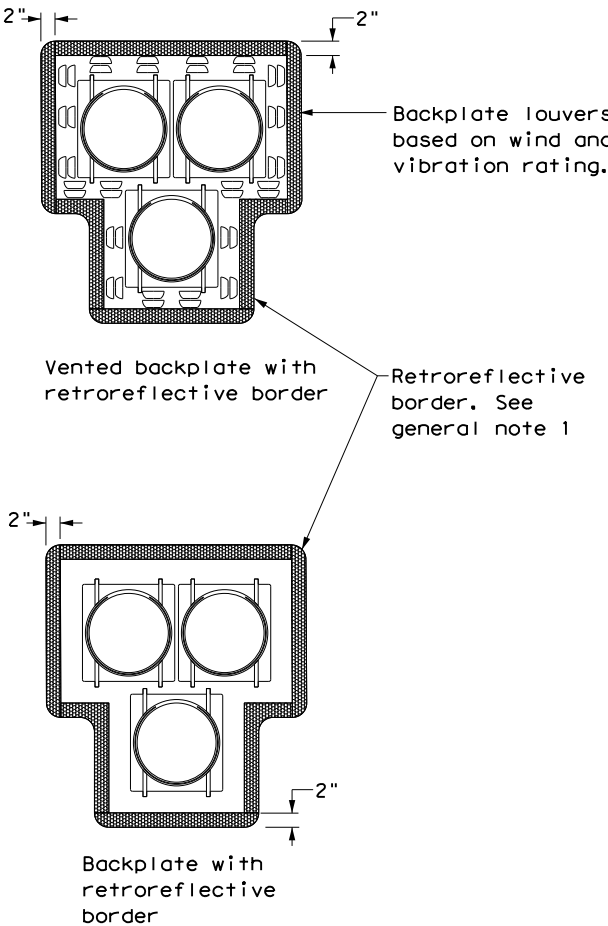

**PEDESTRIAN HYBRID**  
**BEACON**

**GENERAL NOTES:**

1. Backplates are optional for traffic signals and pedestrian hybrid beacons. When backplates are used, a 2-inch wide fluorescent yellow AASHTO Type B<sub>FL</sub> or C<sub>FL</sub> retroreflective border conforming to TxDOT DMS-8300 is required. Place on all approaches when used.
2. Signal head and backplate compatibility must be verified by the contractor prior to installation.
3. When using backplates on signal heads, venting is preferred to reduce cyclic vibration stress.
4. When a vented backplate is used, the retroreflective border must not be placed over the louvers.
5. This standard sheet applies to all signal heads with backplates, including but not limited to:
  - Pole mounted
  - Overhead mounted
  - Span wire mounted
  - Mast arm mounted
  - Vertical signal heads
  - Horizontal signal heads
  - Clustered signal heads
  - Pedestrian hybrid beacons

 <b>Texas Department of Transportation</b>				<b>Traffic Safety Division Standard</b>					
<div>TRAFFIC SIGNAL HEAD WITH BACKPLATE TS-BP-20</div>									
FILE: ts-bp-20.dgn		DN: TxDOT		CK: TxDOT		DW: TxDOT		CR: TxDOT	
© TxDOT June 2020		CONT		SECT		JOB		HIGHWAY	
REVISIONS		--		--		--		SH 123	
		DIST		COUNTY				SHEET NO.	
		SAT		GUAD				T67	




**DISCLAIMER:**

DATE: 9/13/2022 12:54:42



FOUNDATION SELECTION TABLE FOR STANDARD MAST ARM PLUS ILSN SUPPORT ASSEMBLIES (ft)					
		FDN 30-A	FDN 36-A	FDN 36-B	FDN 42-A
80 MPH DESIGN WIND SPEED	MAX SINGLE ARM LENGTH	32'	48'		
	MAXIMUM DOUBLE ARM LENGTH COMBINATIONS	24' X 24'			
		28' X 28'			
		32' X 28'	32' X 32'		
			36' X 36'		
			40' X 36'		
			44' X 28'	44' X 36'	
100 MPH DESIGN WIND SPEED	MAX SINGLE ARM LENGTH		36'	44'	
	MAXIMUM DOUBLE ARM LENGTH COMBINATIONS		24' X 24'		
			28' X 28'		
			32' X 24'	32' X 32'	
				36' X 36'	
				40' x24'	40' X 36'
					44' X 36'

2. For 100mph design wind speed, foundation 36-A can support a single 36' mast arm.



## ANCHOR BOLT ASSEMBLY

⑧ Orient anchor bolts orthogonal with the fixed arm direction to ensure that two bolts are in tension under dead load.

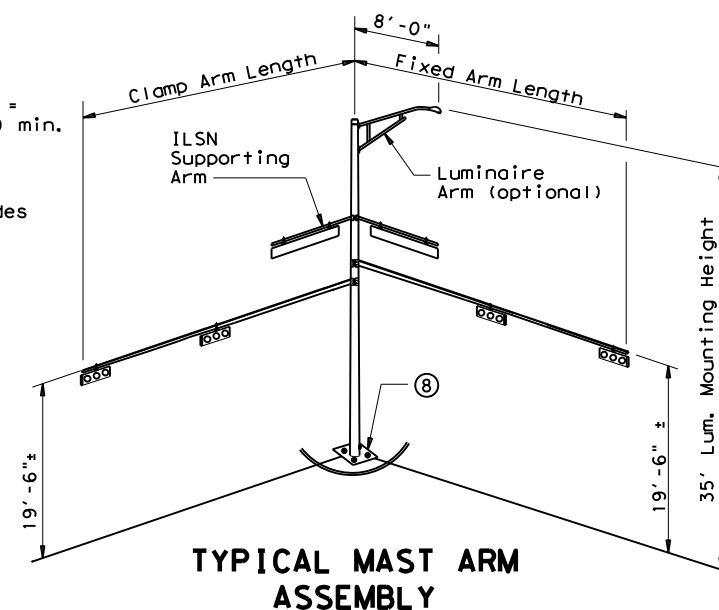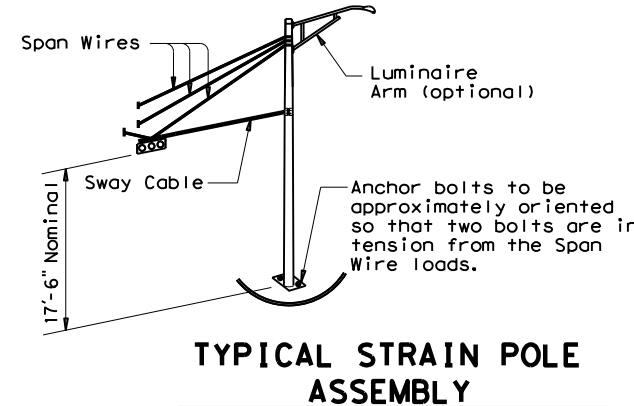


## TYPICAL MAST ARM ASSEMBLY


- ① Anchor bolt design develops the foundation capacity given under Foundation Design Loads.
- ② Foundation Design Loads are the allowable moments and shears at the base of the structure.
- ③ Foundations may be listed separately or grouped according to similarity of location and type. Quantities are for the Contractor's information only.
- ④ Field Penetrometer readings at a depth of approximately 3 to 5 feet may be used to adjust shaft lengths.
- ⑤ If rock is encountered, the Drilled Shaft shall extend a minimum of two diameters into solid rock.
- ⑥ Decimal lengths in Design Table are to allow interpolation for other penetrometer values. Round to nearest foot for entry into Summary Table.

ANCHOR BOLT & TEMPLATE SIZES						
BOLT DIA IN.	⑦ BOLT LENGTH	TOP THREAD	BOTTOM THREAD	BOLT CIRCLE	R <sub>2</sub>	R <sub>1</sub>
¾"	1' - 6"	3"	—	12 ¾"	7 ⅛"	5 ⅝"
1 ½"	3' - 4"	6"	4"	17"	10"	7"
1 ¾"	3' - 10"	7"	4 ½"	19"	11 ¼"	7 ¾"
2"	4' - 3"	8"	5"	21"	12 ½"	8 ½"
2 ¼"	4' - 9"	9"	5 ½"	23"	13 ¾"	9 ¼"

⑦ Min dimensions given,  
longer bolts are acceptable.

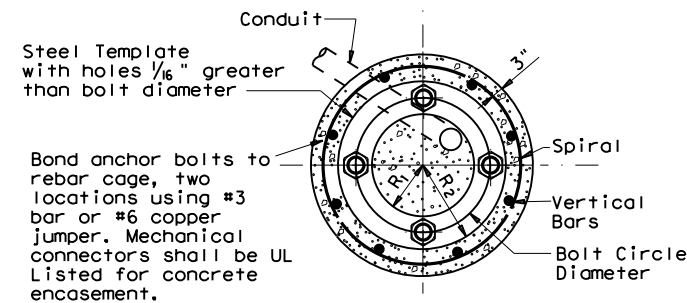

TOP VIEW

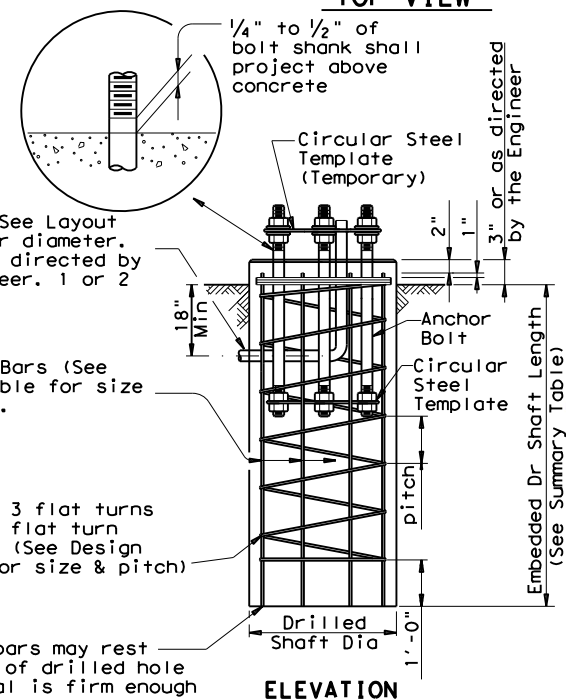

## FOUNDATION DETAILS

FOUNDATION SUMMARY TABLE ③								
LOCATION IDENTIFICATION	AVG. N BLOW /ft.	FDN TYPE	NO. EA	DRILLED SHAFT LENGTH ⑥ (FEET)				
				24-A	30-A	36-A	36-B	42-A
POLE A	10	36-A	1			13'		
POLE B	10	24-A	1	6'				
POLE C	10	24-A	1	6'				
POLE D	10	24-A	1	6'				
POLE E	10	36-A	1			13'		
POLE F	10	36-A	1			13'		
POLE G	10	24-A	1	6'				
TOTAL DRILLED SHAFT LENGTHS				24'		39'		

Design conforms to 1994 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals and interim revisions thereto.

Reinforcing steel shall conform to Item 440, "Reinforcing Steel".

Concrete shall be Class "C".

Threads for anchor bolts and nuts shall be rolled or cut threads of 8UN series up to 2" in diameter or UNC series for all sizes. Bolts and nuts shall have Class 2A and 2B fit tolerances. Galvanized nuts shall be tapped after galvanizing.

Anchor bolts that are larger than 1" in diameter shall conform to "alloy steel" or "medium-strength mild steel" per Item 449, "Anchor Bolts". Anchor bolts that are 1" in diameter or less shall conform to ASTM A36. Galvanize a minimum of the top end thread length plus 6" for all anchor bolts unless otherwise noted. Exposed washers and exposed nuts shall be galvanized. All galvanizing shall be in accordance with Item 445, "Galvanizing".

Templates and embedded nuts need not be galvanized. Lubricate and tighten anchor bolts when erecting the structure in accordance with Item 449, "Anchor Bolts".



 **Texas Department of Transportation**  
Traffic Operations Division

TRAFFIC SIGNAL  
POLE FOUNDATION


TS-FD-12

5-96 11-99 1-12	© TxDOT August 1995		DN: MS	CK: JSY	DW: MAO/MMF	CK: JSY/TEB
	REVISIONS		CONT	SECT	JOB	HIGHWAY
			--	--	--	SH 123
			DIST	COUNTRY		SHEET NO.
			SAT	GUAD		T68




DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 9/13/2022 12:49:37  
FILE: c:\pwworking\dot\13778\WZ-BTS(1)-13.dgn

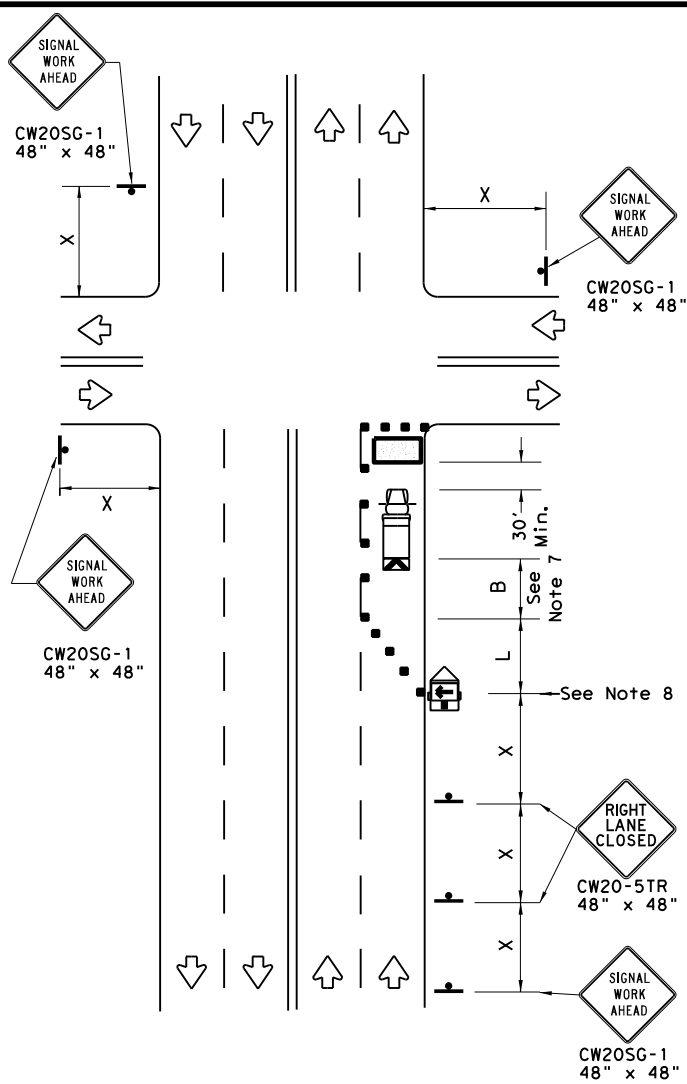

**NEAR SIDE LANE CLOSURE**  
SHORT DURATION OR SHORT TERM STATIONARY

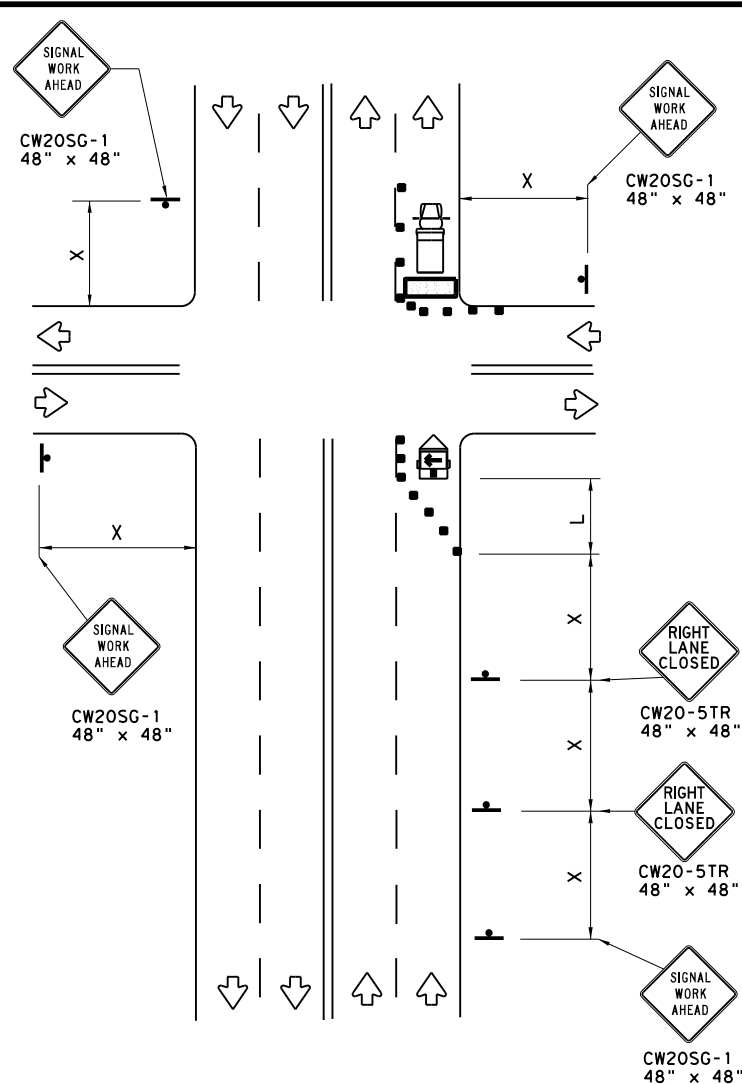

**FAR SIDE RIGHT LANE CLOSURE**  
SHORT DURATION OR SHORT TERM STATIONARY

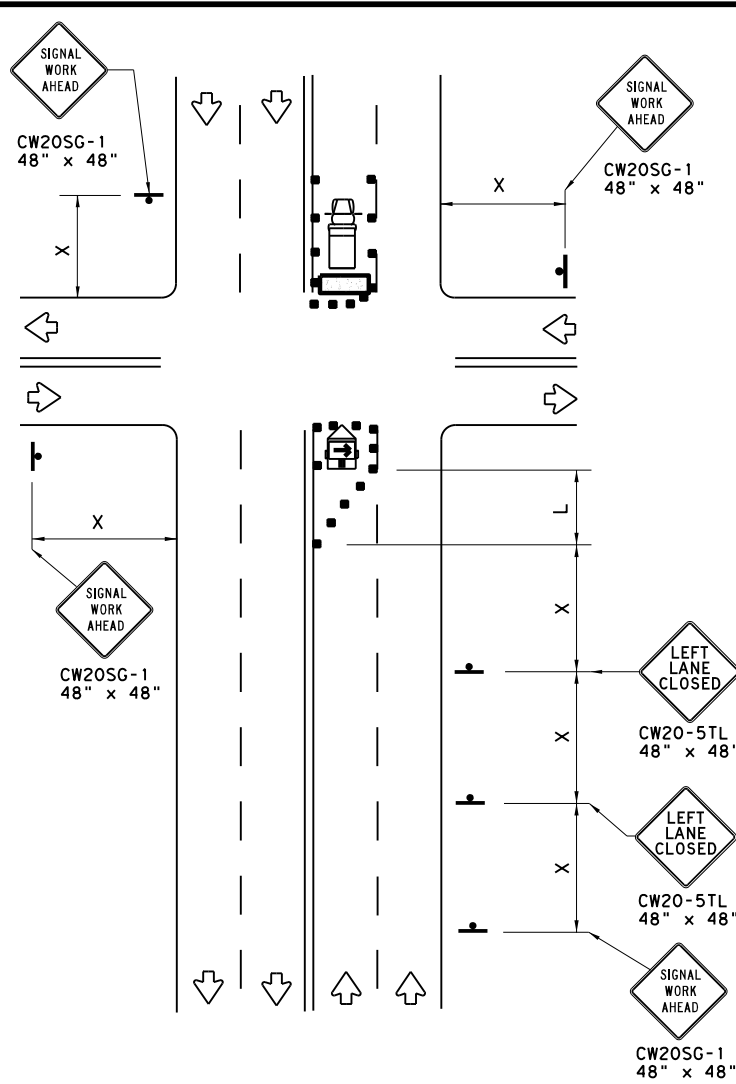

**FAR SIDE LEFT LANE CLOSURE**  
SHORT DURATION OR SHORT TERM STATIONARY

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula L = $\frac{WS^2}{60}$	Minimum Desirable Taper Lengths * X			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = WS	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45		450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

\* Conventional Roads Only  
\*\* Taper lengths have been rounded off.  
L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

**WORKERS IN BUCKET TRUCKS SHALL NOT WORK ABOVE OPEN LANES OF TRAFFIC.**

## GENERAL NOTES

- The minimum size channelizing device is the 28" cone. 42" Two-piece cones, drums, vertical panels or barricades will be required when the device must be left unattended at night.
- Obstructions or hazards at the work area shall be clearly marked and delineated at all times.
- Flaggers and Flagger Symbol (CW20-7) signs may be required according to field conditions.
- Vehicles parked in roadway shall be equipped with at least two high intensity rotating, flashing, oscillating or strobe type lights.
- High level warning devices (flag trees) may be used at corners of the vehicle.
- When work operations are performed on existing signals, the signals may be placed in flashing red mode when approved by the engineer. If existing signals do not have power, All-Way Stop (R1-1 and R1-3P) signs may be implemented when approved by the engineer.
- For Short-Term Stationary work the buffer space "B" from the above table should be used if field conditions permit. For Short Duration (less than 1 hour) any buffer space provided will enhance the safety of the setup.
- The arrow board at this location may be omitted for Short Duration work if the work vehicle has an arrow board in operation. As an option, the arrow board may be placed at the end of the taper in the closed lane if space is not available at the beginning of the taper.
- Signs and devices for the NEAR SIDE LANE CLOSURE may be altered for a left lane closure by using a LEFT LANE CLOSED (CW20-5TL) and adding channelizing devices on the centerline to protect the work space from opposing traffic.

SHEET 1 OF 2



## TRAFFIC SIGNAL WORK TYPICAL DETAILS


**WZ(BTS-1)-13**

FILE: wzbts-13.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT April 1992	CONT	SECT	JOB	HIGHWAY
REVISIONS	--	--	--	SH 123
2-98 10-99 7-13	DIST	COUNTY	SHEET NO.	
4-98 3-03	SAT	GUAD	T69	



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 9/13/2022 12:49:44  
FILE: c:\pwworking\10213778\WZ-BTS(2)-13.dgn

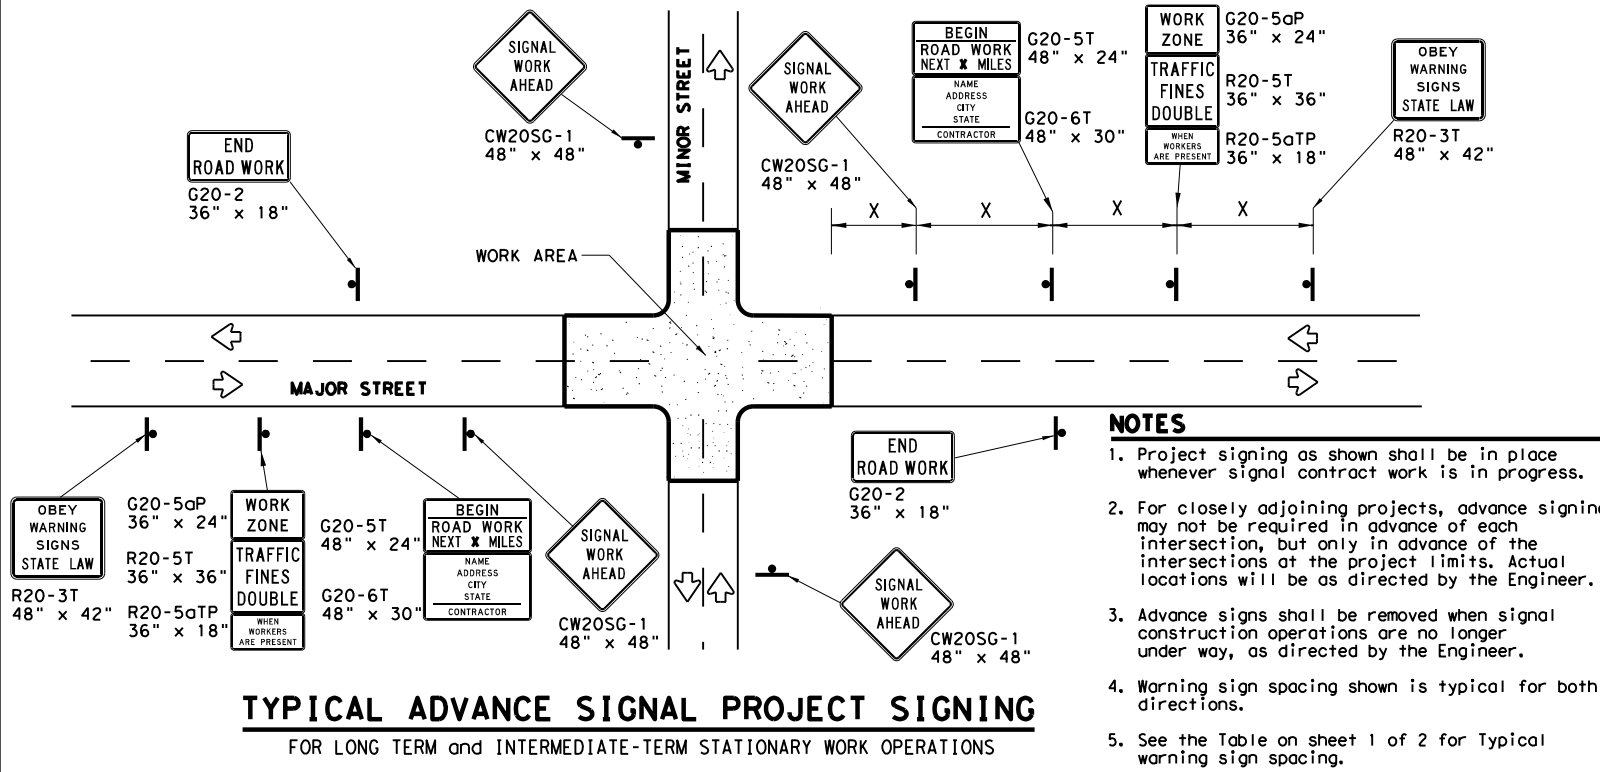

**TYPICAL ADVANCE SIGNAL PROJECT SIGNING**  
FOR LONG TERM and INTERMEDIATE-TERM STATIONARY WORK OPERATIONS

#### GENERAL NOTES FOR WORK ZONE SIGNS

- Signs shall be installed and maintained in a straight and plumb condition.
- Wooden sign posts shall be painted white.
- Barricades shall NOT be used as sign supports.
- Nails shall NOT be used to attach signs to any support.
- All signs shall be installed in accordance with the plans or as directed by the Engineer.
- The Contractor shall furnish the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD).
- The Contractor shall furnish sign supports and substrates listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD), installed as per the manufacturer's recommendations.
- Temporary signs that have damaged or cracked substrates and/or damaged or marred reflective sheeting shall be replaced as directed by the Engineer.
- Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1".
- Damaged wood posts shall be replaced. Splicing wood posts will not be allowed.

#### DURATION OF WORK

- Work zone durations are defined in Part 6, Section 6G.02 of the Texas Manual on Uniform Traffic Control Devices (TMUTCD).

#### SIGN MOUNTING HEIGHT

- Sign height of Long-term/Intermediate-term warning signs shall be as shown on Figure 6F-1 of the TMUTCD.
- Sign height of Short-term/Short Duration warning signs shall be as shown on Figure 6F-2 of the TMUTCD.
- Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

#### REMOVING OR COVERING

- When sign messages may be confusing or do not apply, the signs shall be removed or completely covered, unless otherwise approved by the Engineer.
- When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night without damaging the sign sheeting. Burlap, or heavy materials such as plywood or aluminum shall not be used to cover signs.
- Duct tape or other adhesive material shall NOT be affixed to a sign face.
- Signs and anchor stubs shall be removed and holes backfilled upon completion of the work.

#### REFLECTIVE SHEETING

- All signs shall be retroreflective and constructed of sheeting meeting the requirements of the DMS and color usage table shown on this sheet.

#### SIGN SUPPORT WEIGHTS

- Weights used to keep signs from turning over should be sandbags filled with dry, cohesionless material.
- The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
- Rock, concrete, iron, steel or other solid objects will not be permitted for use as sign support weights.
- Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
- Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber, such as tire inner tubes, shall not be used.
- Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCD list.
- Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
- Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.


LEGEND	
	Sign
	Channelizing Devices
	Type 3 Barricade

#### DEPARTMENTAL MATERIAL SPECIFICATIONS

SIGN FACE MATERIALS	DMS-8300
FLEXIBLE ROLL-UP REFLECTIVE SIGNS	DMS-8310

COLOR	USAGE	SHEETING MATERIAL
ORANGE	BACKGROUND	TYPE B <sub>FL</sub> OR TYPE C <sub>FL</sub> SHEETING
WHITE	BACKGROUND	TYPE A SHEETING
BLACK	LEGEND & BORDERS	ACRYLIC NON-REFLECTIVE SHEETING

Only pre-qualified products shall be used. A copy of the "Compliant Work Zone Traffic Control Device List" (CWZTCD) describes pre-qualified products and their sources and may be found at the following web address:  
[http://www.txdot.gov/txdot\\_library/publications/construction.htm](http://www.txdot.gov/txdot_library/publications/construction.htm)

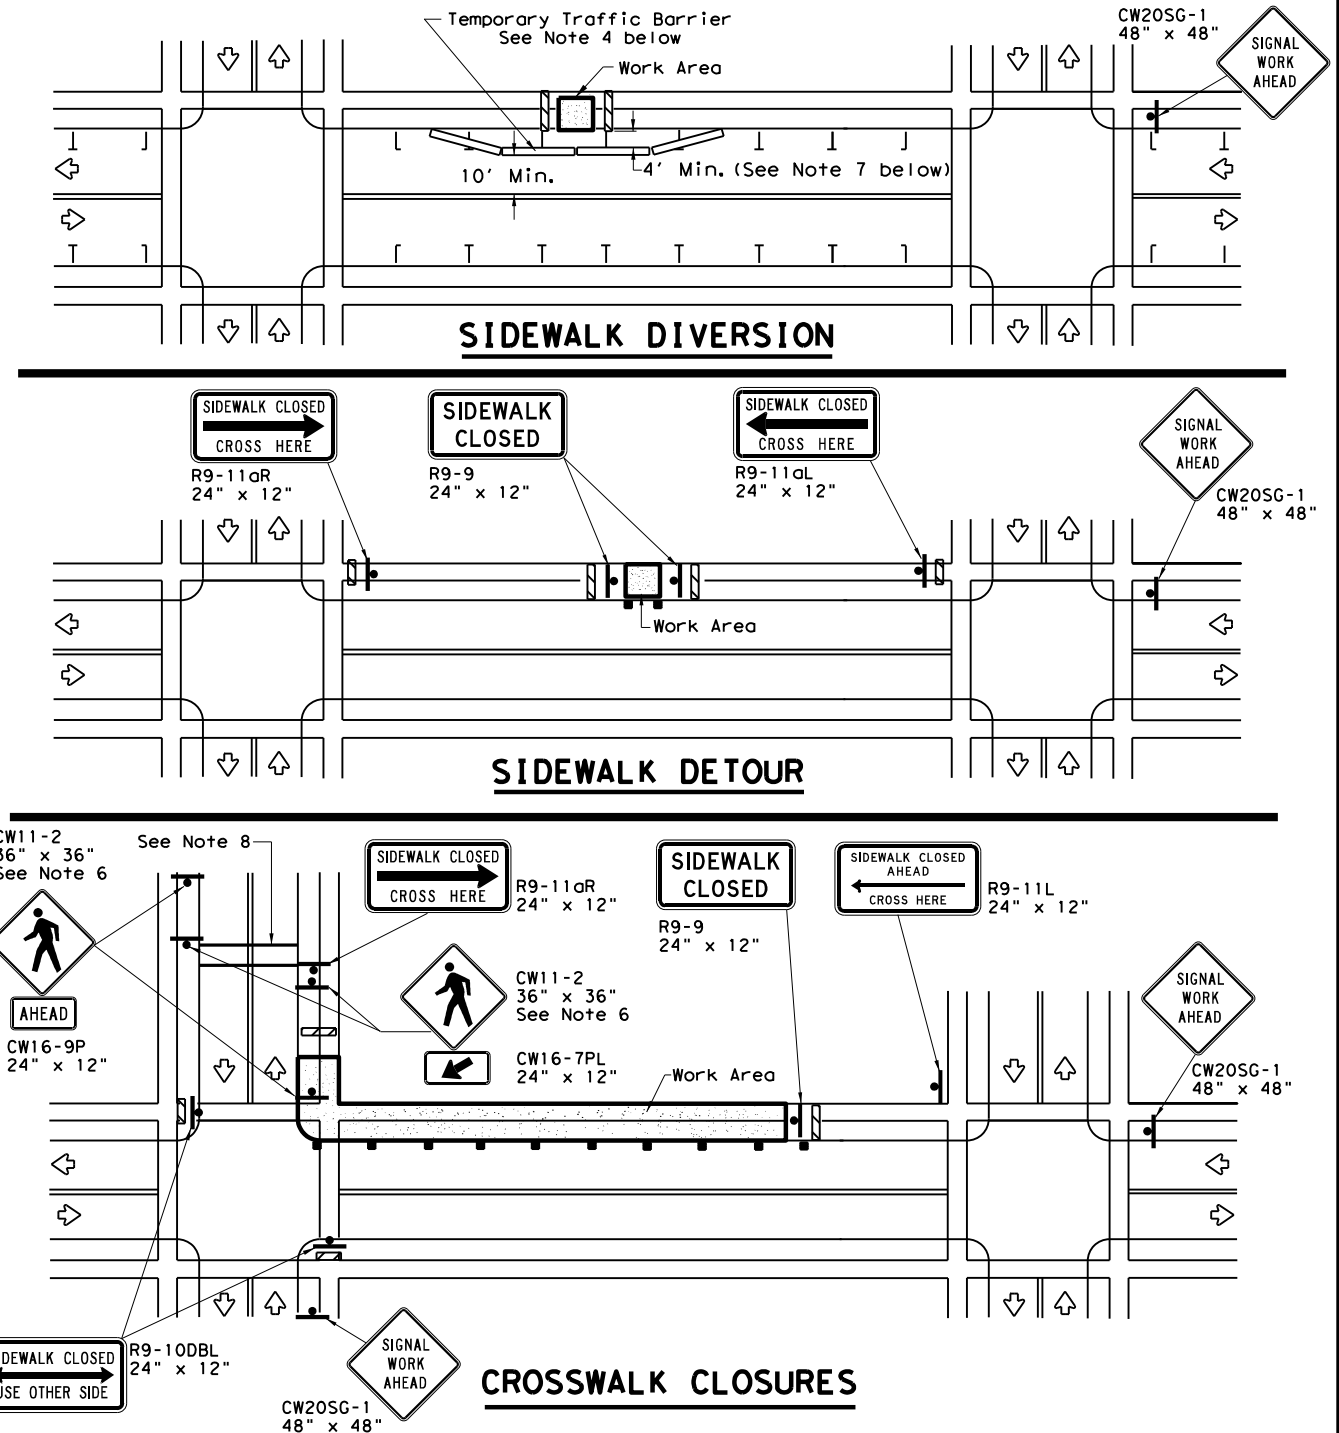

#### PEDESTRIAN CONTROL

- Holes, trenches or other hazards shall be adequately protected by covering, delineating or surrounding the hazard with orange plastic pedestrian fencing or longitudinal channelizing devices, or as directed by the Engineer.
- "CROSSWALK CLOSURES" as detailed above will require the Engineer's approval prior to installation.
- R9 series signs shown may be placed on supports detailed on the BC standards or CWZTCD list, or when fabricated from approved lightweight plastic substrates, they may be mounted on top of a plastic drum at or near the location shown.
- For speeds less than 45 mph longitudinal channelizing devices may be used instead of traffic barriers when approved by the Engineer. Attenuation of blunt ends and installation of water filled devices shall be as per BC(9) and manufacturer's recommendations.
- Location of devices are for general guidance. Actual device spacing and location must be field adjusted to meet actual conditions.
- Where pedestrians with visual disabilities normally use the closed sidewalk Detectable Pedestrian Barricades should be used instead of the Type 3 Barricades shown.
- The width of existing sidewalk should be maintained if practical.
- Pavement markings for mid-block crosswalks shall be paid for under the appropriate bid items.
- When crosswalks or other pedestrian facilities are closed or relocated, temporary facilities shall be detectable and shall include accessibility features consistent with the features present in the existing pedestrian facility.

SHEET 2 OF 2

Texas Department of Transportation

Traffic Operations Division Standard

## TRAFFIC SIGNAL WORK BARRICADES AND SIGNS

### WZ(BTS-2) - 13

FILE: wzbts-13.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT April 1992	CONT	SECT	JOB	HIGHWAY
REVISIONS	--	--	--	SH 123
2-98 10-99 7-13	DIST	COUNTY	SHEET NO.	
4-98 3-03	SAT	GUAD	T70	