

STE, 100 78130



HAUL ROUTE TRUCTION CROSSING CONS

DATE: NOVEMBER 2025

DRAWN BY: ZJL DESIGNED BY: MTA

REVIEWED BY: MTA HMT PROJECT NO .: 337.110

SHEET 2 OF 3

SEQUENCE OF CONSTRUCTION

1. INSTALL EROSION CONTROLS PER APPROVED PLAN.

2. TEMPORARY CONTROLS TO BE INSPECTED AND MAINTAINED WEEKLY AND PRIOR TO ANTICIPATED RAINFALL EVENTS, AND AFTER RAINFALL EVENTS, AS NEEDED. CONTRACTOR/OWNER SHALL PROVIDE A CONTACT NAME AND NUMBER FOR EROSION CONTROL ISSUES.

3. CONDUCT DEMOLITION ACTIVITIES, IF APPLICABLE.

4. CONSTRUCT DRAINAGE IMPROVEMENTS, IF APPLICABLE.

5. CONTRACTOR TO VEGETATE ANY DISTURBED AREAS ONCE FINAL GRADING IS COMPLETE, AND ESTABLISH A MIN OF 70% VEGETATION PRIOR TO COMPLETION. PER TPDES REQUIREMENTS, DISTURBED AREAS ON WHICH CONSTRUCTION ACTIVITIES HAVE CEASED (TEMPORARILY OR PERMANENTLY) SHALL BE STABILIZED WITHIN 14 DAYS UNLESS ACTIVITY RESUMES WITHIN 21 DAYS. SEEDING DOES NOT CONSTITUTE AS STABILIZATION.

S. REMOVE ALL TEMPORARY EROSION CONTROL MEASURES.

> AL L ROUTE NTROL D HAUL N CON SIO ERO

MATTHEW T. ABRAHAMSEN


STE, 100 78130

DATE: NOVEMBER 2025

DRAWN BY: ZJL DESIGNED BY: MTA

REVIEWED BY: MTA HMT PROJECT NO .: 337.110

SHEET

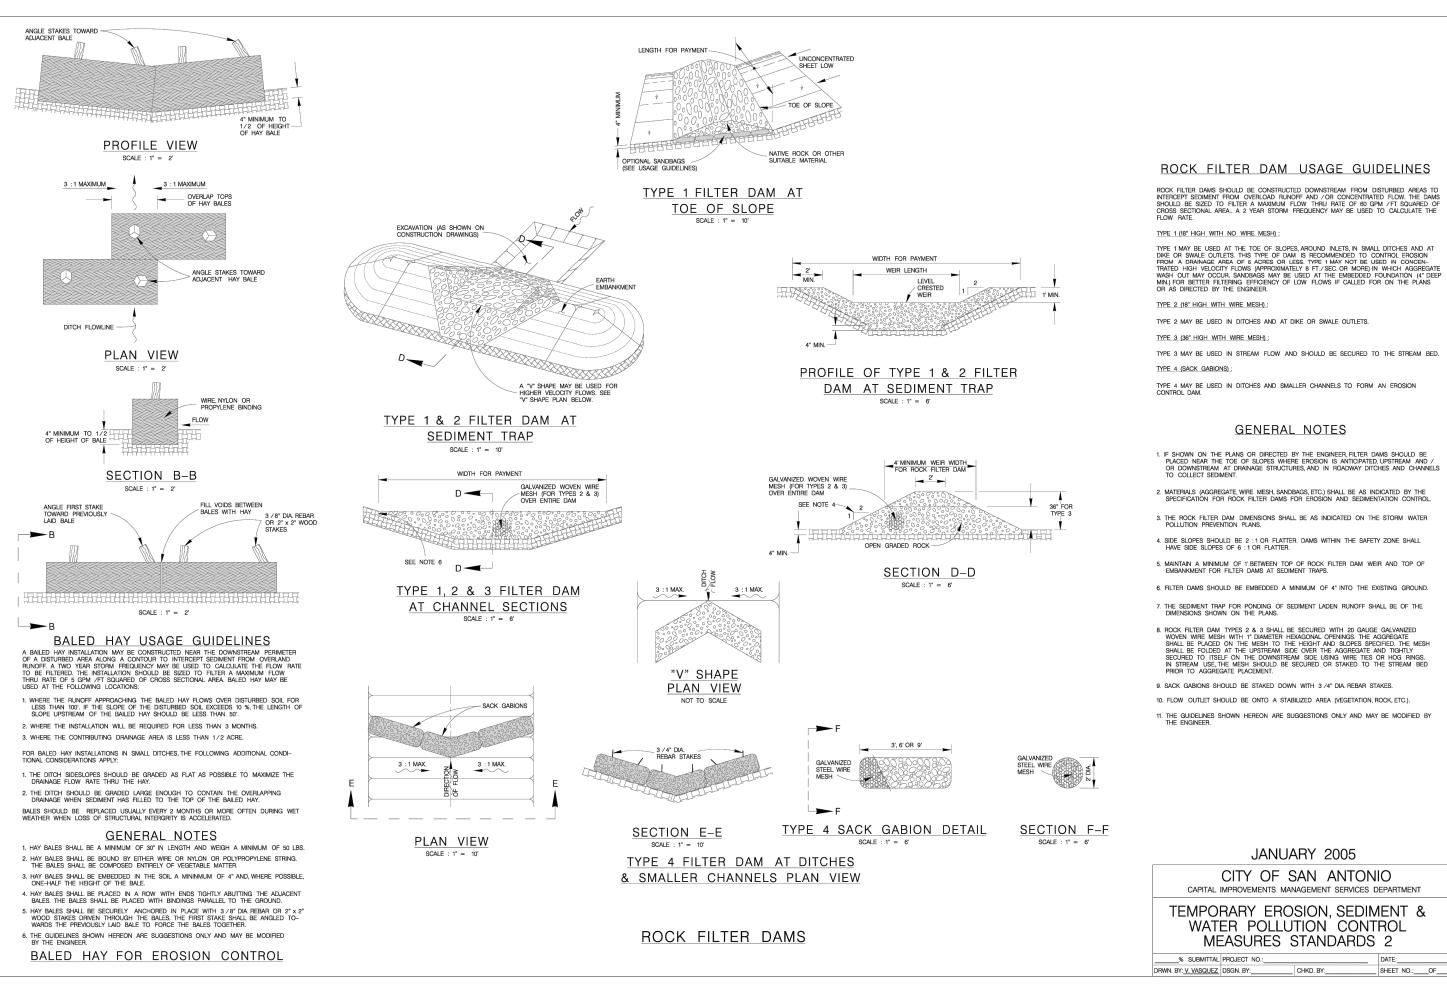

THE LOCATION OF ALL EXISTING UNDERGROUND UTILITIES ARE SHOWN IN APPROXIMATE LOCATIONS ONLY. THE CONTRACTOR SHALL DETERMINE THE EXACT LOCATION OF ALL EXISTING UTILITIES BEFORE COMMENCING WORK. THE CONTRACTOR WILL

AGREE TO BE FULLY RESPONSIBLE FOR ANY AND ALL

24-HOURS PRIOR TO COMMENCING CONSTRUCTION.

DAMAGES WHICH MIGHT BE INCURRED BY THEIR FAILURE TO EXACTLY LOCATE AND PRESERVE ANY AND ALL UNDERGROUND UTILITIES, STRUCTURES OR FACILITIES.

CONTRACTOR SHALL NOTIFY ENGINEER OF ANY DISCREPANCIES