BEGIN PROJECT STA 247+00 POSTED SPEED = 65 MPH

TOTAL DISTURBED AREA = 11.9 AC

THE STANDARD SHEETS SPECIFALLY SHOW WITH PRECEDING (*), HAVE BEEN SELECTED BY ME OR UNDER MY RESPONSIBLE SUPERVISION AS BEING APPLICABLE TO THIS PROJECT.





TDLR INSPECTION NOT REQUIRED

LOCATION MAP NOT TO SCALE EXCEPTIONS: NONE EQUATIONS: NONE RR X-ING'S: NONE

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION NOVEMBER 1, 2014 AND SPECIFICATION ITEMS LISTED AND DATED AS FOLLOWS, SHALL GOVERN ON THIS PROJECT.

TXDOT CONSTRUCTION GENERAL NOTES

- 1. "The design and construction will provide for preserving all existing features in or near the State Right Of Way being affected by the widening. This includes but is not limited to, existing driveway gate set-backs, relocation of electronic private property gates, mailbox turnouts, mail boxes and supports, cattle guards, roadway signing, existing rip-rap or other permanent erosion control features, diversionary berms, swales, ditches, amount and configuration of driveway flares and driveway centerline profile, metal beam guard fence and end treatments, etc. Existing driveway culverts and safety end treatments if effected by roadway widening will be reconstructed to preserve existing front slope rates. The coordination of items that effect existing private property access, mail delivery, etc. is the responsibility of the developer. The written concurrence of any effected property owners for construction effecting their driveways or mailbox turnouts must be obtained and provided TxDOT prior to TxDOT driveway permits being issued."
- 2. "For work in State Right Of Way, the developer is responsible for coordination of, obtaining permits for, and complying with any and all state and federal regulatory agencies and all applicable laws, rules and regulations pertaining to the regulation of drainage, preservation of cultural resources, natural resources and the environment. The developer is responsible for determining if the project is in an environmentally sensitive area such as within the recharge or contributing zone of protected aquifers, and act in accordance with all resource agency regulations."

If TxDOT has a CZP or WPAP on file with TCEQ, the developer is responsible for amending TxDOT's permit, obtaining TCEQ approval and providing TxDOT with the approved amended permit. The amended permit will address the relocation of any TxDOT permanent BMP's including vegetative filter strips that may be impacted by work done within TxDOT ROW. "

If TxDOT does not have a CZP or WPAP on file with TCEQ, any permanent BMP's including vegetative filter strips, that may be required in order to treat additional impervious cover placed in TxDOT ROW will be located in private property and the developer will provide TxDOT with evidence of TCEQ approval of the additional impervious cover."

The developer may not operate under resource agency environmental clearance of a previous or ongoing TxDOT project, but will be required to obtain separate resource/environmental agency clearance."


- 3. "If waste areas or material source areas result from this project, the Contractor is reminded to follow the requirements of the Texas Aggregate Quarry and Pit Safety Act. In addition, it is requested that these areas not be visible from any highway on the State system."
- 3.5. "Any materials removed and not reused and determined to be salvageable shall be stored within the project limits at an approved location or delivered undamaged to the storage yard as directed. Properly dispose unsalvageable materials in accordance with local, state, and federal regulations. Deface traffic signs so that they will not reappear in public as signs."

- 4. "Any trees existing within State Right Of Way are the natural resources of the State and will be protected. In the event that trees must be removed, TxDOT written permission will be received in advance and will identify the specific trees by species, diameter and location to be removed. The developer will be fined for any unpermitted removal of trees."
- 4.5. "In the event that there are areas of public ROW dedication resulting from the platting process, the area within the public ROW dedication does not pass into TxDOT ownership as a result of platting. However, the developer will remove any old fencing, gates and unsightly vegetation within the area of the ROW dedication, leaving it in an aesthetically pleasing condition. The Area of ROW dedication will not be mowed or otherwise maintained by TxDOT. Prior to removal of trees in the area of ROW dedication, the trees will first be evaluated in accordance with the requirements of local tree protection ordinances and the written concurrence of the local jurisdiction will be provided to TxDOT."
- 5. "The developer will maintain at the project site, and make available upon request, copies of all approved environmental plans and permits relating to work in State Right Of Way."
- 6. "Prior to beginning grading activity the contractor will set and maintain roadway stationing, control points, marks, stakes to establish lines, slopes, grades and centerlines."
- 7. "Any slopes in State Right Of Way which become steeper than 3:1 as a result of the work will be treated with 4" thick reinforced concrete riprap and be treated with metal beam guard fence. This may entail additional rip-rap beyond that shown in the plans."
- 7.5. "Unless otherwise shown on the plans, where existing concrete rip-rap is removed, modified or extended, the portion to be removed will be neatly saw-cut prior to removal and the new rip-rap will be formed to match the existing lines and grades of the existing rip-rap and will be doweled into the existing rip-rap with #3 bars on 12" centers. The dowel bars will be epoxied in place with epoxy meeting TxDOT requirements. The minimum embedment length is 9 inches. This applies to any type of concrete rip-rap including metal beam guard fence or cable barrier mow strips."
- 8. "Duane Hofferichter (830) 609-0707 New Braunfels, Travis Young (830) 303-0130 Seguin, Chad Lux (830) 816-2430 Boerne, Mark Andrews (830) 393-3144 Floresville, TxDOT Maintenance office will be contacted by the contractor 48 hours prior to work occurring in State Right Of Way."
- 9. "State Right Of Way will not be used as an area for contractor parking or for staging the receipt of materials or equipment."
- 10. "Traffic control and construction barricades will meet the requirements of the Texas MUTCD."
- 11. "The contractor will provide advance notification to the engineer of impending/upcoming lane closures for all temporary and/or permanent lane, ramp, connector, frontage, shoulder, median crossover, etc. closures or detours."
- 12. "Access to adjoining property must be maintained at all times."





SAN ANTONIO I AUSTIN I HOUSTON I FORT WORTH I DALLAS 2000 NW LOOP 410 I SAN ANTONIO, TX 78213 I 210.375.9000 TEXAS ENGINEERING FIRM #470 I TEXAS SURVEYING FIRM #10028800



STONE GARDEN

GENERAL NOTES

SHEET 1 OF 3

N:	FED. RD. DIV. NO.	STATE	FEDER	FEDERAL AID PROJECT NO.						
: 4:	6	TEXAS				US 181				
G:	DIST.	COUNTY	CONT. NO.	SECT. NO.	JOB NO.	SHEET NO.				
:	SAT	BEXAR	0100	02	XXX	2				

13. "Unless otherwise noted in the plans and/or as directed by the area engineer or maintenance supervisor, daily lane closures shall be limited according to the following restrictions:

Nighttime: Maintenance Supervisor and/or Area engineer approval required. (with uniformed off duty law enforcement officers).


Weekend Closures: Maintenance Supervisor and/or Area engineer approval required."

14. "No lane closures or roadway closures will be permitted for the following key dates and/or special events:

Between December 15 and January 1. Wednesday before Thanksgiving thru the Sunday after Thanksgiving. Saturday and Sunday before Memorial Day and Labor Day. Saturday or Sunday when July 4 falls on a Friday or Monday."


- 15. "At no time will the roadway travel way be blocked"
- 16. "Lane closures will only be permitted with 48 hour prior approval of the TxDOT Maintenance Supervisor. Lane closures will be permitted only between 9:00 a.m. and 4:00 p.m. Monday through Friday."
- 16.5. "For lane closures on two-lane two-way roadways, including during pilot car operations, flaggers will be placed at the beginning and end of the work zone as well as at each individual driveway and side road intersection within the limits of the work zone and extending for a minimum of the beginning of advanced warning signs either end of the work zone to control, warn and direct side road and driveway traffic of the change in traffic operations. Whenever one way traffic control is accomplished by traffic signals work zone flaggers will be similarly stationed at each individual driveway and side road intersection within the limits of the work zone and extending for a minimum of the beginning of the advanced warning signs either end of the work zone. All flaggers will be in constant radio contact."
- 17. "A minimum 3:1 (H:V) temporary safety slope of stable compacted material will be required adjacent to the State highway edge of pavement at all times during non working hours."
- 18. "Only one side of the roadway will be open to construction at a time. Work will be completed and pavement edges backfilled on one side of the road before work will begin on the opposite side of the roadway.
- 19. "All milling, paving and seal coat operations shall proceed in the direction of traffic."
- 20. "Any pavement edge drop-offs between 1 and 2 inches in height will have CW 8-11 warning signs. Any pavement edge drop-off 2 inches or greater will have a 3:1 compacted safety slope and CW 8-9a or CW 8-11 signs plus channelizing devices. Pavement edges will be shouldered up with compacted embankment material and 4 inches of topsoil as soon as possible after paving is completed on the side of the road being widened."

- 21. "Proof rolling of subgrade is required and shall be witnessed by TxDOT prior to placement of pavement structure unless otherwise approved by the TxDOT Maintenance Supervisor. The requirement for proof-rolling of subgrade is not superseded by any other requirements including those of any Geotechnical Report."
- 22. "All Flexible Base will have a minimum Plasticity Index of 4."
- 23. "All courses of asphaltic concrete pavement (regardless of type) will be placed with a asphalt paving equipment meeting the requirements of TxDOT Item 320, "Equipment for Asphalt Concrete Pavement", unless otherwise approved by the Maintenance Supervisor."
- 23.5. "Tack coat will be applied with an asphalt distributor and spread across the surface receiving the tack coat by multiple passes of a pneumatic roller. The application of tack coat and the number of passes of the pneumatic roller will be sufficient to make the surface and exposed edges consistently black with no areas devoid of tack. Asphalt for tack coat shall meet TxDOT specs and be from a TxDOT approved source."
- 24. "All surface aggregates will meet the requirements of TxDOT friction classification "B" and will meet PG Binder grade 70-22."
- 25. "All surface Asphalt Concrete Pavement will be under-sealed with a One Course Surface Treatment."
- 26. "All Asphaltic Concrete Pavement used in base courses will be Type "A" or "B" and will meet PG binder grade 64-22."
- 27. "All pavement widening including shoulders will match the existing pavement cross slope."
- 28. "All pavement markings will be Type I thermoplastic (100 mil) with under-seal meeting the requirements of TxDOT Item 666, Reflectorized Pavement Markings. The contractor will place guide marks in accordance with Item 666 and will make arrangements for TxDOT inspection of the pavement marking layout prior to placement of striping. Equipment used for the placement of striping will meet the production requirements of Item 666 unless otherwise approved in advance by the TxDOT Maintenance Supervisor."
- 29. "Existing pavement markings that conflict with proposed pavement markings will be lightly ground in a manner that does not damage the pavement surface, to remove any pavement marking accumulation, and will be covered with a strip seal of 18" minimum width, consisting of precoated grade 5, friction class B aggregate."
- 30. "All materials and construction methods used in State Right Of Way will meet TxDOT specifications. This supersedes all other specifications in the plans."
- 31. "All turn lane concrete pavement in state ROW will meet the requirements of TxDOT Item 360 Class P concrete and will be batched at concrete plants having a current approved mix design. Class P concrete shall have 7 and 28 day compressive strength of 3200 psi and 4400 psi respectively."





SAN ANTONIO I AUSTIN I HOUSTON I FORT WORTH I DALLAS 2000 NW LOOP 410 I SAN ANTONIO, TX 78213 I 210.375.9000 TEXAS ENGINEERING FIRM #470 I TEXAS SURVEYING FIRM #10028800



STONE GARDEN


GENERAL NOTES

SHEET 2 OF 3

ON:	FED. RD. DIV. NO.	STATE	FEDER	FEDERAL AID PROJECT NO. H						
IK SN:	6	TEXAS				US 181				
VG:	DIST.	COUNTY	CONT. NO.	SECT. NO.	JOB NO.	SHEET NO.				
IK /G:	SAT	BEXAR	0100	02	XXX	3				

- 32. "When widening existing concrete pavements, joints in the new pavement will match joints in existing pavement and curb."
- 33. "The contractor is responsible for ensuring that TxDOT approved materials, mix designs, approved sources and products are used for all work in state ROW. The contractor will arrange for the services of a qualified testing laboratory for all items requiring testing and will notify TxDOT of any discrepancies between test results and TxDOT specs in a timely manner. The contractor will provide to TxDOT invoices and testing results as soon they are available. Failure to do this will result in rejection of the work."
- 34. "Sawing of contraction/construction joints in concrete pavement will be accomplished as soon as personnel can walk on the concrete without damaging the surface regardless of time of day or weather conditions. Stand-by power driven concrete saws will be provided during the sawing operation. Curing compound will be re-applied to the sawed joint immediately upon sawing the joint."
- 35. "Guardrail SGT's will be type 3 unless otherwise approved by the TxDOT Maintenance Supervisor. Guardrail mow strip placed adjacent to other concrete rip-rap will be separated by a formed construction joint."
- 36. "Any concrete curb to be removed will be saw-cut at the limits of removal and be removed entirely. Slicing the top portion of the curb off and leaving remaining portion of curb in place is unacceptable."
- 37. "Any damage to TxDOT facilities will be repaired at no expense to the State, to TxDOT's satisfaction."
- 38. "Sidewalks placed in the highway right-of-way will be a minimum width of five feet or comply with the more stringent width as required by city ordinance and will meet all other requirements of the Americans with Disabilities Act. Pedestrian ramps will be provided at street and driveway intersections as shown on the current State Standard for Pedestrian Facilities. Color contrast and texturing of pedestrian ramps will be place at street intersection ramps only as shown on the current State Standard for Pedestrian Facilities. Pedestrian ramps at driveway intersections will not receive any color contrast or texturing. Metal plating for sidewalk bridges will match the typical width of the approach sidewalk. His may result in a width that is greater than shown in the standard details included in the plans."
- 39. "The contractor will use Best Management Practices (BMP's) to minimize erosion and sedimentation in the State Right Of Way resulting from the proposed construction. Re-vegetation of disturbed areas will be completed in accordance with TxDOT Standard Specifications. Permanent vegetative cover must achieve 70% coverage prior to project acceptance. Soil Retention Blankets may be required to prevent erosion of topsoil prior to vegetation re-establishment"
- 40. "Prior to seeding or re-vegetation the front slopes will be shouldered up with topsoil to eliminate any pavement edge drop-off."
- 41. "Mud tracked onto the roadway from the site will be immediately removed to the satisfaction of TxDOT."

- 42. "It will be the developer/owner's responsibility to clean out, to the state's satisfaction, any drainage structure or storm sewer system that becomes silted as a result of their operations."
- 43. "The adjustment of any utilities in State Right Of Way or adjacent private easement will be the responsibility of the developer/owner's."
- 44. "The contractor is responsible for placing and maintaining existing signs on TxDOT approved temporary mounts until permanent signs are placed."
- 45. "The final placement of permanent signs will be coordinated prior to placement with the local TxDOT Maintenance Supervisor."
- 46 "For work within the State Right Of Way where removal of materials or debris within the construction limits and not incorporated in the finished roadway section of right of way, will be disposed of in a manner acceptable to the Maintenance Supervisor at no expense to the State. Materials that are not determined to be salvageable by the Maintenance Supervisor become the property of the Contractor for proper disposal at their expense. Materials determined to be salvageable will be returned to the State and delivered to the location as determined by the Maintenance Supervisor."
- 47. "Regardless of errors and omissions in information provided in the plans or cross-sections the permitee is responsible for providing for positive drainage outfalls within and off the limits of the project."
- 47.5. "Keep the signals in operation at all times except when necessary for specific installation operations, including any modifications to existing signal heads to maintain clear visibility at all times. When it is necessary for a signal to be turned off, hire off duty police officers to control the traffic until the signals are back in satisfactory condition."
- 48. Contact TxDOT representative, Craig Williams, at (210) 615-6213, e-mail Craig.Williams@txdot.gov, 48 hours before beginning signal work or when working within 400 feet of existing traffic signals. The contractor is responsible for repair or replacement of any signal equipment damaged by construction operations. The method of repair or replacement shall be pre-approved and inspected. Depending on the type and extent of the damages, the Engineer reserves the right to perform repair or replacement work and the Contractor will be billed for this work. When working near aerial electrical lines or utility poles, comply with Federal, State and local regulations.
- 49. All quantities shown in the TxDOT permit plans are for contractor's information only. TxDOT's review and approval of the permit in no way implies that all items of work necessary for the completion of the work are reflected in the plans nor does it imply the accuracy of the item quantities shown.





SAN ANTONIO I AUSTIN I HOUSTON I FORT WORTH I DALLAS 2000 NW LOOP 410 I SAN ANTONIO, TX 78213 I 210.375.9000 TEXAS ENGINEERING FIRM #470 I TEXAS SURVEYING FIRM #10028800





STONE GARDEN

GENERAL NOTES

SHEET 3 OF 3

OGN:	FED. RD. DIV. NO.	STATE	FEDER	AL AID PROJE	CT NO.	HIGHWAY NO.
CHK DGN:	6	TEXAS				US 181
OWG:	DIST.	COUNTY	CONT. NO.	SECT. NO.	JOB NO.	SHEET NO.
CHK DWG:	SAT	BEXAR	0100	02	XXX	4

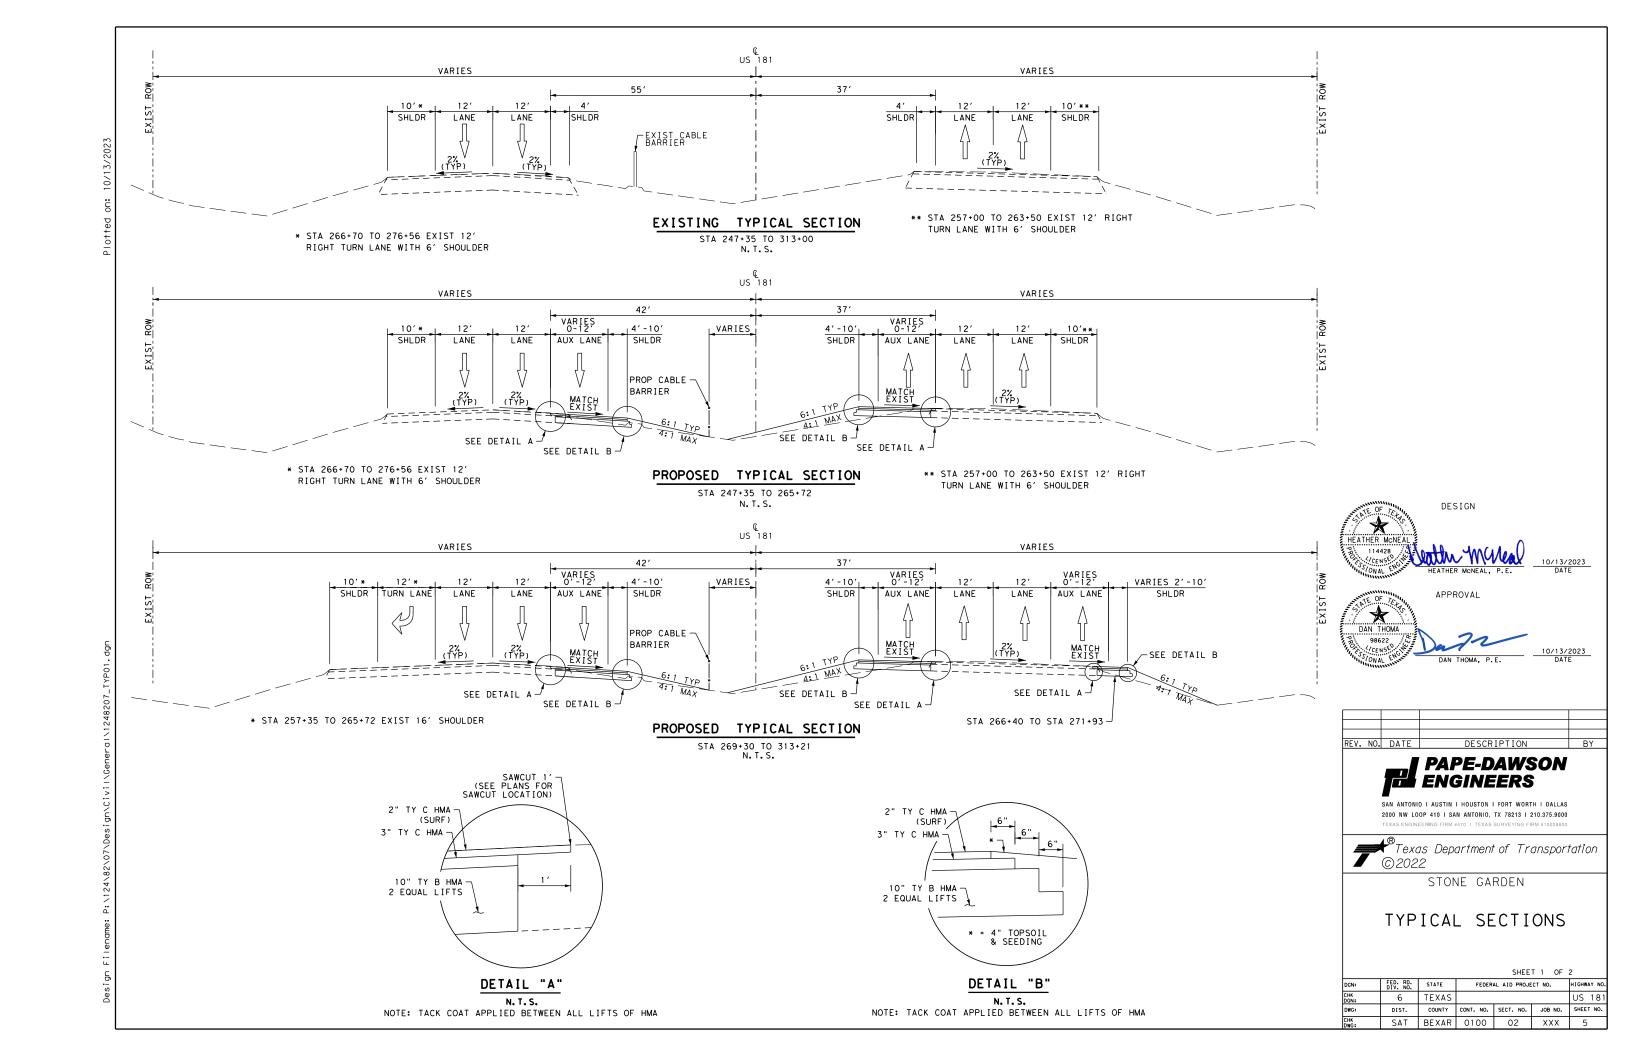

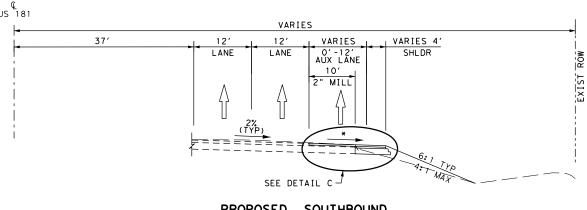


PROPOSED SOUTHBOUND SECTION

STA 276+22 TO STA 295+77 N. T. S.

TA 295+77 * MATCH EXISTING SLOPE




DESIGN

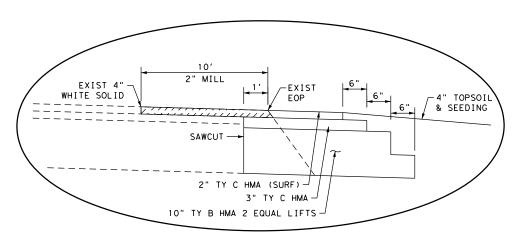

DETAIL "C"


N.T.S.

NOTE: TACK COAT APPLIED BETWEEN ALL LIFTS OF HMA



PAPE-DAWSON ENGINEERS

SAN ANTONIO I AUSTIN I HOUSTON I FORT WORTH I DALLAS 2000 NW LOOP 410 I SAN ANTONIO, TX 78213 I 210.375.9000 TEXAS ENGINEERING FIRM #470 I TEXAS SURVEYING FIRM #10028800



STONE GARDEN

TYPICAL SECTIONS

SHEET 2 OF 2

DGN:	FED. RD. DIV. NO.	STATE	FEDER	FEDERAL AID PROJECT NO. HIGHWAY NO.						
CHK DGN:	6	TEXAS				US 181				
DWG:	DIST.	COUNTY	CONT. NO.	SECT. NO.	JOB NO.	SHEET NO.				
CHK DWG:	SAT	BEXAR	0100	02	XXX	6				


ITEM	DESCRIPTION	UNIT	QTY
0100-6002	PREPARING ROW	STA	65
0104-6009	REMOVING CONC (RIPRAP)	SY	580
0104-6021	REMOVING CONC (CURB)	LF	3027
0104-6054	REMOVING CONCRETE (MOW STRIP)	LF	5370
0105-6105	REMOVING STAB BASE AND ASPH PAV(15")	SY	8612
0110-6001	EXCAVATION (ROADWAY)	CY	5338
0132-6003	EMBANKMENT (FINAL) (ORD COMP) (TY B)	CY	2396
0160-6003	FURNISHING AND PLACING TOPSOIL (4")	SY	53014
0164-6003	BROADCAST SEED (PERM) (RURAL) (CLAY)	SY	53014
0168-6001	VEGETATIVE WATERING	MG	817
0354-6045	PLANE ASPH CONC PAV (2")	SY	2095
0432-6045	RIPRAP (MOW STRIP) (4 IN)	CY	221
0459-6006	GABION MATTRESSES (GALV) (9 IN)	SY	1 4
0464-6005	RC PIPE (CL III) (24 IN)	LF	130
0464-6084	RC PIPE (ARCH)(CL IV)(DES 1)	LF	524
0467-6363	SET (TY II) (18 IN) (RCP) (6: 1) (P)	EA	10
0467-6395	SET (TY II) (24 IN) (RCP) (6: 1) (P)	EA	4
0496-6004	REMOV STR (SET)	EA	6
0496-6007	REMOV STR (PIPE)	LF	245
0500-6001	MOBILIZATION	LS	1
0502-6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	MO	9
0506-6001	ROCK FILTER DAMS (INSTALL) (TY 1)	LF	75
0506-6011	ROCK FILTER DAMS (REMOVE)	LF	75
0506-6020	CONSTRUCTION EXITS (INSTALL) (TY 1)	SY	336
0506-6024	CONSTRUCTION EXITS (REMOVE)	SY	336
0506-6042	BIODEG EROSN CONT LOGS (INSTL) (18")	LF	376
0506-6043	BIODEG EROSN CONT LOGS (REMOVE)	LF	376
0536-6002	CONC MEDIAN	SY	779
0540-6001	MTL W-BEAM GD FEN (TIM POST)	LF	600
0540-6016	DOWNSTREAM ANCHOR TERMINAL SECTION	EA	1
0542-6001	REMOVE METAL BEAM GUARD FENCE	LF	820
0542-6003	REMOVE DOWNSTREAM ANCHOR TERMINAL	EA	2
0543-6001	CABLE BARRIER SYSTEM (TL-3)	LF	4420
0543-6019	CABLE BARRIER TERMINAL SECTION (TL-3)	EA	8
0543-6021	REMOVE CABLE BARRIER	LF	4800
0543-6022	REMOVE CABLE BARRIER TERMINAL SECTION	EA	6
0544-6001	GUARDRAIL END TREATMENT (INSTALL)	EA	2
0544-6003	GUARDRAIL END TREATMENT (REMOVE)	EA	2

ITEM	DESCRIPTION	UNIT	QTY
0644-6004	IN SM RD SN SUP&AM TY10BWG(1)SA(T)	EΑ	74
0644-6051	IN SM RD SN SUP&AM TYS80(2)SA(P-EXAL)	EΑ	4
0644-6076	REMOVE SM RD SN SUP&AM	EΑ	18
0658-6015	INSTL DEL ASSM (D-SW)SZ (BRF)GF1	EΑ	14
0658-6047	INSTL OM ASSM (OM-2Y) (WC) GND	EΑ	12
0662-6095	WK ZN PAV MRK REMOV (Y)4"(SLD)	LF	20073
0666-6030	REFL PAV MRK TY I (W)8"(DOT)(100MIL)	LF	799
0666-6036	REFL PAV MRK TY I (W)8"(SLD)(100MIL)	LF	6876
0666-6048	REFL PAV MRK TY I (W)24"(SLD)(100MIL)	LF	125
0666-6054	REFL PAV MRK TY I (W) (ARROW) (100MIL)	EA	30
0666-6078	REFL PAV MRK TY I (W) (WORD) (100MIL)	EΑ	16
0666-6138	REFL PAV MRK TY I (Y)8"(SLD)(100MIL)	LF	264
0666-6147	REFL PAV MRK TY I (Y)24"(SLD)(100MIL)	LF	65
0666-6300	RE PM W/RET REQ TY I (W)4"(BRK)(100MIL)	LF	3790
0666-6303	RE PM W/RET REQ TY I (W)4"(SLD)(100MIL)	LF	3042
0666-6315	RE PM W/RET REQ TY I (Y)4"(SLD)(100MIL)	LF	10572
0672-6007	REFL PAV MRKR TY I-C	EΑ	22
0672-6010	REFL PAV MRKR TY II-C-R	EA	601
0677-6001	ELIM EXT PAV MRK & MRKS (4")	LF	6135
0677-6003	ELIM EXT PAV MRK & MRKS (8")	LF	5725
3076-6001	D-GR HMA TY-B PG64-22	TON	11396
3076-6066	TACK COAT	GAL	5938
3076-6074	D-GR HMA TY-C SAC-B PG70-22 (EXEMPT)	TON	2436
3076-6079	D-GR HMA TY-C PG70-22 (EXEMPT)	TON	3198
6001-6002	PORTABLE CHANGEABLE MESSAGE SIGN	EΑ	2
6185-6002	TMA (STATIONARY)	DAY	340
6185-6005	TMA (MOBILE OPERATION)	DAY	30





SAN ANTONIO I AUSTIN I HOUSTON I FORT WORTH I DALLAS 2000 NW LOOP 410 I SAN ANTONIO, TX 78213 I 210.375.9000 TEXAS ENGINEERING FIRM #470 I TEXAS SURVEYING FIRM #10028800



STONE GARDEN

ESTIMATE AND QUANTITY

N:	FED. RD. DIV. NO.	STATE	FEDER	FEDERAL AID PROJECT NO. HIGHWAY							
(N:	6	TEXAS				US 181					
G:	DIST.	COUNTY	CONT. NO.	SECT. NO.	JOB NO.	SHEET NO.					
(3:	SAT	BEXAR	0100	02	XXX	7					

ℚ US 181

Beginning chain ALIGN1 description

N 13,657,226.63 E 2,172,085.81 Sta 235+00.00

Course from 1 to 2 S 62° 27′ 33.31" E Dist 9,656.65

Point 2 N 13,652,761.59 E 2,180,648.19 Sta 331+56.65

Ending chain ALIGN1 description




APPROVAL

DESCRIPTION

PAPE-DAWSON ENGINEERS

SAN ANTONIO I AUSTIN I HOUSTON I FORT WORTH I DALLAS 2000 NW LOOP 410 I SAN ANTONIO, TX 78213 I 210.375.9000



STONE GARDEN

HORIZONTAL ALIGNMENT DATA

SHEET 1 OF 1

1	FED. RD. DIV. NO.	STATE	FEDER	FEDERAL AID PROJECT NO. HIGH							
:	6	TEXAS				US 181					
	DIST.	COUNTY	CONT. NO.	SECT. NO.	JOB NO.	SHEET NO.					
:	SAT	BEXAR	0100	02	XXX	8					

			SUMMARY	OF SI	$\bigvee A \mid A \mid$	L SIG	NS							
					YPE A)) SGN	ASSM TY X	XXXX (X)	<u>XX</u> (X- <u>XXXX</u>)	BRIDGE MOUNT			
PLAN SHEET NO.	SIGN NO.	SIGN NOMENCLATURE	SIGN	DIMENSIONS	T ALUMINUM (TYPE	10BWG = 10 BWG	POSTS 1 or 2	UB=Universal Bolt SA=Slipbase-Conc SB=Slipbase-Bolt	PREFABRICATE P = "Plain" T = "T"	NTING DESIGNATION D 1EXT or 2EXT = # of Ext BM = Extruded Wind Beam WC = 1.12 #/ft Wing Channel	CLEARANCE SIGNS (See Note 2)			
	1 - 1	R5-1a	WRONG	36" X 24"	X FLAT	10 BWG	1	WS=Wedge Steel WP=Wedge Plastic SA	U = "U"	EXAL= Extruded Alum Sign Panels	TY N TY S			
			WAY						_					
	1-2	R5-1a	WRONG WAY	36" X 24"	X	10 BWG	1	SA	T			ALUMINUM SIGN B	Minimum Thic	
	1 - 3	R5-1	DO NOT	36" X 36"	X	10 BWG	1	SA	Т			Less than 7.5	0.080"	
			DO NOT ENTER									7.5 to 15	0.100"	1
	1 - 4	R5-1	DO NOT ENTER	36" X 36"	Х	10 BWG	1	SA	T			Greater than 15	0.125"	1
	1-5	R5-1	DO NOT ENTER	36" X 36"	X	10 BWG	1	SA	T					
	1-6	R6-1L	ONE WAY	54" X 18"	X	10 BWG	1	SA	Т			The Standard Hig for Texas (SHSD) the following we http://www	can be found bsite.	
	1 - 7	R5-1	DO NOT ENTER	30" X 36"	X	10 BWG	1	SA	Т			nup.//www	.txuot.gov/	
	1.0	DE 1		70" V 70"		10 DWC		C.A.				NOTE:		
	1-8	R5-1	DO NOT ENTER	36" X 36"	X	10 BWG	1	SA	T			1. Sign supports shal on the plans, exce		
	1-9	R5-1	DO NOT ENTER	36" X 36"	X	10 BWG	1	SA	Т			may shift the sign design guidelines, secure a more desi avoid conflict wit	supports, wit where necessorable location	thin ary to n or to
	1-10) R5-1a	WRONG	36" X 24"	X	10 BWG	1	SA	T			otherwise shown on Contractor shall s will verify all si	the plans, th take and the E	he Engineer
	1-11	R5-1a	WRONG	36" X 24"	X	10 BWG	1	SA	Т			2. For installation o signs, see Bridge Assembly (BMCS)Sta	Mounted Cleard	
		1.0.10	WAY	30 X 21		10 540								
	1-12	2 R3-8uT		30" X 36"	X	10 BWG	1	SA	Т			 For Sign Support D Sign Mounting Deta Signs General Note 	ils Small Road	dside
			ONLY											
	1-13	3 D13-1TL	TURNAROUND	96" X 48"	×	S80	2	SA	P	EXAL				
	1-14	4 R3-1	®	36" X 36"	X	10 BWG	1	SA	T					
	2-1	W9-2TR		36" X 36"	X	10 BWG	1	SA	Т					
	- 1	-	In on Higher Hig					-				*		Traff
	2-2	R6-1R	ONE WAY	54" X 18"	х	10 BWG	1	SA	Т			Texas Department of	Transportation	Trafi Operat Divisi Stand
	2-3	M3-3	SOUTH	24" X 12"	х	10 BWG	1	SA	Т					
		M1 - 4	[181]	30" X 24"									RY OF SIGNS	
		M5 - 3T		30" X 24"										
	2.4	D6 10		FAII V 40"		10 842			-			SC)SS	
	2-4		ONE WAY	54" X 18"	X	10 BWG	1	SA	T			FILE: sums16.dgn DN:	TXDOT CK: TXDOT DW:	: T×DOT C
	3-1	R6-1R	ONE WAY	54" X 18"	X	10 BWG	1	SA	T			REVISIONS 01	00 02 XXX	US 1
												8-16 SA		311

			SUMMARY	OF SM	V A L	LSIGNS				
					YPE A)		N ASSM TY X	XXXX (X)	XX (X-XXX)	BRIDGE MOUNT
of this standard to other formats or for incorrect results or damages resulting from its use.		SIGN NOMENCLATURE	SIGN	DIMENSIONS	LAT ALUMINUM (T	TWT = Thin-Wall 1 or 2	UA=Universal Conc UB=Universal Bolt SA=Slipbase-Conc SB=Slipbase-Bolt WS=Wedge Steel	PREFABRICATED	NTING DESIGNATION 1EXT or 2EXT = # of Ext BM = Extruded Wind Beam WC = 1.12 #/ft Wing Channel EXAL= Extruded Alum Sign	CLEARANCE SIGNS (See Note 2) TY = TYPE TY N
ng fr	3-2	R3-5R	ONLY	30" X 36"	Х	10 BWG 1	WP=Wedge Plastic	Т	Pane I s	TY S
1 - 1 - 1 - 1 - 1										
les de la company de la compan	3-3	R3-7R	RIGHT LANE MUST TUUN RIGHT	36" X 36"	X	10 BWG 1	SA	T		ALUMINUM SIGN BLANKS THICKNESS
Somob Somob	3-4	R1-1		36" X 36"	X	10 BWG 1	SA	Т		Square Feet Minimum Thickness Less than 7.5 0.080"
20			(STOP)	30 % 30		10 5110				7.5 to 15 0.100"
+	3-5	M3 - 1	NORTH NORTH	24" X 12"	Х	10 BWG 1	SA	Т		Greater than 15 0.125"
	+	M1 - 4	[181]	30" X 24"						
Corre		M5-3T	<u> </u>	30" X 24"						
 			<u>¥ 1</u>	30 X 21						The Standard Highway Sign Designs for Texas (SHSD) can be found at
p	4-1	R3-8uT	lacksquare	30" X 36"	x	10 BWG 1	SA	Т		the following website. http://www.txdot.gov/
\$ + PE			ONLY							
[Jo	4-2	R2-1	SPEED LIMIT 65	36" X 48"	Х	10 BWG 1	SA	T		
o the				768 2 768		10.500		_		NOTE: 1. Sign supports shall be located as shown
P	4-3	W9-2TR	MEGG MGHT	36" X 36"	X	10 BWG 1	SA	T		on the plans, except that the Engineer may shift the sign supports, within
go do	4-4	R5-1a	WRONG	36" X 24"	X	10 BWG 1	SA	T		design guidelines, where necessary to secure a more desirable location or to
9 %			WAY							avoid conflict with utilities. Unless otherwise shown on the plans, the
£		25.	(m)	76 H. V. O.4 H.		10 000	<u> </u>	_		Contractor shall stake and the Engineer will verify all sign support locations.
	4-5	R5-1a	WRONG WAY	36" X 24"	X	10 BWG 1	SA	T		2. For installation of bridge mount clearand signs, see Bridge Mounted Clearance Sign
	4-6	R5-1	DO NOT	36" X 36"	X	10 BWG 1	SA	Т		Assembly (BMCS)Standard Sheet.
			DO NOT ENTER							3. For Sign Support Descriptive Codes, see Sign Mounting Details Small Roadside
dgn	4-7	R5-1	OO NOT ENTER	36" X 36"	Х	10 BWG 1	SA	Т		Signs General Notes & Details SMD (GEN).
S_02.										
-S0S	4-8	R5-1	DO NOI ENTER	36" X 36"	Х	10 BWG 1	SA	Т		
8207	4-9	M3-3	SOUTH	24" X 12"	X	10 BWG 1	SA	Т		
\$1124	4-2	M1 - 4	[181]	30" X 24"		10 0110	JA	1		
j.										Traffic
Summ	4-10	R6-1L	ONE WAY	54" X 18"	X	10 BWG 1	SA	Т		Traffic Operation Texas Department of Transportation Texas Department of Transportation
<u>-</u>	4-11	R5-1	DO NOT ENTER	36" X 36"	х	10 BWG 1	SA	Т		Standar
										SUMMARY OF
P:\124\82\07\Design	4-12	R5-1	OO NOT ENTER	36" X 36"	X	10 BWG 1	SA	Т		SMALL SIGNS
707	4-13	R5-1	60 NOT	36" X 36"	X	10 BWG 1	SA	Т		
4/82			DO NOT ENTER							soss
377	4-14	R6-1R	ONE WAY	54" X 18"	Х	10 BWG 1	SA	Т		FILE: SUMS16.dgn DN: TXDDT CK: TXDDT DW: TXDDT CK: T CTXDDT May 1987 CONT SECT JOB HIGHWAY
FILE	4-15	R5-1a	WRONG	36" X 24"	X	10 BWG 1	SA	Т		REVISIONS 0100 02 XXX US 18
Z I			WRONG WAY							8-16 SAT BEXAR 10

S						NS	ALL SIG	OF SMA	SUMMAR`			
Althoropy		MOUNT CLEARANCE					Z ← D E					PLAN
### ### ### ### ### ### ### ### ### ##		(See Note 2) TY = TYPE TY N	1EXT or 2EXT = # of Ext BM = Extruded Wind Beam WC = 1.12 #/ft Wing Channel EXAL = Extruded Alum Sign	PREFABRICATED P = "Plain" T = "T"	UA=Universal Conc UB=Universal Bolt SA=Slipbase-Conc SB=Slipbase-Bolt WS=Wedge Steel		FRP = Fiberglass TWT = Thin-Wall 10BWG = 10 BWG S80 = Sch 80	DIMENSIONS WINING NAME OF THE PROPERTY OF THE	SIGN	SIGN NOMENCLATURE	SIGN NO.	SHEET NO.
				Т	SA	1	10 BWG	36" X 24" X	WRONG WAY	R5-1a	4-16	
Solution from Solution fro	ALUMINUM SIGN BLA		EXAL	Р	SA	2	X S80	96" X 48"	TURNAROUND	D13-1TL	4-17	
Sign												
Sign				Т	SA	1	10 BWG	36" X 36" X	®	R3-1	4-18	
STOP				Т	SA	1	10 PWC	36" Y 36" Y		R1 - 1	4-19	
Solid Soli	orearer man 13			l l	SA	'	TO BWG	26 × 26 ×	(STOP)	K1-1	4-19	
Solid Soli				Т	SA	1	10 BWG	36" X 36" X	DO NOT	R5-1	5-1	
Service Serv	The Standard Highwo								ENTER			
Sign supports shall be not replant, except and the plant, except	the following websi			Т	SA	1	10 BWG	36" X 36" X	DO NOT ENTER	R5-1	5-2	
Solid Soli				Т	SA	1	10 BWG	36" X 36" X	DO NOT ENTER	R5-1	5-3	
1, Sign supports and 1	NOTE:			т	C A	1	10 PWC	E4" V 10" V		DC 41	- 1	
36" x 36" x 10 BWG 1 SA T	1. Sign supports shall to on the plans, except			I	SA	Į.	TO BWG	54 X 18 X	ONE WAY	R6-1L	5-4	
36" X 36" X 10 BWG 1 SA T	may shift the sign su			Т	SA	1	10 BWG	36" X 36" X	60 NOT	R5-1	5-6	
SA T Contractor shall stow will leverify oil stow will lever the control of the story will be story to story will be story to story will be story oil story will be story to story will be story to story will stow will be story to story will be sto	secure a more desirab avoid conflict with u					-			ENTER			
SA T TA TA	Contractor shall stak			Т	SA	1	10 BWG	36" X 36" X	00 NOT	R5-1	5-7	
Sa									ENTER			
WRONG	signs, see Bridge Mou			Т	SA	1	10 BWG	36" X 36" X	DO NOT ENTER	R5-1	5-8	
WRONG	3. For Sign Support Desc			Т	SA	1	10 BWG	36" X 24" X	WRONG WAY	R5-1a	5-9	
SA T T SA T T SA T T SA T T T T T T T T T	Signs General Notes 8			Т	SA	1	10 BWG	36" X 24" X	WRONG	R5-1a	5-10	
SA T T T T T T T T T									WAY			
SOS SA P EXAL				Т	SA	1	10 BWG	36" X 36" X		S3-1	5-11	
SA T SUMMAFE WRONG 36" x 24" x 10 BWG 1 SA T				Т	SA	1	10 BWG	30" X 36" X		R3-8UT	5-12	
##RONG ##AY X S80 2 SA P EXAL									ONLY			
SA T SUMMAR SMALL SM			EXAL	Р	SA	2	X \$80	96" X 48"	TURNAROUND	D13-1TL	5-13	
SUMMAR SMALL SMA	Texas Department of Train			Т	SA	1	10 BWG	36" X 36" X	MERCE MERCE	W9-2TL	5-14	
WRONG 36" X 24" X	CLIVALA D			т	CA	1	10 PWC	36" V 36" V	· ·	R3-1	5-15	
WRONG 36" X 24" X				I	SA	'	TO BWG	36 X 36 X	®	K3-1	3-13	
WRONG 36" X 24" X 10 BWG 1 SA T SILE: SUMS16.dgn DN: TXD CTXDT May 1987 CONT	SWALL			Т	SA	1	10 BWG	36" X 24" X	WRONG	R5-1a	5-16	
WAY FILE: Sums16.dgn DN: TXD © TXD0T May 1987 Cont												
©TxD0T May 1987 cont	SOS	F 11		Т	SA	1	10 BWG	36" X 24" X	WRONG	R5-1a	5-17	
TETITOTO TETITOTO	TxDOT May 1987 CONT S								WAY			
36" X 36" X 10 BWG 1 SA T 4-16 8-16 SAT	1-16 DIST	4 8		Т	SA	1	10 BWG	36" X 36" X	de cal	W9-2TR	6-1	

ANKS THICKNESS Minimum Thickness 0.080" 0.100" 0.125"

way Sign Designs can be found at ite.

kdot.gov/

- be located as shown of that the Engineer supports, within where necessary to able location or to utilities. Unless the plans, the ake and the Engineer on support locations.
- bridge mount clearance ounted Clearance Sign dard Sheet.
- scriptive Codes, see Is Small Roadside & Details SMD(GEN).

ansportation

Traffic Operations Division Standard

RY OF SIGNS

S

Ξ:	sums16.dgn	DN: Tx	DOT	ck: TxDOT	DW:	T×DOT	ck: TxDOT
TxDOT	May 1987	CONT SECT		JOB		HIGHWAY	
	REVISIONS	0100	02	XXX		US	5 181
16 16		DIST		COUNTY			SHEET NO.
. 0		SAT		BEXA	R		11

			SUMMARY	OF S	M A		L SIG			<u> </u>	XX (X-XXXX)	00101-
PLAN					ш	(TYPE G	POST TYPE				ITING DESIGNATION	BRIDGE MOUNT CLEARANCE
NO.	SIGN NO.	SIGN NOMENCLATURE	SIGN	DIMENSIONS	LAT ALUMINUM		FRP = Fiberglass TWT = Thin-Wall 10BWG = 10 BWG S80 = Sch 80			PREFABRICATED	IEXT or 2EXT = # of Ext BM = Extruded Wind Beam WC = 1.12 #/ft Wing Channel EXAL= Extruded Alum Sign Panels	SIGNS (See Note 2) TY = TYPE TY N TY S
	6-2	R6-1R	ONE WAY	54" X 18"	X		10 BWG	1	SA	Т		
	6-3	R6-1R	ONE WAY	54" X 18"	X		10 BWG	1	SA	Т		
	6-4	W9-2TR	MRRG MIGHT	36" X 36"	X		10 BWG	1	SA	Т		
	6-5	M3 - 1 M1 - 4	 NORTH	24" X 12" 30" X 24"	X		10 BWG	1	SA	Т		
		M1 - 4	181	30 X 24								
		M5-3T	₽	30" X 24"								
	6-6	M3-3	[SOUTH]	24" X 12"	x		10 BWG	1	SA	Т		
		M1 - 4	181	30" X 24"								
		M5-3T	ภ	30" X 24"								
	7 - 1	R3-8UT	ONLY	30" X 36"	X		10 BWG	1	SA	Т		
	7-2	R5-1a	WRONG WAY	36" X 24"	X		10 BWG	1	SA	T		
	7-3	R5-1a	WRONG WAY	36" X 24"	x		10 BWG	1	SA	T		
	7-4	R5-1	OO NOT	36" X 36"	X		10 BWG	1	SA	Т		
	7-5	R5-1		36" X 36"	X		10 BWG	1	SA	Т		
			DO NOT									
	7-6	R5-1	OO NOT ENTER	36" X 36"	X		10 BWG	1	SA	Т		
	7-7	R6-1L	▼ ONE WAY	54" X 18"	X		10 BWG	1	SA	Т		
	7-8	R5-1	DO NOT ENTER	36" X 36"	X		10 BWG	1	SA	Т		
	7-9	R5-1		36" X 36"	X		10 BWG	1	SA	Т		
			DO NOT									
	7-10	R5-1	DO NOT. ENTER	36" X 36"	X		10 BWG	1	SA	Т		
	7-11	R5-1a	WRONG WAY	36" X 24"	X		10 BWG	1	SA	T		
	7-12	R5-1a	WRONG	36" X 24"	x		10 BWG	1	SA	Т		
	7-13	D13-1TL	TURNAROUND	96" X 48"		Х	\$80	2	SA	P	EXAL	
	7-14	R3-1		36" X 36"	X		10 BWG	1	SA	Т		
			⊗									

ALUMINUM SIGN BLANKS THICKNESS

Square Feet Minimum Thickness

Less than 7.5 0.080"

7.5 to 15 0.100"

Greater than 15 0.125"

The Standard Highway Sign Designs for Texas (SHSD) can be found at the following website.

http://www.txdot.gov/

NOTE:

- 1. Sign supports shall be located as shown on the plans, except that the Engineer may shift the sign supports, within design guidelines, where necessary to secure a more desirable location or to avoid conflict with utilities. Unless otherwise shown on the plans, the Contractor shall stake and the Engineer will verify all sign support locations.
- For installation of bridge mount clearance signs, see Bridge Mounted Clearance Sign Assembly (BMCS)Standard Sheet.
- For Sign Support Descriptive Codes, see Sign Mounting Details Small Roadside Signs General Notes & Details SMD(GEN).

Texas Department of Transportation

Traffic Operations Division Standard

SUMMARY OF SMALL SIGNS

SOSS

Ē:	sums16.dgn	DN: Tx	DOT	ck: TxDOT D	ow: T×DO	T ck: TxDOT	
TxDOT	May 1987	CONT	SECT	JOB		H [GHWAY	
	REVISIONS	0100	02	XXX	T (US 181	
16 16		DIST	T COUNTY			SHEET NO.	
		SAT	BEXAR 12				

1. GENERAL

- (1) TRAFFIC MUST BE HANDLED THROUGHOUT THE PROJECT DURING CONSTRUCTION. THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING A SAFE AND COMFORTABLE PASSAGE FOR VEHICULAR AND PEDESTRIAN TRAFFIC WITH MINIMAL INCONVENIENCE TO THE PUBLIC, AS SHOWN IN THE PLANS OR AS DIRECTED/APPROVED BY THE ENGINEER.
- (2) THE CONTRACTOR MAY PROPOSE/RECOMMEND MODIFICATIONS TO THE SEQUENCE OF WORK FOR CONSIDERATION BY THE ENGINEER. ANY MAJOR RECOMMENDED MODIFICATION BY THE CONTRACTOR SHALL INCLUDE ANY CHANGES TO THE VARIOUS BID ITEMS, IMPACT TO TRAFFIC, EFFECT OF OVERALL PROJECT IN TIME AND COST, ETC. IF THIS PROPOSAL IS IMPLEMENTED, THE CONTRACTOR WILL BE RESPONSIBLE FOR DEVELOPING DETAILED PLAN SHEETS TO BE SEALED BY A LICENSED PROFESSIONAL ENGINEER FOR INCLUSION WITH THE CHANGE ORDER. THE CONTRACTOR CANNOT PROCEED WITH ANY CONSTRUCTION OPERATIONS BASED ON A REVISED PHASE/SEQUENCE UNLESS WRITTEN APPROVAL IS OBTAINED FROM THE ENGINEER. IF AT ANY TIME DURING CONSTRUCTION THE CONTRACTOR'S PROPOSED PLAN OF OPERATION FOR HANDLING TRAFFIC DOES NOT PROVIDE FOR SAFE AND COMFORTABLE MOVEMENT, THE CONTRACTOR WILL IMMEDIATELY CHANGE THEIR OPERATION TO CORRECT THE UNSATISFACTORY CONDITION.
- (3) DO NOT STORE ANY CONSTRUCTION MATERIAL OR EQUIPMENT AT ANY LOCATION THAT WILL CONSTITUTE A HAZARD AND WILL ENDANGER TRAFFIC.
- THE CONTRACTOR WILL PROVIDE ADVANCE NOTIFICATION TO THE ENGINEER OF IMPENDING / UPCOMING LANE CLOSURES FOR ALL TEMPORARY AND / OR FERMANENT LANE, RAMP, CONNECTOR, FRONTAGE, SHOULDER, ETC. CLOSURES OR DETOURS. SEE GENERAL NOTES FOR NOTIFICATION REQUIREMENTS.
- (5) ACCESS TO ADJOINING PROPERTY MUST BE MAINTAINED AT ALL TIMES.
- (6) TEMPORARY DRAINAGE IS THE RESPONSIBILITY OF THE CONTRACTOR.
- (7) AT NO TIME SHALL TWO CONSECUTIVE INTERSECTING ROADWAYS BE CLOSED AT ONE TIME DURING CONSTRUCTION.
- (8) AT NO TIME SHALL TWO CONSECUTIVE RAMPS BE CLOSED AT ONE TIME DURING CONSTRUCTION OR OVERLAY OPERATIONS
- (9) UNLESS OTHERWISE NOTED IN THE PLANS AND/OR AS DIRECTED BY THE ENGINEER, DAILY LANE CLOSURES SHALL BE LIMITED ACCORDING TO THE FOLLOWING RESTRICTIONS:

NIGHTTIME AND WEEKEND LANE CLOSURES TO BE COORDINATED WITH TXDOT INSPECTOR NO LANE CLOSURES WILL BE PERMITTED FOR THE FOLLOWING DATES AND/OR SPECIAL EVENTS:

BETWEEN DECEMBER 15 AND JANUARY 1.

FIESTA WEEK AND TAX-FREE WEEKEND. (BEXAR COUNTY ONLY)

WEDNESDAY BEFORE THANKSGIVING THRU THE SUNDAY AFTER THANKSGIVING

SATURDAY AND SUNDAY BEFORE MEMORIAL DAY AND LABOR DAY

SATURDAY OR SUNDAY WHEN JULY 4 FALLS ON A FRIDAY OR MONDAY

ELECTION DAYS (BEXAR COUNTY ONLY)

DURING MAJOR EVENTS AT THE AT&T CENTER (SPURS HOME GAMES, RODEO, CONCERTS, ETC.), ALAMODOME AND OR CONVENTION

- (10) REMOVAL AND DISPOSAL OF EXISTING ABANDONED UTILITIES (EITHER PREVIOUSLY ABANDONED OR ABANDONED DURING THIS PROJECT) REQUIRED TO SUPPORT THIS PROJECT'S CONSTRUCTION SHALL BE PERFORMED UNDER THE OVERALL PREPARE RIGHT-OF-WAY ITEM (ITEM 100).
- (11) COORDINATE WITH ADJACENT PROJECTS.
- (12) COVER PERMANENT SIGNS IF NOT USED. THIS IS SUBSIDIARY TO ITEM 502.
- (13) COORDINATE WITH TXDOT FOR SIGNAL TIMING REVISIONS, AS NECESSARY
- (14) CONTRACTOR IS NOT PERMITTED TO WORK IN AREAS WITH ONGOING UTILITY RELOCATION OR ROW ACQUISITION.

2. SEQUENCE OF WORK

- (1) THE PROJECT WILL BE CONSTRUCTED IN (3) PHASES. BEFORE THE COMMENCEMENT OF EACH PHASE, INSTALL ADVANCE WARNING SIGNS, TEMPORARY SIGNS AND BARRICADES AS SHOWN ON THE PLANS AND/OR AS DIRECTED/APPROVED BY THE ENGINEER. DAILY LANE CLOSURES WILL BE USED IN ACCORDANCE WITH STATE TCP STANDARDS. DROP OFF CONDITIONS OF GREATER THAN 2" MUST HAVE A 3:1 SLOPE AT THE END OF FACH DAY AS WELL AS THROUGHOUT THE PROJECT WHERE ACCESS TO ADJACENT PROPERTIES IS ALLOWED TO DRIVEWAYS AND SIDE STREETS
- (2) PREPARING ROW / REMOVAL OF EXISTING ITEMS TO BE DONE ONLY IN AREAS WHERE WORK IS OCCURING. AS PER THE PHASES NOTED BELOW.
- (3) PLANING, SURFACE TREATMENTS AND OVERLAYS SHALL BE PERFORMED IN THE DIRECTION OF TRAFFIC. BEGIN SURFACE CONSTRUCTION ON HIGH SIDE OF ROAD TO AVOID WATER PONDING ISSUES.
- (4) A BRIEF DESCRIPTION OF THESE PHASES ARE AS FOLLOWS:

PHASE 1

- 1. PLACE ADVANCE WARNING SIGNS ALONG THE PROJECT PER TXDOT BC, TCP, AND WZ STANDARD SHEETS.
- 2. INSTALL EROSION CONTROL MEASURES AS SHOWN ON THE SW3P/TCP LAYOUTS.
- INSTALL TEMPORARY TRAFFIC CONTROL DEVICES AS SHOWN ON THE SW3P/TCP LAYOUTS. REFER TO TCP STANDARDS.
- CONSTRUCT PHASE 1 AS SHOWN IN THE PLANS.
- 5. COMPLETE WORK IN PHASE 1 BEFORE PROCEEDING TO PHASE 2.

PHASE 2

- INSTALL TEMPORARY TRAFFIC CONTROL DEVICES AS SHOWN ON THE SW3P/TCP LAYOUTS. REFER TO TCP STANDARDS.
- INSTALL EROSION CONTROL MEASURES AS SHOWN ON THE SW3P LAYOUTS.
- CONSTRUCT PHASE 2 AS SHOWN IN THE PLANS.
- INSTALL FINAL STRIPING NEEDED TO OPEN 2 NORTHBOUND AND 2 SOUTHBOUND LANES.
- COMPLETE ALL WORK IN PHASE 2 BEFORE PHASE 3.

PHASE 3

- INSTALL TEMPORARY TRAFFIC CONTROL DEVICES AS SHOWN ON THE SW3P/TCP LAYOUTS. REFER TO TCP STANDARDS. PLACE FINAL STRIPING AS NEEDED FOR THE PHASE 3 CONFIGURATION.
- INSTALL EROSION CONTROL MEASURES AS SHOWN ON THE SW3P LAYOUTS
- SAWCUT AND WIDEN AS SHOWN IN PLANS. MILL SHOULDER AND PLACE FINAL LIFT OF ASPHALT.
- CONSTRUCT PHASE 3 AS SHOWN IN THE PLANS
- COMPLETE FINAL STRIPING.
- PERFORM FINAL CLEANUP AND INSTALL PERMANENT SEEDING.

3. SAFETY

- THE CONTRACTOR WILL PROVIDE, CONSTRUCT AND MAINTAIN BARRICADES AND SIGNS IN ACCORDANCE WITH STATE STANDARDS. ANY SIGNS REQUIRED THAT ARE NOT DETAILED IN THE STANDARD SHEETS SHALL BE IN CONFORMANCE WITH THE "TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS" AND THE "STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS."
- BARRICADES AND WARNING SIGNS SHALL BE PLACED AS INDICATED ON THE PLANS. THIS SHALL BE CONSIDERED THE MINIMUM REQUIRED TO PROVIDE FOR THE SAFETY OF TRAFFIC DURING CONSTRUCTION. THE CONTRACTOR SHALL PROVIDE AND MAINTAIN OTHER SUCH BARRICADES AND SIGNS DEEMED NECESSARY BY THE ENGINEER OR AS DIRECTED BY FIELD CONDITIONS. TO PROVIDE FOR THE PASSAGE OF TRAFFIC IN SAFETY AT ALL TIMES
- THE CONTRACTOR SHALL PROVIDE AND MAINTAIN FLAGGERS AS DIRECTED/APPROVED BY THE ENGINEER, AT SUCH POINTS, AND FOR SUCH PERIODS OF TIME AS MAY BE REQUIRED, TO PROVIDE FOR THE SAFETY OF THE TRAVELING PUBLIC AND THE CONTRACTOR'S PERSONNEL
- THE CONTRACTOR SHALL KEEP THE ROADWAY CLEAN AND FREE OF DIRT OR OTHER MATERIALS DURING HAULING OPERATIONS. IF THE CONTRACTOR DOES NOT MAINTAIN A CLEAN ROADWAY, THEY SHALL CEASE ALL CONSTRUCTION OPERATIONS, WHEN DIRECTED BY THE ENGINEER, TO CLEAN THE ROADWAY TO THE SATISFACTION OF THE ENGINEER.

4. HAULING EQUIPMENT

- (1) THE USE OF RUBBER-TIRED EQUIPMENT WILL BE REQUIRED FOR MOVING DIRT OR OTHER MATERIALS ALONG OR ACROSS PAVEMENTED SURFACES. WHERE THE CONTRACTOR DESIRES TO MOVE ANY EQUIPMENT NOT LICENSED FOR OPERATION ON PUBLIC HIGHWAYS, ON OR ACROSS PAVEMENT. THEY SHALL PROTECT THE PAVEMENT FROM DAMAGE AS DIRECTED / APPROVED BY THE ENGINEER.
- (2) THROUGHOUT CONSTRUCTION OPERATIONS, THE CONTRACTOR WILL BE REQUIRED TO CONDUCT THEIR HAULING OPERATIONS IN A MANNER SUCH THAT VEHICLES WILL NOT HAUL OVER PREVIOUSLY RECOMPACTED SUBGRADE OR COMPACTED BASE MATERIAL, EXCEPT IN SHORT SECTIONS FOR DUMPING MANIPULATIONS

5. FINAL CLEAN UP

UPON COMPLETION OF THE WORK AND BEFORE FINAL ACCEPTANCE AND FINAL PAYMENT IS MADE, THE CONTRACTOR SHALL CLEAR AND REMOVE FROM THE SITE ALL SURPLUS AND DISCARDED MATERIALS AND DEBRIS OF EVERY KIND AND LEAVE THE ENTIRE PROJECT IN A SMOOTH, NEAT AND SIGHTLY CONDITION

6. PAYMENT


ALL BARRICADES, SIGNS, AND FLAGGERS SHALL BE SUBSIDIARY TO ITEM 502 BARRICADES, SIGNS AND TRAFFIC HANDLING, ALL EROSION AND SEDIMENT CONTROL DEVICES WILL BE PAID FOR UNDER ITEM 506 TEMPORARY EROSION, SEDIMENTATION, AND ENVIRONMENTAL CONTROLS. ALL WORK ZONE PAVEMENT MARKINGS WILL BE PAID FOR UNDER ITEM 662 WORK ZONE PAVEMENT MARKINGS. ALL OTHER WORK AND MATERIALS SHALL BE SUBSIDIARY TO THE VARIOUS BID ITEMS UNLESS OTHERWISE INDICATED IN THE PLANS.



APPROVAI



SAN ANTONIO I AUSTIN I HOUSTON I FORT WORTH I DALLAS 2000 NW LOOP 410 | SAN ANTONIO, TX 78213 | 210.375.9000



STONE GARDEN

TCP NARRATIVE

SHEET 1 OF 1									
FED. RD. DIV. NO.	STATE	FEDER	HIGHWAY NO.						
6	TEXAS		US 181						
DIST.	COUNTY	CONT. NO.	SECT. NO.	JOB NO.	SHEET NO.				
SAT	BEXAR	0100	02	XXX	13				

A. <u>General site data</u>
1. PROJECT LIMITS: Same as stated on the Title Sheet
2. PROJECT SITE MAPS: * Pro ject Latitude 29.2896 Pro ject Longitude -98.3534 * Pro ject Location Map: Shown on Title Sheet * Drainage Patterns: Shown on Drainage Area Maps 77 * Approx. Slopes Anticipated After Major Gradings and Areas of Soil Disturbance: Shown on Typical Sections 5 THRU 6 * Major Controls and Locations of Stabilization Practices: Shown on SW3P Sheets 17 THRU 34 * Project Specific Locations: Off-site waste, borrow, or storage areas are not part of this SW3P.
* Surface Waters and Discharge Locations: Shown on Drainage and Culvert Layout Sheets 77
3. PROJECT DESCRIPTION: Same description as stated on Title Sheet
Non-Joint Bid Utilities are not part of this SW3P.
A FOR MAIOR SOLI DISTURBING ACTIVITIES SEQUENCE OF EVENTS.
4. FOR MAJOR SOIL DISTURBING ACTIVITIES SEQUENCE OF EVENTS: 1. Install controls down-slope of work area and initiate inspection and maintenance activities.
Begin phased construction with interim stabilization practices. Adjust erosion and sedimentation controls during construction to meet requirements and changing conditions and as directed/approved by the Engineer.
3. Major soil disturbing activities may include but are not limited to: right-of-way preparation, cut and/or fill to improve roadway profile, final grading and placement of topsoil and the following (if marked):
5. EXISTING AND PROPOSED CONDITIONS:
Description of existing vegetative cover: (Provide type and description of vegetative cover) Percentage of existing vegetative cover: 50%. Existing vegetative cover:(mark one) Thick or uniformly established Thin and Patchy None or minimal cover
Description of soils: (Provide classification and description of soils)
Site Acreage: 14.55 ACRES Acreage disturbed: ,9 ACRES Site runoff coefficient (pre-construction): 0.49 Site runoff coefficient (post-construction): 0.55
6. RECEIVING WATERS: (Mark all that apply)
X A classified stream does not pass through project.
A classified stream passes through project. Name Segment Number Name of receiving waters that will receive discharges
from disturbed areas of the project: <u>UPPER SAN ANTONIO RIVER (TCEQ SEG. 1911)</u>
Site is in a Municipal Separate Storm Sewer System (MS4). MS4 Operator (name):

B. BEST MANAGEMENT PRACTICES

General timing or sequence for implementation of BMPs shall be as required and/or as directed/approved by the Engineer to provide adequate controls. BMPs shown on plan sheets are to be considered "proposed" unless/until install date is shown. BMPs are to reduce sediments from road construction activities.

shown. BMPs are to reduce sediments from road construction activities.
1. <u>SOIL STABILIZATION PRACTICES</u> : (Select T = Temporary or P = Permanent, as applicable)
P SEEDING P PRESERVATION OF NATURAL RESOURCES MULCHING (Hay or Straw) FLEXIBLE CHANNEL LINER BUFFER ZONES RIGID CHANNEL LINER PLANTING SOIL RETENTION BLANKET COMPOST/MULCH FILTER BERM COMPOST MANUFACTURED TOPSOIL SODDING OTHER: (Specify Practice)
2. STRUCTURAL PRACTICES: (Select T = Temporary or P = Permanent, as applicable)
SILT FENCES HAY BALES T ROCK FILTER DAMS DIVERSION, INTERCEPTOR, OR PERIMETER DIKES DIVERSION, INTERCEPTOR, OR PERIMETER SWALES DIVERSION DIKE AND SWALE COMBINATIONS PIPE SLOPE DRAINS PAVED FLUMES T ROCK BEDDING AT CONSTRUCTION EXIT TIMBER MATTING AT CONSTRUCTION EXIT CHANNEL LINERS SEDIMENT TRAPS SEDIMENT BASINS STORM INLET SEDIMENT TRAP STONE OUTLET STRUCTURES CURBS AND GUTTERS STORM SEWERS VELOCITY CONTROL DEVICES OTHER: (Specify Practice)
3. STORM WATER MANAGEMENT: The proposed facility was designed in consideration of hydraulic design standards to convey stormwater in a manner that is protective of public safety and property. The control of erosion from the facility is inherent to the design. Additional factors affecting post-construction
stormwater at the project location include:(mark all that apply)
 X Existing or new vegetation provides natural filtration. The design includes provisions for permanent erosion controls provided by strategically placed pervious and impervious surfaces.
Project includes permanent sedimentation controls (other than grass).
<u>X</u> Velocities do not require dissipation devices.
Velocity-dissipation devices included in the design. Other:
4. NON-STORM WATER DISCHARGES:
Off-site discharges are prohibited except as follows:
I. Discharges from fire fighting activities and/or fire hydrant flushings.
 Vehicle, external building, and pavement wash water where detergents and soaps are not used and where spills or leaks of toxic or hazardous materials have not occurred (unless all spilled material has been removed).
3. Plain water used to control dust.
4. Plain water originating from potable water sources.
 Uncontaminated groundwater, spring water or accumulated stormwater. Foundation or footing drains where flows are not contaminated with process materials such as solvents.
7. Other:
Concrete truck wash water discharges on the site should be prohibited or minimized. If allowed by the Engineer, they must be managed in a manner so as not to contaminate surface water. They must not be located in areas of concentrated flow. Concrete truck wash-out locations must be shown on the SW3P Layout and included in the inspections.

Hazardous material spill/leak shall be prevented or minimized. At a minimum, this includes asphalt products, fuels, oils, lubricants, solvents, paints, acids, concrete curing compounds and chemical additives for soil stabilization. BMPs shall be implemented to the storage areas of these products. All spills must be cleaned and disposed properly and reported to the Engineer. Report any release at or above the reportable quantity during a 24 hour period to the National Response Center at I-800-424-8802.

C. OTHER REQUIREMENTS & PRACTICES

1. MAINTENANCE:

All erosion and sediment controls shall be maintained in good working order. If a repair is necessary, it shall be performed before the next anticipated storm event but no later than 7 calendar days after the surrounding exposed ground has dried sufficiently to prevent further damage from equipment. If maintenance prior to the next anticipated storm event is impracticable, maintenance must be scheduled and accomplished as soon as practicable. Disturbed areas on which construction activities have ceased, temporarily or permanently, shall be stabilized within 14 calendar days unless they are scheduled to and do resume within 21 calendar days. The areas adjacent to creeks and drainageways shall have priority followed by protecting storm sewer inlets.

2. INSPECTION:

For areas of the construction site that have not been finally stabilized, areas used for storage of materials, structural control measures, and locations where vehicles enter or exit the site, personnel provided by the permittee and familiar with the SW3P must inspect disturbed areas at least once every seven (7) calendar days. An Inspection and Maintenance Report shall be prepared for each inspection and the controls shall be revised on the SW3P within seven (7) calendar days following the inspection.

3. WASTE MATERIALS:

All non-hazardous municipal waste materials such as litter, rubbish, trash and garbage located on or originating from the project shall be collected and stored in a securely lidded metal dumpster, provided by the Contractor. The dumpster shall be emptied as necessary or as required by local regulation and the trash shall be hauled to a permitted disposal facility. The burying of non-hazardous municipal waste on the project shall not be permitted. Construction material waste sites, stockpiles and haul roads shall be constructed to minimize and control the amount of sediment that may enter receiving waters. Construction material waste sites shall not be located in any wetland, water body or stream bed. Construction staging areas and vehicle maintenance areas shall be constructed in a manner to minimize the runoff of pollutants.

4. OFFSITE VEHICLE TRACKING:

REVISION DATE: 10/12

Off-site vehicle tracking of sediments and the generation of dust must be minimized. Excess sediments on road shall be removed on a regular basis as directed/approved by the Engineer.

5. OTHER:

See the EPIC sheet for additional environmental information.

DESIGN

HEATHER MCNEAL

114428

HEATHER MCNEAL, P.E.

DATE

DATE

DAN THOMA

98622

10/13/2023





STORM WATER POLLUTION PREVENTION PLAN (SW3P)

FED.RD. DIV.NO.	FE	HIGHWAY NO.		
6			US 181	
STATE	DISTRICT	COUNTY	05 161	
TEXAS	SAT	BEXAR	SHEET	
CONTROL	SECTION	JOB	NO.	
0100	02	XXX	14	

TxDOT c				
	II.	WORK IN OR NEAR STREA ACT SECTIONS 401 AND	'.	TLANDS CLEAN
any purpose whatsoever. formats or for incorrect			(USACE) Permit required for n any potential USACE juriso treams, or wetlands.	
ourpose ats or		The Contractor shall adher the following permit(s):	e to all of the terms and co	onditions associ
orm o		No Permit Required		
		☐ Nationwide Permit (NWP)	14 - Pre-construction Notic	e (PCN) not Requ
othe		☐ Nationwide Permit 14 - F	PCN Required	
×PO +		☐ Individual 404 Permit Re	equired	
made by TxDOT for standard to other		Other Nationwide Permit	Required: NWP#	
kind is mad of this sta		and check Best Management P	ers of the US permit applies ractices (BMPs) planned to d ect total suspended solids	control erosion,
kir of		1.		
		2.		
		3.		
		4		
		4.		
_				
2 PM gn\Civil\S†andards\SW3P\epic.dgn				
pic				
3P\e				
\SW3		401 Best Management Pra	ctices: (Not applicable	if no USACE p
rds		Erosion	Sedimentation	Post-Construc
ppu		☐ Temporary Vegetation	Silt Fence	Vegetative Filt
Sto		☐ Blankets/Matting	Rock Berm	Retention/Irrig
		Mulch	☐ Triangular Filter Dike	Extended Detent
		Sodding	Sand Bag Berm	Constructed Wet
2 P gn/		Interceptor Swale	Straw Bale Dike	Wet Basin
5: 1 esi		Diversion Dike	Brush Berms	Erosion Control
2:55: 7\Des		Erosion Control Compost	Erosion Control Compost	Mulch Filter Be
		Mulch Filter Berm and Socks	Mulch Filter Berm and Socks	Compost Filter
13/2023		Compost Filter Berm and Socks		
10/13 P:\12			Stone Outlet Sediment Traps	Sand Filter Sys
- P			Sediment Basins	Sedimentation (
			SSGTINGTITE BGGTT10	Grassy Swales
l				

erosion and sedimentation in accordance with Item 506.

accordance with TPDES Permit TXR 150000.

Required Action

necessary to control pollution or required by the Engineer.

Environmental Protection Agency (EPA) or other inspectors.

☐ No Action Required

the Engineer.

5. NOI required: ☐Yes ☒No

Action No.

I. STORMWATER POLLUTION PREVENTION-CLEAN WATER ACT SECTION 402 Texas Pollutant Discharge Elimination System (TPDES) TXR 150000: Stormwater Discharge Permit or Construction General Permit (CGP) required for projects with 1 or more acres distrubed soil. Projects with any disturbed soil must protect for 1. Prevent stormwater pollution by controlling erosion and sedimentation in 2. Comply with the Storm Water Pollution Prevention Plan (SW3P) and revise when 3. Post Construction Site Notice (CSN) with SW3P information on or near the site, accessible to the public and Texas Commission on Environmental Quality (TCEQ), 4. When Contractor project specific locations (PSL's) increase disturbed soil area to 5 acres or more, Contractor shall submit Notice of Intent (NOI) to TCEQ and Note: If amount of soil disturbance changes, permit requirements may change. S AND WETLANDS CLEAN WATER equired for filling, dredging, rms and conditions associated with tion Notice (PCN) not Required it applies to, location in project plicable if no USACE permit) Post-Construction TSS ☐ Vegetative Filter Strips Retention/Irrigation Systems Extended Detention Basin Constructed Wetlands ☐ Erosion Control Compost Mulch Filter Berm and Socks and Socks Compost Filter Berm and Socks rm and Socks 🗌 Vegetation Lined Ditches ment Traps 🔲 Sand Filter Systems Sedimentation Chambers

III. CULTURAL RESOURCES

Refer to TxDOT Standard Specifications in the event historical issues or archeological artifacts are found during construction. Upon discovery of archeological artifacts (bones, burnt rock, flint, pottery, etc.) cease work in the immediate area and contact the Engineer immediately.

No Action Required	Required	Action
Action No.		
1.		
2.		
3.		

IV. VEGETATION RESOURCES

Preserve native vegetation to the extent practical. Contractor must adhere to Construction Specification Requirements Specs 162,164, 192, 193, 506, 730, 751, 752 in order to comply with requirements for invasive species, beneficial landscaping, and tree/brush removal commitments.

No Action Required ■	Required Action
Action No.	
1.	
2.	

V. FEDERAL LISTED, PROPOSED THREATENED, ENDANGERED SPECIES, CRITICAL HABITAT, STATE LISTED SPECIES, CANDIDATE SPECIES

AND MIGRATORY BIRDS.	
☐ No Action Required	Required Action

1. MIGRATORY BIRD NESTS: Schedule construction activities as needed to meet the following requirements:

A. Do not remove or destroy any active migratory bird nests (nests containing eggs and/or flightless birds) at any time of year. If there are any active nests, they shall not be removed until the nests become inactive.

B. On/in structures, if there are any active nests, they shall not be removed until all nests become inactive. After inactive nests are removed and/or before nest activity begins, deterrent materials may be applied to the structures to prevent future nest building.

2. See Item 5 in General Notes.

3.Contractors will be advised of potential occurrence for the Eastern Plains Spotted Skunk in the project area, and to avoid harming the species if encountered, and to avoid unnecessary impacts to dens.

If any of the listed species are observed, cease work in the immediate area, do not disturb species or habitat and contact the Engineer immediately. The work may not remove active nests from bridges and other structures during nesting season of the birds associated with the nests. If caves or sinkholes are discovered, cease work in the immediated area, and contact the Engineer immediately.

VI. HAZARDOUS MATERIALS OR CONTAMINATION ISSUES

General (applies to all projects):

Comply with the Hazard Communication Act (the Act) for personnel who will be working with hazardous materials by conducting safety meetings prior to beginning construction and making workers aware of potential hazards in the workplace. Ensure that all workers are provided with personal protective equipment appropriate for any hazardous materials used. Obtain and keep on-site Material Safety Data Sheets (MSDS) for all hazardous products used on the project, which may include, but are not limited to the following categories: Paints, acids, solvents, asphalt products, chemical additives, fuels and concrete curing compounds or additives. Provide protected storage, off bare ground and covered, for products which may be hazardous. Maintain product labelling as required by the Act. Maintain an adequate supply of on-site spill response materials, as indicated in the MSDS. In the event of a spill, take actions to mitigate the spill as indicated in the MSDS, in accordance with safe work practices, and contact the District Spill Coordinator immediately. The Contractor shall be responsible for the proper containment and cleanup of all product spills.

Contact the Engineer if any of the follwing are detected:

- * Dead or distressed vegetation (not identified as normal)
- * Trash piles, drums, canister, barrels, etc.
- * Undesirable smells or odors
- * Evidence of leaching or seepage of substances

Hazardous Materials or Contamination Issues Specific to this Project:

je'

If "Yes", a pre- demolition notification must be submitted to the Texas Department of State Health Services. The contractor shall contact TxDOT's Project Engineer 25 calendar days prior to the demolition of the bridges(s) on the project to assist with the notification.

VII. OTHER ENVIRONMENTAL ISSUES

(includes regional	issues	such (as	Edwards	Aquifer	District,	etc.)
No Action Requi	red			Requir	ed Actic	'n	

Action	No.	


		1





ENVIRONMENTAL PERMITS. ISSUES AND COMMITMENTS


EPIC


epic_2015-10-09_SAT.dgn	DN: Tx[TOC	ck: TxDOT	DW:	BW	ck: GAG
T×DOT OCTOBER 2015	CONT	SECT	JOB		H I GHWAY	
REVISIONS					U	S 181
	DIST	COUNTY		SHEET NO.		
	SAT	BEXAR			15	

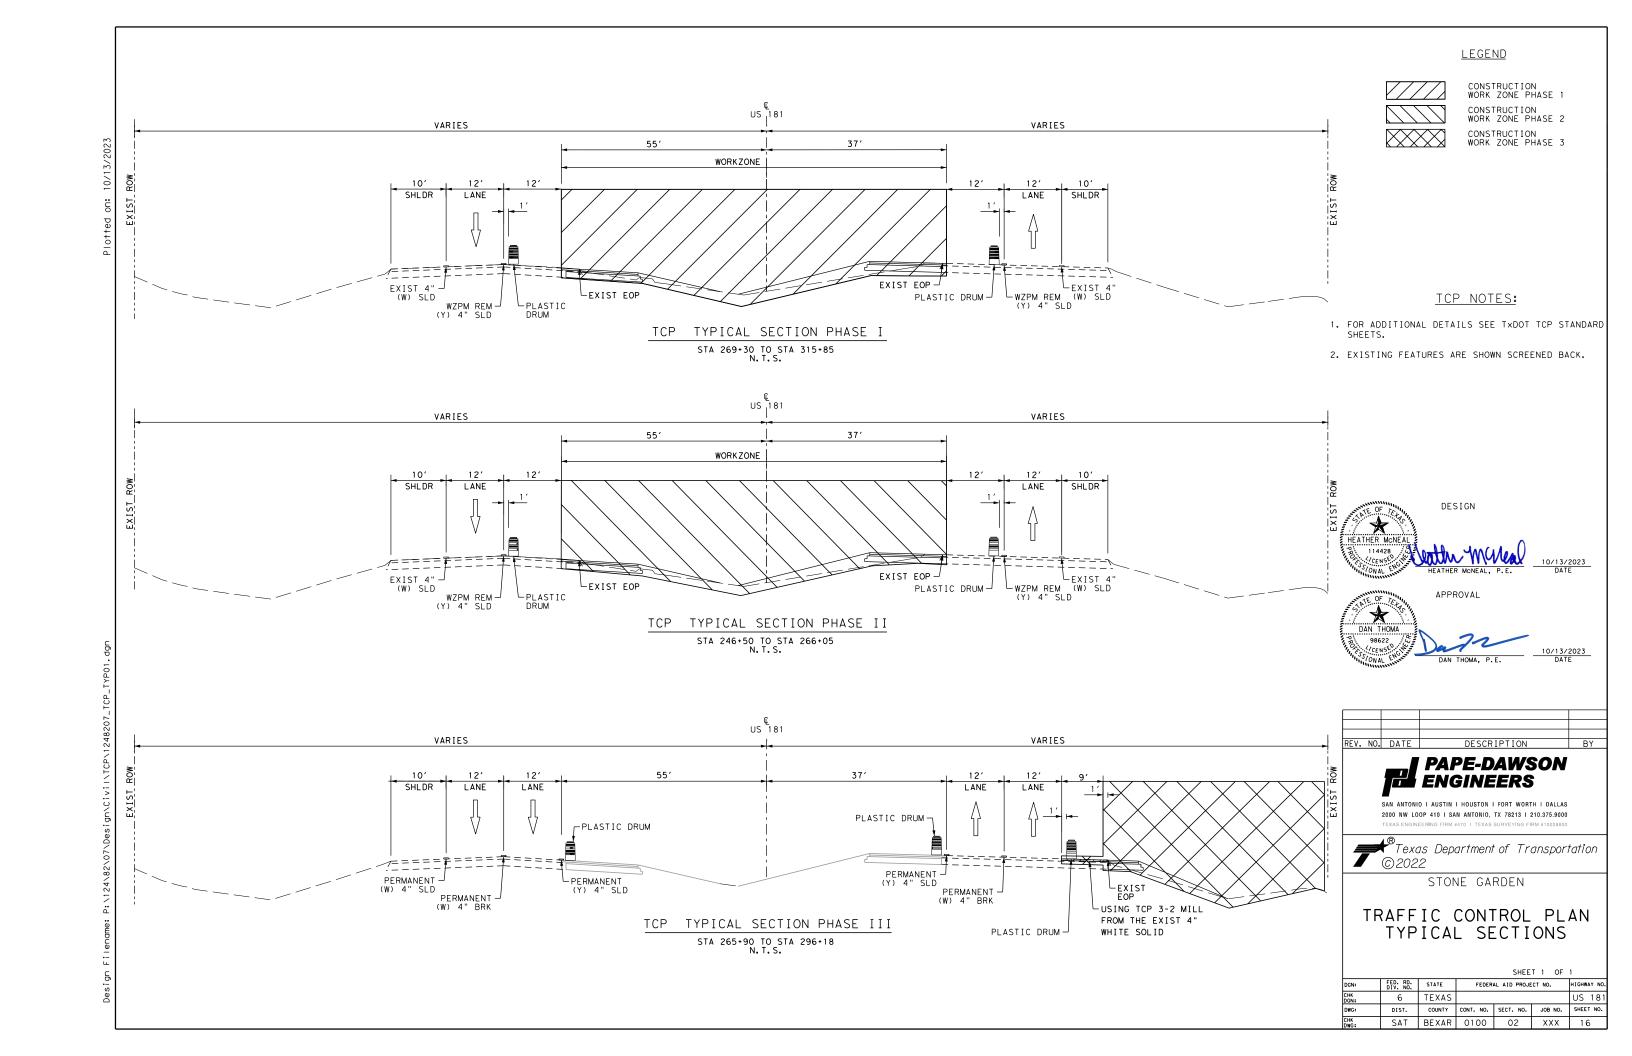


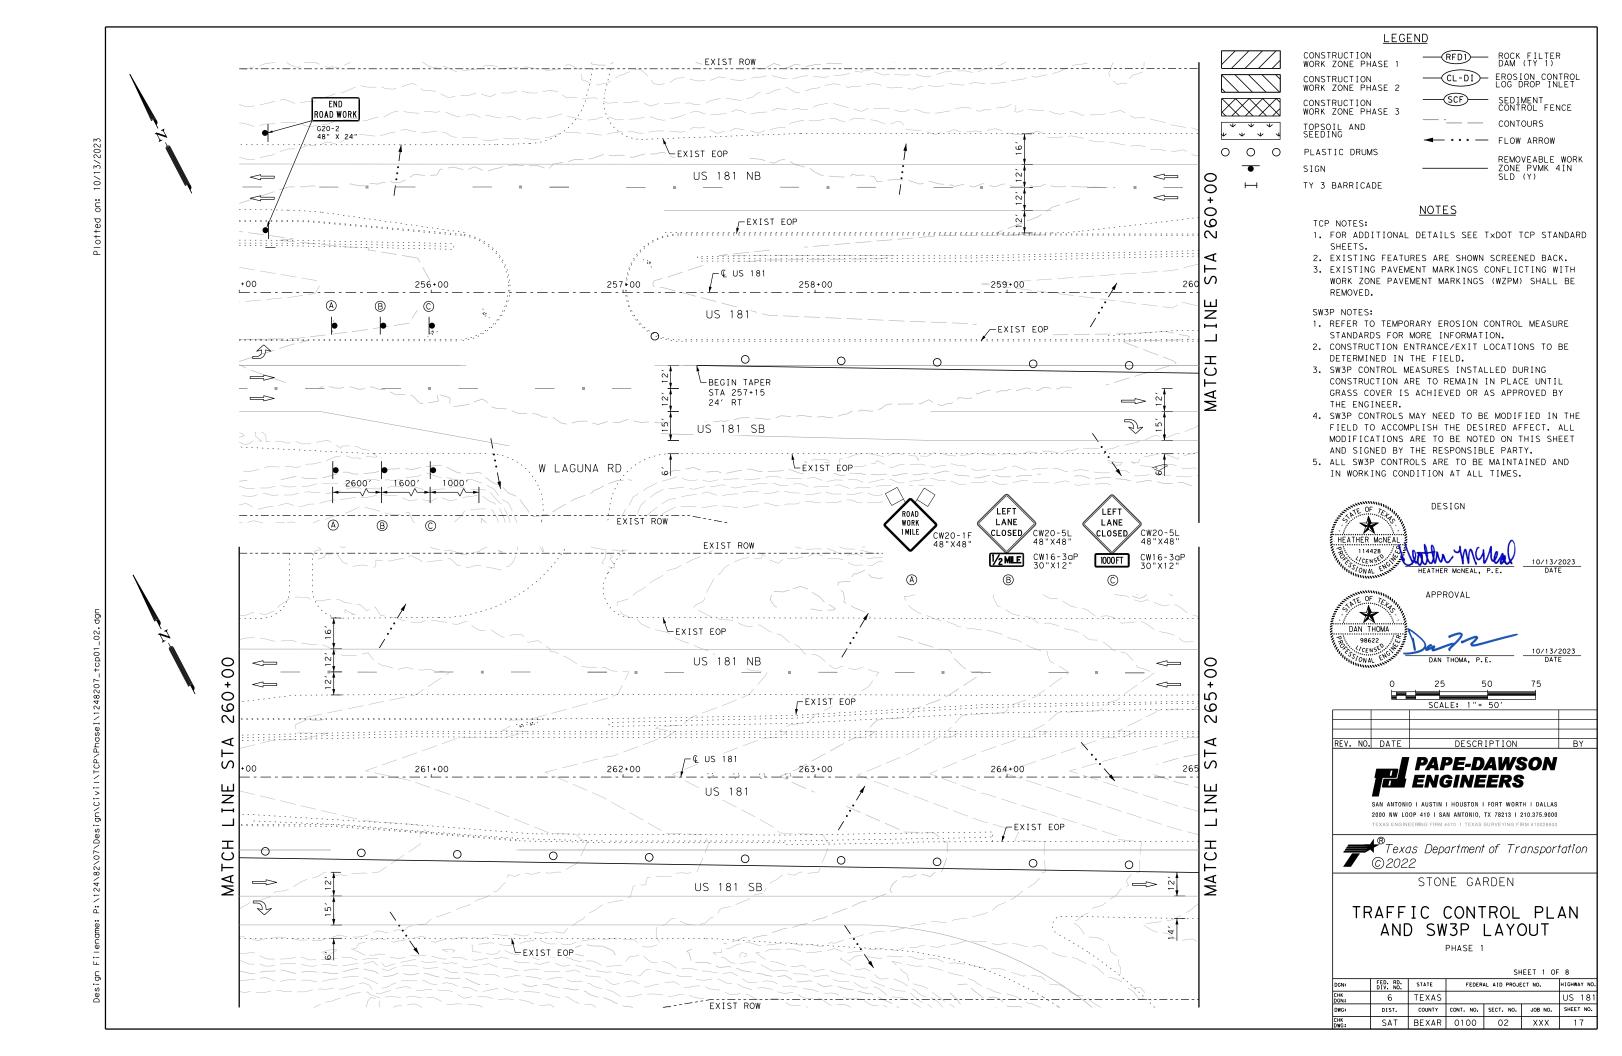


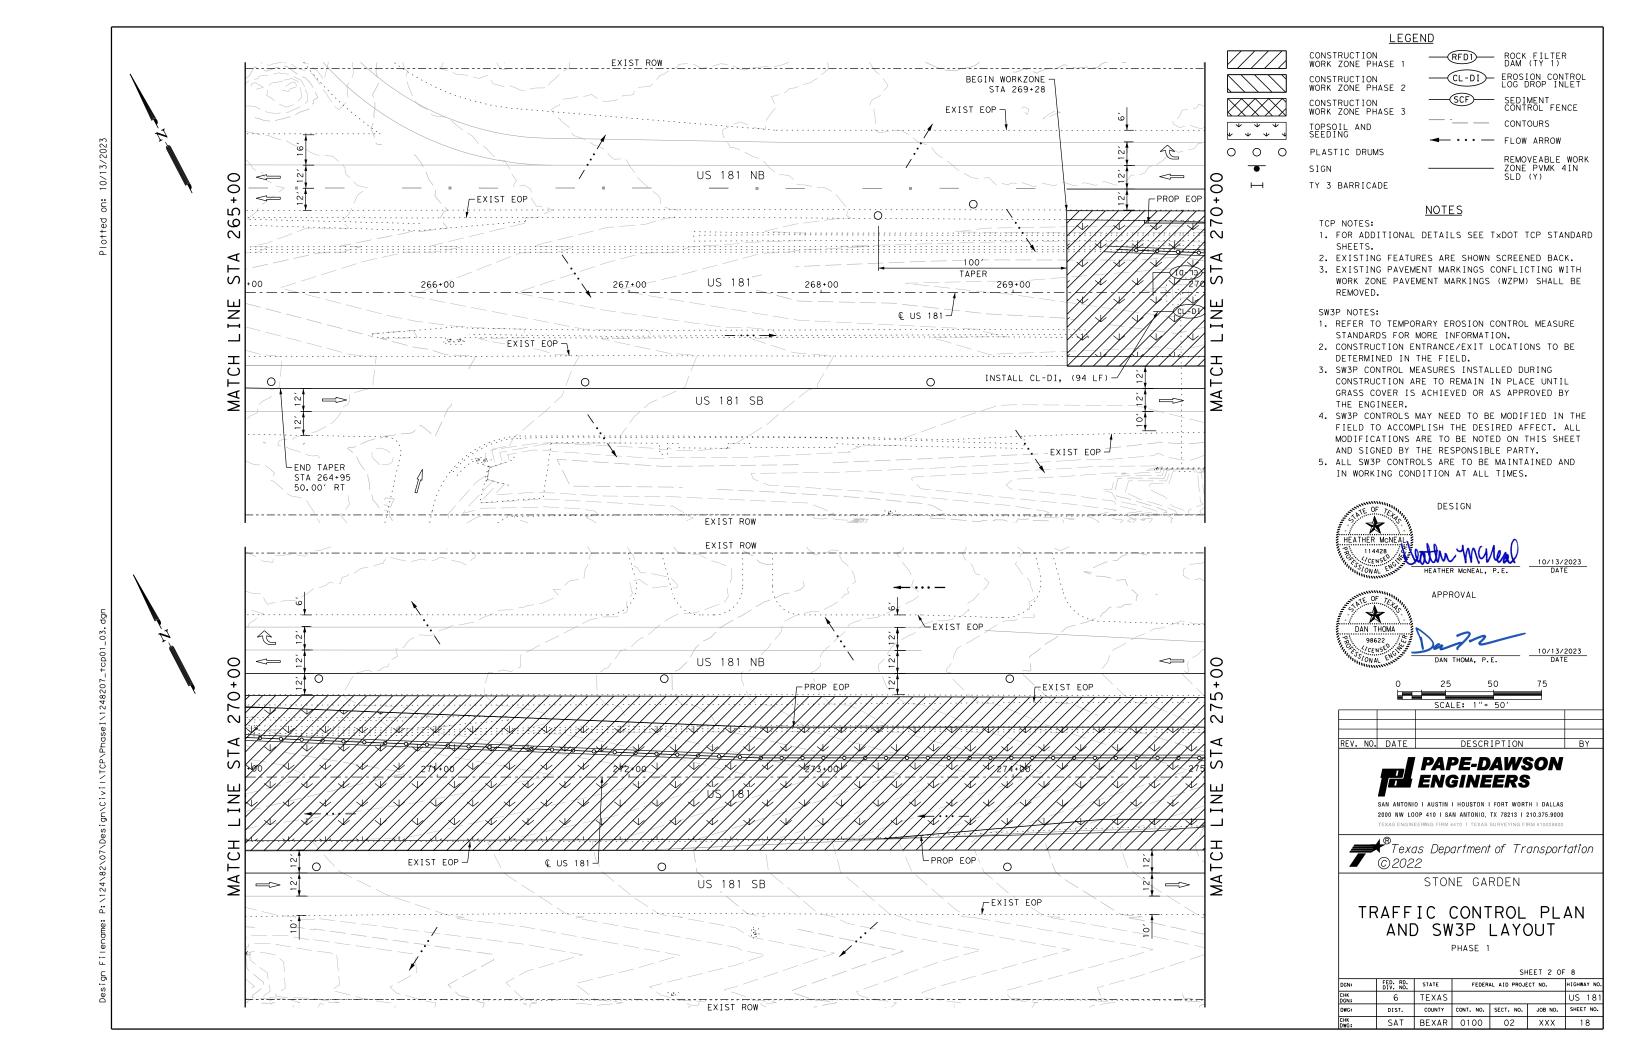


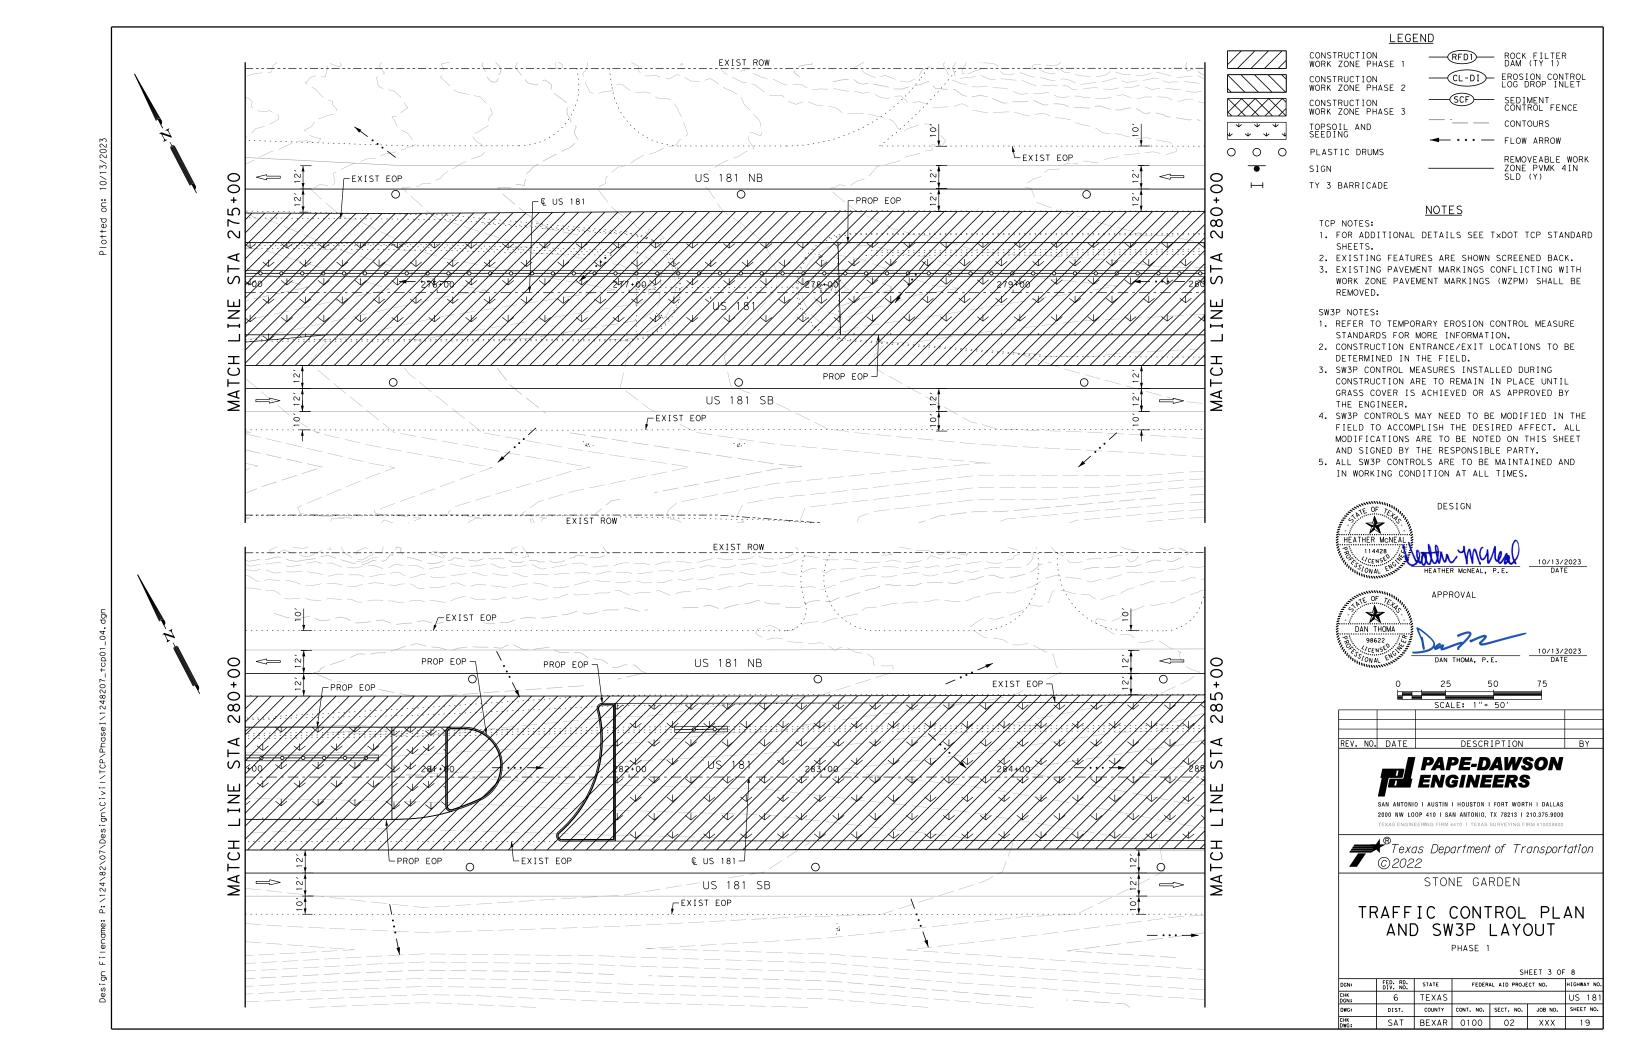


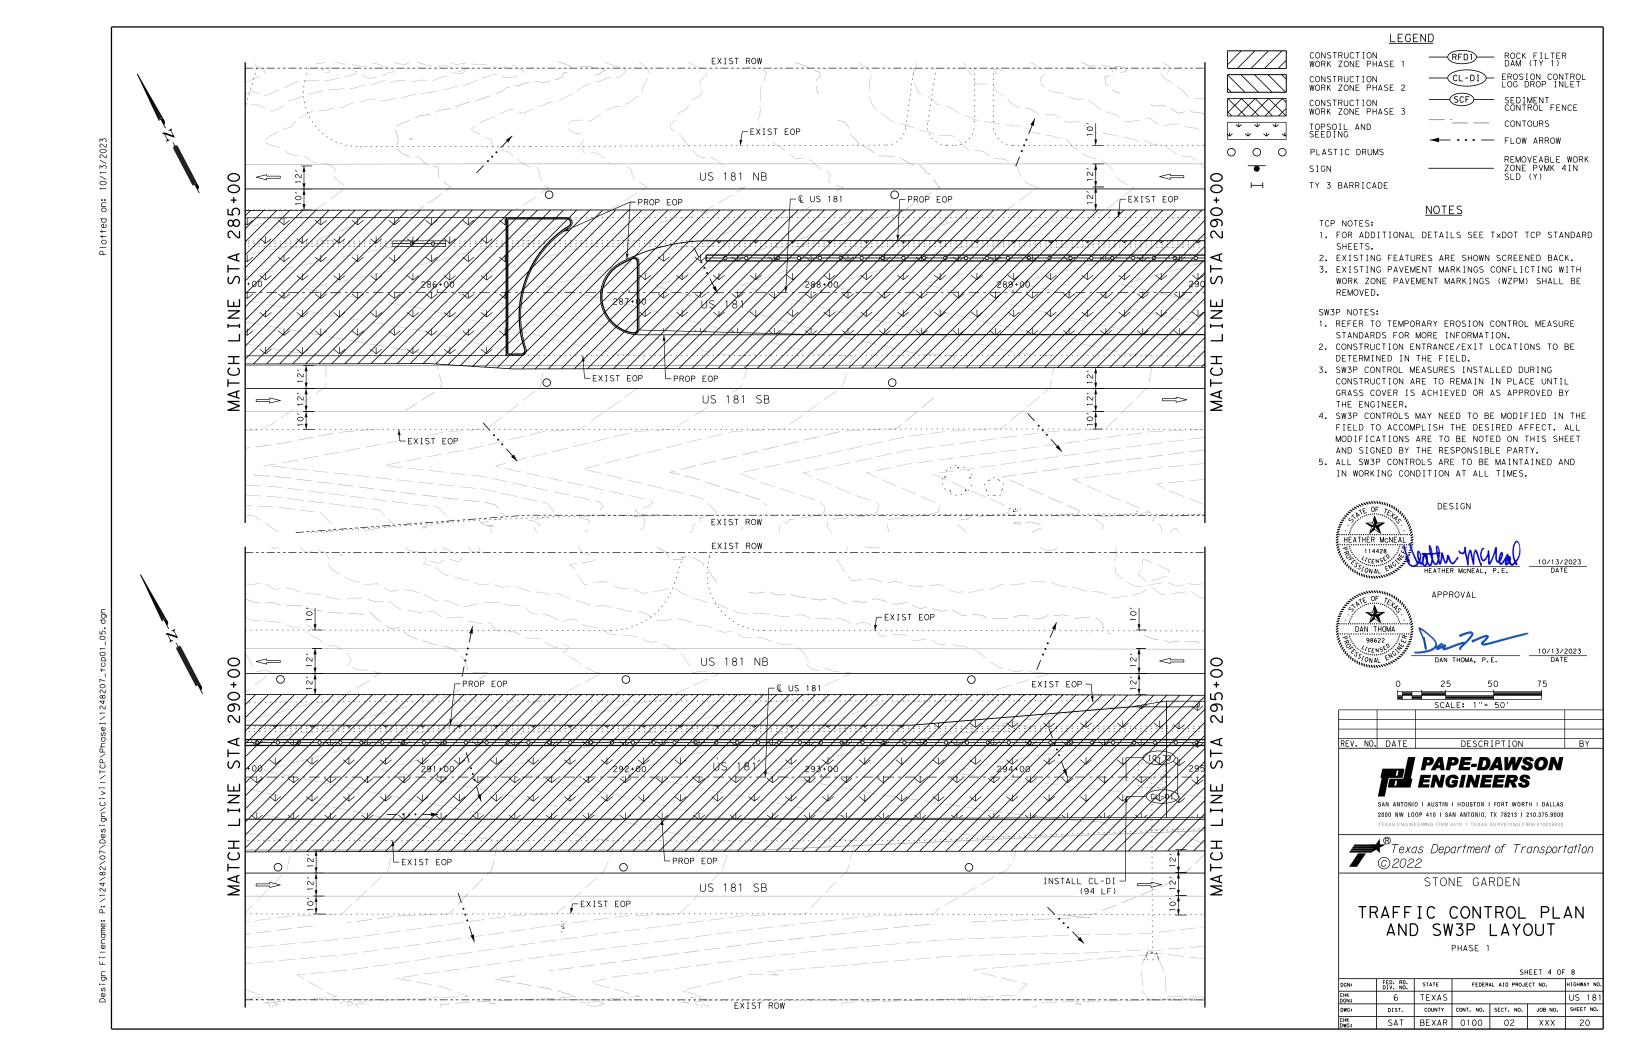


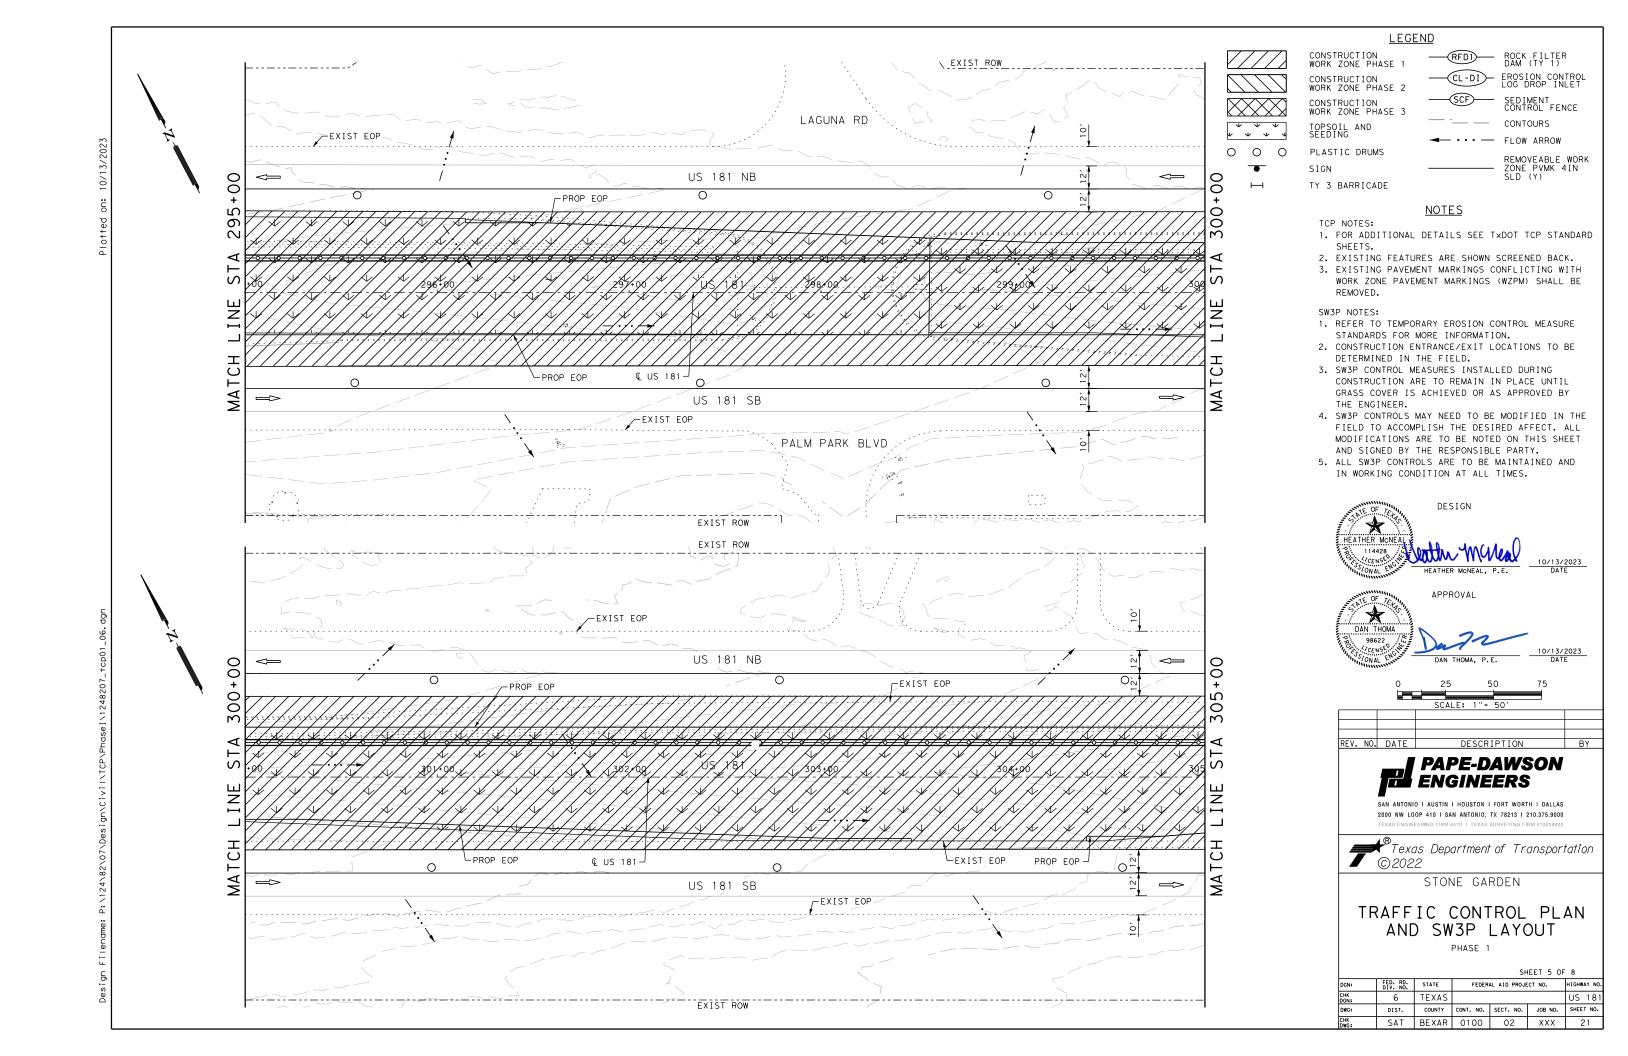


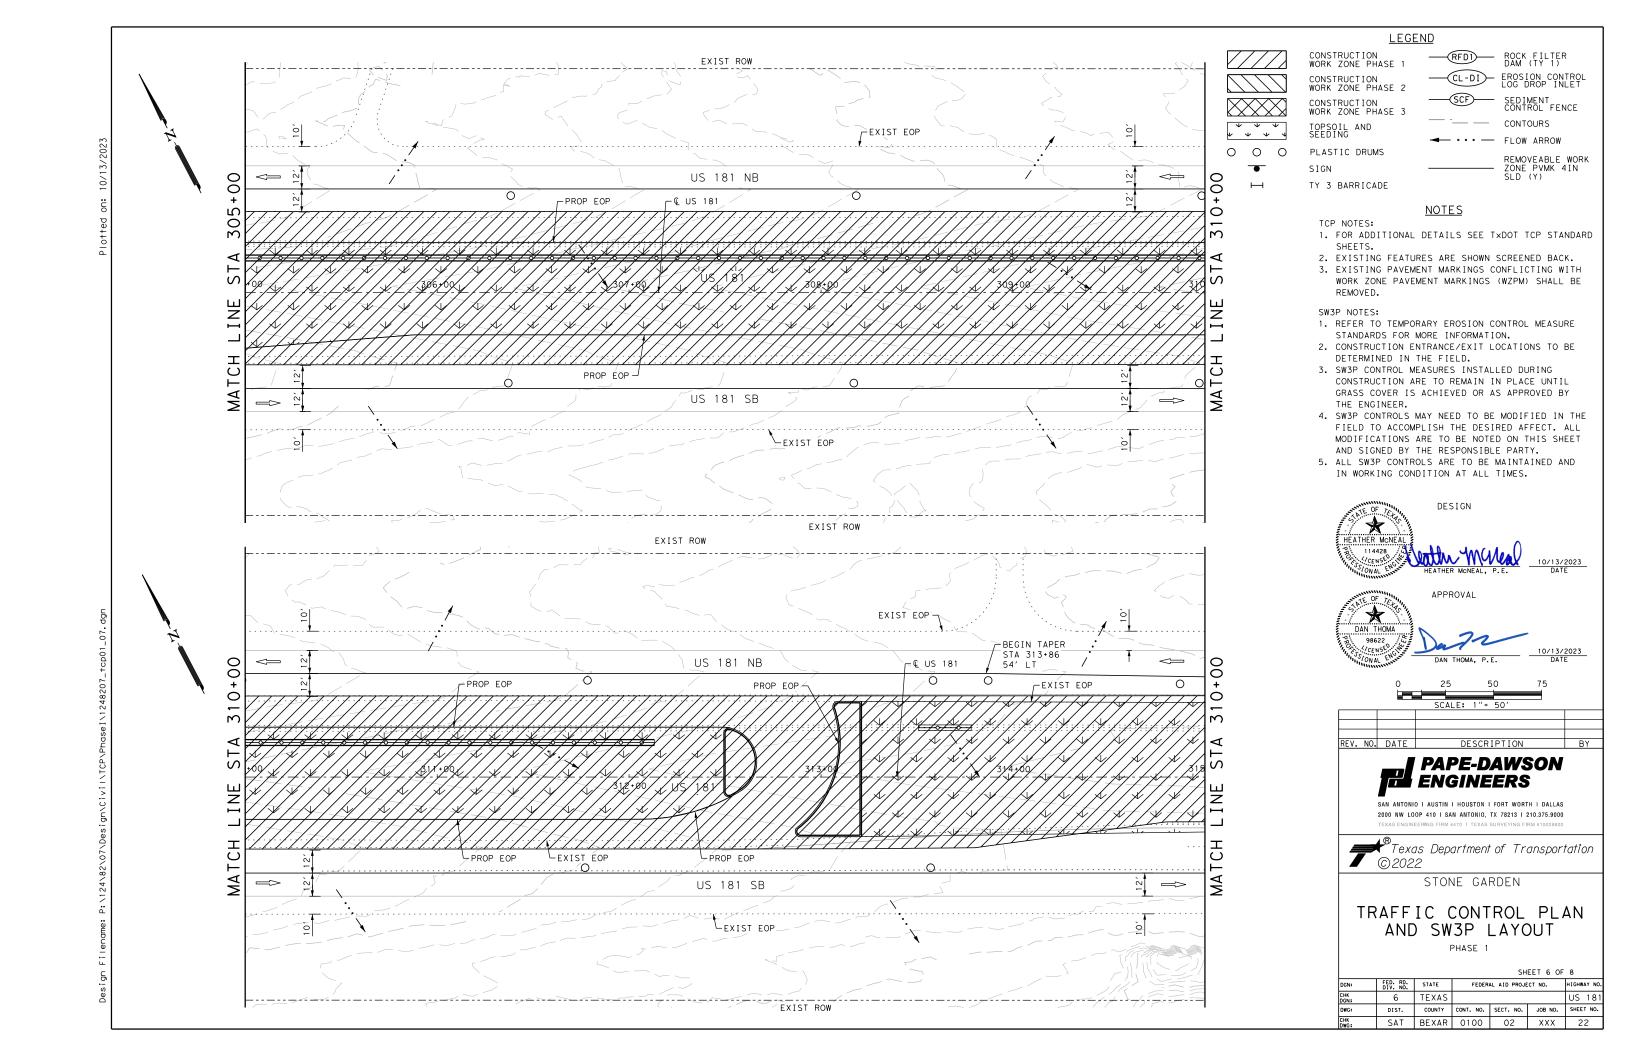


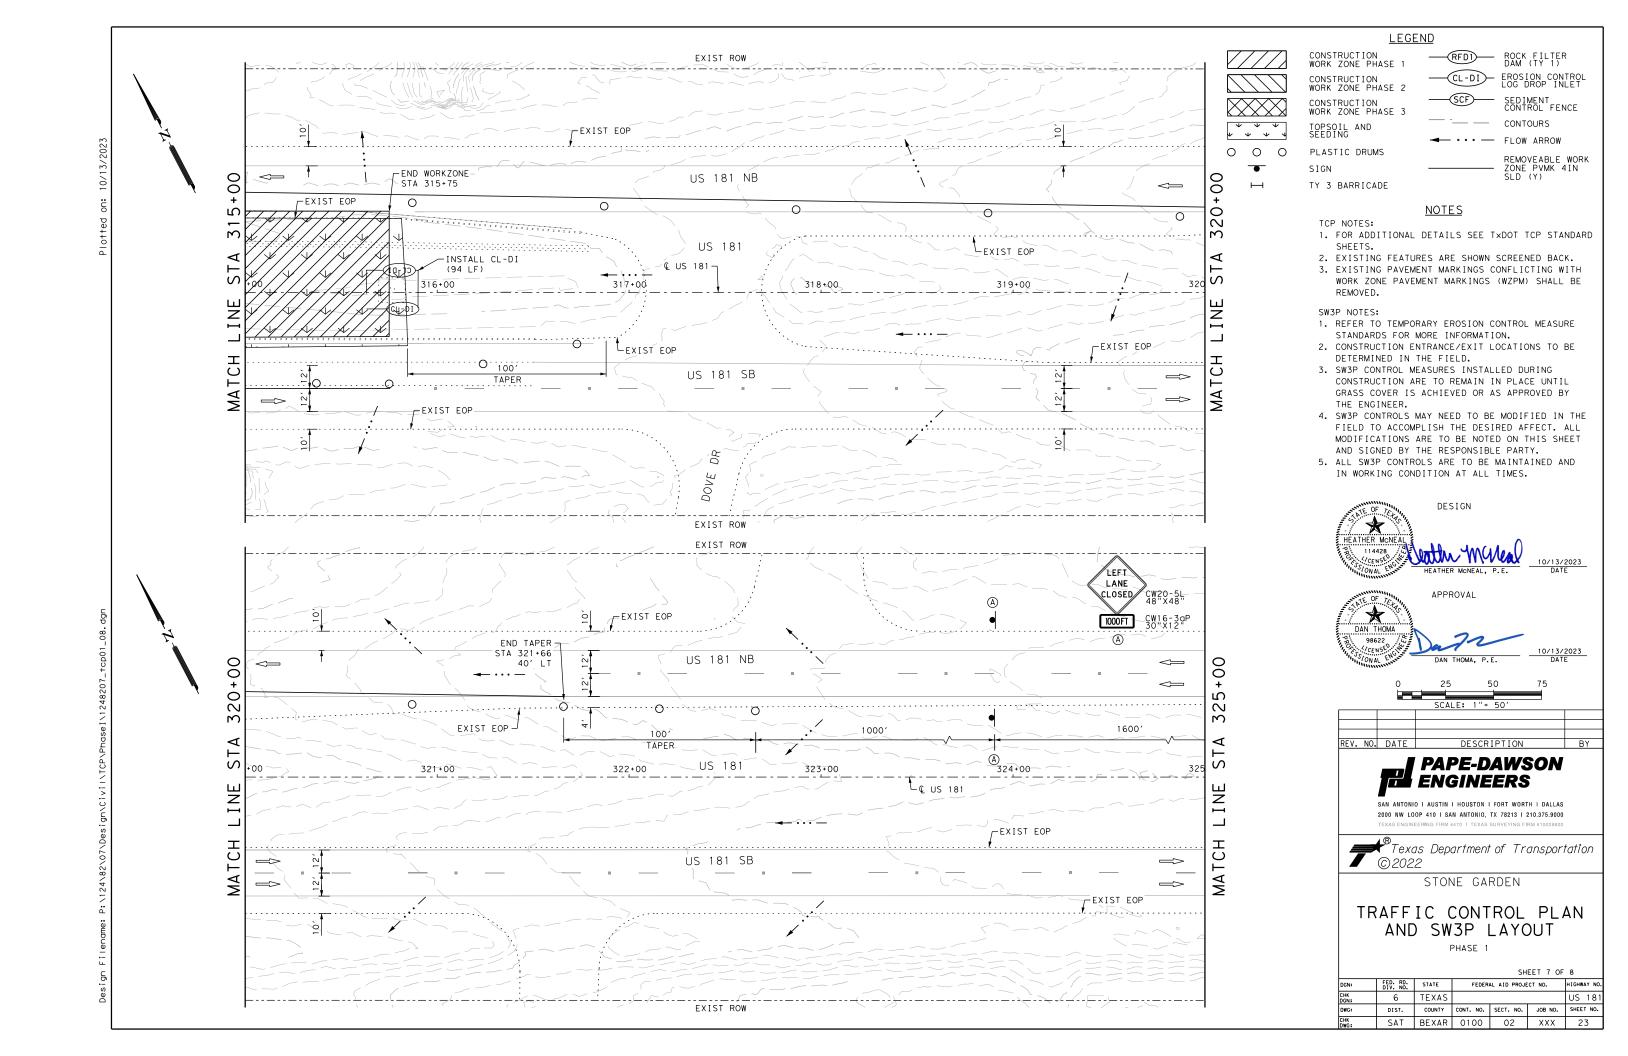


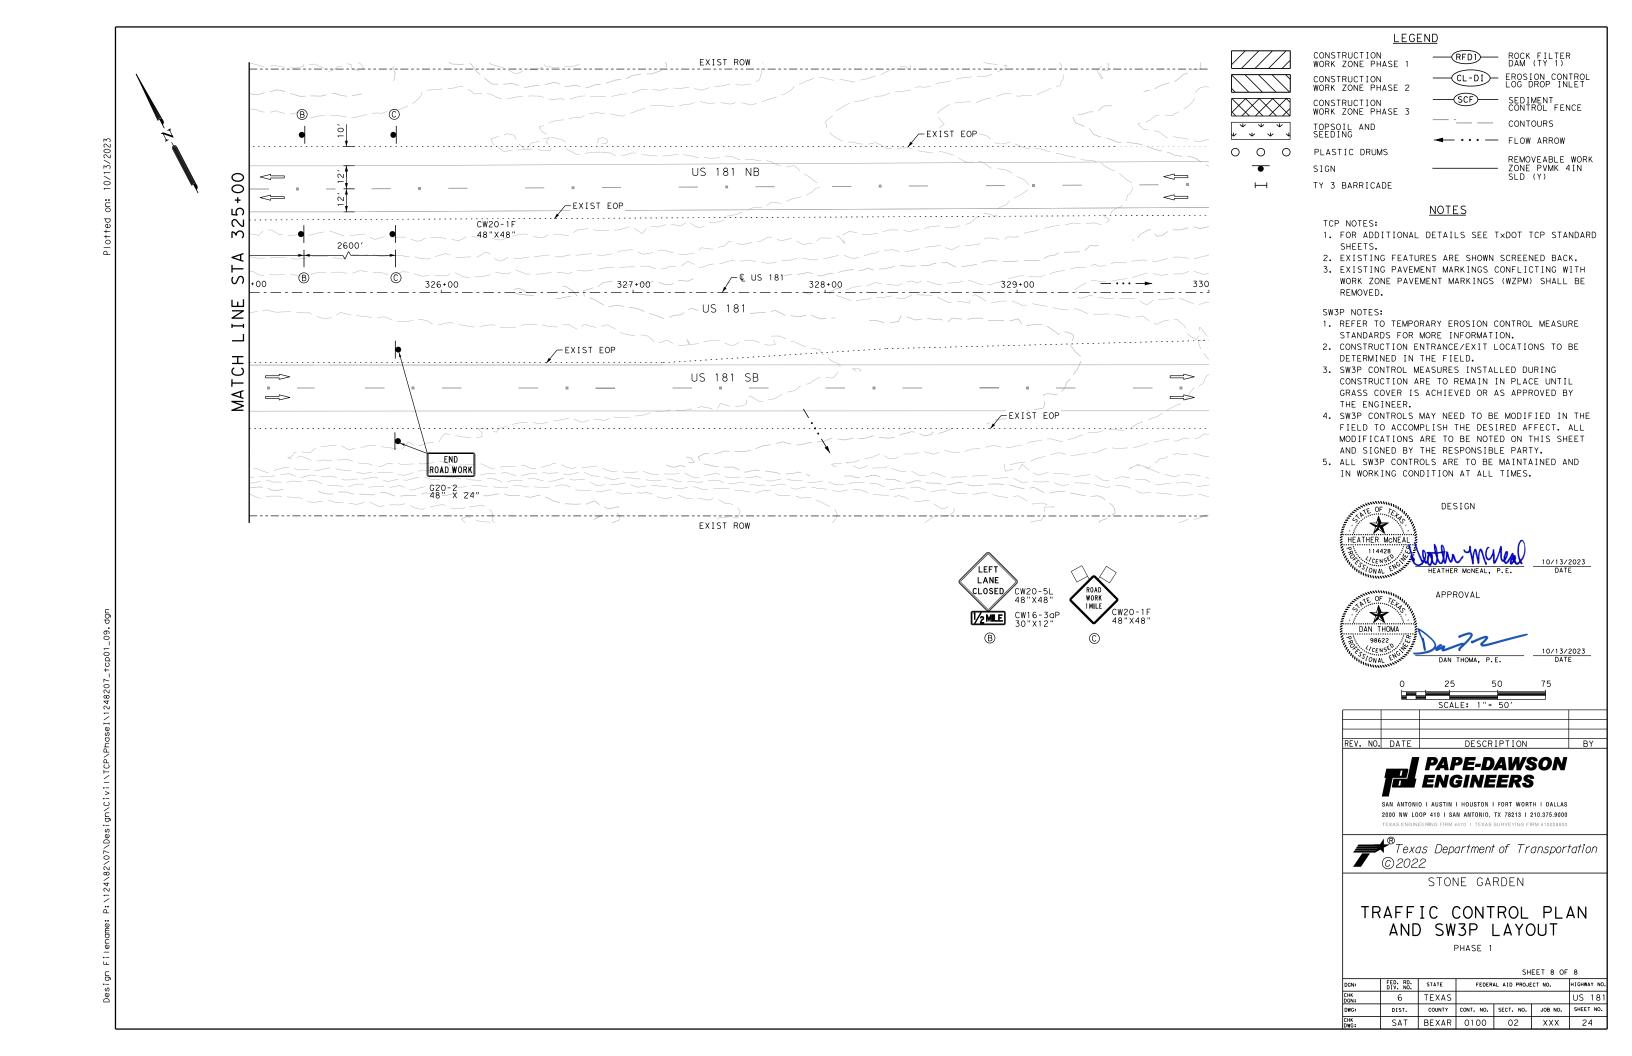


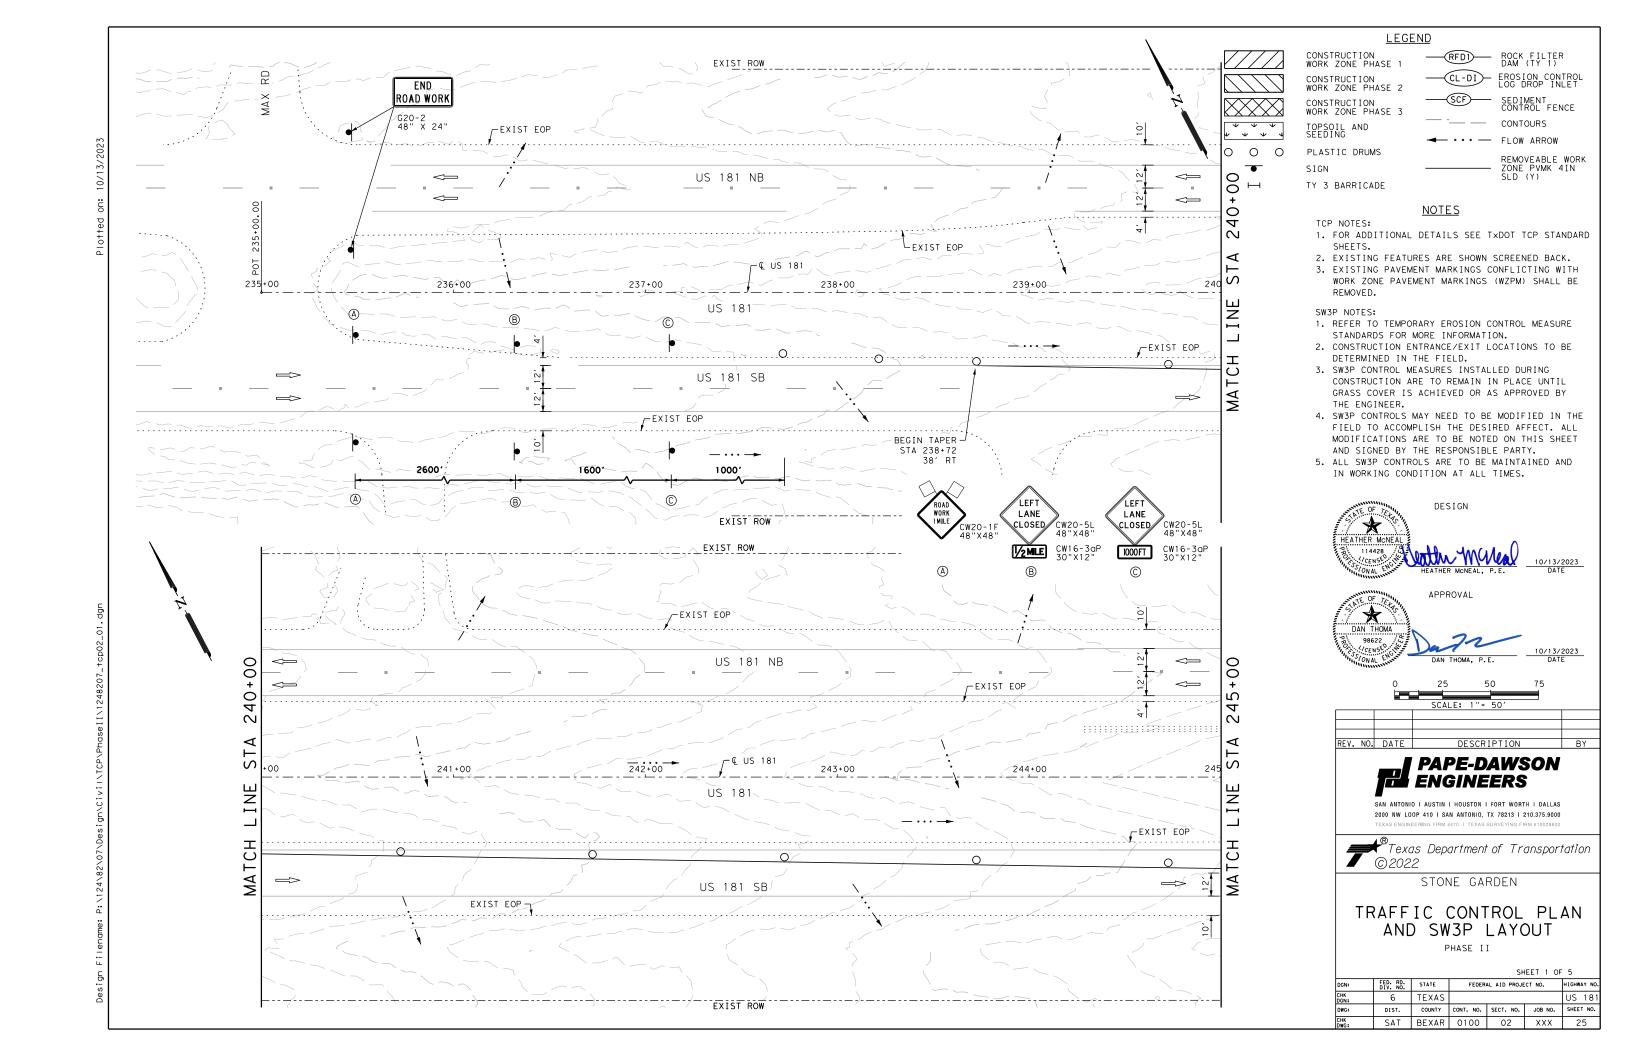


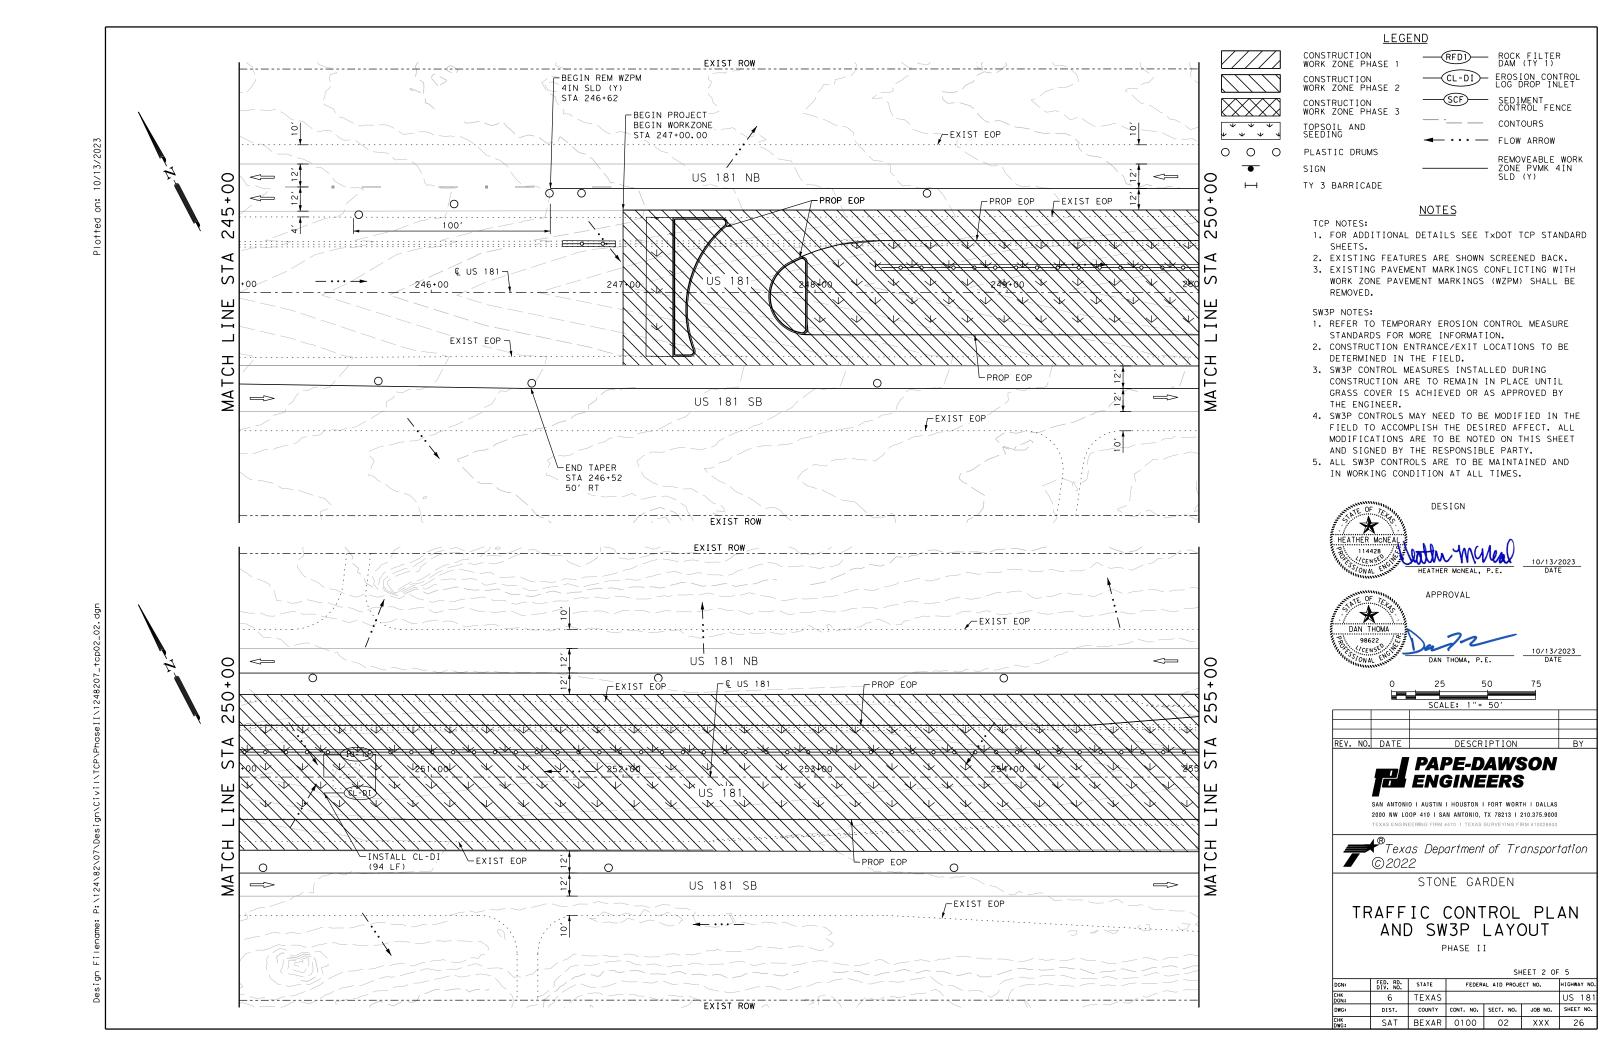

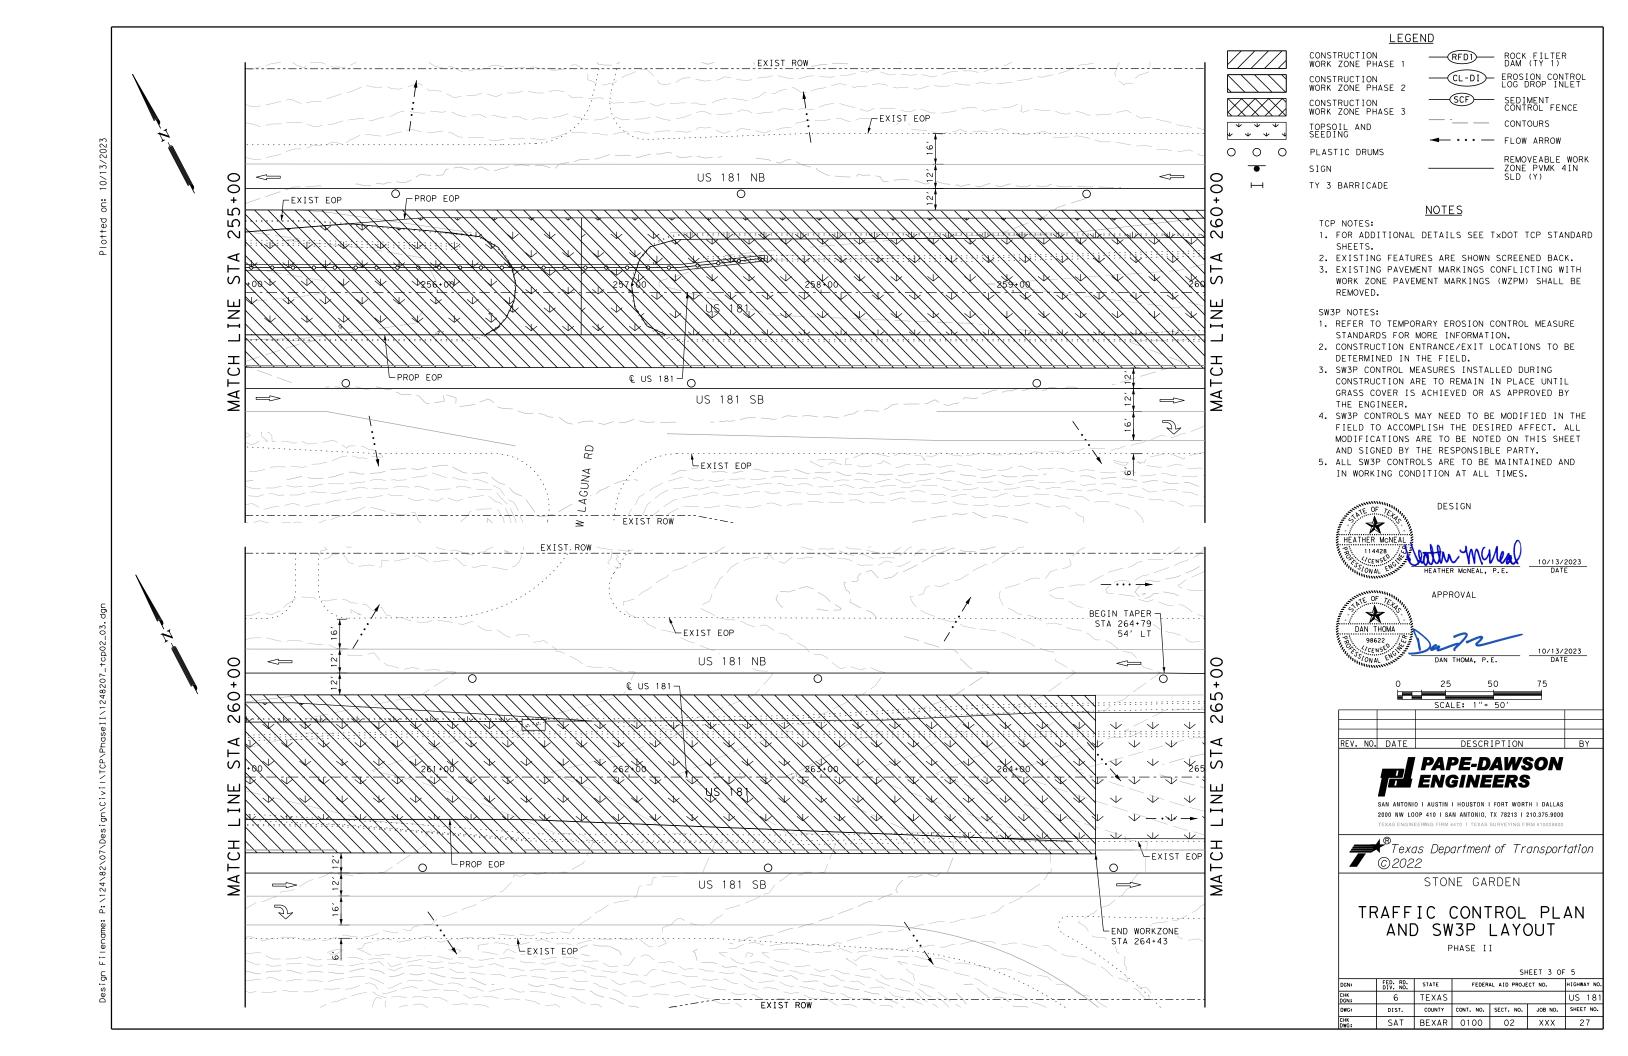

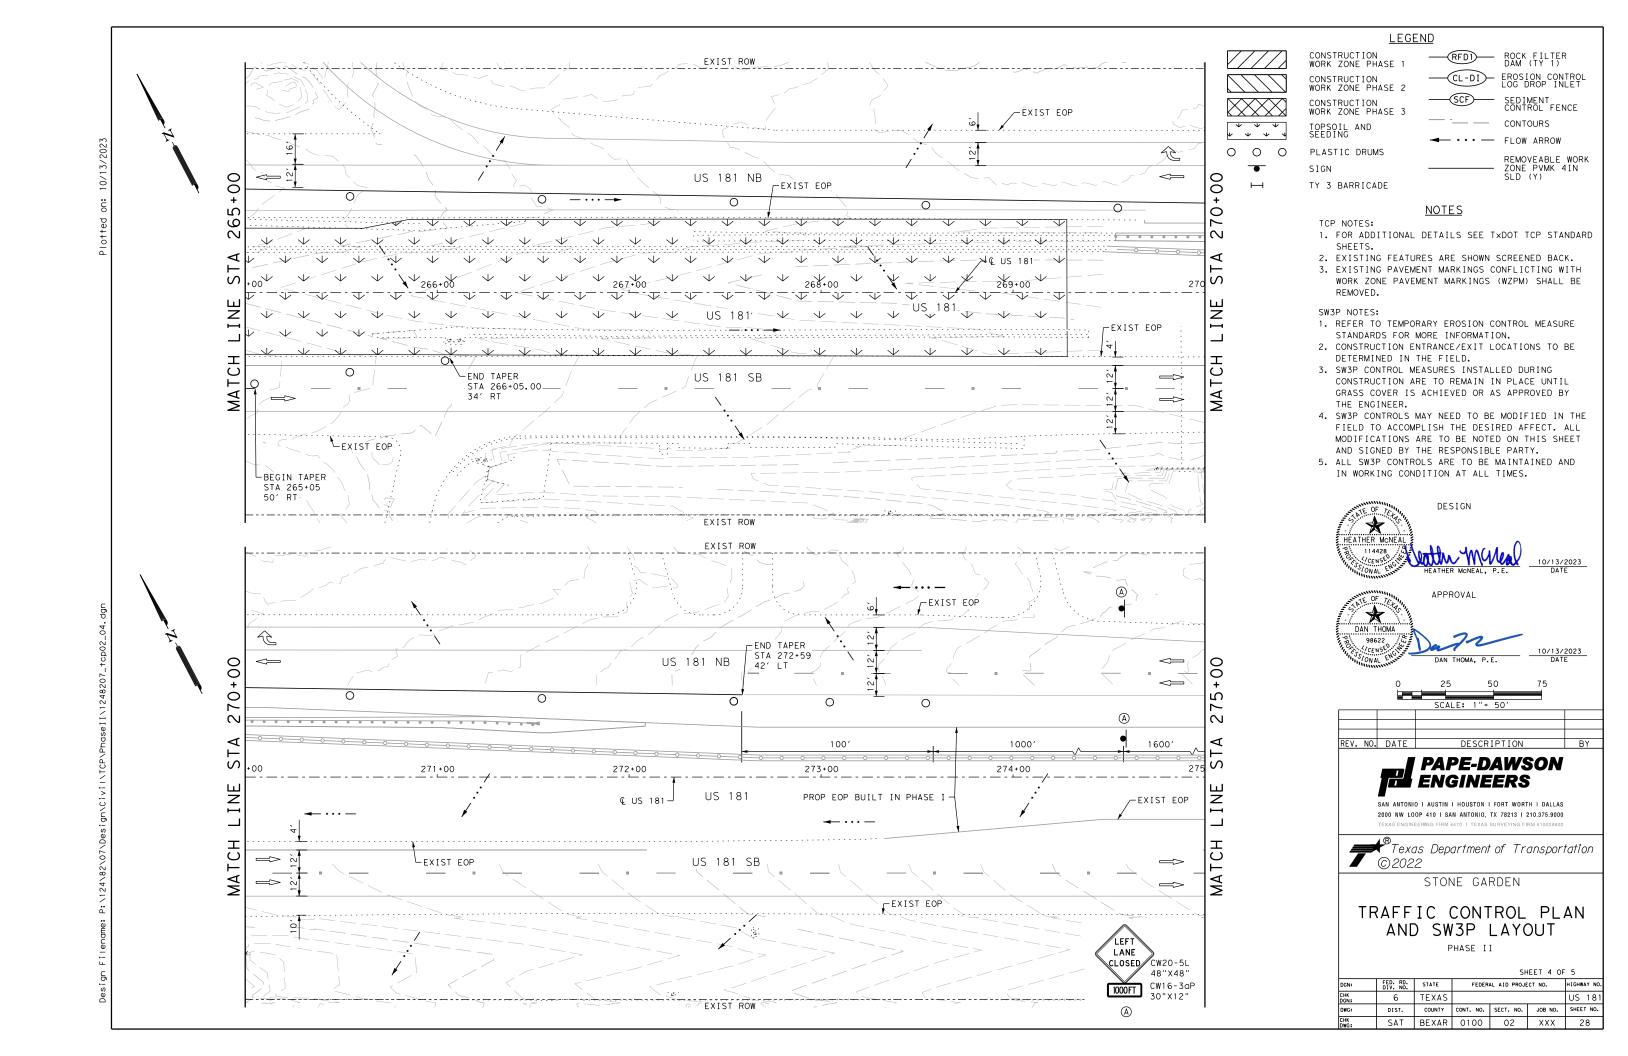


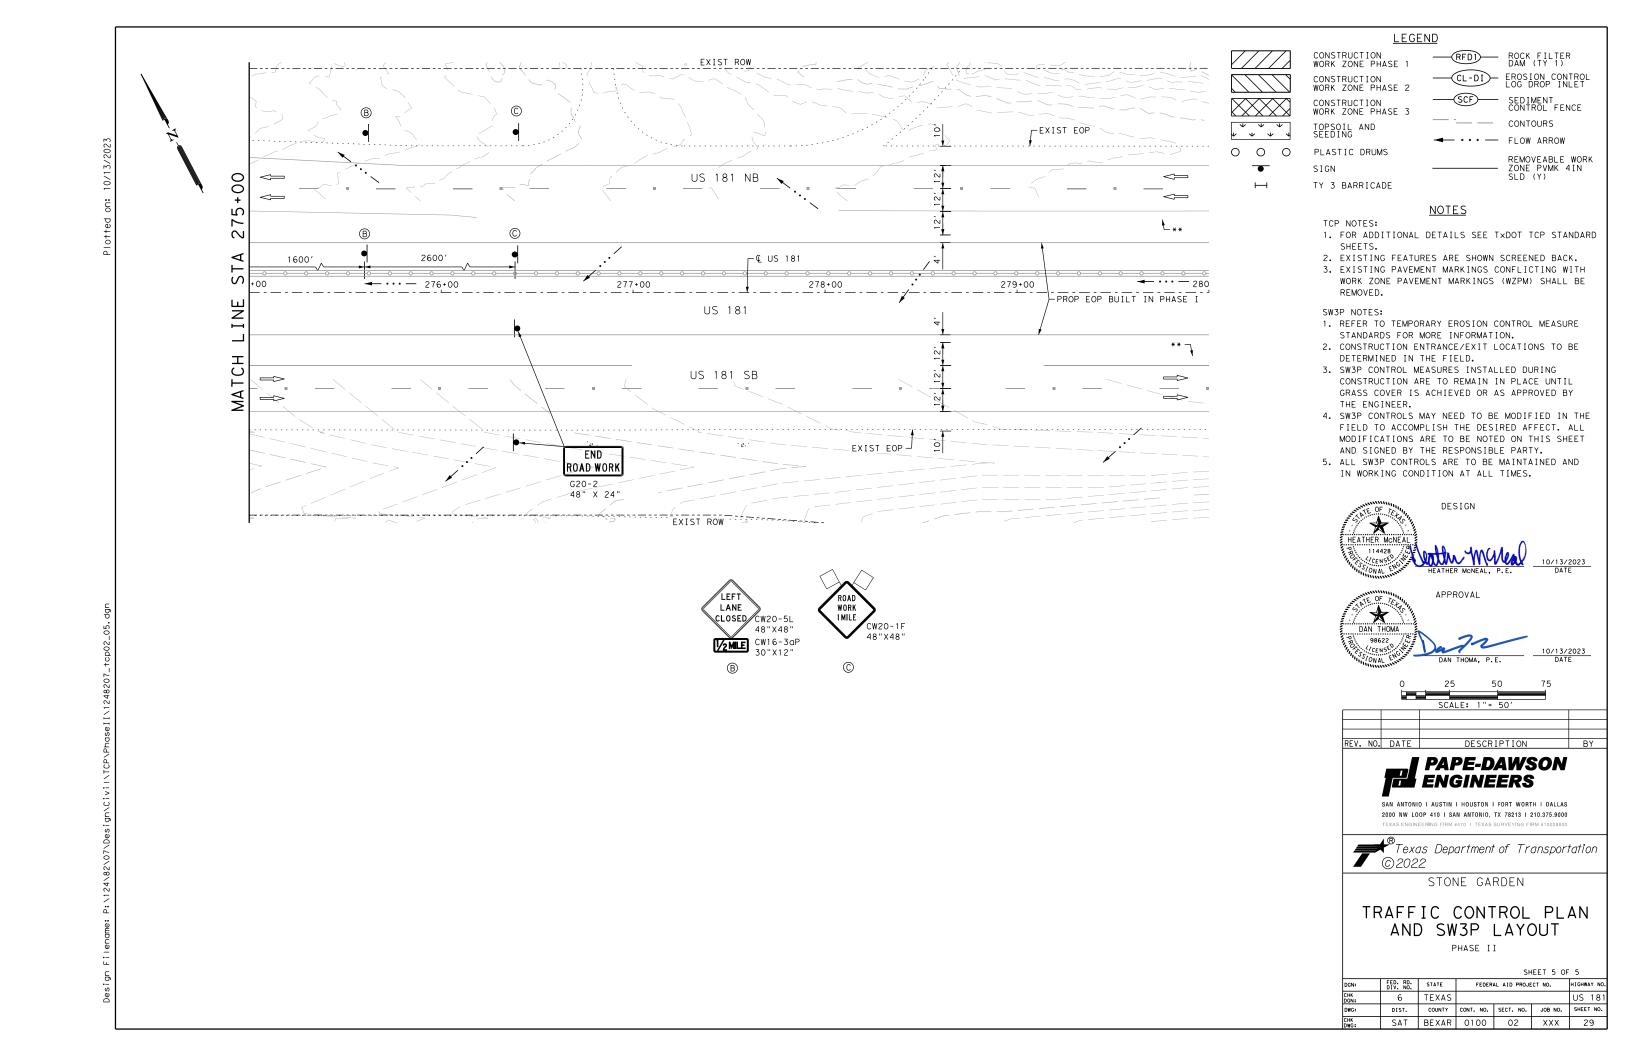


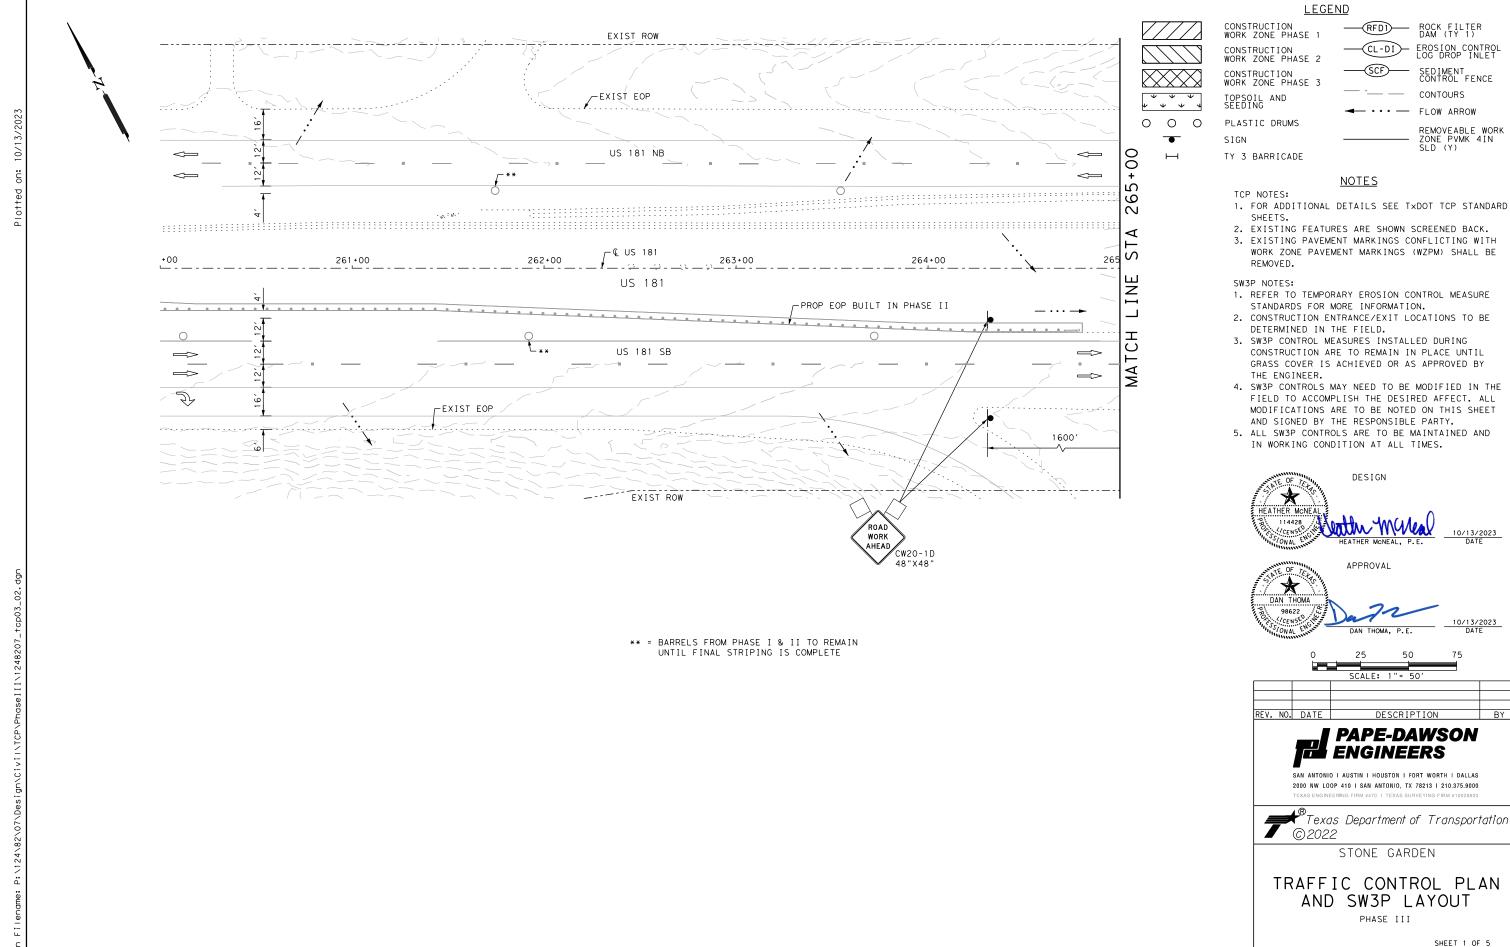



SHEET 1 OF 5

FED. RD. STATE FEDERAL AID PROJECT NO. 6 TEXAS DIST. COUNTY CONT. NO. SECT. NO. JOB NO. SHEET NO. SAT BEXAR 0100 02 XXX 30

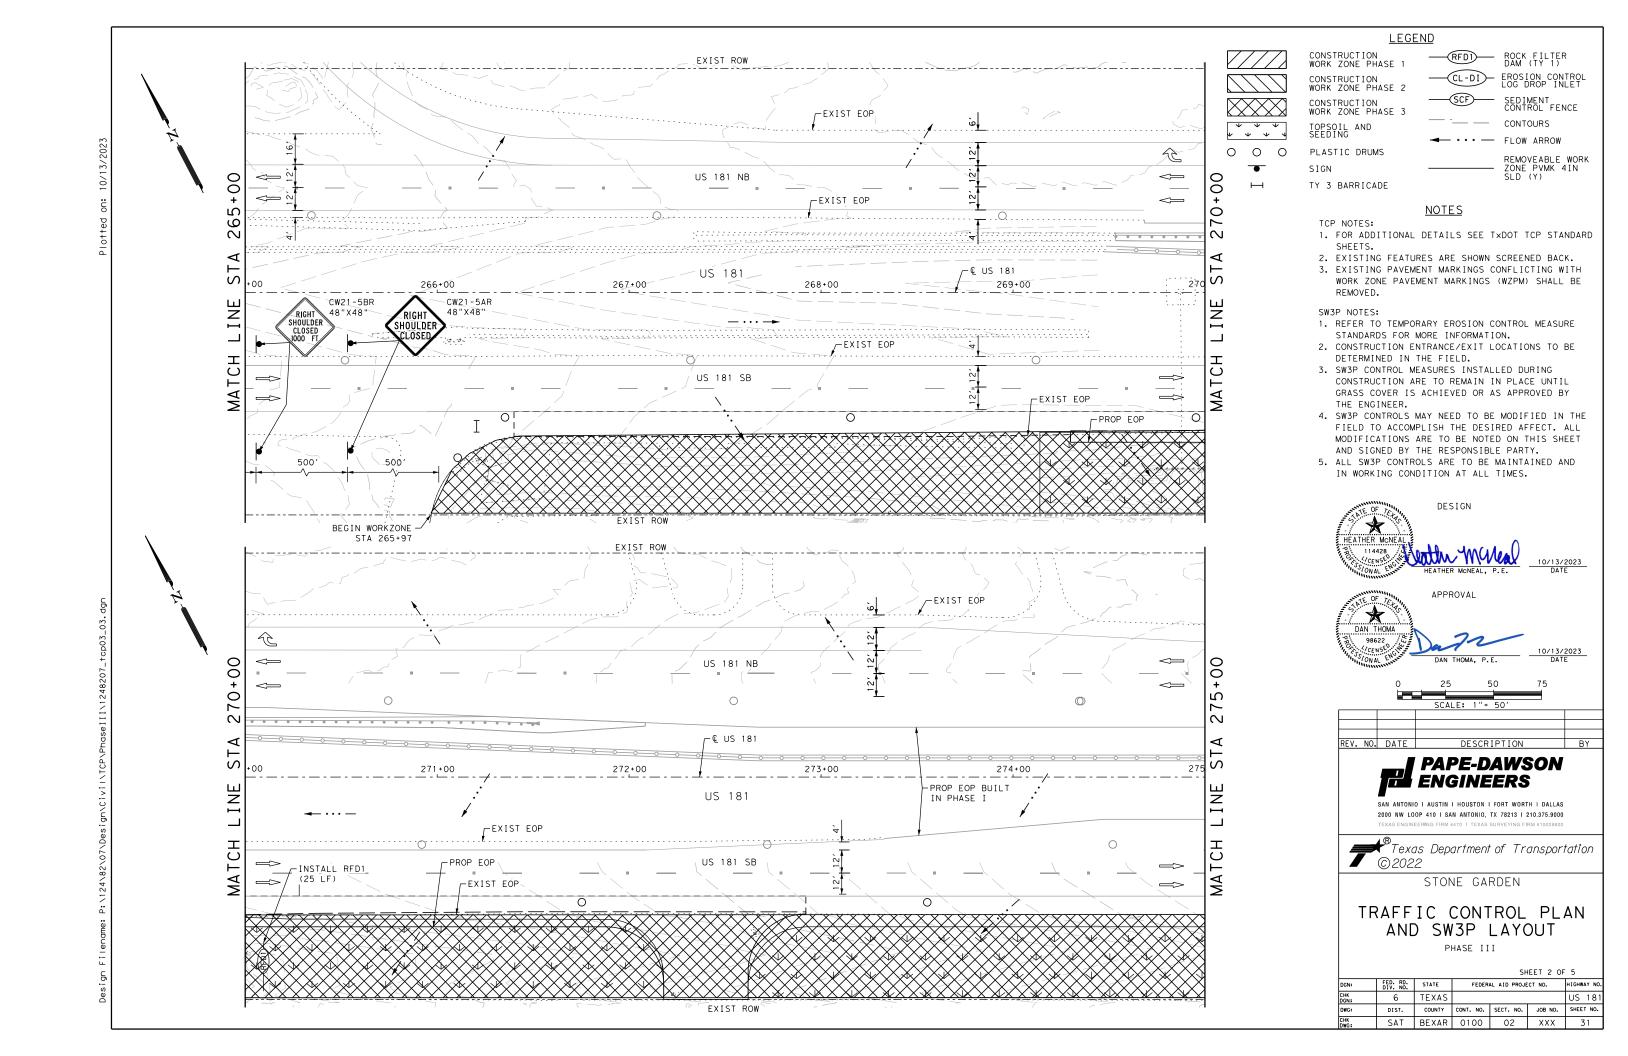

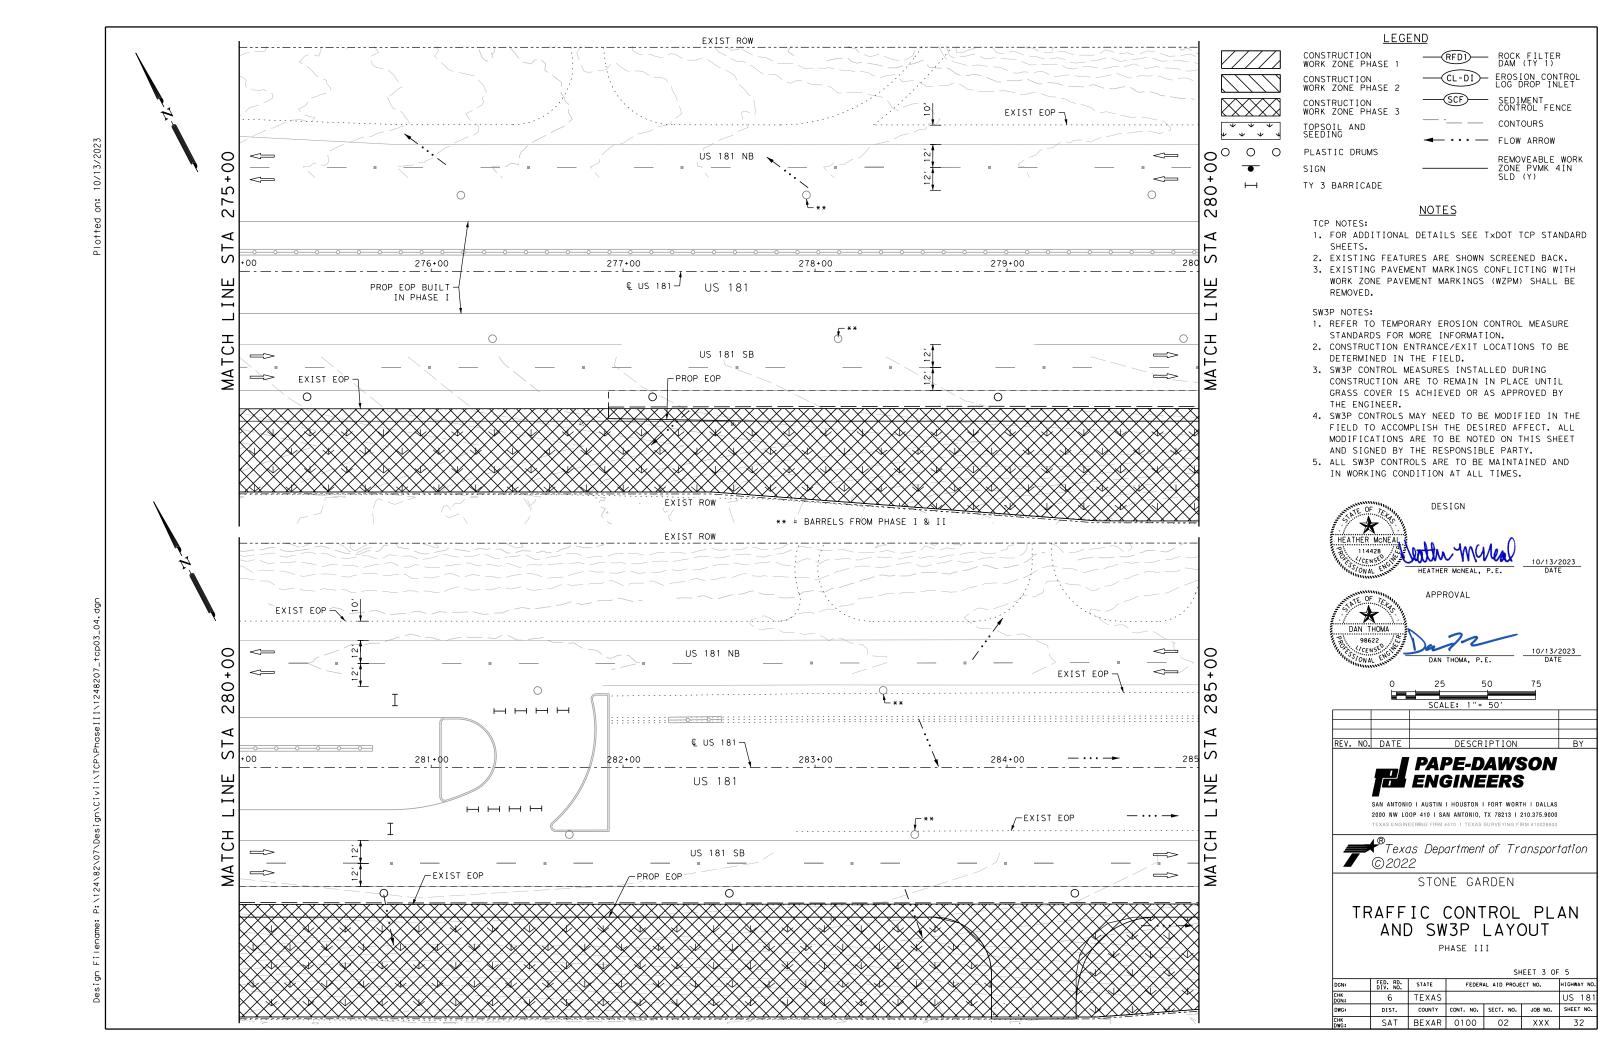

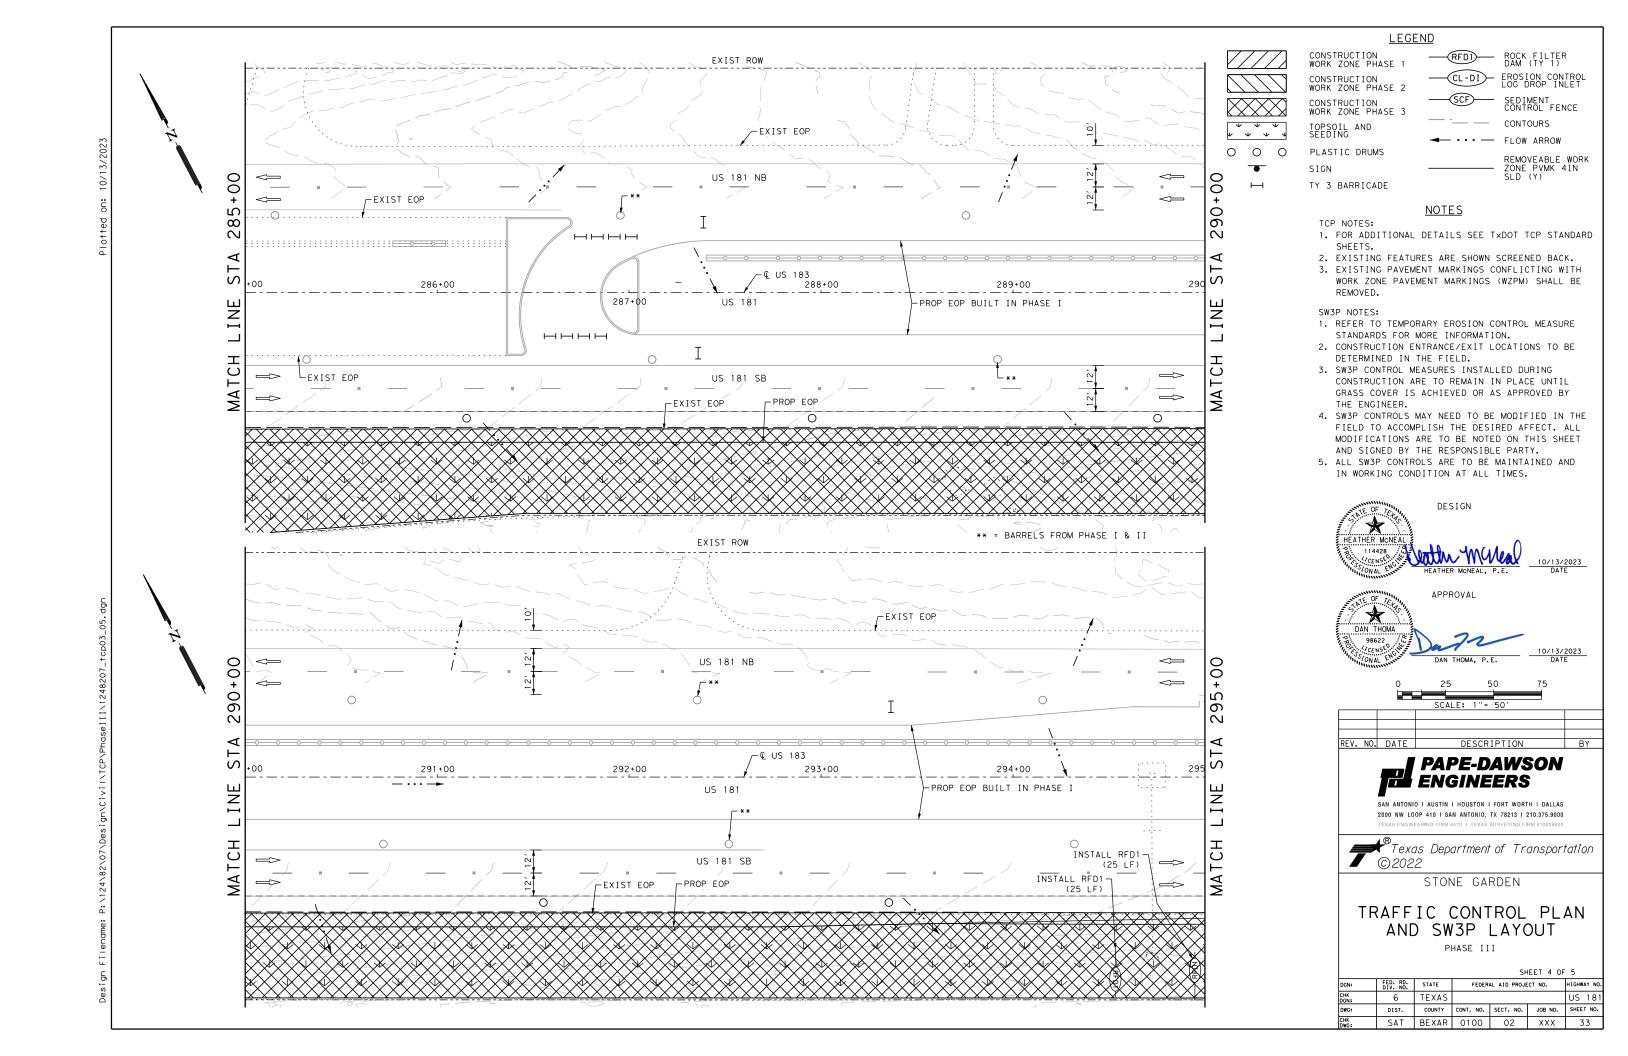

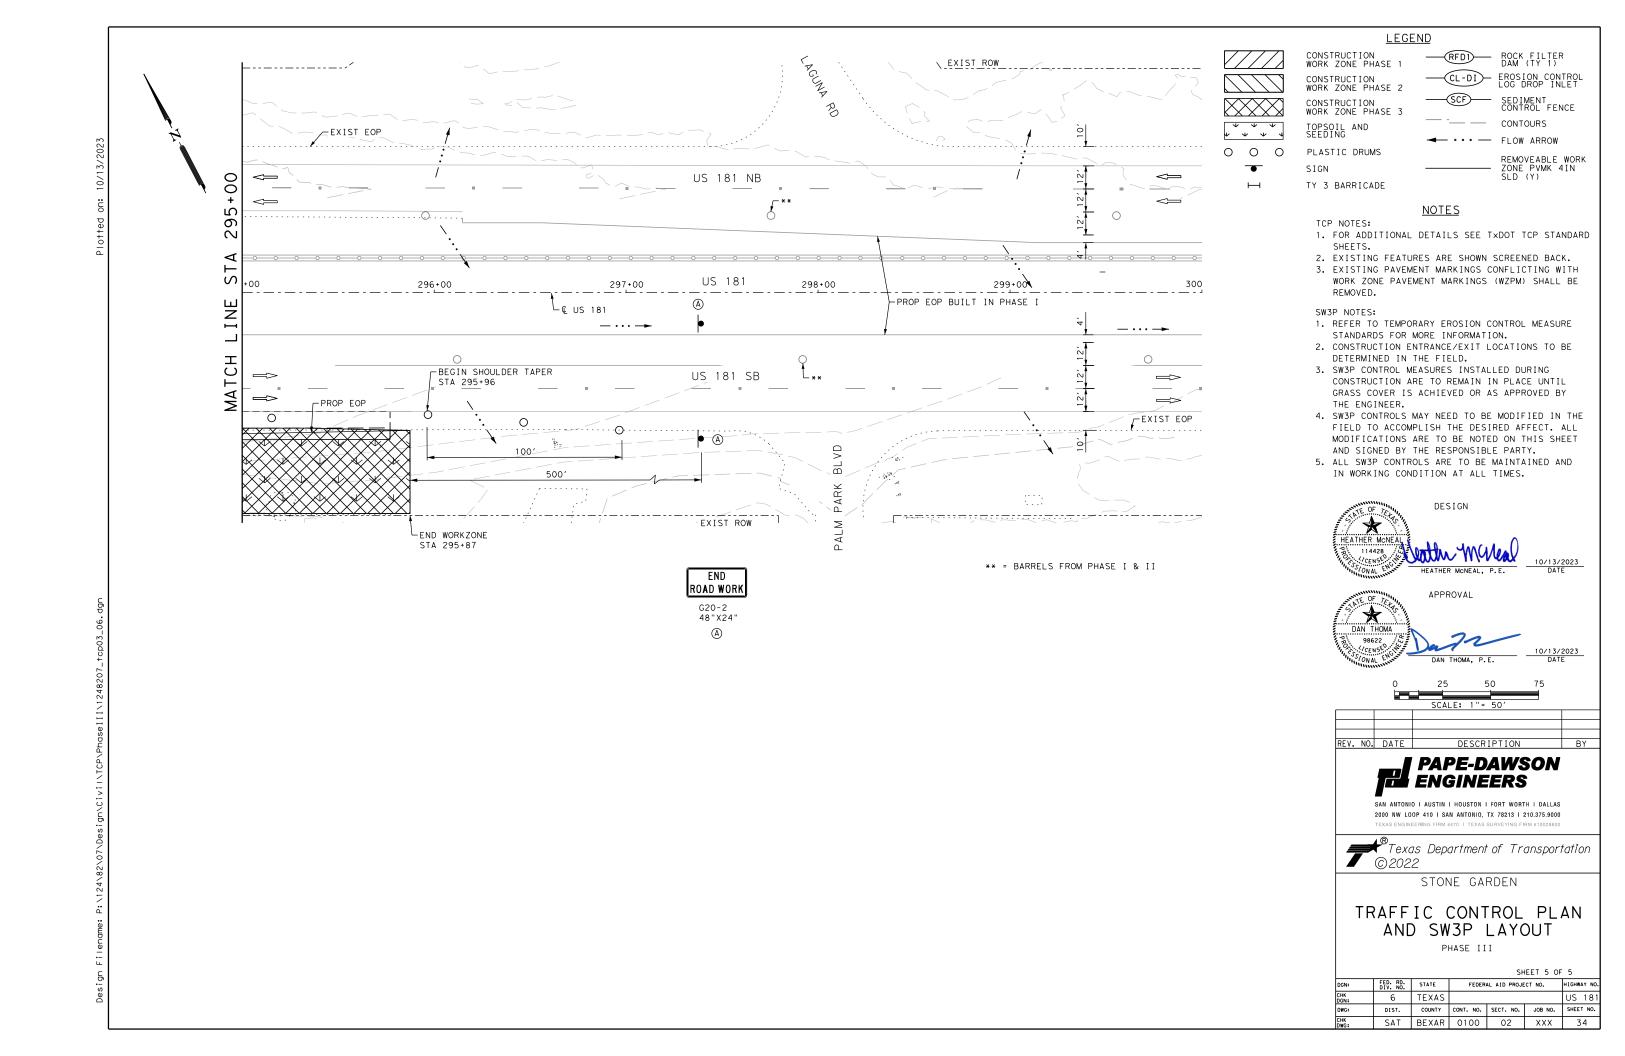

BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:

- 1. The Barricade and Construction Standard Sheets (BC sheets) are intended to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- 2. The development and design of the Traffic Control Plan (TCP) is the responsibility of the Engineer.
- 3. The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop, sign and seal Contractor proposed changes.
- 4. The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
- 5. Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
- 6. When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
- The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
- 8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
- 9. The temporary traffic control devices shown in the illustrations of the BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
- 10. Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown on BC(2). The OBEY WARNING SIGNS STATE LAW sign, STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES, CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, CSJ limit signs are not required.
- 11. Traffic control devices should be in place only while work is actually in progress or a definite need exists.
- 12. The Engineer has the final decision on the location of all traffic control devices.
- 13. Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travel lanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.

WORKER SAFETY NOTES:

- 1. Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility Apparel," or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
- 2. Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.

COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES

- Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
- 2. Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).

THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT http://www.txdot.gov COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD) DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS) MATERIAL PRODUCER LIST (MPL) ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS)" STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD) TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD) TRAFFIC ENGINEERING STANDARD SHEETS

SHEET 1 OF 12



Safety
Division
Standard

BARRICADE AND CONSTRUCTION GENERAL NOTES AND REQUIREMENTS

BC(1)-21

LE:	bc-21.dgn	DN: TxDOT		ck: TxDOT	DW:	TxDOT	ck: TxDOT
)TxDOT	November 2002	CONT	SECT	JOB		н	GHWAY
REVISIONS 4-03 7-13 9-07 8-14	0100	02	XXX ι		US	JS 181	
	DIST	IST COUNTY			SHEET NO.		
5-10	5-21	SAT	SAT BEXAR				35
O.E.							

₽ (

2:55:40

ROAD

CLOSED R11-2

Type 3

devices


B

Barricade or

channelizina

CW13-1P

Channelizing Devices

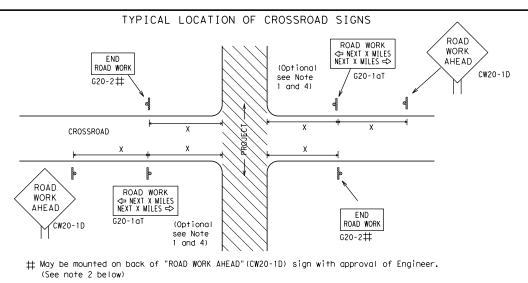

- The typical minimum signing on a crossroad approach should be a "ROAD WORK AHEAD" (CW20-1D)sign and a (G20-2) "END ROAD WORK" sign, unless noted otherwise in plans.
- 2. The Engineer may use the reduced size 36" x 36" ROAD WORK AHEAD (CW20-1D) sign mounted back to back with the reduced size 36" x 18" "END ROAD WORK" (G20-2) sign on low volume crossroads (see Note 4 under "Typical Construction Warning Sign Size and Spacing"). See the "Standard Highway Sign Designs for Texas" manual for sign details. The Engineer may omit the advance warning signs on low volume crossroads. The Engineer will determine whether a road is low volume as per TMUTCD Part 5. This information shall be shown in the plans.
- Based on existing field conditions, the Engineer/Inspector may require additional signs such as FLAGGER AHEAD, LOOSE GRAVEL, or other appropriate signs. When additional signs are required, these signs will be considered part of the minimum requirements. The Engineer/Inspector will determine the proper location and spacing of any sign not shown on the BC sheets, Traffic Control Plan sheets or the Work Zone Standard Sheets.
- 4. The "ROAD WORK NEXT X MILES" (G20-1aT) sign shall be required at high volume crossroads to advise motorists of the length of construction in either direction from the intersection. The Engineer will determine whether a roadway is considered high volume.
- 5. Additional traffic control devices may be shown elsewhere in the plans for higher volume crossroads.
- 6. When work occurs in the intersection area, appropriate traffic control devices, as shown elsewhere in the plans or as determined by the Engineer/Inspector, shall be in place.

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING DOWNSTREAM OF THE CSJ LIMITS

ROAD

WORK

AHFAD

CW20-1D

BEGIN T-INTERSECTION WORK ZONE **X** ★ G20-9TP ★ ★ R20-5T FINES DOLIBL X R20-5aTP WORKERS ARE PRESENT ROAD WORK ⇔ NEXT X MILES END * * G20-2bT WORK ZONE G20-1bTI \Diamond INTERSECTED 1000'-1500' 1 Block - City - Hwy 1000'-1500' - Hwy 1 Block - City ROADWAY \Rightarrow ROAD WORK G20-1bTR NEXT X MILES => 80' Limit WORK ZONE G20-26T X X min BEGIN WORK \times \times G20-9TP ZONE TRAFFI G20-6T $+ \times R20-5T$ FINES DOUBLE \times \times R20-5aTP ROAD WORK G20-2

CSJ LIMITS AT T-INTERSECTION

- 1. The Engineer will determine the types and location of any additional traffic control devices, such as a flagger and accompanying signs, or other signs, that should be used when work is being performed at or near an intersection.
- 2. If construction closes the road at a T-intersection, the Contractor shall place the "CONTRACTOR NAME"(G20-6T) sign behind the Type 3 Barricades for the road closure (see BC(10) also). The "ROAD WORK NEXT X MILES" left arrow(G20-1bTL) and "ROAD WORK NEXT X MILES" right arrow (G20-1bTR)" signs shall be replaced by the detour signing called for in the plans.

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING AT THE CSJ LIMITS

TYPICAL CONSTRUCTION WARNING SIGN SIZE AND SPACING $^{\text{I,5,6}}$

SIZE		
nventional Road	Expressway/ Freeway	Poste Speed
		MPH
48" × 48"	48" × 48"	30
40 % 40		35
		40
		45
36" × 36"	48" × 48"	50
	10 × 10	55
		60
		65
48" × 48"	48" × 48"	70
		75
		80
		*

Sign△ sted eed Spacing " X " Feet ирн (Apprx. 30 120 35 160 40 240 45 320 50 400 55 500² 60 6002 65 700 2 70 800² 75 900²

1000²

SPACING

* For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.

 \triangle Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

GENERAL NOTES

Sign

Number

or Series

CW20'

CW21

CW22

CW23

CW25

CW14

CW1, CW2,

CW7. CW8.

CW9, CW11


CW3, CW4.

CW5, CW6,

CW10, CW12

CW8-3,

- 1. Special or larger size signs may be used as necessary.
- 2. Distance between signs should be increased as required to have 1500 feet advance warning.
- 3. Distance between signs should be increased as required to have 1/2 mile or more advance warning.
- 4. $36" \times 36"$ "ROAD WORK AHEAD" (CW20-1D) signs may be used on low volume crossroads at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
- 5. Only diamond shaped warning sign sizes are indicated.
- 6. See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design

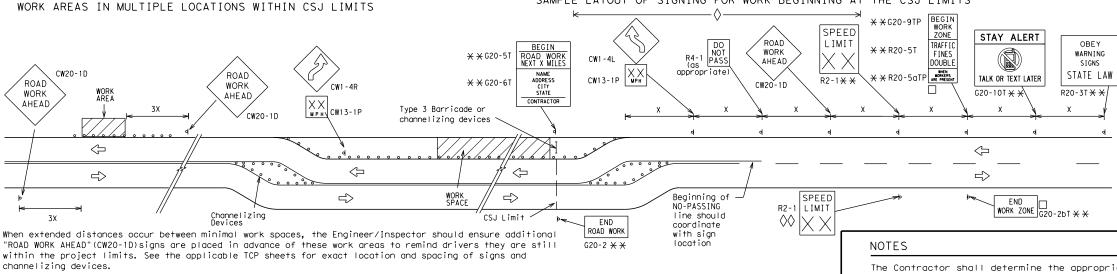

SPEED

LIMIT

-CSJ Limi-

R2-1

X X G20-5T

* *G20-6T

END ROAD WORK

G20-2 * *

NEXT X MILE

ROAD

WORK

⅓ MILE

CW20-1E

★ ★G20-9TF

X XR20-5T

★ ¥ R20-5aTF

ZONE

TRAFFIC

FINES

SPEED R2-1

LIMIT

DOUBLE

STAY ALERT

TALK OR TEXT LATER

END

WORK ZONE G20-26T X X

G20-10

OBEY

SIGNS

STATE LAW

 \triangleleft

 \Rightarrow

R20-3

The Contractor shall determine the appropriate distance to be placed on the G20-1 series signs and "BEGIN ROAD WORK NEXT X MILES" (G20-5T) sign for each specific project. This distance shall replace the "X" and shall be rounded to the nearest whole mile with the approval of the Engineer.

- The "BEGIN WORK ZONE" (G20-9TP) and "END WORK ZONE" (G20-2b1 shall be used as shown on the sample layout when advance signs are required outside the CSJ Limits. They inform the motorist of entering or legying a part of the work zone lying outside the CSJ Limits where traffic fines may double workers are present.
- imes CSJ limit signing is required for highway construction and maintenance work, with the exception of mobile operations.
- Area for placement of "ROAD WORK AHEAD" (CW20-1D) sign and other signs or devices as called for on the Traffic
- Contractor will install a regulatory speed limit sign at $\Diamond \Diamond$ the end of the work zone.

LEGEND					
⊢⊣ Туре 3 Barricade					
000 Channelizing Devices					
4	Sign				
Х	See Typical Construction Warning Sign Size and Spacing chart or the TMUTCD for sign spacing requirements.				

SHEET 2 OF 12



Traffic Safety Division Standard


BARRICADE AND CONSTRUCTION PROJECT LIMIT

BC(2) - 21

ILE:	bc-21.dgn	DN: TxDOT		ck: TxDOT	DW:	TxDOT	ck: TxDOT
C) TxDOT	November 2002	CONT SECT		JOB		HIGHWAY	
9-07 8-14 7-13 5-21	0100	02	XXX		US	181	
	DIST		COUNTY		SHEET NO.		
	SAT		BEXAR		\Box	36	

TYPICAL APPLICATION OF WORK ZONE SPEED LIMIT SIGNS

Work zone speed limits shall be regulatory, established in accordance with the "Procedures for Establishing Speed Zones," and approved by the Texas Transportation Commission, or by City Ordinance when within Incorporated City Limits.

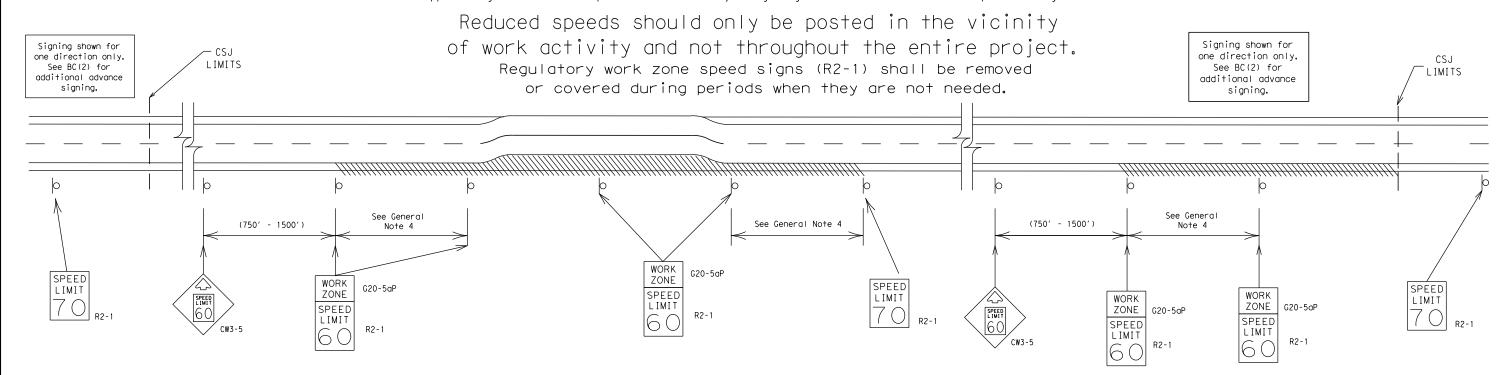

GUIDANCE FOR USE:

LONG/INTERMEDIATE TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit should be included on the design of the traffic control plans when restricted geometrics with a lower design speed are present in the work zone and modification of the geometrics to a higher design speed is not feasible.

Long/Intermediate Term Work Zone Speed Limit signs, when approved as described above, should be posted and visible to the motorist when work activity is present. Work activity may also be defined as a change in the roadway that requires a reduced speed for motorists to safely negotiate the work area, including:

- a) rough road or damaged pavement surface
- b) substantial alteration of roadway geometrics (diversions)
- c) construction detours
- d) grade
- e) width
- f) other conditions readily apparent to the driver

As long as any of these conditions exist, the work zone speed limit signs should remain in place.

SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit may be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, when work activity is within 10 feet of the traveled way or actually in the traveled way.

Short Term Work Zone Speed Limit signs should be posted and visible to the motorists only when work activity is present. When work activity is not present, signs shall be removed or covered. (See Removing or Covering on BC(4)).

GENERAL NOTES

- 1. Regulatory work zone speed limits should be used only for sections of construction projects where speed control is of major importance.
- 2. Regulatory work zone speed limit signs shall be placed on supports at a 7 foot minimum mounting height.
- 3. Speed zone signs are illustrated for one direction of travel and are normally posted for each direction of travel.
- 4. Frequency of work zone speed limit signs should be:

40 mph and greater 0.2 to 2 miles

35 mph and less

0.2 to 2 miles 0.2 to 1 mile

- 5. Regulatory speed limit signs shall have black legend and border on a white reflective background (See "Reflective Sheeting" on BC(4)).
- 6. Fabrication, erection and maintenance of the "ADVANCE SPEED LIMIT" (CW3-5) sign, "WORK ZONE" (G20-5aP) plaque and the "SPEED LIMIT" (R2-1) signs shall not be paid for directly, but shall be considered subsidiary to Item 502.
- 7. Turning signs from view, laying signs over or down will not be allowed, unless as otherwise noted under "REMOVING OR COVERING" on BC(4).
- 8. Techniques that may help reduce traffic speeds include but are not limited to:
 A. Law enforcement.
 - B. Flagger stationed next to sign.
 - C. Portable changeable message sign (PCMS).
 - D. Low-power (drone) radar transmitter.
 - E. Speed monitor trailers or signs.
- 9. Speeds shown on details above are for illustration only. Work Zone Speed Limits should only be posted as approved for each project.
- 10. For more specific guidance concerning the type of work, work zone conditions and factors impacting allowable regulatory construction speed zone reduction see TxDOT form #1204 in the TxDOT e-form system.

SHEET 3 OF 12




BARRICADE AND CONSTRUCTION WORK ZONE SPEED LIMIT

Traffic Safety Division Standard

BC(3)-21

E:	bc-21.dgn	DN: TxDOT		ck: TxDOT	DW:	TxDOT	ck: TxDOT	l	
TxDOT	November 2002	CONT SECT		JOB		н	HIGHWAY		
9-07	REVISIONS 8-14 5-21	0100	02	XXX		US	US 181		
		DIST		COUNTY		SHEET NO.			
7-13		SAT		37	l				

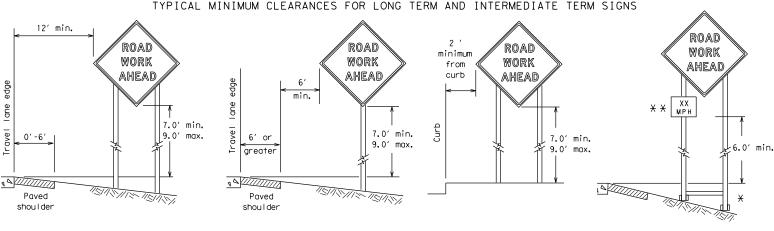


* When placing skid supports on unlevel ground, the leg post lengths must be adjusted so the sign appears straight and plumb.

Objects shall NOT be placed under skids as a means of leveling.

* * When plaques are placed on dual-leg supports, they should be attached to the upright nearest the travel lane.

Supplemental plaques (advisory or distance) should not cover the surface of the parent sign.

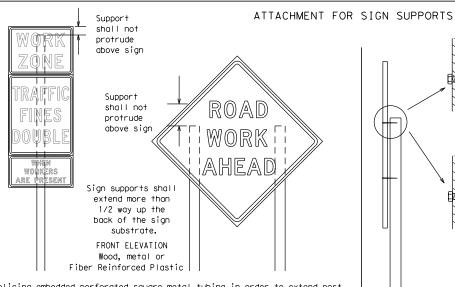


Splicing embedded perforated square metal tubing in order to extend post height will only be allowed when the splice is made using four bolts, two above and two below the spice point. Splice must be located entirely behind the sign substrate, not near the base of the support. Splice insert lengths should be at least 5 times nominal post size, centered on the splice and of at least the same gauge material.

Attachment to wooden supports
will be by bolts and nuts
or screws. Use TxDOT's or
manufacturer's recommended
procedures for attaching sign
substrates to other types of
sign supports

Nails shall NOT
be allowed.
Each sign
shall be attached
directly to the sign
support. Multiple
signs shall not be
joined or spliced by
any means. Wood
supports shall not be
extended or repaired
by splicing or
other means.

STOP/SLOW PADDLES

- STOP/SLOW paddles are the primary method to control traffic by flaggers. The STOP/SLOW paddle size should be 24" x 24".
 STOP/SLOW paddles shall be retroreflectorized when used at night.
- STOP/SLOW paddles may be attached to a staff with a minimum length of 6' to the bottom of the sign.
- Any lights incorporated into the STOP or SLOW paddle faces shall only be as specifically described in Section 6E.03 Hand Signaling Devices in the TMUTCD.



SHEETING RE	QUIREMEN	(WHEN USED AT NIGHT)
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	ORANGE	TYPE B _{FL} OR C _{FL} SHEETING
LEGEND & BORDER	WHITE	TYPE B OR C SHEETING
LEGEND & BORDER	BLACK	ACRYLIC NON-REFLECTIVE FILM

CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS

SIDE ELEVATION

Wood

- 1. Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, specific service (LOGO), or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
- When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition. For details for covering large guide signs see the TS-CD standard.
- When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
- 4. If existing signs are to be relocated on their original supports, they shall be installed on croshworthy bases as shown on the SMD Standard sheets. The signs shall meet the required mounting heights shown on the BC Sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
- . If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use crashworthy supports as shown on the BC standard sheets, TLRS standard sheets or the CWZTCD list. The signs shall meet the required mounting heights shown on the BC, or the SMD standard sheets during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
- Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper guidance for the motorists. This will be subsidiary to Item 502.

GENERAL NOTES FOR WORK ZONE SIGNS

- . Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
- 2. Wooden sign posts shall be painted white.
- 3. Barricades shall NOT be used as sign supports.
- 4. All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and guide the traveling public safely through the work zone.
- 5. The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
- 6. The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so the Engineer can verify the correct procedures are being followed.
- The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
- 8. Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1 inch.
- 9. The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

<u>DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)</u>

- The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in regard to crashworthiness and duration of work requirements.
 - a. Long-term stationary work that occupies a location more than 3 days.
 - b. Intermediate-term stationary work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than one hour.
 - c. Short-term stationary daytime work that occupies a location for more than 1 hour in a single daylight period.
 - d. Short, duration work that occupies a location up to 1 hour.
- e. Mobile work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

ICN MOUNTING HEIGHT

- 1. The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except as shown for supplemental plaques mounted below other signs.
- 2. The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above the ground
- the ground.
 3. Long-term/Intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.
- 4. Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to appropriate Long-term/Intermediate sign height.
- 5. Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

SIZE OF SIGNS

1. The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

SIGN SUBSTRATES

- The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZTCD lists each substrate that can be used on the different types and models of sign supports.
- 2. "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave.
- 3. All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign face.

REFLECTIVE SHEETING

- 1. All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300
- for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).
- White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background.
 Orange sheeting, meeting the requirements of DMS-8300 Type B_{FL} or Type C_{FL}, shall be used for rigid signs with orange backgrounds.

SIGN LETTERS

1. All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

REMOVING OR COVERING

- 1. When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
- 2. Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
- Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
- 4. When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting.
- 5. Burlap shall NOT be used to cover signs.6. Duct tape or other adhesive material shall NOT be affixed to a sign face.
- 7. Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

SIGN SUPPORT WEIGHTS

- Where sign supports require the use of weights to keep from turning over, the use
 of sandbags with dry, cohesionless sand should be used.
 The sandbags will be tied shut to keep the sand from spilling and to maintain a
- The sandbags will be fied shuf to keep the sand from spilling and to maintain a constant weight.
- Rock, concrete, iron, steel or other solid objects shall not be permitted for use as sign support weights.
- for use as sign support weights.
 4. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
- Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall NOT be used.
 Rubber ballasts designed for channelizing devices should not be used for
- ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCD list.

 7. Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or
- traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
- Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

FLAGS ON SIGNS

 Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall not be allowed to cover any portion of the sign face. SHEET 4 OF 12



BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES

Traffic Safety Division Standard

BC(4)-21


	FILE:	bc-21.dgn	DN: T	<dot< th=""><th>ck: TxDOT</th><th>DW:</th><th>TxDOT</th><th>CK: TXDOT</th></dot<>	ck: TxDOT	DW:	TxDOT	CK: TXDOT
	© TxD0T	November 2002	CONT	SECT	JOB		H	HIGHWAY
	9-07 7-13	REVISIONS 8-14 5-21	0100	02	XXX		US 181	
			DIST	ST COUNTY			SHEET NO.	
			SAT	BEXAR			38	

opposite sides going in opposite directions. Minimum

weld, do not

back fill puddle.

weld starts here

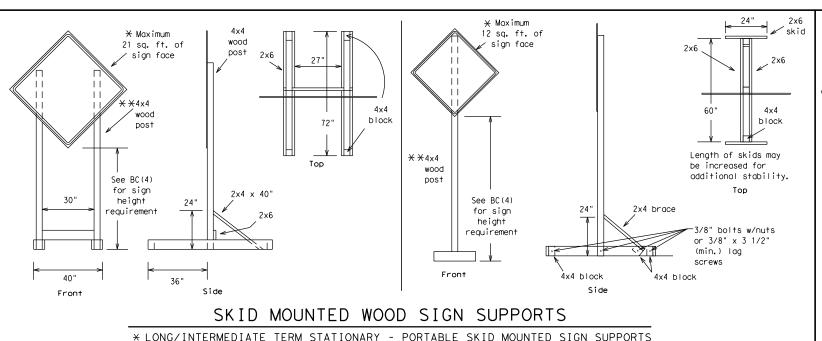


-2" x 2"

upright

12 ga.

SINGLE LEG BASE

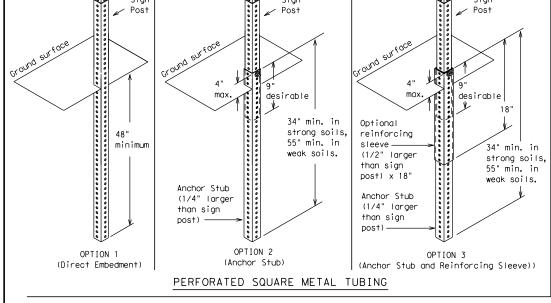


Post Oround surface A" max. Base Post For embedment. WING CHANNEL Lap-splice/base boilted anchor

GROUND MOUNTED SIGN SUPPORTS

Refer to the CWZTCD and the manufacturer's installation procedure for each type sign support.

The maximum sign square footage shall adhere to the manufacturer's recommendation.

Two post installations can be used for larger signs.

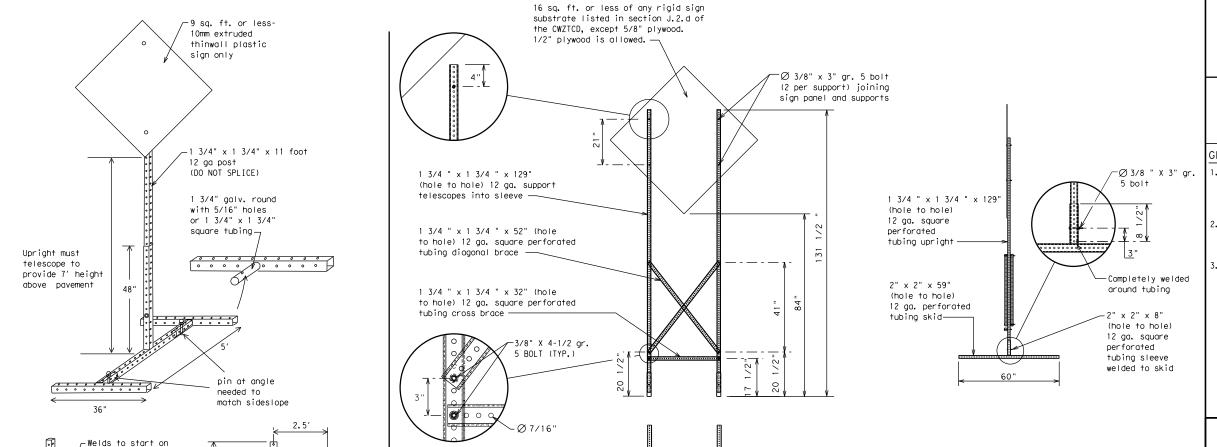

WEDGE ANCHORS

Both steel and plastic Wedge Anchor Systems as shown on the SMD Standard Sheets may be used as temporary sign supports for signs up to 10 square feet of sign face. They may be set in concrete or in sturdy soils if approved by the Engineer. (See web address for "Traffic Engineering Standard Sheets" on BC(1)).

OTHER DESIGNS

MORE DETAILS OF APPROVED LONG/INTERMEDIATE
AND SHORT TERM SUPPORTS CAN BE FOUND ON THE
CWZTCD LIST. SEE BC(1) FOR WEBSITE LOCATION.

GENERAL NOTES

- Nails may be used in the assembly of wooden sign supports, but 3/8" bolts with nuts or 3/8" x 3 1/2" lag screws must be used on every joint for final connection.
- No more than 2 sign posts shall be placed within a 7 ft. circle, except for specific materials noted on the CWZTCD List.
- When project is completed, all sign supports and foundations shall be removed from the project site. This will be considered subsidiary to Item 502.
 - imes See BC(4) for definition of "Work Duration."
- X Wood sign posts MUST be one piece. Splicing will NOT be allowed. Posts shall be painted white.
- $\hfill \Box$ See the CWZTCD for the type of sign substrate that can be used for each approved sign support.

SHEET 5 OF 12



Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION TYPICAL SIGN SUPPORT

BC(5)-21

FILE: bc-21.dgn	DN: T:	×DOT	ck: TxDOT	DW:	TxD0	T CK: TXDOT	
© TxDOT November 2002	CONT	SECT	JOB			HIGHWAY	
REVISIONS	0100	02	XXX		Ų	JS 181	
9-07 8-14	DIST	COUNTY			SHEET NO.		
7-13 5-21	SAT	BEXAR				39	

SKID MOUNTED PERFORATED SQUARE STEEL TUBING SIGN SUPPORTS

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

32′

WHEN NOT IN USE. REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

PORTABLE CHANGEABLE MESSAGE SIGNS

- 1. The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- 2. Messages on PCMS should contain no more than 8 words (about four to eight characters per word), not including simple words such as "TO,' "FOR." "AT." etc.
- 3. Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by
- 4. Use the word "EXIT" to refer to an exit ramp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- 5. Always use the route or interstate designation (IH, US, SH, FM) along with the number when referring to a roadway.
- When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible.
- 7. The message term "WEEKEND" should be used only if the work is to start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- 8. The Engineer/Inspector may select one of two options which are available for displaying a two-phase message on a PCMS. Each phase may be displayed for either four seconds each or for three seconds each.
- 9. Do not "flash" messages or words included in a message. The message should be steady burn or continuous while displayed.
- 10. Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- 11. Do not use the word "Danger" in message.
- 12. Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- 13. Do not display messages that scroll horizontally or vertically across the face of the sign.
- 14. The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be abbreviated, unless shown in the TMUTCD.
- 15. PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.
- 16. Each line of text should be centered on the message board rather than left or right justified.
- 17. If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid bars is appropriate.

WORD OR PHRASE	ABBREVIATION	WORD OR PHRASE	ABBREVIATION
Access Road	ACCS RD	Major	MAJ
Alternate	ALT	Miles	MI
Avenue	AVE	Miles Per Hour	MPH
Best Route	BEST RTE	Minor	MNR
Boulevard	BLVD	Monday	MON
Bridge	BRDG	Normal	NORM
Cannot	CANT	North	N
Center	CTR	Northbound	(route) N
Construction Ahead	CONST AHD	Parking	PKING
	W.T.N.O.	Road	RD
CROSSING	XING	Right Lane	RT LN
Detour Route	DETOUR RTE	Saturday	SAT
Do Not	DONT	Service Road	SERV RD
East	E	Shoulder	SHLDR
Eastbound	(route) E	Slippery	SLIP
Emergency	EMER	South	S
Emergency Vehicle		Southbound	(route) S
Entrance, Enter	ENT	Speed	SPD
Express Lane	EXP LN	Street	ST
Expressway	EXPWY	Sunday	SUN
XXXX Feet	XXXX FT	Telephone	PHONE
Fog Ahead	FOG AHD	Temporary	TEMP
Freeway	FRWY, FWY	Thursday	THURS
Freeway Blocked	FWY BLKD	To Downtown	TO DWNTN
Friday	FRI	Traffic	TRAF
Hazardous Driving		Travelers	TRVLRS
Hazardous Material		Tuesday	TUES
High-Occupancy	HOV	Time Minutes	TIME MIN
Vehicle	HWY	Upper Level	UPR LEVEL
Highway		Vehicles (s)	VEH. VEHS
Hour(s)	HR, HRS	Warning	WARN
Information	INFO	Wednesday	WED
It Is	ITS	Weight Limit	WT LIMIT
Junction	JCT	West	W
Left	LFT	Westbound	(route) W
Left Lane	LFT LN	Wet Pavement	WET PVMT
Lane Closed	LN CLOSED	Will Not	WONT
Lower Level	LWR LEVEL		1 110111
Maintenance	MΔINT		

designation # IH-number, US-number, SH-number, FM-number

RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES

(The Engineer may approve other messages not specifically covered here.)

Phase 1: Condition Lists

FREEWAY CLOSED X MILE	FRONTAGE ROAD CLOSED	ROADWORK XXX FT	ROAD REPAIRS XXXX FT
ROAD CLOSED AT SH XXX	SHOULDER CLOSED XXX FT	FLAGGER XXXX FT	LANE NARROWS XXXX FT
ROAD CLSD AT FM XXXX	RIGHT LN CLOSED XXX FT	RIGHT LN NARROWS XXXX FT	TWO-WAY TRAFFIC XX MILE
RIGHT X LANES CLOSED	RIGHT X LANES OPEN	MERGING TRAFFIC XXXX FT	CONST TRAFFIC XXX FT
CENTER LANE CLOSED	DAYTIME LANE CLOSURES	LOOSE GRAVEL XXXX FT	UNEVEN LANES XXXX FT
NIGHT LANE CLOSURES	I-XX SOUTH EXIT CLOSED	DETOUR X MILE	ROUGH ROAD XXXX FT
VARIOUS LANES CLOSED	EXIT XXX CLOSED X MILE	ROADWORK PAST SH XXXX	ROADWORK NEXT FRI-SUN
EXIT CLOSED	RIGHT LN TO BE CLOSED	BUMP XXXX FT	US XXX EXIT X MILES
MALL DRIVEWAY CLOSED	X LANES CLOSED TUE - FRI	TRAFFIC SIGNAL XXXX FT	LANES SHIFT

* LANES SHIFT in Phase 1 must be used with STAY IN LANE in Phase

Phase 2: Possible Component Lists

А	ction to Take	/E		еΙ	Location List		Warning List		* * Advance Notice List
	MERGE RIGHT		FORM X LINES RIGHT		AT FM XXXX		SPEED LIMIT XX MPH		TUE-FRI XX AM- X PM
	DETOUR NEXT X EXITS		USE XXXXX RD EXIT		BEFORE RAILROAD CROSSING		MAXIMUM SPEED XX MPH		APR XX- XX X PM-X AM
	USE EXIT XXX		USE EXIT I-XX NORTH		NEXT X MILES		MINIMUM SPEED XX MPH		BEGINS MONDAY
	STAY ON US XXX SOUTH		USE I-XX E TO I-XX N		PAST US XXX EXIT		ADVISORY SPEED XX MPH		BEGINS MAY XX
	TRUCKS USE US XXX N		WATCH FOR TRUCKS		XXXXXXX TO XXXXXXX		RIGHT LANE EXIT		MAY X-X XX PM - XX AM
	WATCH FOR TRUCKS		EXPECT DELAYS		US XXX TO FM XXXX		USE CAUTION		NEXT FRI-SUN
	EXPECT DELAYS		PREPARE TO STOP				DRIVE SAFELY		XX AM TO XX PM
	REDUCE SPEED XXX FT		END SHOULDER USE				DRIVE WITH CARE		NEXT TUE AUG XX
• {	USE OTHER ROUTES		WATCH FOR WORKERS						TONIGHT XX PM- XX AM
nase 2.	STAY IN LANE	×			*	¥ See A∣	oplication Guide	elines M	Note 6.

APPLICATION GUIDELINES

- 1. Only 1 or 2 phases are to be used on a PCMS.
- 2. The 1st phase (or both) should be selected from the "Road/Lane/Ramp Closure List" and the "Other Condition List".
- 3. A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- 4. A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- 5. If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS shall be limited to two phases, and should be understandable by themselves.
- 6. For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

WORDING ALTERNATIVES

- 1. The words RIGHT, LEFT and ALL can be interchanged as appropriate.
- 2. Roadway designations IH, US, SH, FM and LP can be interchanged as appropriate.
- 3. EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can be interchanged as appropriate.
- 4. Highway names and numbers replaced as appropriate.
- 5. ROAD, HIGHWAY and FREEWAY can be interchanged as needed.
- 6. AHEAD may be used instead of distances if necessary.
- 7. FT and MI. MILE and MILES interchanged as appropriate.
- 8. AT. BEFORE and PAST interchanged as needed.
- 9. Distances or AHEAD can be eliminated from the message if a location phase is used.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC. THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.


FULL MATRIX PCMS SIGNS

BLVD

CLOSED

- 1. When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" above.
- 2. When symbol signs, such as the "Flagger Symbol"(CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above
- 3. When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute for, or replace that sign.
- 4. A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the same size arrow.

SHEET 6 OF 12




BARRICADE AND CONSTRUCTION PORTABLE CHANGEABLE MESSAGE SIGN (PCMS)

BC(6) - 21


FILE:	bc-21.dgn	DN: TxDOT		ck: TxDOT	DW:	TxD0	T	ck: TxDOT
CTxDOT November 2002		CONT	SECT	JOB			HIGHWAY	
REVISIONS		0100	02	XXX		Ĺ	JS	181
9-07	8-14			COUNTY			Ş	SHEET NO.
7-13	5-21	SAT	BEXAR					40

- 1. Barrier Reflectors shall be pre-qualified, and conform to the color and reflectivity requirements of DMS-8600. A list of prequalified Barrier Reflectors can be found at the Material Producer List web address shown on BC(1).
- 2. Color of Barrier Reflectors shall be as specified in the TMUTCD. The cost of the reflectors shall be considered subsidiary to Item 512.




CONCRETE TRAFFIC BARRIER (CTB)

- 3. Where traffic is on one side of the CTB, two (2) Barrier Reflectors shall be mounted in approximately the midsection of each section of CTB. An alternate mounting location is uniformly spaced at one end of each CTB. This will allow for attachment of a barrier grapple without damaging the reflector. The Barrier Reflector mounted on the side of the CTB shall be located directly below the reflector mounted on top of the barrier, as shown in the detail above.
- 4. Where CTB separates two-way traffic, three barrier reflectors shall be mounted on each section of CTB. The reflector unit on top shall have two yellow reflective faces (Bi-Directional) while the reflectors on each side of the barrier shall have one yellow reflective face, as shown in the detail above.
- 5. When CTB separates traffic traveling in the same direction, no barrier reflectors will be required on top of the CTB.
- 6. Barrier Reflector units shall be yellow or white in color to match the edgeline being supplemented.
- 7. Maximum spacing of Barrier Reflectors is forty (40) feet.
- 8. Pavement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- 9. Attachment of Barrier Reflectors to CTB shall be per manufacturer's
- 10.Missing or damaged Barrier Reflectors shall be replaced as directed
- 11. Single slope barriers shall be delineated as shown on the above detail.



LOW PROFILE CONCRETE BARRIER (LPCB)

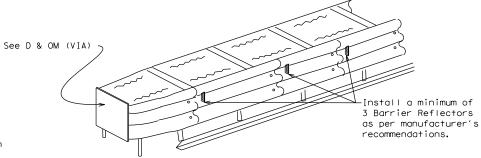


DELINEATION OF END TREATMENTS


END TREATMENTS FOR CTB'S USED IN WORK ZONES

End treatments used on CTB's in work zones shall meet the apppropriate crashworthy standards as defined in the Manual for Assessing Safety Hardware (MASH), Refer to the CWZTCD List for approved end treatments and manufacturers.

BARRIER REFLECTORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS



Type C Warning Light or approved substitute mounted on a drum adjacent to the travel way.



Warning reflector may be round or square. Must have a yellow reflective surface area of at least 30 square inches

WARNING LIGHTS

- 1. Warning lights shall meet the requirements of the TMUTCD.
- 2. Warning lights shall NOT be installed on barricades.
- 3. Type A-Low Intensity Flashing Warning Lights are commonly used with drums. They are intended to warn of or mark a potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type B_{FL} or C_{FL} Sheeting meeting the requirements of Departmental Material Specification DMS-8300.
- 4. Type-C and Type D 360 degree Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB".
- 5. The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- 6. When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the warning lights meet the requirements of the latest ITE Purchase Specifications for Flashing and Steady-Burn Warning Lights.
- 7. When used to delineate curves, Type-C and Type D Steady Burn Lights should only be placed on the outside of the curve, not the inside.
- 8. The location of warning lights and warning reflectors on drums shall be as shown elsewhere in the plans.

WARNING LIGHTS MOUNTED ON PLASTIC DRUMS


- 1. Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- 2. Type A random flashing warning lights are not intended for delineation and shall not be used in a series.
- 3. A series of sequential flashing warning lights placed on channelizing devices to form a merging taper may be used for delineation. If used, the successive flashing of the sequential warning lights should occur from the beginning of the toper to the end of the merging taper in order to identify the desired vehicle path. The rate of flashing for each light shall be 65 flashes per minute, plus or minus 10 flashes.
- 4. Type C and D steady-burn warning lights are intended to be used in a series to delineate the edge of the travel lane on detours, on lane changes, on lane closures, and on other similar conditions.
- 5. Type A, Type C and Type D warning lights shall be installed at locations as detailed on other sheets in the plans.
- 6. Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- 7. The maximum spacing for warning lights on drums should be identical to the channelizing device spacing.

WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C (STEADY BURN) WARNING LIGHTS

- 1. A warning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn warning light at the discretion of the Contractor unless otherwise noted in the plans.
- 2. The warning reflector shall be yellow in color and shall be manufactured using a sign substrate approved for use with plastic drums listed
- 3. The warning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- 4. Round reflectors shall be fully reflectorized, including the area where attached to the drum.
- 5. Square substrates must have a minimum of 30 square inches of reflectorized sheeting. They do not have to be reflectorized where it
- 6. The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type B or Type C.
- 7. When used near two-way traffic, both sides of the warning reflector shall be reflectorized.
- 8. The warning reflector should be mounted on the side of the handle nearest approaching traffic.
- 9. The maximum spacing for warning reflectors should be identical to the channelizing device spacing requirements.

Arrow Boards may be located behind channelizing devices in place for a shoulder taper or merging taper, otherwise they shall be delineated with four (4) channelizing devices placed perpendicular to traffic on the upstream side of traffic.

- 1. The Flashing Arrow Board should be used for all lane closures on multi-lane roadways, or slow moving maintenance or construction activities on the travel lanes.
- 2. Flashing Arrow Boards should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Board.
- 4. The Flashing Arrow Board should be able to display the following symbols:

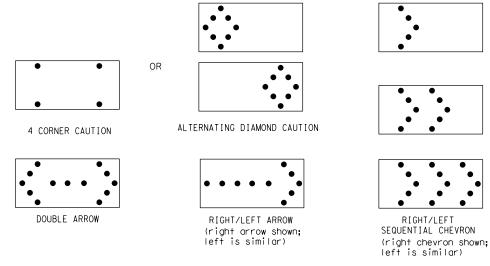

- 5. The "CAUTION" display consists of four corner lamps flashing simultaneously, or the Alternating Diamond Caution mode as shown.
- The straight line caution display is NOT ALLOWED.
- The Flashing Arrow Board shall be capable of minimum 50 percent dimming from rated lamp voltage. The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.
- 8. Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal intervals of 25 percent for each sequential phase of the flashing chevron.
- 9. The sequential arrow display is NOT ALLOWED.
 10. The flashing arrow display is the TxDOT standard; however, the sequential chevron display may be used during daylight operations.
- 11. The Flashing Arrow Board shall be mounted on a vehicle, trailer or other suitable support.
 12. A Flashing Arrow Board SHALL NOT BE USED to laterally shift traffic.
 13. A full matrix PCMS may be used to simulate a Flashing Arrow Board provided it meets visibility,
- flash rate and dimming requirements on this sheet for the same size arrow.
- 14. Minimum mounting height of trailer mounted Arrow Boards should be 7 feet from roadway to bottom of panel.

	REQUIREMENTS											
TYPE	MINIMUM SIZE	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE									
В	30 x 60	13	3/4 mile									
С	48 × 96	15	1 mile									

ATTENTION Flashing Arrow Boards shall be equipped with automatic dimmina devices.

WHEN NOT IN USE, REMOVE THE ARROW BOARD FROM THE RIGHT-OF-WAY OR PLACE THE ARROW BOARD BEHIND CONCRETE TRAFFIC BARRIER OR GUARDRAIL.

FLASHING ARROW BOARDS

SHEET 7 OF 12

TRUCK-MOUNTED ATTENUATORS

- 1. Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the Manual for Assessing Safety Hardware (MASH).
- Refer to the CWZTCD for the requirements of Level 2 or Level 3 TMAs.
- 3. Refer to the CWZTCD for a list of approved TMAs.
- 4. TMAs are required on freeways unless otherwise noted n the plans
- 5. A TMA should be used anytime that it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the work performance.
- 6. The only reason a TMA should not be required is when a work area is spread down the roadway and the work crew is an extended distance from the TMA.



Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION ARROW PANEL, REFLECTORS, WARNING LIGHTS & ATTENUATOR

BC(7) - 21

FILE:	bc-21.dgn	DN: T	<dot< td=""><td>ck: TxDOT</td><td>DW:</td><td>TxDOT</td><td>ck: TxDOT</td></dot<>	ck: TxDOT	DW:	TxDOT	ck: TxDOT
© TxD0T	November 2002	CONT	SECT	JOB		н	IGHWAY
	REVISIONS		02	XXX	XXX US 181		S 181
9-07	8-14	DIST	COUNTY				SHEET NO.
7-13	5-21	SAT	BEYAR				⊿ 1

- GENERAL NOTES

 1. For long term stationary work zones on freeways, drums shall be used as
- the primary channelizing device.

 2. For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in tangent sections by vertical panels, or 42" two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
- 3. For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
- Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWYTCD).
- Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

GENERAL DESIGN REQUIREMENTS

Pre-qualified plastic drums shall meet the following requirements:

- Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
- 2. The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
- Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
- 4. Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
- 5. The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved compliant sign.
- 6. The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectorized space between any two adjacent stripes shall not exceed 2 inches in width.
- Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
- 8. Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material.

10.Drum and base shall be marked with manufacturer's name and model number.


9. Drum body shall have a maximum unballasted weight of 11 lbs.


RETROREFLECTIVE SHEETING

- The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Sign Face Materials." Type A or Type B reflective sheeting shall be supplied unless otherwise specified in the plans.
- The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.

BALLAST

- 1. Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
- Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
- 4. The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- 6. Ballast shall not be placed on top of drums.
- 7. Adhesives may be used to secure base of drums to pavement.

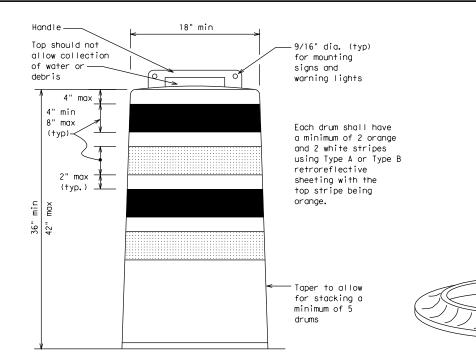




DETECTABLE PEDESTRIAN BARRICADES

- When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures.
- Where pedestrians with visual disabilities normally use the closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade.
- 3. Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian path.
- 4. Tape, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian movements.
- Warning lights shall not be attached to detectable pedestrian barricades.
- 6. Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.





See Ballast



12" x 24"
Vertical Panel
mount with diagonals
sloping down towards
travel way

Plywood, Aluminum or Metal sign substrates shall NOT be used on plastic drums

SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS

- Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- 2. Chevrons and other work zone signs with an orange background shall be manufactured with Type B_{FL} or Type C_{FL} Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
- 3. Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- 4. Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below.
- Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection
- Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.
- 7. Chevrons may be placed on drums on the outside of curves, on merging tapers or on shifting tapers. When used in these locations, they may be placed on every drum or spaced not more than on every third drum. A minimum of three (3) should be used at each location called for in the plans.
- R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.

SHEET 8 OF 12





Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC(8)-21


	. •	•					
E: bc-21.dgn	DN: TxDOT		ck: TxDOT	DW:	TxDOT	ck: TxDOT	
TxDOT November 2002	CONT	SECT	JOB		HIGHWAY		
REVISIONS -03 8-14	0100	02	XXX		U:	5 181	
-03 8-14 -07 5-21	DIST		COUNTY			SHEET NO.	
-13	SAT	BEXAR 42					

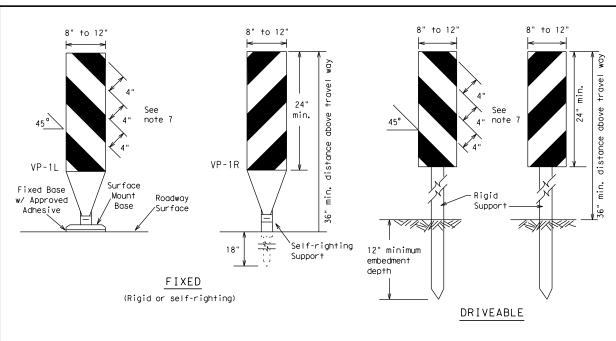




- 1. Vertical Panels (VP's) are normally used to channelize traffic or divide opposing lanes of traffic.
- 2. VP's may be used in daytime or nighttime situations. They may be used at the edge of shoulder drop-offs and other areas such as lane transitions where positive daytime and nighttime delineation is required. The Engineer/Inspector shall refer to the Roadway Design Manual for additional requirements on the use VP's for drop-offs.
- 3. VP's should be mounted back to back if used at the edge of cuts adjacent to two-way two lane roadways. Stripes are to be reflective orange and reflective white and should always slope downward toward the travel lane.
- 4. VP's used on expressways and freeways or other high speed roadways, may have more than 270 square inches of retroreflective area facing traffic.
- 5. Self-righting supports are available with portable base. See "Compliant Work Zone Traffic Control Devices List"
- 6. Sheeting for the VP's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- 7. Where the height of reflective material on the vertical panel is 36 inches or greater, a panel stripe of 6 inches shall be used.

VERTICAL PANELS (VPs)



- 1. Opposing Traffic Lane Dividers (OTLD) are delineation devices designed to convert a normal one-way roadway section to two-way operation. OTLD's are used on temporary centerlines. The upward and downward arrows on the sign's face indicate the direction of traffic on either side of the divider. The base is secured to the pavement with an adhesive or rubber weight to minimize movement caused by a vehicle impact or wind gust.
- 2. The OTLD may be used in combination with 42"
- 3. Spacing between the OTLD shall not exceed 500 feet. 42" cones or VPs placed between the OTLD's should not exceed 100 foot spacing.
- 4. The OTLD shall be orange with a black nonreflective legend. Sheeting for the OTLD shall be retroreflective Type B_{FL} or Type C_{FL} conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.

OPPOSING TRAFFIC LANE DIVIDERS (OTLD)




Fixed Base w/ Approved Adhesive (Driveable Base, or Flexible Support can be used)

- 1. The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
- 2. Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
- 3. Chevrons, when used, shall be erected on the out side of a sharp curve or turn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
- 4. To be effective, the chevron should be visible for at least 500 feet.
- 5. Chevrons shall be orange with a black nonreflective legend. Sheeting for the chevron shall be retroreflective Type B_{FL} or Type C_{FL} conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.
- 6. For Long Term Stationary use on tapers or transitions on freeways and divided highways, self-righting chevrons may be used to supplement plastic drums but not to replace plastic drums.

CHEVRONS

GENERAL NOTES

- 1. Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- 2. Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
- 3. Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- 4. The Contractor shall maintain devices in a clean condition and replace damaged, nonreflective, faded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spacing and alignment.
- 5. Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh a minimum of 30 lbs.
- 6. Pavement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's recommendations.
- 7. The installation and removal of channelizing devices shall not cause detrimental effects to the final pavement surfaces, including pavement surface discoloration or surface integrity. Driveable bases shall not be permitted on final payement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.



LONGITUDINAL CHANNELIZING DEVICES (LCD)

- 1. LCDs are crashworthy, lightweight, deformable devices that are highly visible, have good target value and can be connected together. They are not designed to contain or redirect a vehicle on impact.
- 2. LCDs may be used instead of a line of cones or drums.
- 3. LCDs shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- 4. LCDs should not be used to provide positive protection for obstacles, pedestrians or workers.
- 5. LCDs shall be supplemented with retroreflective delineation as required for temporary barriers on BC(7) when placed roughly parallel to the travel lanes.
- 6. LCDs used as barricades placed perpendicular to traffic should have at least one row of reflective sheeting meeting the requirements for barricade rails as shown on BC(10). Place reflective sheeting near the top of the LCD along the full length of the device.

WATER BALLASTED SYSTEMS USED AS BARRIERS

- 1. Water ballasted systems used as barriers shall not be used solely to channelize road users, but also to protect the work space per the appropriate Manual for Assessing Safety Hardware (MASH) crashworthiness requirements based on roadway speed and barrier application.
- 2. Water ballasted systems used to channelize vehicular traffic shall be supplemented with retroreflective delineation or channelizing devices to improve daytime/nighttime visibility. They may also be supplemented with pavement markings.
- 3. Water ballasted systems used as barriers shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- 4. Water ballasted systems used as barriers should not be used for a merging taper except in low speed (less than 45 MPH. urban areas. When used on a taper in a low speed urban area, the taper shall be delineated and the taper length should be designed to optimize road user operations considering the available geometric conditions.
- 5. When water ballasted systems used as barriers have blunt ends exposed to traffic, they should be attenuated as per manufacturer recommendations or flared to a point outside the clear zone.

If used to channelize pedestrians, longitudinal channelizing devices or water ballasted systems must have a continuous detectable bottom for users of long canes and the top of the unit shall not be less than 32 inches in height.

HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS

Posted Speed	Formula		esirab er Len X X	Spacing of Channelizing Devices		
		10′ Offset	11' Offset	12' Offset	On a Taper	On a Tangent
30	$L = \frac{WS^2}{60}$	150′	165′	180′	30′	60′
35		205′	225′	245′	35′	70′
40		265′	295′	320′	40′	80′
45		450′	495′	540′	45′	90′
50		500′	550′	600′	50′	100′
55	L=WS	550′	605′	660′	55′	110′
60	L 113	600′	660′	720′	60′	120′
65		650′	715′	780′	65′	130′
70		700′	770′	840′	70′	140′
75		750′	825′	900′	75′	150′
80		800′	880′	960′	80′	160′

X Taper lengths have been rounded off. L=Length of Taper (FT.) W=Width of Offset (FT.) S=Posted Speed (MPH)

SUGGESTED MAXIMUM SPACING OF CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS

SHEET 9 OF 12



Texas Department of Transportation

Traffic Safety Division Standard

Suggested Maximum

BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC(9) - 21


ILE:	bc-21.dgn	DN: TxDOT		CK: TXDOT DW:		TxDOT	ck: TxDOT
C) T×DOT	November 2002	CONT	SECT	JOB		ніс	GHWAY
REVISIONS		0100	02	XXX		US	181
9-07	8-14	DIST		COUNTY			SHEET NO.
7-13	5-21	SAT	SAT BEXAR 4				43

₹ d


2:55:57

TYPE 3 BARRICADES

- 1. Refer to the Compliant Work Zone Traffic Control Devices List (CWZTCD) for details of the Type 3 Barricades and a list of all materials used in the construction of Type 3 Barricades.
- Type 3 Barricades shall be used at each end of construction projects closed to all traffic.
- 3. Barricades extending across a roadway should have stripes that slope downward in the direction toward which traffic must turn in detouring. When both right and left turns are provided, the chevron striping may slope downward in both directions from the center of the barricade. Where no turns are provided at a closed road, striping should slope downward in both directions toward the center of roadway.
- 4. Striping of rails, for the right side of the roadway, should slope downward to the left. For the left side of the roadway, striping should slope downward to the right.
- Identification markings may be shown only on the back of the barricade rails. The maximum height of letters and/or company logos used for identification shall be 1".
- 6. Barricades shall not be placed parallel to traffic unless an adequate clear zone is provided.
- 7. Warning lights shall NOT be installed on barricades.
- 8. Where barricades require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand is recommended. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight. Sand bags shall not be stacked in a manner that covers any portion of a barricade rails reflective sheeting. Rock, concrete, iron, steel or other solid objects will NOT be permitted. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall not be used for sandbags. Sandbags shall only be placed along or upon the base supports of the device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners.
- Sheeting for barricades shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300 unless otherwise noted.




TYPICAL STRIPING DETAIL FOR BARRICADE RAIL



Stiffener may be inside or outside of support, but no more than 2 stiffeners shall be allowed on one barricade.

TYPICAL PANEL DETAIL

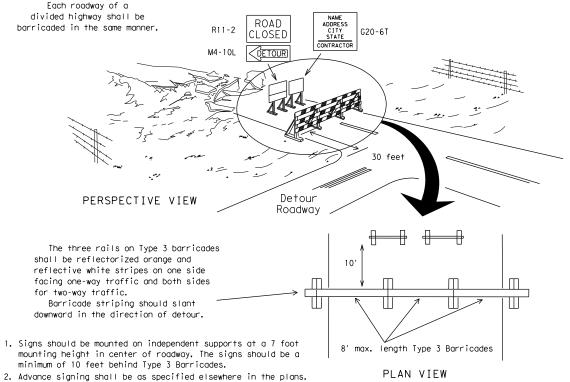

TYPE 3 BARRICADE (POST AND SKID) TYPICAL APPLICATION

Two-Piece cones

1. Where positive redirectional capability is provided, drums may be omitted. 2. Plastic construction fencing may be used with drums for safety as required in the plans. 3. Vertical Panels on flexible support may be substituted for drums when the Typical shoulder width is less than 4 feet. Plastic Drum 4. When the shoulder width is greater than 12 feet, steady-burn lights PERSPECTIVE VIEW may be omitted if drums are used. 5. Drums must extend the length These drums are not required of the culvert widening. on one-way roadway LEGEND Plastic drum Plastic drum with steady burn light A minimum of two drums be used across the work or yellow warning reflector teady burn warning light or yellow warning reflector $\left\langle \cdot \right\rangle$ Increase number of plastic drums on the side of approaching traffic if the crown width makes it necessary. (minimum of 2 and maximum of 4 drums)

CONES _4" min. orange $\frac{\sqrt[4]{2}}{\sqrt[4]{4}}$ min. white =2" min. 4" min. orange [6" min. _2" min. 2" min. 4" min. white 42' min. 28' min.

4" min.

PLAN VIEW

2" to 6

CULVERT WIDENING OR OTHER ISOLATED WORK WITHIN THE PROJECT LIMITS

One-Piece cones

Tubular Marker

FOR SKID OR POST TYPE BARRICADES

Alternate Alternate Drums, vertical panels or 42" cones Approx. Approx. at 50' maximum spacing 501 50′ Min. 2 drums or 1 Type 3 or 1 Type 3 barricade п STOCKPILE П On one-way roads Desirable downstream drums stockpile location Channelizing devices parallel to traffic or barricade may be is outside should be used when stockpile is omitted here clear zone. within 30' from travel lane. \Diamond \Rightarrow

TRAFFIC CONTROL FOR MATERIAL STOCKPILES

28" Cones shall have a minimum weight of 9 1/2 lbs.

42" 2-piece cones shall have a minimum weight of 30 lbs. including base.

- 1. Traffic cones and tubular markers shall be predominantly orange, and meet the height and weight requirements shown above.
- 2. One-piece cones have the body and base of the cone molded in one consolidated unit. Two-piece cones have a cone shaped body and a separate rubber base. or ballast, that is added to keep the device upright and in place.
- 3. Two-piece cones may have a handle or loop extending up to 8" above the minimum height shown, in order to aid in retrieving the device.
- 4. Cones or tubular markers shall have white or white and orange reflective bands as shown above. The reflective bands shall have a smooth, sealed outer surface and meet the requirements of Departmental Material Specification DMS-8300 Type A or Type B.
- 5. 28" cones and tubular markers are generally suitable for short duration and short-term stationary work as defined on BC(4). These should not be used for intermediate-term or long-term stationary work unless personnel is on-site to maintain them in their proper upright position.
- 6. 42" two-piece cones, vertical panels or drums are suitable for all work zone durations.
- 7. Cones or tubular markers used on each project should be of the same size and shape.

SHEET 10 OF 12



Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC(10)-21

E:	bc-21.dgn	DN: TxDOT		ck: TxDOT	DW:	TxDOT	ck: TxDOT
TxDOT	November 2002	CONT	SECT	JOB		н	GHWAY
	REVISIONS 9-07 8-14	0100	02	XXX		US	181
		DIST COUNTY				SHEET NO.	
7-13	5-21	SAT		BEXAF	₹		44

WORK ZONE PAVEMENT MARKINGS

GENERAL

- 1. The Contractor shall be responsible for maintaining work zone and existing pavement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
- 2. Color, patterns and dimensions shall be in conformance with the Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- 3. Additional supplemental pavement marking details may be found in the plans or specifications.
- 4. Pavement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
- 5. When short term markings are required on the plans, short term markings shall conform with the TMUTCD, the plans and details as shown on the Standard Plan Sheet WZ(STPM).
- 6. When standard pavement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where passing is prohibited and PASS WITH CARE signs at the beginning of sections where passing
- 7. All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

RAISED PAVEMENT MARKERS

- 1. Raised pavement markers are to be placed according to the patterns
- 2. All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.

PREFABRICATED PAVEMENT MARKINGS

- 1. Removable prefabricated pavement markings shall meet the requirements
- 2. Non-removable prefabricated pavement markings (foil back) shall meet the requirements of DMS-8240.


MAINTAINING WORK ZONE PAVEMENT MARKINGS

- 1. The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
- 2. Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
- 3. The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 160 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
- 4. Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

REMOVAL OF PAVEMENT MARKINGS

- 1. Pavement markings that are no longer applicable, could create confusion or direct a motorist toward or into the closed portion of the roadway shall be removed or obliterated before the roadway is opened to traffic.
- 2. The above shall not apply to detours in place for less than three days, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
- 3. Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Pavement Markinas and Markers".
- 4. The removal of pavement markings may require resurfacing or seal coating portions of the roadway as described in Item 677.
- 5. Subject to the approval of the Engineer, any method that proves to be successful on a particular type pavement may be used.
- 6. Blast cleaning may be used but will not be required unless specifically shown in the plans.
- 7. Over-painting of the markings SHALL NOT BE permitted.
- 8. Removal of raised pavement markers shall be as directed by the
- 9. Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
- 10. Black-out marking tape may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

Temporary Flexible-Reflective Roadway Marker Tabs

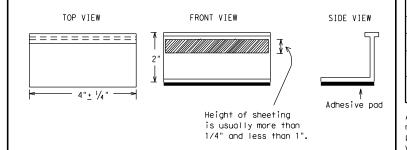

STAPLES OR NAILS SHALL NOT BE USED TO SECURE TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER TABS TO THE PAVEMENT SURFACE

- 1. Temporary flexible-reflective roadway marker tabs used as guidemarks shall meet the requirements of DMS-8242.
- 2. Tabs detailed on this sheet are to be inspected and accepted by the Engineer or designated representative. Sampling and testing is not normally required, however at the option of the Engineer, either "A" or "B" below may be imposed to assure quality before placement on the
 - A. Select five (5) or more tabs at random from each lot or shipment and submit to the Construction Division, Materials and Pavement Section to determine specification compliance.
 - B. Select five (5) tabs and perform the following test. Affix five (5) tabs at 24 inch intervals on an asphaltic pavement in a straight line. Using a medium size passenger vehicle or pickup, run over the markers with the front and rear tires at a speed of 35 to 40 miles per hour, four (4) times in each direction. No more than one (1) out of the five (5) reflective surfaces shall be lost or displaced as a result of this test.
- 3. Small design variances may be noted between tab manufacturers.
- 4. See Standard Sheet WZ(STPM) for tab placement on new pavements. See Standard Sheet TCP(7-1) for tab placement on seal coat work.

RAISED PAVEMENT MARKERS USED AS GUIDEMARKS

- 1. Raised pavement markers used as guidemarks shall be from the approved product list, and meet the requirements of DMS-4200.
- 2. All temporary construction raised pavement markers provided on a project shall be of the same manufacturer.
- 3. Adhesive for guidemarks shall be bituminous material hot applied or butyl rubber pad for all surfaces, or thermoplastic for concrete surfaces.
- Guidemarks shall be designated as: YELLOW - (two amber reflective surfaces with yellow body). WHITE - (one silver reflective surface with white body).

DEPARTMENTAL MATERIAL SPECIFICATIO	NS
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
TRAFFIC BUTTONS	DMS-4300
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY REMOVABLE, PREFABRICATED PAVEMENT MARKINGS	DMS-8241
TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS	DMS-8242

A list of pregualified reflective raised pavement markers. non-reflective traffic buttons, roadway marker tabs and other pavement markings can be found at the Material Producer List web address shown on BC(1).

SHEET 11 OF 12



Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION PAVEMENT MARKINGS

BC(11)-21

De (1 1 / 2 1										
FILE: bc-21.dgn	DN: T>	OOT	ck: TxDOT	DW:	TxD0	CK: TXDOT				
© TxDOT February 1998	CONT	SECT	JOB			H [GHWAY				
REVISIONS	0100	02	XXX		L	JS 181				
2-98 9-07 5-21 1-02 7-13	DIST		COUNTY			SHEET NO.				
11-02 8-14	SAT		BEXAF	₹		45				

2:55:57)7\Design

10/13/2023 2:55:57 P:\124\82\07\Design

Yellow

4 to 8"

5

TWO-WAY LEFT TURN LANE

10 to 12"

REFLECTORIZED PAVEMENT MARKINGS - PATTERN A

REFLECTORIZED PAVEMENT MARKINGS - PATTERN B


Yellow


Yellow

REFLECTORIZED PAVEMENT MARKINGS

Prefabricated markings may be substituted for reflectorized pavement markings.

White

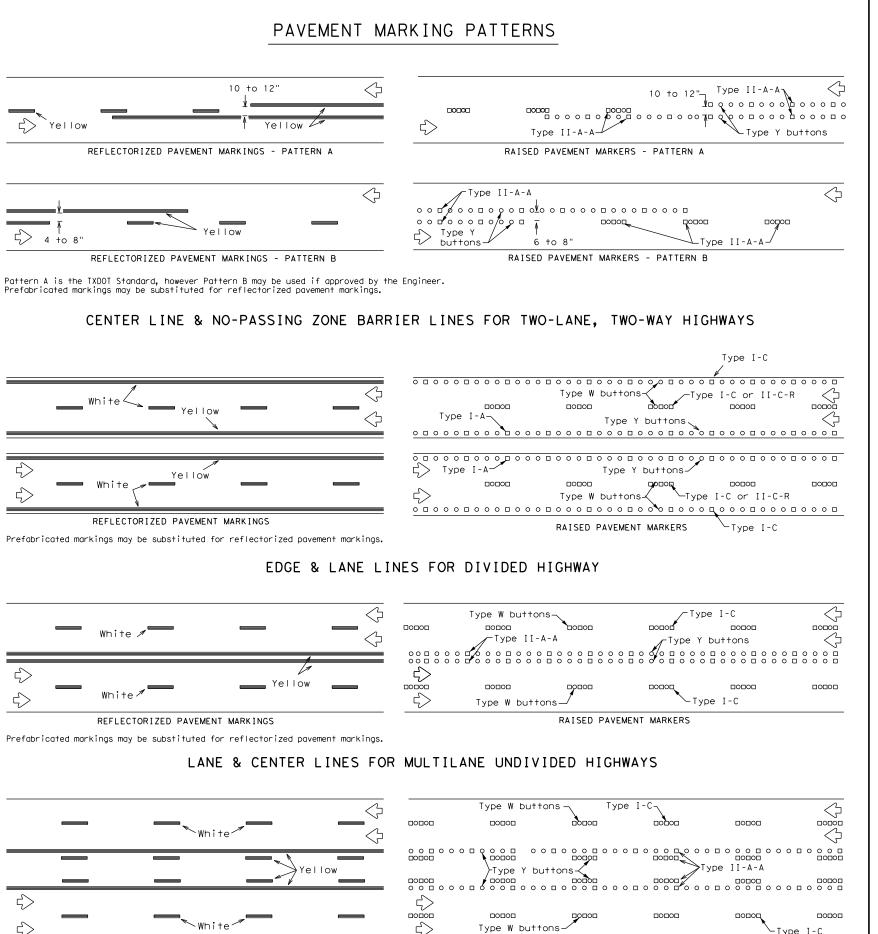


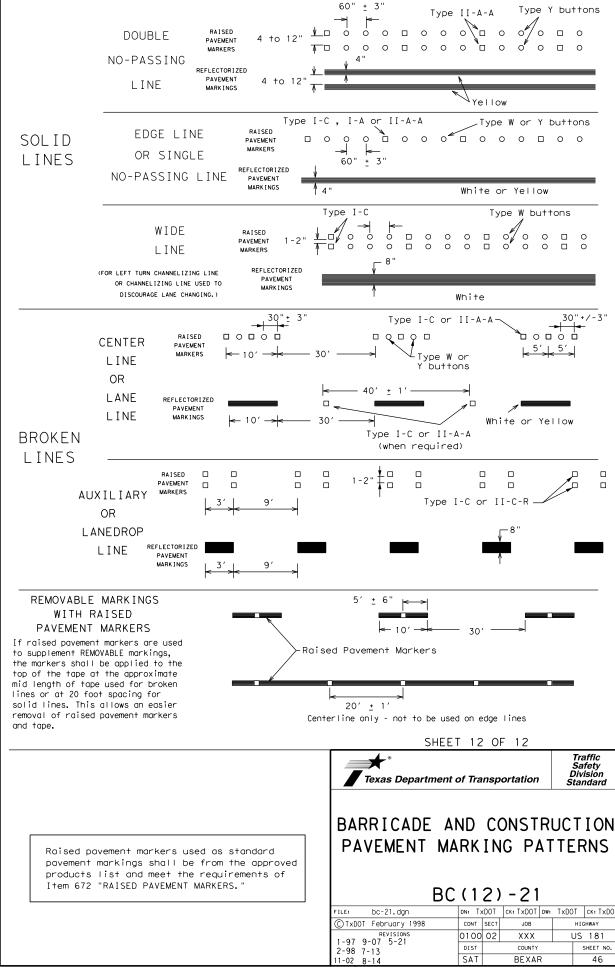

BEXAR

46

STANDARD WORK ZONE PAVEMENT MARKINGS DETAILS

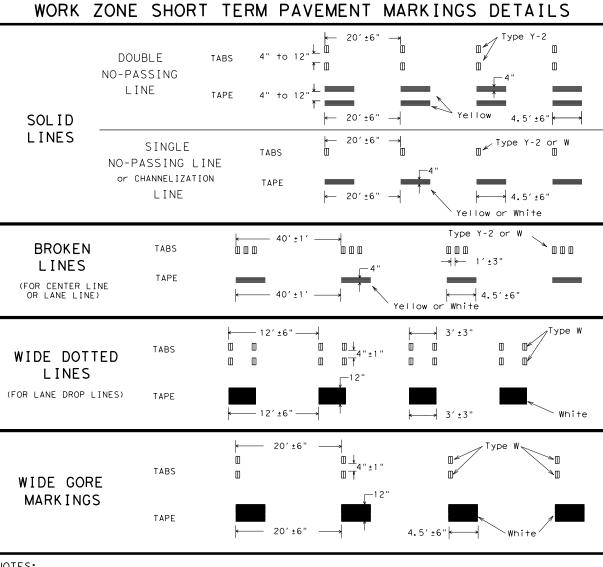


NOTES:

- 1. Short term pavement markings may be prefabricated markings (stick down tape) or temporary flexiblereflective roadway marker tabs unless otherwise specified elsewhere in plans.
- 2. Short term payement markings shall NOT be used to simulate edge lines.
- 3. Dimensions indicated on this sheet are typical and approximate. Variations in size and height may occur between markers or devices made by manufacturers, by as much as 1/4 inch, unless otherwise noted.
- 4. Temporary flexible-reflective roadway marker tabs will require normal maintenance replacement when used on roadways with an ADT per lane of up to 7500 vehicles with no more than 10% truck mix. When roadways exceed these values, additional maintenance replacement of devices should be planned.
- No segment of roadway open to traffic shall remain without permanent pavement markings for a period greater than 14 calendar days. The Contractor will be responsible for maintaining short term pavement markings until permanent pavement markings are in place. When the Contractor is responsible for placement of permanent pavement markings, no segment of roadway shall remain without permanent pavement markings for a period greater than 14 calendar days unless weather conditions prohibit placement. Permanent pavement markings shall be placed as soon as weather permits.
- For two lane, two-way roadways, DO NOT PASS signs shall be erected to mark the beginning of sections where passing is prohibited and PASS WITH CARE signs shall be erected to mark the beginning of sections where passing is permitted. Signs shall be in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and may be used to indicate the limits of no-passing zones for up to 14 calendar days. Permanent pavement markings should then be placed.
- For low volume two lane, two-way roadways of 4000 ADT or less, no-passing lines may be omitted when approved by the Engineer. DO NOT PASS and PASS WITH CARE signs shall be erected (see note 6).
- For exit gores where a lane is being dropped place wide gore markings or retroreflective channelizing devices to guide motorist through the exit. If channelizing devices are to be used it should be noted elsewhere in the plans. One piece cones are not allowed for this purpose.


TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS (TABS)

- Temporary flexible-reflective roadway marker tabs detailed on this sheet will be designated Type Y-2 (two amber reflective surfaces with yellow body); Type Y (one amber reflective surface with yellow body); and Type W (one white or silver reflective surface with white body). Additional details may be found on BC(11).
- Tabs shall meet requirements of Departmental Material Specification DMS-8242.
- 3. When dry, tabs shall be visible for a minimum distance of 200 feet during normal daylight hours and when illuminated by automobile low-beam head light at night, unless sight distance is restricted by roadway
- No two consecutive tabs nor four tabs per 1000 feet of line shall be missing or fail to meet the visual performance requirements of Note 3.

WORK ZONE SHORT TERM PAVEMENT MARKINGS PATTERNS

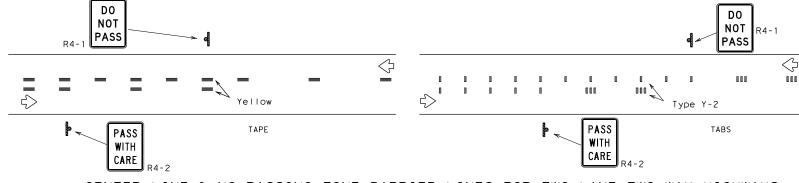


CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO LANE TWO-WAY HIGHWAYS

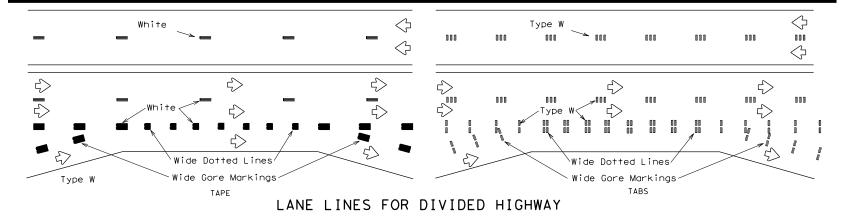


Š 000 000 Type W ≠ 0 0 0 0 Type Y-2 Yellow 000 000 000 000 White/ Type W

LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS

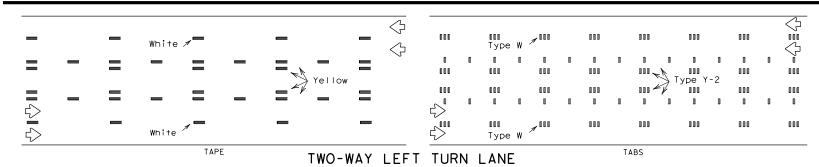

Removable Raised Short Term Pavement Pavement | Marker Markina (Tape)

If raised pavement markers are used to supplement REMOVABLE short term markings, the markers shall be applied to the top of the tape at the approximate mid length of the tape. This allows an easier removal of raised markers and tape.



Operation Division Standard

PREFABRICATED PAVEMENT MARKINGS

1. Temporary Removable Prefabricated Pavement Markings shall meet the requirements of DMS-8241.

TAPE

Non-removable Prefabricated Pavement Markings shall meet the requirements of either DMS-8240
"Permanent Prefabricated Pavement Markings" or DMS-8243 "Temporary Costruction-Grade
Prefabricated Pavement Markings."

RAISED PAVEMENT MARKERS

1. All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and DMS-4200.

DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS) & MATERIAL PRODUCER LISTS (MPL)

1. DMSs referenced above can be found along with embedded links to their respective MPLs at the following website: http://www.txdot.gov/business/contractors_consultants/material_specifications/default.htm


WORK ZONE SHORT TERM PAVEMENT MARKINGS

WZ (STPM) - 13

FILE:	wzstpm-13.dgn	DN: T	XDOT	CK: TXDOT D	w: TxDO	T CK: TXDOT
© TxDOT	April 1992	CONT	SECT	JOB		HIGHWAY
1-97	REVISIONS	0100	02	XXX	ι	JS 181
3-03		DIST		COUNTY		SHEET NO.
7-13		SAT		BEXAR		47



10/13/2023 2:55:59 P:\124\82\07\Design

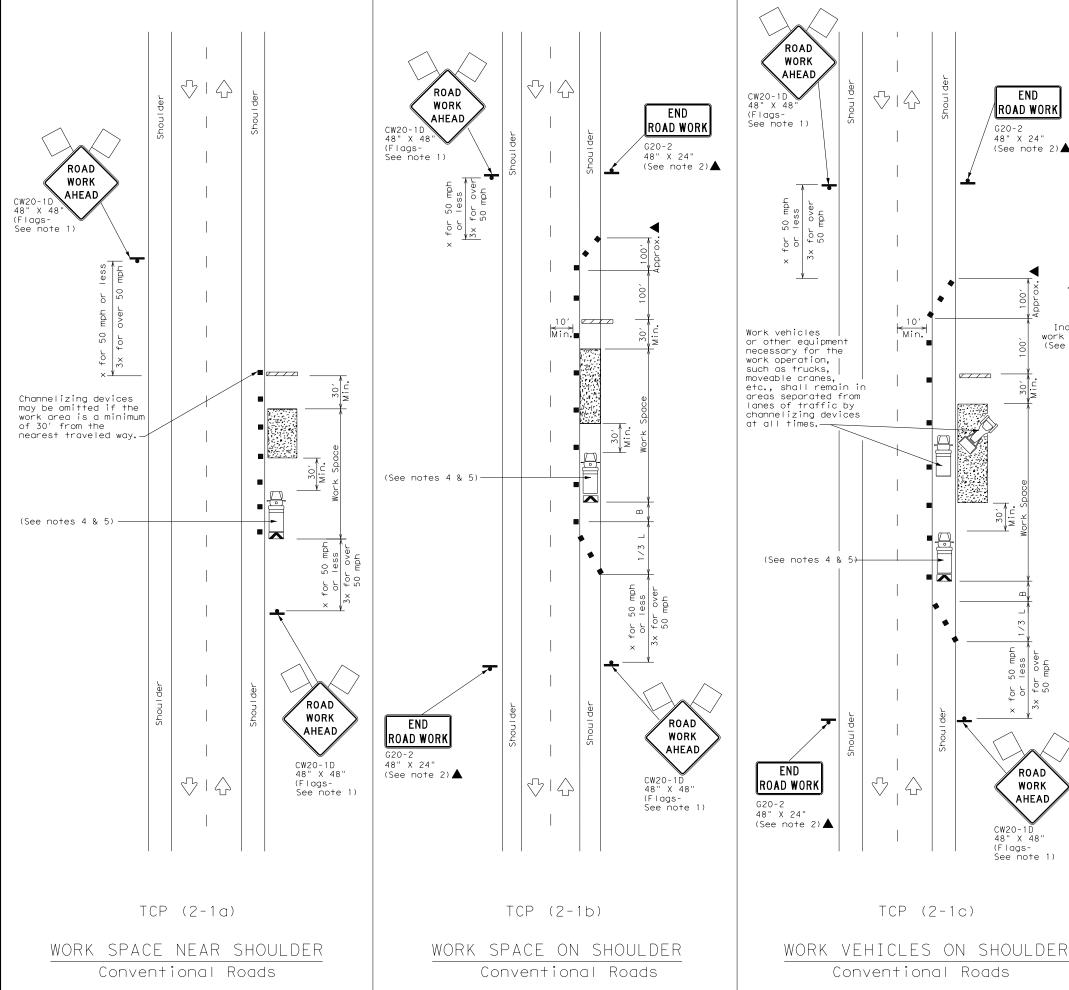

LEGEND								
	Type 3 Barricade		Channelizing Devices					
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)					
	Trailer Mounted Flashing Arrow Board	M	Portable Changeable Message Sign (PCMS)					
-	Sign	\frac{1}{2}	Traffic Flow					
\bigcirc	Flag	Lo	Flagger					
Water and the second se								

Posted Speed	Formula	* * *		Spacir Channe		Minimum Sign Spacing "X"	Suggested Longitudinal Buffer Space	
*		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	Distance	"B"
30		150′	165′	180′	30′	60′	120′	90′
35	L = WS	2051	225′	245′	35′	70′	160′	120′
40	80	265′	295′	3201	40′	80′	240′	155′
45		450′	495′	540′	45′	90′	320′	195′
50		500′	550′	600′	50′	100′	400′	240′
55	L=WS	550′	605′	660′	55′	110′	500′	295′
60	L 11/3	600′	660′	720′	60′	120′	600′	350′
65		650′	715′	780′	65′	130′	700′	410′
70		700′	770′	840′	70′	140′	800′	475′
75		750′	825′	900′	75′	150′	900′	540′

* Conventional Roads Only

END

ROAD WORK

(See note 2)▲

ROAD

WORK

AHEAD

(Flags-See note 1)

Inactive

work vehicle

48" X 24"

 \Diamond

** Taper lengths have been rounded off.

L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

	Typical usage								
MOBILE	MOBILE SHORT SHORT TERM INTERMEDIATE LONG TERM DURATION STATIONARY TERM STATIONARY STATIONARY								
	√ √ √								

GENERAL NOTES

- 1. Flags attached to signs where shown, are REQUIRED.
- 2. All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated in the
- plans, or for routine maintenance work, when approved by the Engineer.
 3. Stockpiled material should be placed a minimum of 30 feet from
- nearest traveled way.

 4. Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
- 5. Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect a wider work space.
- 6. See TCP(5-1) for shoulder work on divided highways, expressways and
- 7. Inactive work vehicles or other equipment should be parked near the
- right-of-way line and not parked on the paved shoulder. 8. CW21-5 "SHOULDER WORK" signs may be used in place of CW20-1D "ROAD WORK AHEAD" signs for shoulder work on conventional roadways.


Texas Department of Transportation


Traffic Operations Division Standard


TRAFFIC CONTROL PLAN CONVENTIONAL ROAD SHOULDER WORK


TCP (2-1) - 18

101 (2 17 10									
tcp2-1-18.dgn	DN:		CK:	DW:	CK:				
TxDOT December 1985	CONT	SECT	JOB		HIGHWAY				
REVISIONS 94 4-98	0100	02	XXX	l	JS 181				
94 4-96 95 2-12	DIST		COUNTY		SHEET NO.				
7 2-18	SAT		BEXA	7	48				

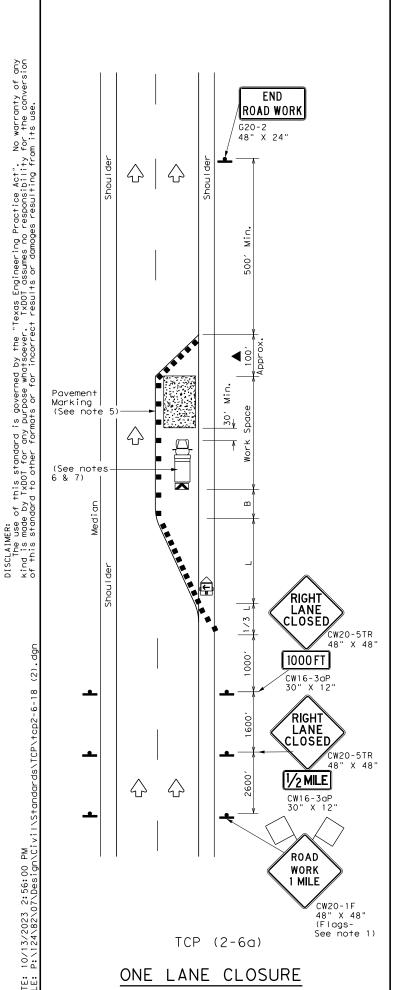

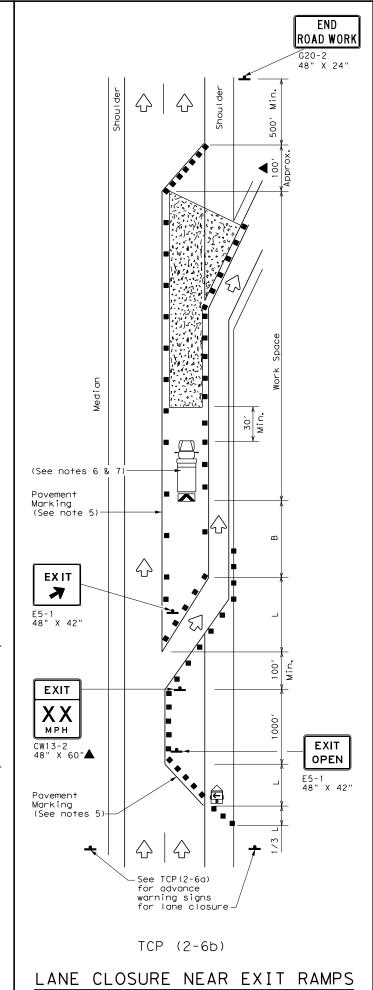

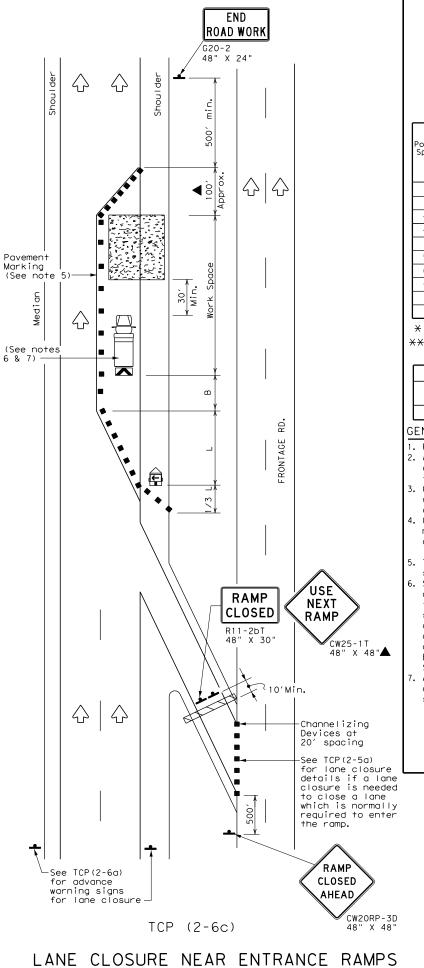



Speed	· I		Minimum Desirable Taper Lengths XX			d Maximum ng of lizing ices	Minimum Sign Spacing "X"	Suggested Longitudinal Buffer Space
*		10' Offset	11' Offset	12′ Offset	On a Taper	On a Tangent	Distance	"B"
30	ws ²	150′	165′	180′	30′	60′	120′	90′
35	L = WS	205′	225′	245′	35′	70′	160′	120′
40	80	265′	295′	320′	40′	80′	240′	155′
45		450′	495′	540′	45′	90′	320′	195′
50		500′	550′	600′	50′	100′	400′	240′
55	L=WS	5501	605′	660′	55′	110′	500′	295′
60] - "'	600′	660′	720′	60′	120′	600′	350′
65		650′	715′	780′	65′	130′	700′	410′
70		700′	770′	840′	70′	140′	800′	475′
75		750′	825′	900′	75′	150′	900′	540′

- imes Conventional Roads Only
- ** Taper lengths have been rounded off.

L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

	TYPICAL USAGE								
MOBILE	MOBILE SHORT SHORT TERM INTERMEDIATE LONG TERM DURATION STATIONARY TERM STATIONARY STATIONARY								
	√ √								

GENERAL NOTES

- 1. Flags attached to signs where shown, are REQUIRED.
- 2. All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer
- Channelizing devices used to close lanes may be supplemented with the Chevron Alignment Sign placed on every other channelizing device. Chevrons may be attached to plastic drums as per BC Standards.
- Channelizing devices used along the work space or along tangent sections may be supplemented with vertical panels (VP) placed on everyother channelizing device. If night time conditions make it difficult to see at least two VPs, the VPs may be placed on each channelizing device.
- The placement of pavement markings may be omitted on Intermediate-term stationary work zones with the approval of the Engineer.
- Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the
- Additional Shadow Vehicles with TMAs may be positioned in each closed lane, on the shoulder or off the paved surface, next to those


Texas Department of Transportation


TRAFFIC CONTROL PLAN LANE CLOSURES ON DIVIDED HIGHWAYS

Traffic Operations Division Standard


TCP(2-6)-18

ILE: tcp2-6-18.dgn	DN:		CK:	DW:	CK:
C)TxDOT December 1985	CONT	SECT	JOB		HIGHWAY
REVISIONS 2-94 4-98	0100	02	XXX ι		US 181
3-95 2-12	DIST		COUNTY		SHEET NO.
-97 2-18	SAT		BEXAF	7	49

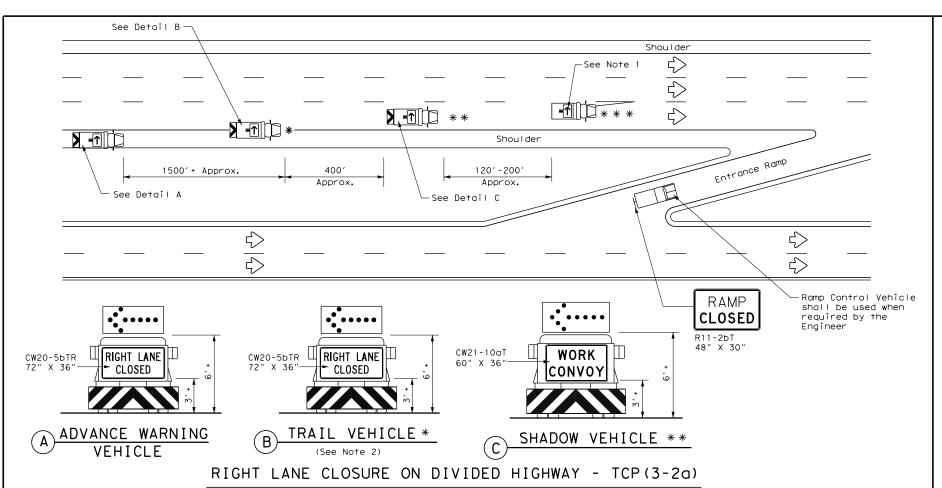

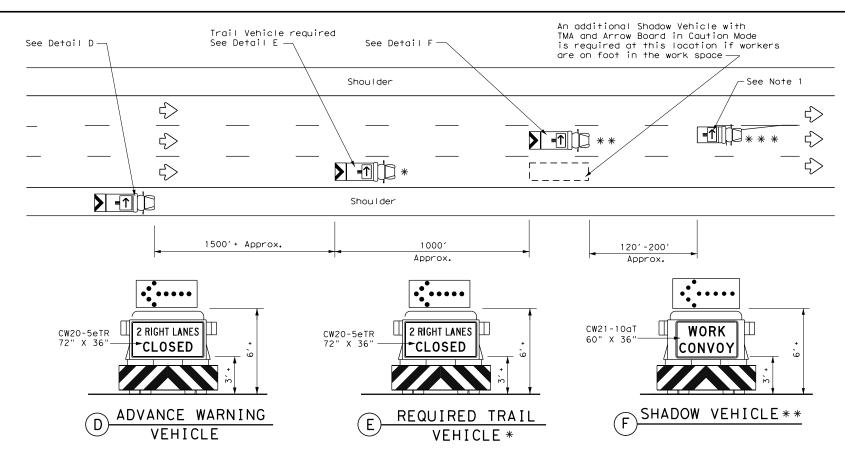


INTERIOR LANE CLOSURE ON MULTI-LANE DIVIDED HIGHWAY - TCP (3-2b)

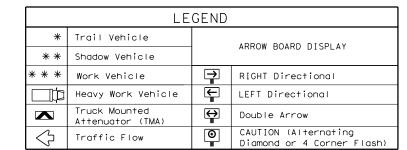

TYPICAL USAGE									
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY					
1									

GENERAL NOTES

- ADVANCE WARNING, TRAIL and SHADOW vehicles shall be equipped with Type B or Type C flashing arrow boards as per the Barricade and Construction (BC) standards. Arrow boards on WORK vehicles will be optional based on the type of work being performed. The arrow boards shall be operated from inside the vehicle.
- 2. For TCP(3-2a) the Engineer will determine if the TRAIL VEHICLE is required based on prevailing roadway conditions, traffic volume, and sight distance restrictions. All other vehicles shown for both TCP(3-2a) and TCP(3-2b) are required.
- 3. The use of amber high intensity rotating, flashing, oscillating, or strobe lights on vehicles are required. Blue high intensity rotating, flashing, oscillating or strobe lights when mounted on the driver's side of the vehicle may be operated simultaneously with the amber beacons or strobe lights.
- . The use of truck mounted attenuators (TMA) on the ADVANCE WARNING, SHADOW, and TRAIL vehicles are required.
- Reflective sheeting on the rear of the TMA shall meet or exceed the reflectivity and color requirements of DMS 8300, Type A.
- . Each vehicle shall have two-way radio communication capability.
- 7. When work convoys must change lanes, the TRAIL VEHICLE should change lanes first to shadow the other convoy vehicles.
- 8. Vehicle spacing between the TRAIL VEHICLE and the SHADOW VEHICLE will vary depending on sight distance restrictions. Motorists approaching the work convoy should be able to see the TRAIL VEHICLE in time to slow down and/or change lanes as they approach the TRAIL VEHICLE. Vehicle spacing between the WORK VEHICLE and SHADOW VEHICLE may vary according to terrain, work activity and other factors.
- 9. Standard 48" X 48" diamond shaped warning signs with the same message as those shown may be used where adequate mounting space exists.
- 10. The signs shown should be used on the Advance Warning Vehicle. As an option, a portable changeable message sign (PCMS) or a truck mounted changeable message sign (TMCMS) with a minimum character height of 12", and displaying the same legend may be substituted for these signs. An appropriate directional arrow display, simulating the size and legibility of the flashing arrow board, must be used in the second phase of the PCMS/TMCMS message. When this is done, the arrow board will not be required on the Advance Warning Vehicle.
- 11. Standard diamond shape versions of the CW20-5 series signs may be used as an option if the rectangular signs shown are not available.
- 12. The principles on this sheet may be used to close lanes from the left side of the roadway considering the number of lanes, shoulder width, sight distance, and ramp frequency.
- 13. Signs and flashing arrow board modes shall be appropriately altered when implementing left lane closures or interior closures which close the left lanes.
- 14. The Advance Warning Vehicle may straddle the edgeline when shoulder width makes it necessary.



STRIPING FOR TMA




Traffic Operations Division Standard

TRAFFIC CONTROL PLAN MOBILE OPERATIONS DIVIDED HIGHWAYS

TCP(3-2)-13

DN: T	OOT	ck: TxDOT	DW:	TxDOT	ck: TxDOT
CONT	IT SECT JOB		HIGHWAY		
0100	02	XXX		US 181	
DIST	DIST COUNTY				SHEET NO.
SAT	T BEXAR				50
	CONT O100 DIST	CONT SECT 0100 02 DIST	CONT SECT JOB 0100 02 XXX DIST COUNTY	CONT SECT JOB 0100 02 XXX DIST COUNTY	CONT SECT JOB HIG 0100 02 XXX US DIST COUNTY

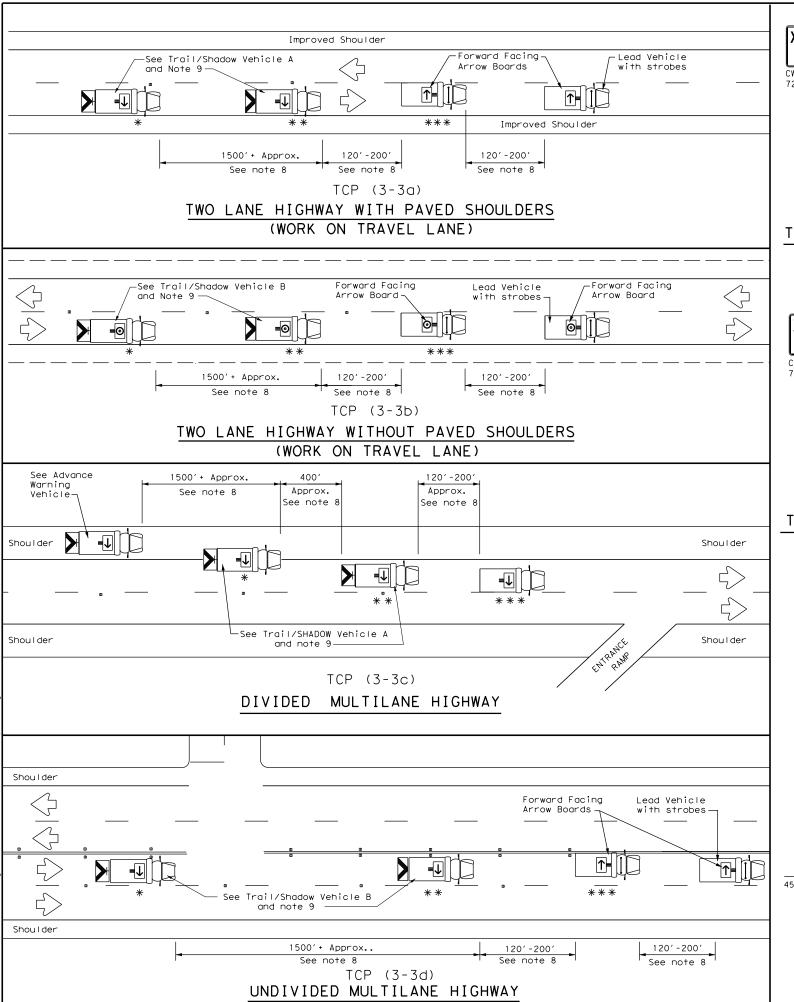


warranty of any the conversion

Po-

ned by the "Texas Engineering Practice Act". whatsoever. TXDOT assumes no responsibility and approve the property of the prope


this standard TxDOT for any

2:56:02




with DICHT Directional display

with RIGHT Directional display Flashing Arrow Board




TRAIL/SHADOW VEHICLE B

with Flashing Arrow Board in Caution Mode



ADVANCE WARNING VEHICLE



LEGEND								
*	Trail Vehicle	ADDOM DOADD DICDLAY						
* *	Shadow Vehicle	ARROW BOARD DISPLAY						
* * *	Work Vehicle	1	RIGHT Directional					
	Heavy Work Vehicle	LEFT Directional						
	Truck Mounted Attenuator (TMA)	*	Double Arrow					
\\ \}	Traffic Flow	0	CAUTION (Alternating Diamond or 4 Corner Flash)					

		TYPICAL L	JSAGE	
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
1				

GENERAL NOTES

- 1. TRAIL, SHADOW, and LEAD vehicles shall be equipped with arrow boards as illustrated. When a LEAD vehicle is not used on two way roads the WORK vehicle must have an arrow board. For divided roadways, the arrow board on the WORK vehicle is optional based on the type of work being performed. The Engineer will determine if the LEAD vehicle and/or TRAIL vehicle are required based on providing readway conditions traffic vehicle are sight distance restrictions.
- prevailing roadway conditions, traffic volume, and sight distance restrictions.

 2. The use of amber high intensity rotating, flashing, oscillating, or strobe lights on vehicles are required. Blue high intensity rotating, flashing, oscillating, or strobe lights when mounted on the driver's side of the vehicle may be operated simultaneously with the amber beacons or strobe lights.
- 3. The use of truck mounted attenuators (TMA) on the SHADOW VEHICLE, ADVANCE WARNING and TRAIL VEHICLE are required.
- 4. Reflective sheeting on the rear of the TMA shall meet or exceed the reflectivity and color requirements of DEPARTMENTAL MATERIAL SPECIFICATION DMS 8300, Type A.
- Flashing arrow boards shall be Type B or Type C as per the Barricade and Construction (BC) standards. The board shall be controlled from inside the vehicle.
- . Each vehicle shall have two-way radio communication capability. . When work convoys must change lanes, the TRAIL VEHICLE should change lanes
- 7. When work convoys must change lanes, the TRAIL VEHICLE should change lanes first to shadow the other convoy vehicles.
- 3. Vehicle spacing between the TRAIL VEHICLE and the SHADOW VEHICLE will vary depending on sight distance restrictions. Motorists approaching the convoy should be able to see the TRAIL VEHICLE in time to slow down and/or change lanes as they approach the TRAIL VEHICLE. Vehicle spacing between the WORK VEHICLE and SHADOW VEHICLE and vehicle spacing between WORK VEHICLE and LEAD VEHICLE may vary according to terrain, work activity and other factors.

 3. X VEHICLE CONVOY (CW21-10cT) or WORK CONVOY (CW21-10aT) signs shall be used on
- 9. X VEHICLE CONVOY (CW21-10cT) or WORK CONVOY (CW21-10aT) signs shall be used or TRAIL VEHICLES and SHADOW VEHICLES as shown. As an option 48" x 48" diamond shaped WORK CONVOY (CW21-10T) or X VEHICLE CONVOY (CW21-10bT) signs may be used where adequate mounting space exists. When used, the X VEHICLE CONVOY sign shall have the number of the convoy vehicles displayed on the sign in the number designation "X" location. The X VEHICLE CONVOY sign shall not be used on the SHADOW VEHICLE if a TRAIL VEHICLE is used.
- 10. For divided highways with two or three lanes in one direction, the appropriate LEFT LANE CLOSED (CW20-5bTL), RIGHT LANE CLOSED (CW20-5bTR), or CENTER LANE CLOSED (CW20-5dT) sign should be used on the Advance Warning Vehicle. As an option, a portable changeable message sign (PCMS) or truck mounted changeable message sign (TMCMS) with a minimum character height of 12", and displaying the same legend may be substituted for these signs. An appropriate directional arrow display, simulating the size and legibility of the flashing arrow board may be used in the second phase of the PCMS/TMCMS message. When this is done, the arrow board will not be required on the Advance Warning Vehicle.
- 11. A double arrow shall not be displayed on the arrow board on the Advance Warning Vehicle.
- 12. For divided highways with three or four lanes in each direction, use TCP(3-2).
- 13. Standard diamond shape versions of the CW20-5 series signs may be used as an option if the rectangular signs shown are not available.
- 14. The Advance Warning Vehicle may straddle the edgeline when Shoulder width makes it necessary.
- 15.On two-lane two-way roadways, the work and protection vehicles should pull over periodically to allow motor vehicle traffic to pass. If motorists are not allowed to pass the work convoy, a DO NOT PASS (R4-1) sign should be placed on the back of the rearmost protection vehicle.




Traffic Operations Division Standard

TRAFFIC CONTROL PLAN
MOBILE OPERATIONS
RAISED PAVEMENT
MARKER INSTALLATION/
REMOVAL
TCP (3-3)-14

FILE: tcp3-3.dgn	DN: To	<dot< th=""><th>ck: TxDOT</th><th>ow: TxD0</th><th>OT CK: TXDOT</th></dot<>	ck: TxDOT	ow: TxD0	OT CK: TXDOT
© TxDOT September 1987	CONT	SECT	JOB		HIGHWAY
REVISIONS	0100	02	XXX		US 181
2-94 4-98 8-95 7-13		COUNTY			SHEET NO.
1-97 7-14	SAT		BEXAR		51






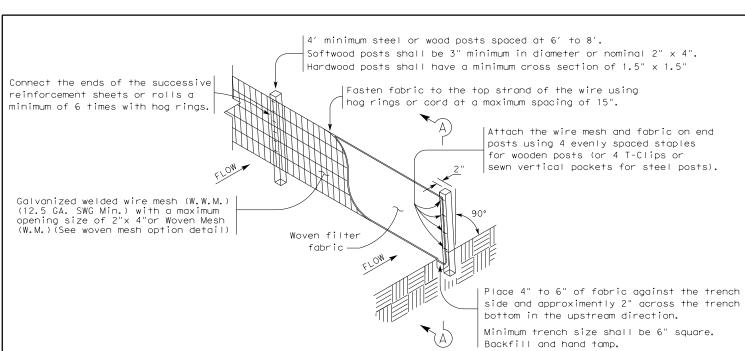

TEMPORARY SEDIMENT CONTROL FENCE



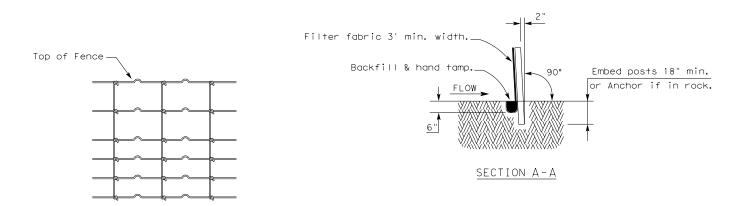

HINGE JOINT KNOT WOVEN MESH (OPTION) DETAIL

Galvanized hinge joint knot woven mesh (12.5 GA.SWG Min.) requires a minimum of five horizontal wires spaced at a maximum of 12 inches apart and all vertical wires spaced at a maximum of 12 inches apart.

SEDIMENT CONTROL FENCE USAGE GUIDELINES

A sediment control fence may be constructed near the downstream perimeter of a disturbed area along a contour to intercept sediment from overland runoff. A 2 year storm frequency may be used to calculate the flow rate to be filtered.


Sediment control fence should be sized to filter a maximum flow through rate of 100 GPM/FT². Sediment control fence is not recommended to control erosion from a drainage area larger than 2 acres.

LEGEND

Sediment Control Fence

GENERAL NOTES

- 1. Vertical tracking is required on projects where soil distributing activities have occurred unless otherwise approved.
- 2. Perform vertical tracking on slopes to temporarily stabilize soil.
- 3. Provide equipment with a track undercarriage capable of producing linear soil impressions measuring a minimum of 12" in length by 2" to 4" in width by 1/2" to 2" in depth.
- 4. Do not exceed 12" between track impressions.
- 5. Install continous linear track impressions where the minimum 12" length impressions are perpendicular to the slope or direction of water flow.

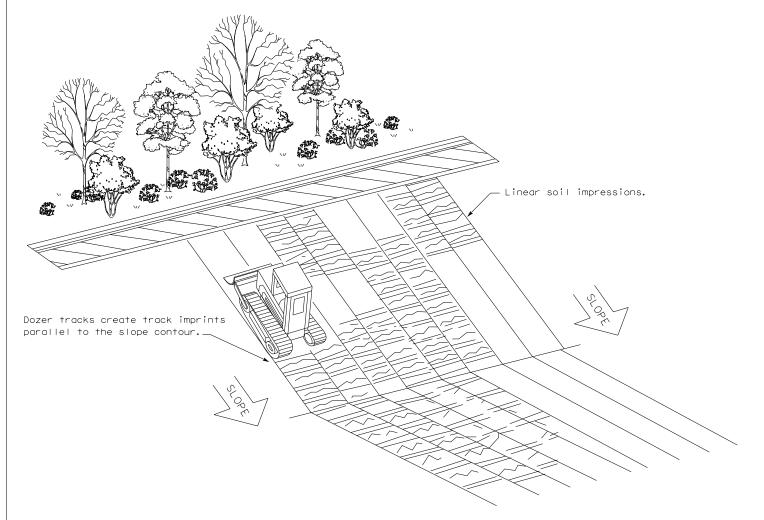

VERTICAL TRACKING




TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES

FENCE & VERTICAL TRACKING

EC(1)-16

FILE: ec116	DN: TxD	OT	CK: KM DW: VF		DN/CK: LS	
© TxDOT: JULY 2016	CONT	SECT	JOB		HIGHWAY	
REVISIONS	0100	02	XXX		US 181	
	DIST	COUNTY			SHEET NO.	
	SAT	BEXAR		52		

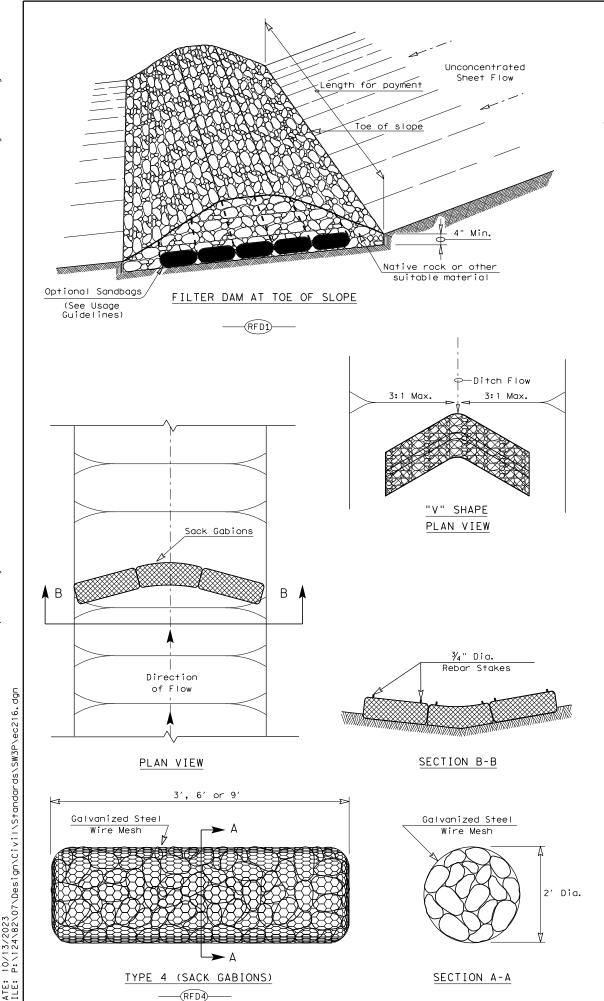

is made by results or


any kind incorrect r

anty of or for :

Engineering Practice Act". of this standard to other


"Texds ersion


this standard is governed by es no responsibility for the

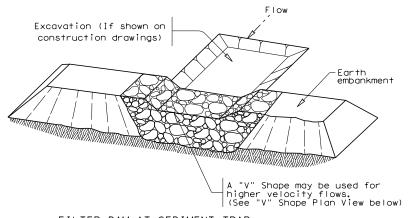

FILTER DAM AT SEDIMENT TRAP





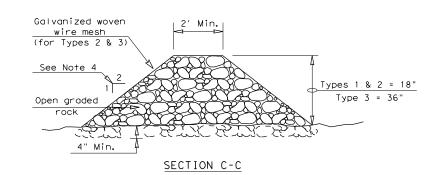

ROCK FILTER DAM USAGE GUIDELINES


Rock Filter Dams should be constructed downstream from disturbed areas to intercept sediment from overland runoff and/or concentrated flow. The dams should be sized to filter a maximum flow through rate of 60 GPM/FT 2 of cross sectional area. A 2 year storm frequency may be used to calculate the flow rate.

Type 1 (18" high with no wire mesh) (3" to 6" aggregate): Type 1 may be used at the toe of slopes, around inlets, in small ditches, and at dike or swale outlets. This type of dam is recommended to control erosion from a drainage area of 5 acres or less. Type 1 may not be used in concentrated high velocity flows (approximently 8 Ft/Sec or more) in which aggregate wash out may occur. Sandbags may be used at the embedded foundation (4" deep min.) for better filtering efficiency of low flows if called for on the plans or directed by the Engineer.

Type 2 (18" high with wire mesh) (3" to 6" aggregate): Type 2 may be used in ditches and at dike or swale outlets.

Type 4 (Sack gabions) (3" to 6" aggregate): Type 4 May be used in ditches and smaller channels to form an erosion control dam.

Type 5: Provide rock filter dams as shown on plans.

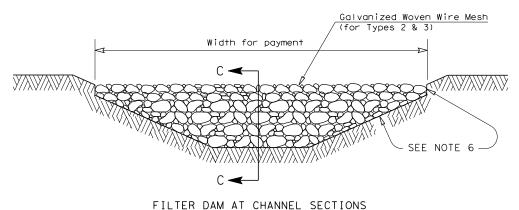

TETER DAM AT CHANNEL SECTIONS

GENERAL NOTES

- If shown on the plans or directed by the Engineer, filter dams should be placed near the toe of slopes where erosion is anticipated, upstream and/or downstream at drainage structures, and in roadway ditches and channels to collect sediment.
- Materials (aggregate, wire mesh, sandbags, etc.) shall be as indicated by the specification for "Rock Filter Dams for Erosion and Sedimentation Control".
- 3. The rock filter dam dimensions shall be as indicated on the SW3P plans.
- Side slopes should be 2:1 or flatter. Dams within the safety zone shall have sideslopes of 6:1 or flatter.
- 5. Maintain a minimum of 1' between top of rock filter dam weir and top of embankment for filter dams at sediment traps.
- 6. Filter dams should be embedded a minimum of 4" into existing ground.
- 7. The sediment trap for ponding of sediment laden runoff shall be of the dimensions shown on the plans.
- 8. Rock filter dam types 2 & 3 shall be secured with 20 gauge galvanized woven wire mesh with 1" diameter hexagonal openings. The aggregate shall be placed on the mesh to the height & slopes specified.

 The mesh shall be folded at the upstream side over the aggregate and tightly secured to itself on the downstream side using wire ties or hog rings. For in stream use, the mesh should be secured or staked to the stream bed prior to aggregate placement.
- 9. Sack Gabions should be staked down with $\frac{3}{4}$ " dia. rebar stakes, and have a double-twisted hexagonal weave with a nominal mesh opening of 2 $\frac{1}{2}$ " x 3 $\frac{1}{4}$ "
- 10. Flow outlet should be onto a stabilized area (vegetation, rock, etc.).
- 11. The guidelines shown hereon are suggestions only and may be modified by

PLAN SHEET LEGEND

Type 1 Rock Filter Dam RFD1

Type 2 Rock Filter Dam RFD2

Type 3 Rock Filter Dam RFD3

Type 4 Rock Filter Dam —




Design Division Standard

TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES


ROCK FILTER DAMS

EC(2)-16

E: ec216	DN: TxD	OT CK: KM DW: \		٧P	DN/CK: LS		
xDOT: JULY 2016	CONT	SECT	JOB			HIGHWAY	
REVISIONS	0100	02	XXX	1		JS 181	
	DIST		COUNTY		SHEET NO.		
	SAT					53	

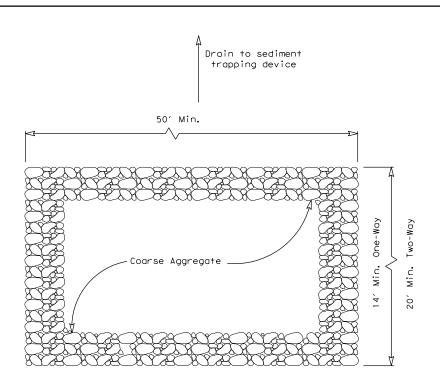

PLAN VIEW

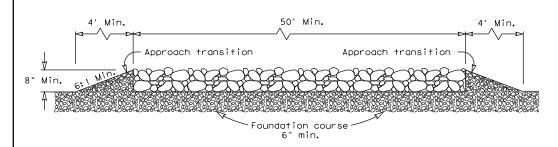


ELEVATION VIEW

CONSTRUCTION EXIT (TYPE 1)


ROCK CONSTRUCTION (LONG TERM)

GENERAL NOTES (TYPE 1)

- 1. The length of the type 1 construction exit shall be as indicated on the plans, but not less than 50'.
- 2. The coarse aggregate should be open graded with a size of 4" to 8".
- 3. The approach transitions should be no steeper than 6:1 and constructed as directed by the Engineer.
- 4. The construction exit foundation course shall be flexible base, bituminous concrete, portland cement concrete or other materialas approved by the Engineer.
- 5. The construction exit shall be graded to allow drainage to a sediment trappina device.
- 6. The guidelines shown hereon are suggestions only and may be modified
- 7. Construct exits with a width of at least 14 ft. for one-way and 20 ft. for two-way traffic for the full width of the exit, or as directed by the engineer.

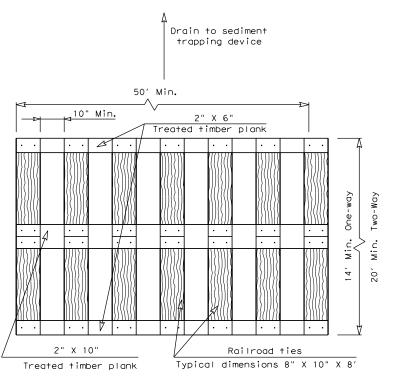

PLAN VIEW

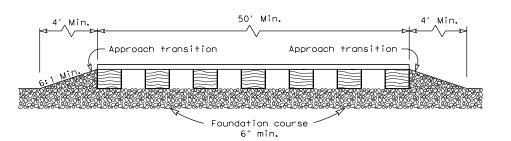


ELEVATION VIEW

CONSTRUCTION EXIT (TYPE 2)

TIMBER CONSTRUCTION (LONG TERM)


GENERAL NOTES (TYPE 2)

- 1. The length of the type 2 construction exit shall be as indicated on the plans, but not less than 50'.
- The treated timber planks shall be attached to the railroad ties with $\frac{1}{2}$ "x 6" min. lag bolts. Other fasteners may be used as approved by the Engineer.
- The treated timber planks shall be #2 grade min., and should be free from large and loose knots.
- 4. The approach transitions shall be no steeper than 6:1 and constructed as directed by the Engineer.
- 5. The construction exit foundation course shall be flexible base, bituminous concrete, portland cement concrete or other material as approved by the Engineer.
- The construction exit should be graded to allow drainage to a sediment trapping device.
- The guidelines shown hereon are suggestions only and may be modified by the Engineer.
- 8. Construct exits with a width of at least 14 ft. for one-way and 20 ft. for two-way traffic for the full width of the exit, or as directed by the



Paved Roadway

PLAN VIEW

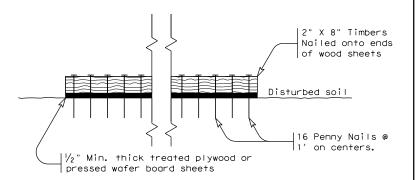

SECTION A-A

CONSTRUCTION EXIT (TYPE 3) SHORT TERM

GENERAL NOTES (TYPE 3)

- 1. The length of the type 3 construction exit shall be as shown on the plans, or as directed by the Engineer.
- 2. The type 3 construction exit may be constructed from open graded crushed stone with a size of two to four inches spread a min. of 4" thick to the limits shown on the plans.
- 3. The treated timber planks shall be #2 grade min., and should be free from large and loose knots.
- 4. The guidelines shown hereon are suggestions only and may be modified by the Engineer.




TEMPORARY EROSION. SEDIMENT AND WATER POLLUTION CONTROL MEASURES CONSTRUCTION EXITS

FC (3) -	1	6
	DN: TxDOT		ск: КМ

LE: ec316	DN: Tx[)OT	CK: KM DW: V		VP	DN/CK: LS
TxDOT: JULY 2016	CONT	SECT	JOB		HIGHWAY	
REVISIONS	0100	02	XXX		U	S 181
	DIST	COUNTY		SHEET NO.		
	SAT		REYAR			54

DATE: FILE:

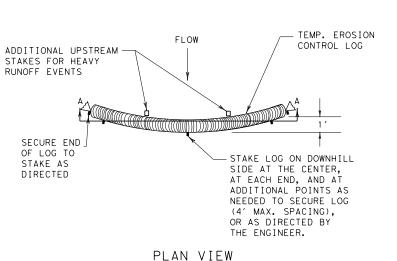

STAKE LOG ON DOWNHILL

R.O.W.

SIDE AT THE CENTER.

AT EACH END, AND AT

ADDITIONAL POINTS AS

NEEDED TO SECURE LOG

AS DIRECTED BY THE

ENGINEER.

(4' MAX. SPACING), OR

ADDITIONAL UPSTREAM

STAKES FOR HEAVY

RUNOFF EVENTS

FLOW ADDITIONAL UPSTREAM STAKES FOR HEAVY RUNOFF EVENTS SECURE END OF LOG TO STAKE AS DISTURBED AREA DIRECTED BACK OF CURB -LIP OF GUTTER STAKE ON DOWNHILL SIDE OF TEMP. EROSION LOG AT 8' (ON CENTER) MAX. CONTROL LOG AS NEEDED TO SECURE LOG, OR AS DIRECTED BY THE ENGINEER.

PLAN VIEW

TEMP. EROSION


COMPOST CRADIT

UNDER EROSION


CONTROL LOG

CONTROL LOG

STAKE ON DOWNHILL SIDE OF LOG AT 8' (ON CENTER) MAX. AS NEEDED TO SECURE LOG, (TYP.) OR AS DIRECTED BY THE ENGINEER. TEMPORARY EROSION CONTROL LOG FLOW -DISTURBED AREA SECURE END BACK OF CURB OF LOG TO STAKE AS DIRECTED LIP OF GUTTER ADDITIONAL UPSTREAM STAKES FOR HEAVY RUNOFF EVENTS

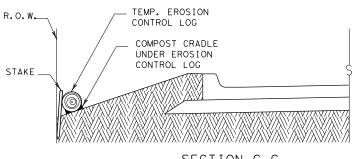


PLAN VIEW

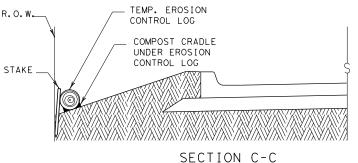



EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY



SECTION A-A EROSION CONTROL LOG DAM

MIN



LEGEND

CL-D - EROSION CONTROL LOG DAM

TEMP. EROSION-

CONTROL LOG

(TYP.)

COMPOST CRADLE UNDER EROSION

CONTROL LOG

- —(cl-boc)— Erosion control log at back of curb
- EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY (CL-ROW
- EROSION CONTROL LOGS ON SLOPES STAKE AND TRENCHING ANCHORING -(CL-SST
- EROSION CONTROL LOGS ON SLOPES STAKE AND LASHING ANCHORING -(CL-SSL
- (CL-DI - EROSION CONTROL LOG AT DROP INLET
- (CL-CI EROSION CONTROL LOG AT CURB INLET
- EROSION CONTROL LOG AT CURB & GRATE INLET (CL-GI)

REBAR STAKE DETAIL

SEDIMENT BASIN & TRAP USAGE GUIDELINES

An erosion control log sediment trap may be used to filter sediment out of runoff draining from an unstabilized area.

The drainage area for a sediment trap should not exceed Log Traps: 5 acres. The trap capacity should be 1800 CF/Acre (0.5" over the drainage area).

Control logs should be placed in the following locations:

- 1. Within drainage ditches spaced as needed or min. 500' on center
- 2. Immediately preceding ditch inlets or drain inlets
- 3. Just before the drainage enters a water course
- 4. Just before the drainage leaves the right of way
- 5. Just before the drainage leaves the construction limits where drainage flows away from the project.

The logs should be cleaned when the sediment has accumulated to a depth of 1/2 the log diameter.

Cleaning and removal of accumulated sediment deposits is incidental and will not be paid for separately.

DIAMETER MEASUREMENTS OF EROSION

CONTROL LOGS SPECIFIED IN PLANS

GENERAL NOTES:

1. EROSION CONTROL LOGS SHALL BE INSTALLED IN ACCORDANCE WITH MANFACTURER'S

2. LENGTHS OF EROSION CONTROL LOGS SHALL

BIODEGRADABLE OR PHOTODEGRADABLE

USE RECYCLABLE CONTAINMENT MESH.

STAKES SHALL BE 2" X 2" WOOD OR

THE PURPOSE INTENDED.

3. UNLESS OTHERWISE DIRECTED, USE

ENGINEER.

DEFORMATION.

THE ENGINEER.

MESH.

MINIMUM

COMPACTED

DIAMETER

RECOMMENDATIONS, OR AS DIRECTED BY THE

BE IN ACCORDANCE WITH MANUFACTURER'S

RECOMMENDATIONS AND AS REQUIRED FOR

CONTAINMENT MESH ONLY WHERE LOG WILL

SYSTEM. FOR TEMPORARY INSTALLATIONS,

REMAIN IN PLACE AS PART OF A VEGETATIVE

FILL LOGS WITH SUFFICIENT FILTER MATERIAL

SPECIFIED IN THE PLANS WITHOUT EXCESSIVE

#3 REBAR, 2'-4' LONG, EMBEDDED SUCH THAT

SANDBAGS USED AS ANCHORS SHALL BE PLACED

ON TOP OF LOGS & SHALL BE OF SUFFICIENT

TURN THE ENDS OF EACH ROW OF LOGS UPSLOPE

TO PREVENT RUNOFF FROM FLOWING AROUND THE

UPSTREAM STAKES MAY BE NECESSARY TO KEEP

6. DO NOT PLACE STAKES THROUGH CONTAINMENT

7. COMPOST CRADLE MATERIAL IS INCIDENTAL &

WILL NOT BE PAID FOR SEPARATELY.


10. FOR HEAVY RUNOFF EVENTS, ADDITIONAL

LOG FROM FOLDING IN ON ITSELF.

SIZE TO HOLD LOGS IN PLACE.

2" PROTRUDES ABOVE LOG, OR AS DIRECTED BY

TO ACHIEVE THE MINIMUM COMPACTED DIAMETER



MINIMUM


COMPACTED DIAMETER

TEMPORARY EROSION. SEDIMENT AND WATER POLLUTION CONTROL MEASURES

EROSION CONTROL LOG

EC(9) - 16


ILE: ec916	DN: TxD	ОТ	ск: КМ	DW:	LS/PT	CK: LS
TxDOT: JULY 2016	CONT	SECT	JOB	JOB		GHWAY
REVISIONS	0100	02	02 XXX county BEXAR		US	181
	DIST					SHEET NO.
	SAT					55



SECTION B-B

EROSION CONTROL LOG AT BACK OF CURB

CL-BOC

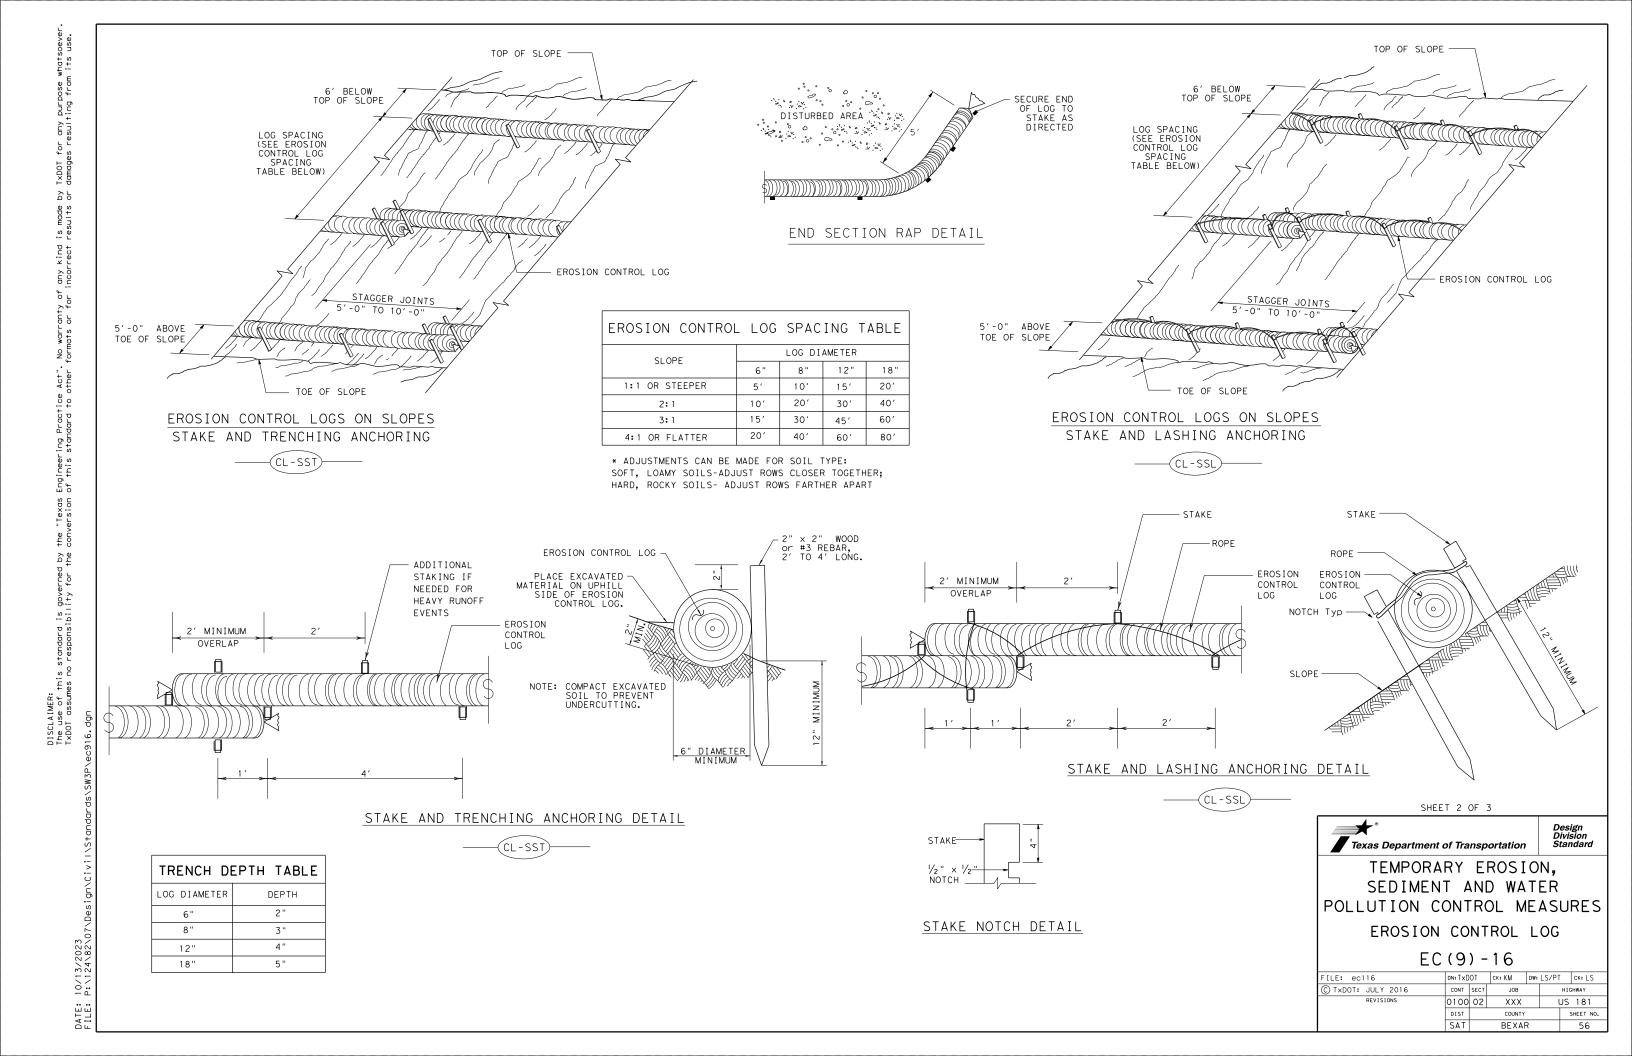

SECURE END > OF LOG TO STAKE AS


DIRECTED


TEMP. EROSION-

FLOW

CONTROL LOG

DATE: 10/13/2023 FILE: P:\124\82\07\Design\Civil\S+andards\SW3P\ec916.d



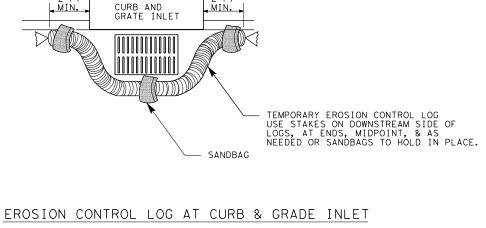

OVERLAP ENDS TIGHTLY 24" MINIMUM

- FLOW

EROSION CONTROL LOG AT DROP INLET

-STAKE OR USE SANDBAGS ON DOWNHILL SIDE OF LOG AS NEEDED TO HOLD IN PLACE (TYPICAL)

COMPLETELY SURROUND
DRAINAGE ACCESS TO
AREA DRAIN INLETS WITH
EROSION CONTROL LOG

EROSION CONTROL LOG AT CURB INLET

CURB


TEMP. EROSION CONTROL LOG

SANDBAG

_____CL-CI)____

EROSION CONTROL LOG AT CURB INLET

-2 SAND BAGS



NOTE: EROSION CONTROL LOGS USED AT CURB INLETS SHOULD ONLY BE USED IF THEY WILL NOT IMPEDE TRAFFIC OR FLOOD THE ROADWAY OR WHEN THE STORM SEWER SYSTEM IS NOT FULLY FUNCTIONAL.


USE STAKES ON DOWNSTREAM SIDE OF LOGS, AT ENDS, MIDPOINT, & AS NEEDED OR SANDBAGS TO HOLD IN PLACE.

6" CURB-

ROADWAY

2 SAND BAGS

TEMP. EROSION CONTROL LOG



SHEET 3 OF 3




-CURB INLET

_INLET EXTENSION

TEMPORARY EROSION,
SEDIMENT AND WATER
POLLUTION CONTROL MEASURES
EROSION CONTROL LOG

EC(9)-16

			_		
FILE: ec916	DN: Tx[DN: TxDOT CK: KM DW		DW: LS/P	CK: LS
© TxDOT: JULY 2016	CONT	SECT	JOB		HIGHWAY
REVISIONS	0100	02	XXX		US 181
	DIST	COUNTY			SHEET NO.
	SAT	BEXAR		₹	57

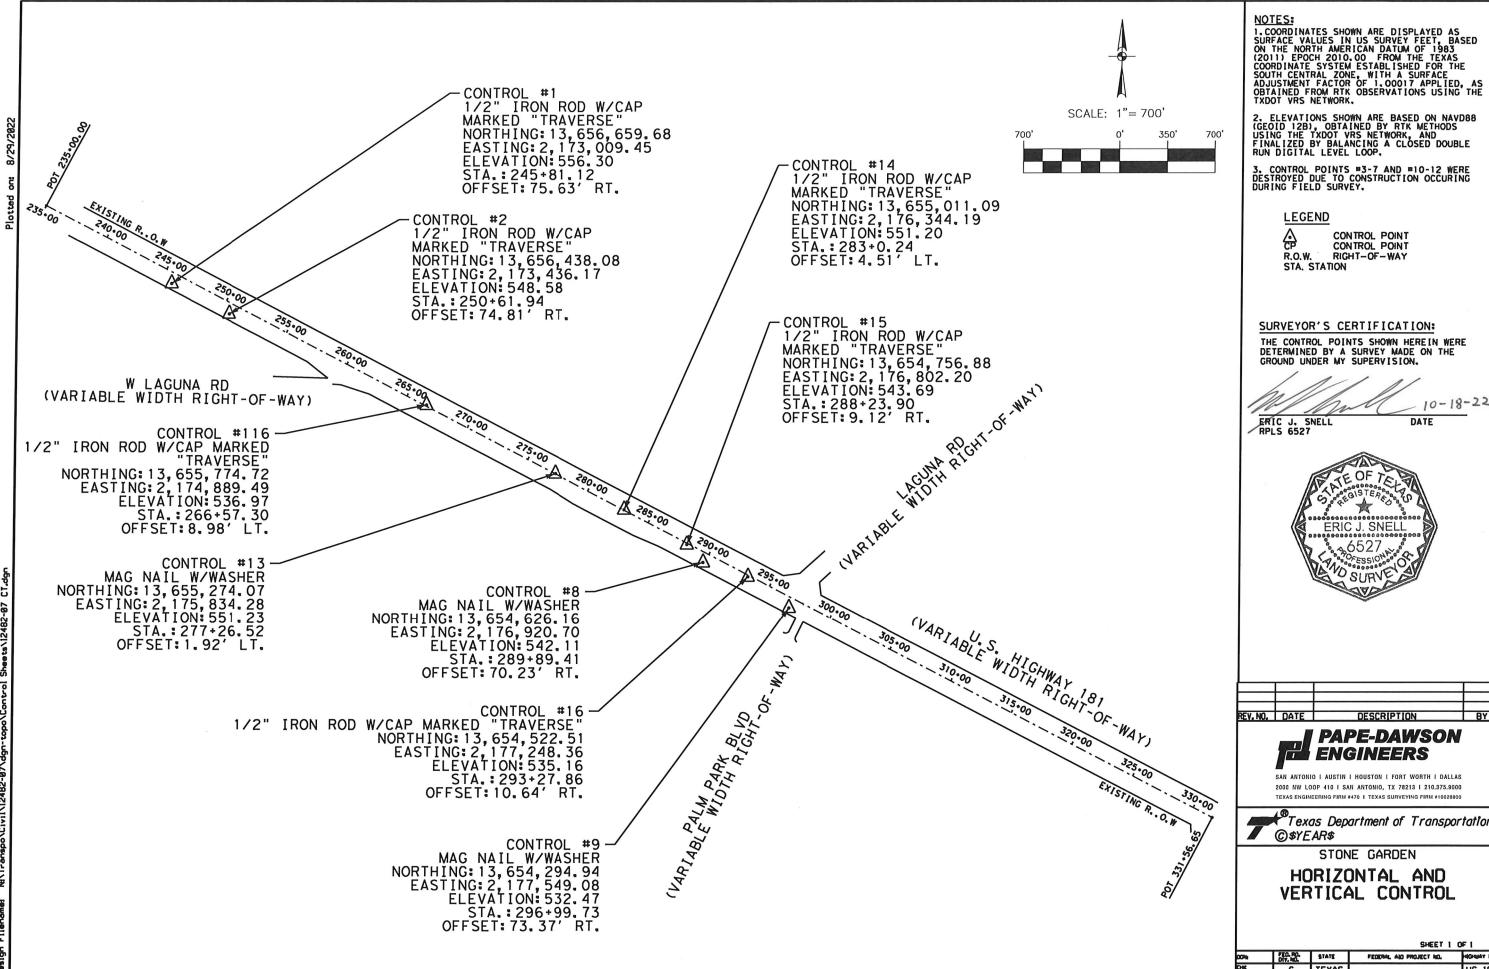

10-18-22 DATE




2000 NW LOOP 410 I SAN ANTONIO, TX 78213 I 210.375.9000 TEXAS ENGINEERING FIRM #470 | TEXAS SURVEYING FIRM #1002880


Texas Department of Transportation


HORIZONTAL AND VERTICAL CONTROL


SHEET 1 OF 1


PEDERAL AND PROJECT NO. 6 TEXAS US 181 DIST. COUNTY CONT. NO. SECT. NO. JOB NO. SHEET NO. 15 BEXAR

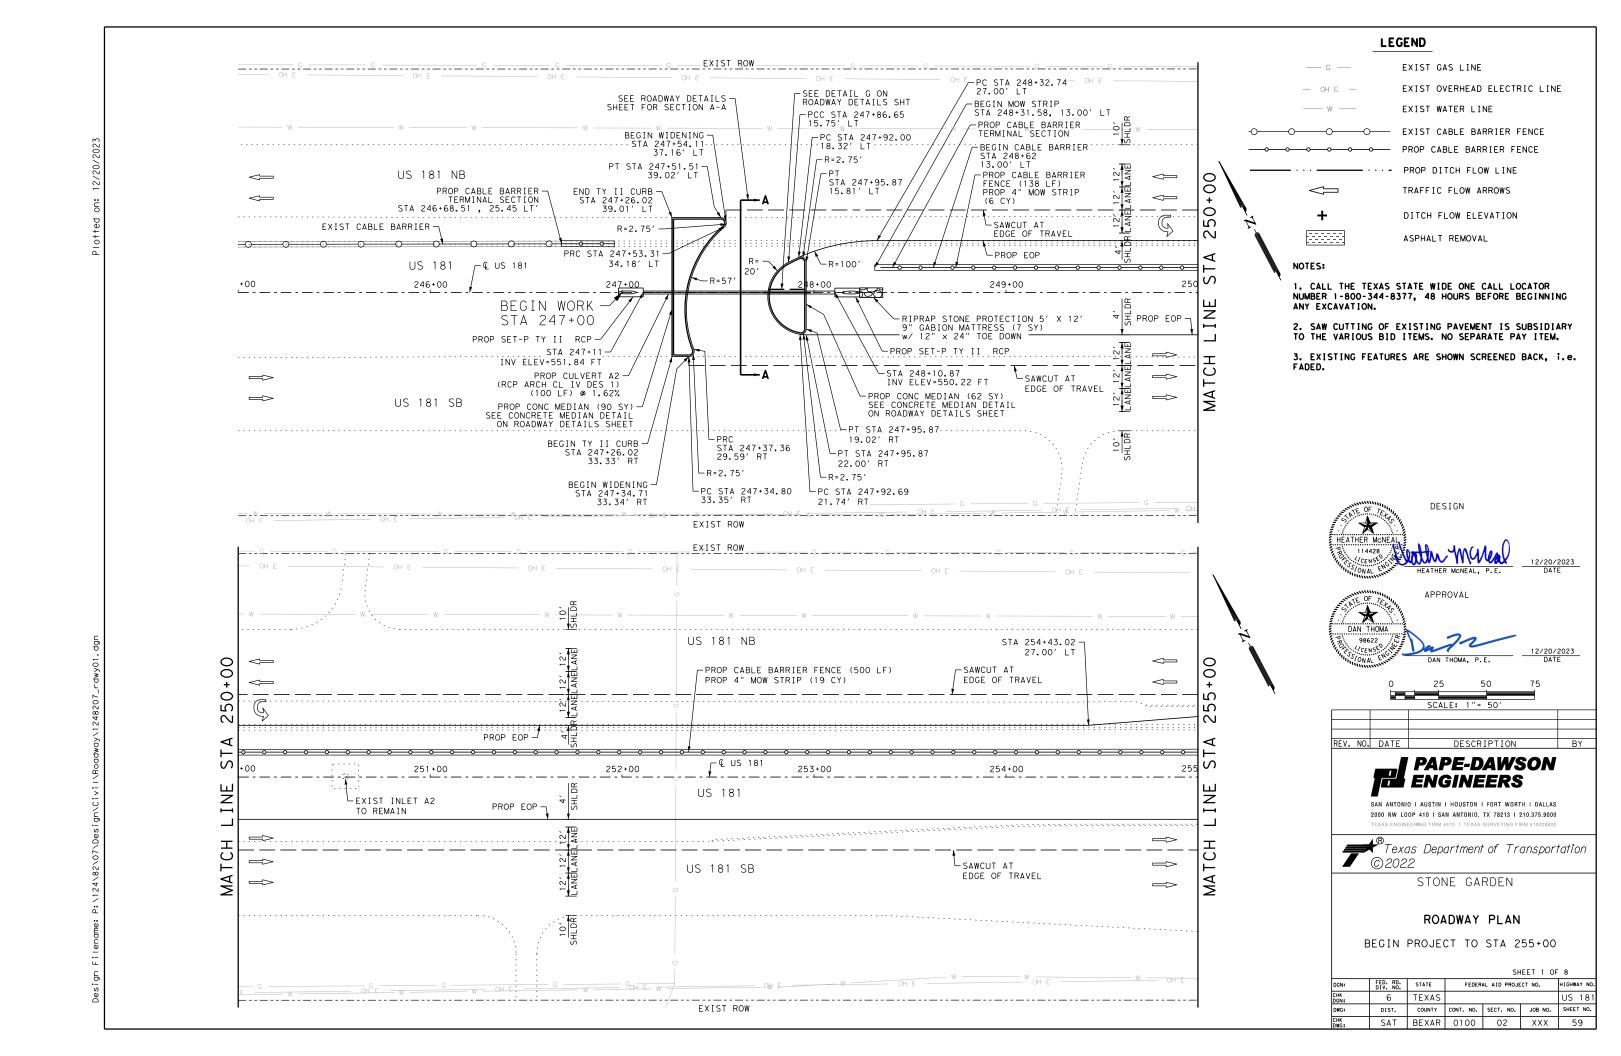


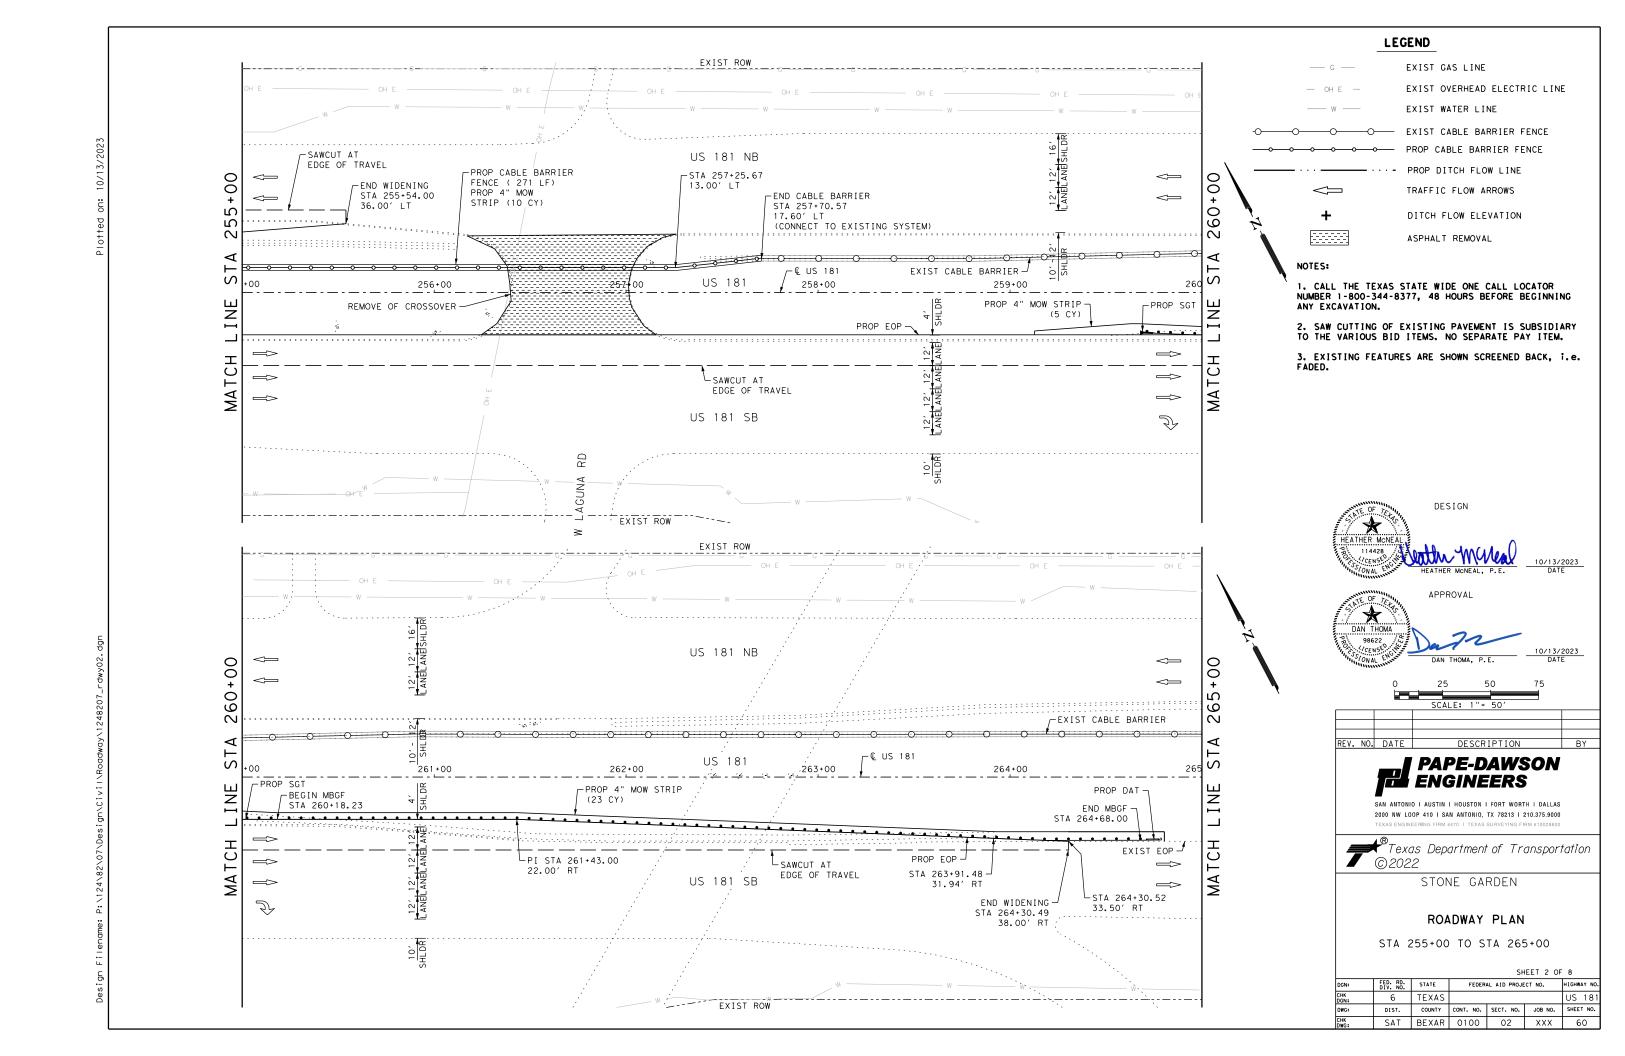


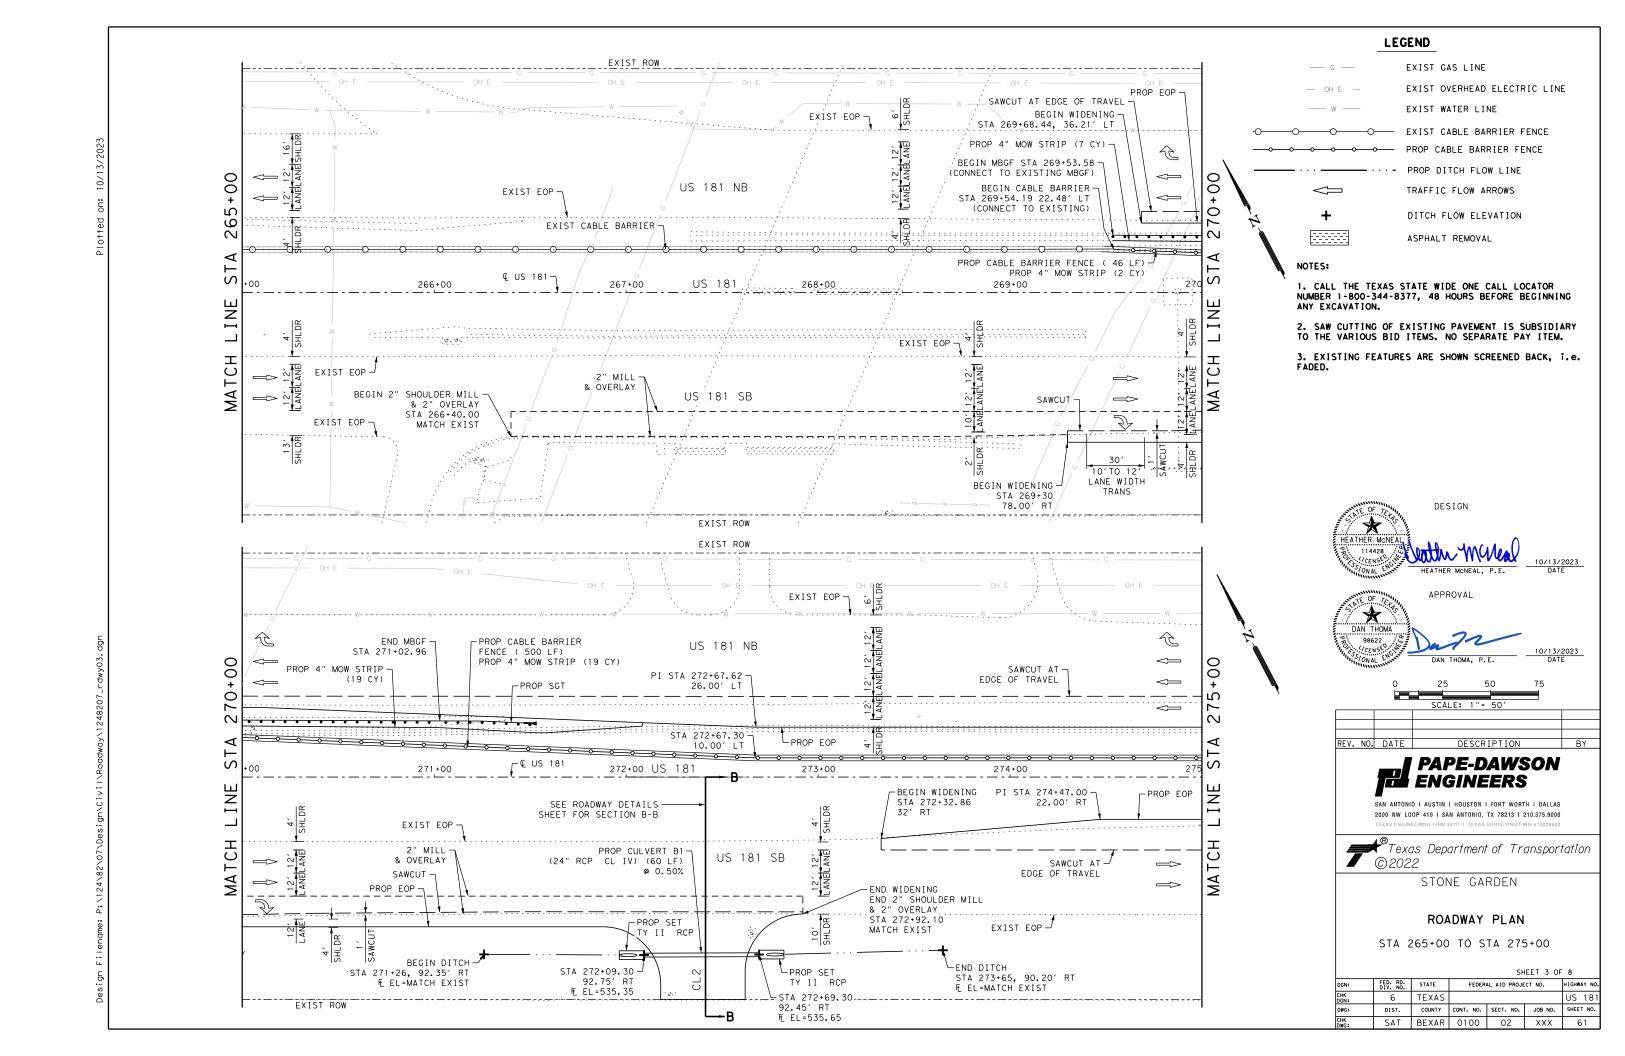


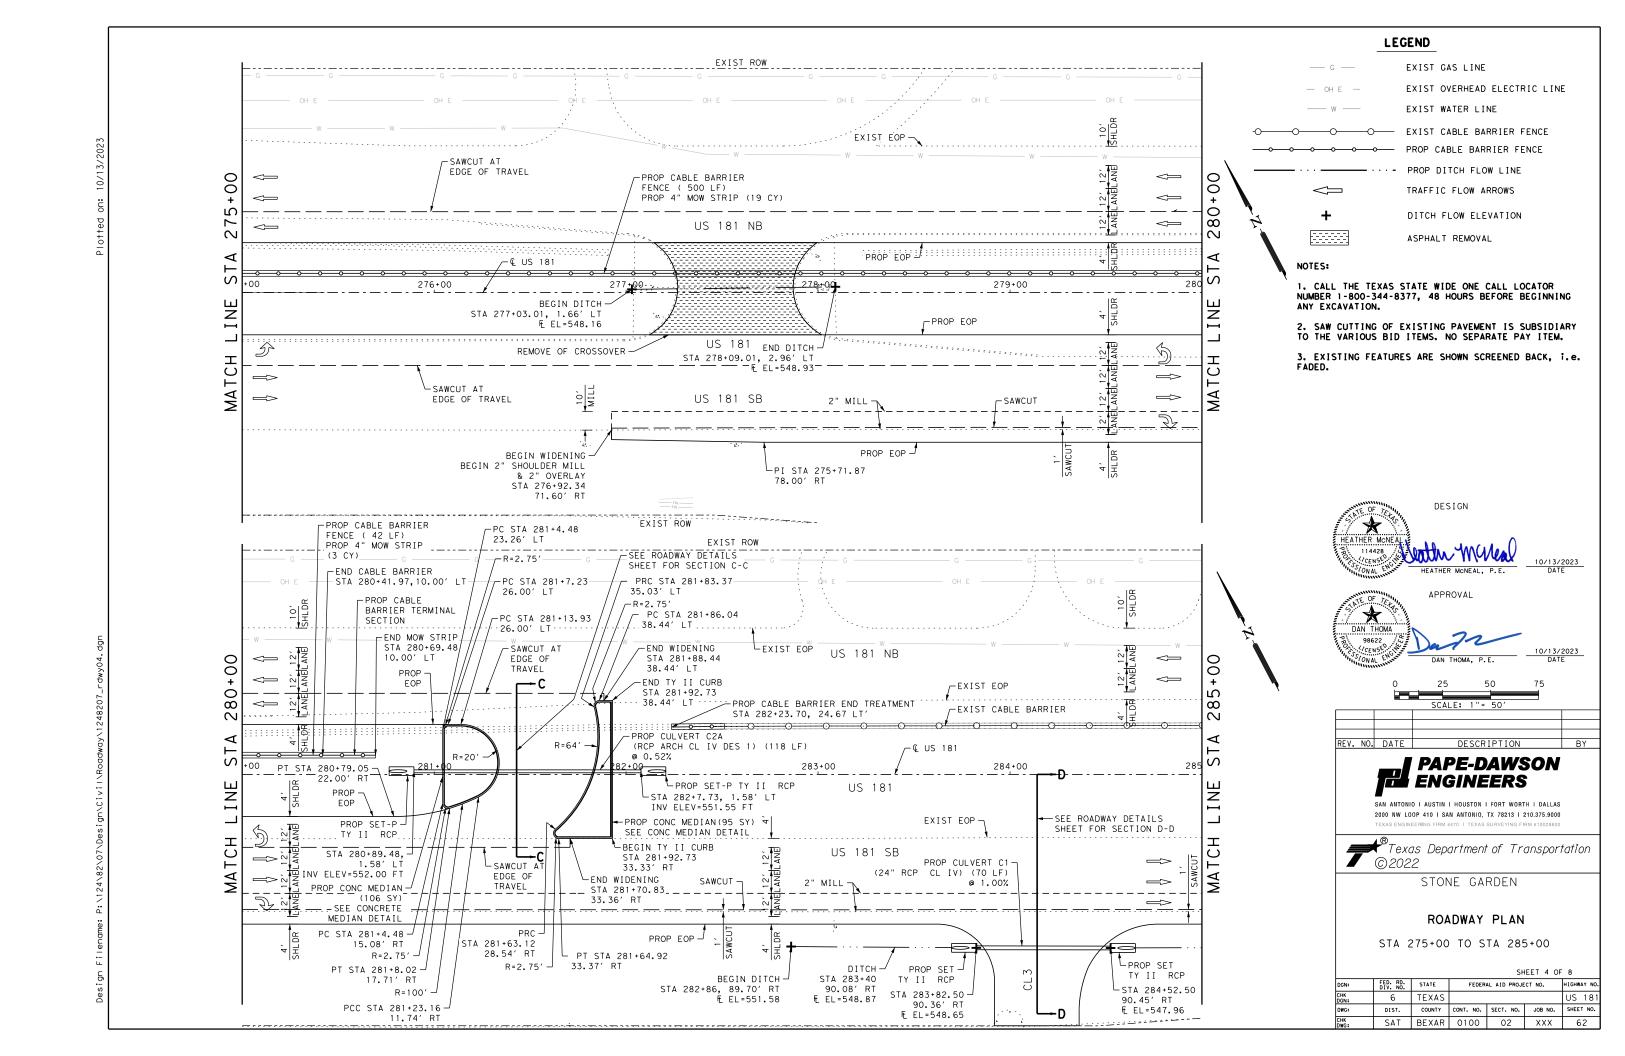

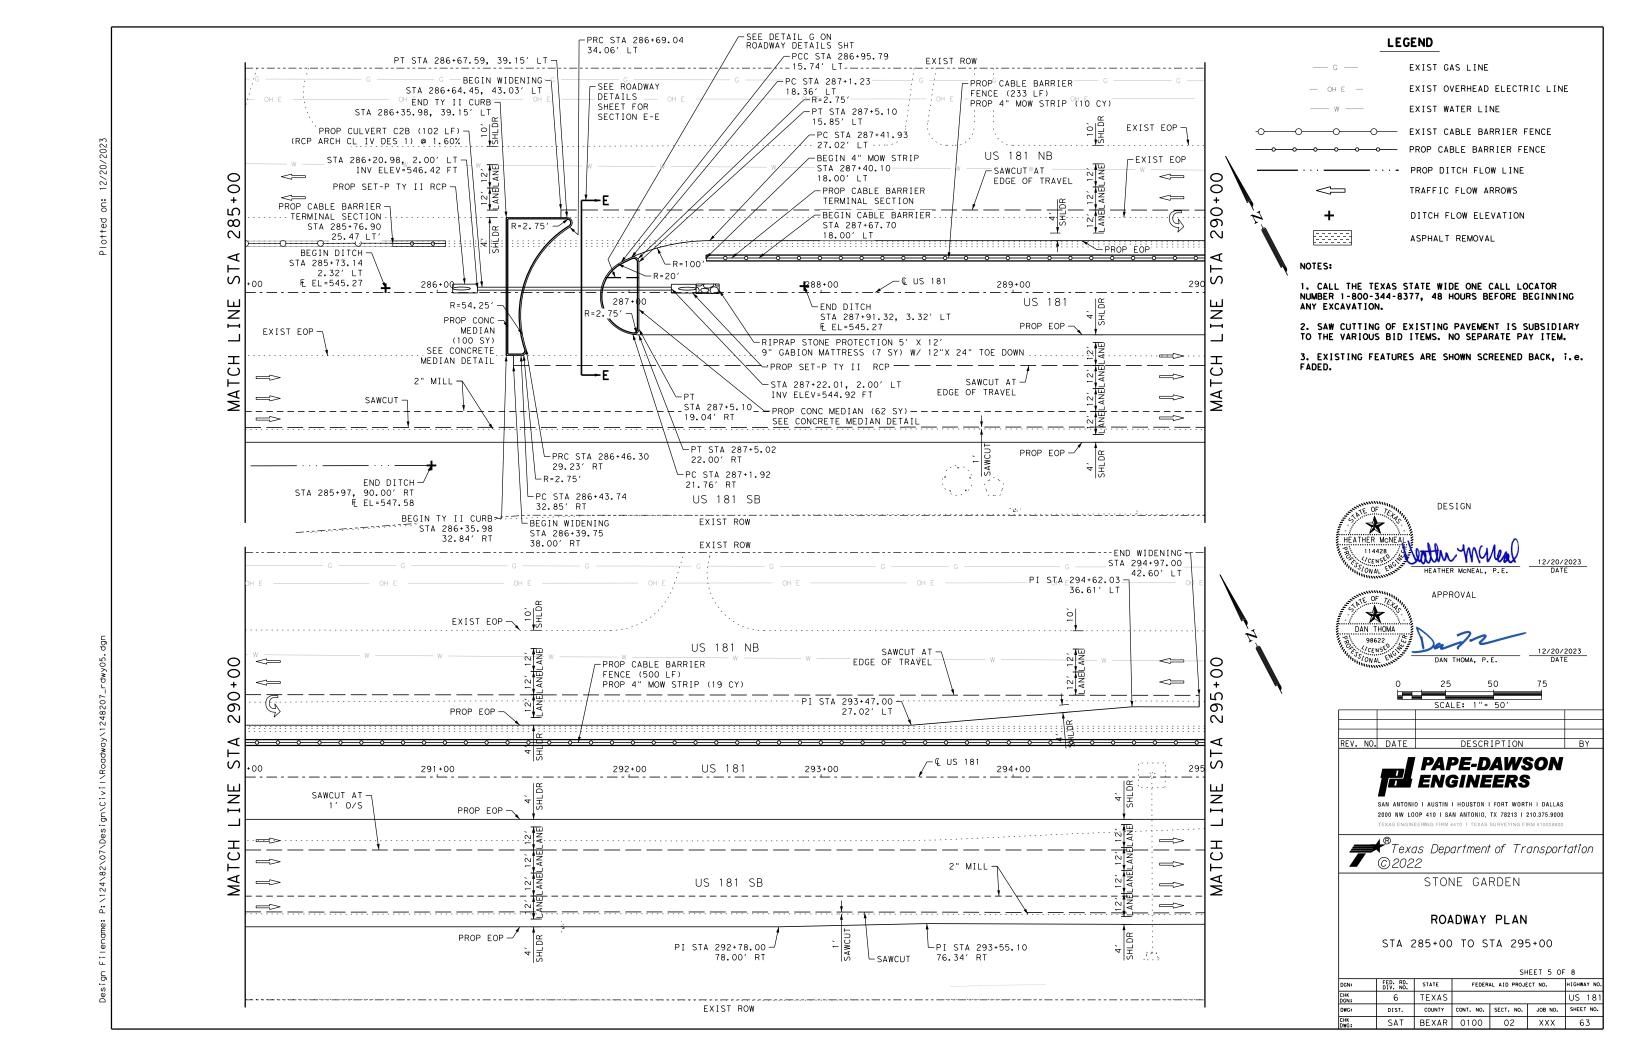

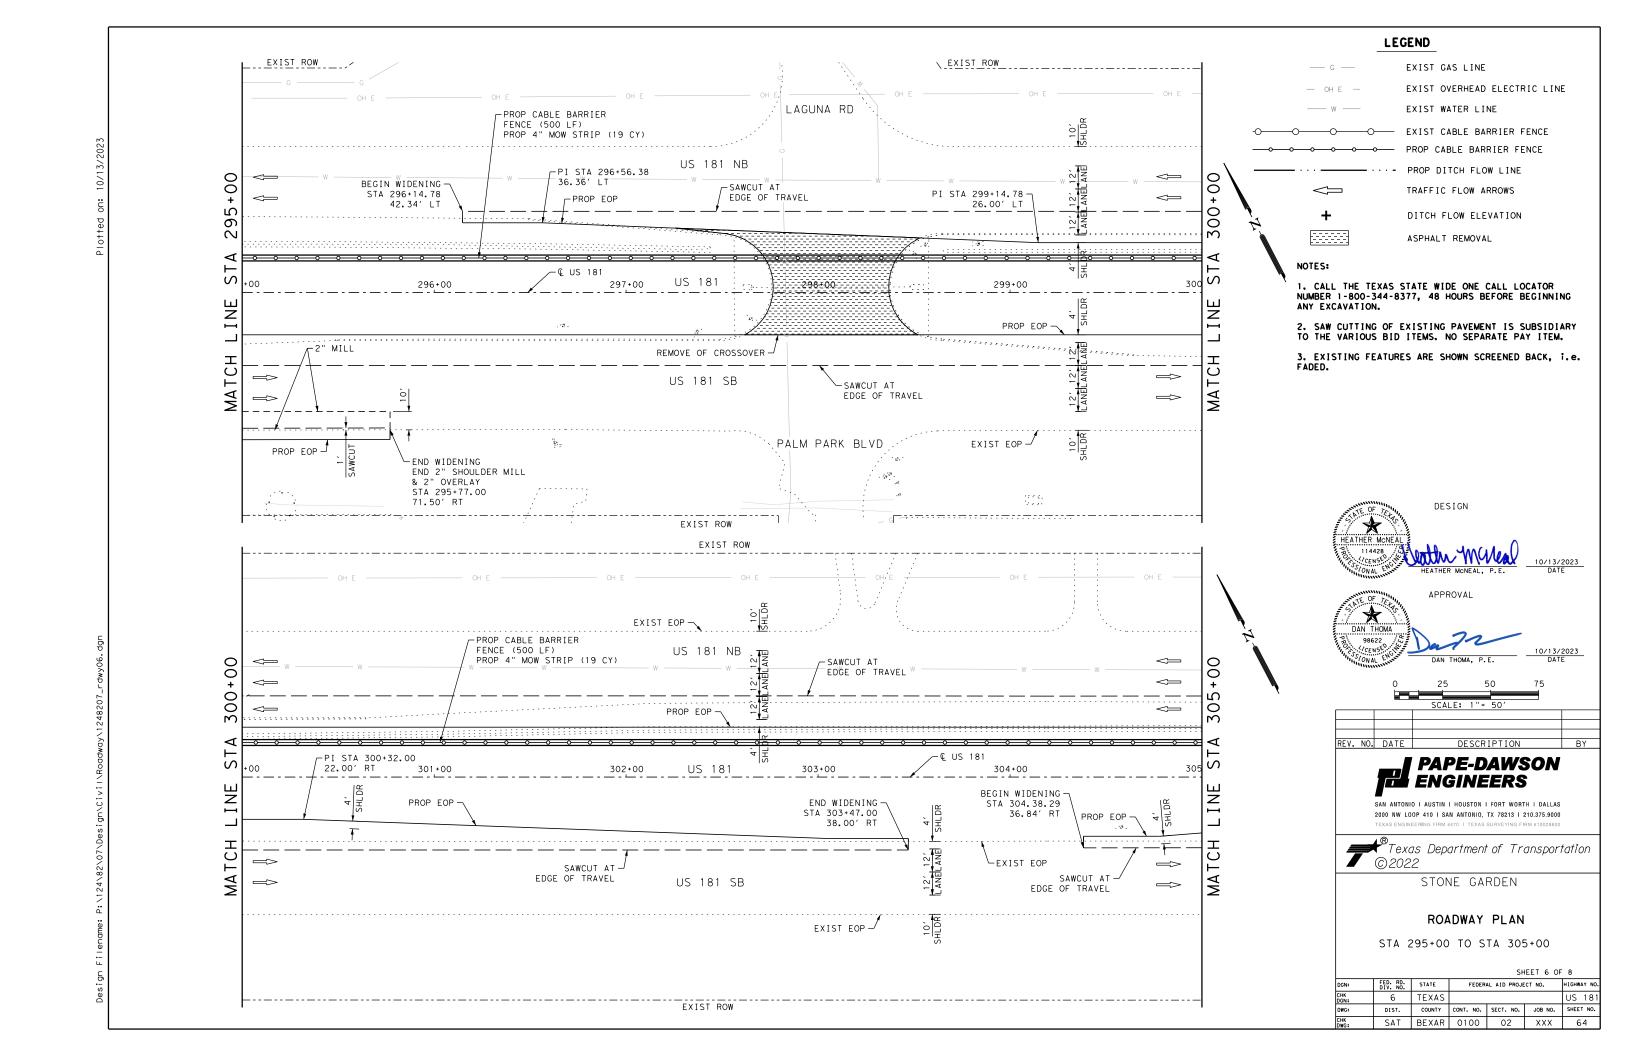

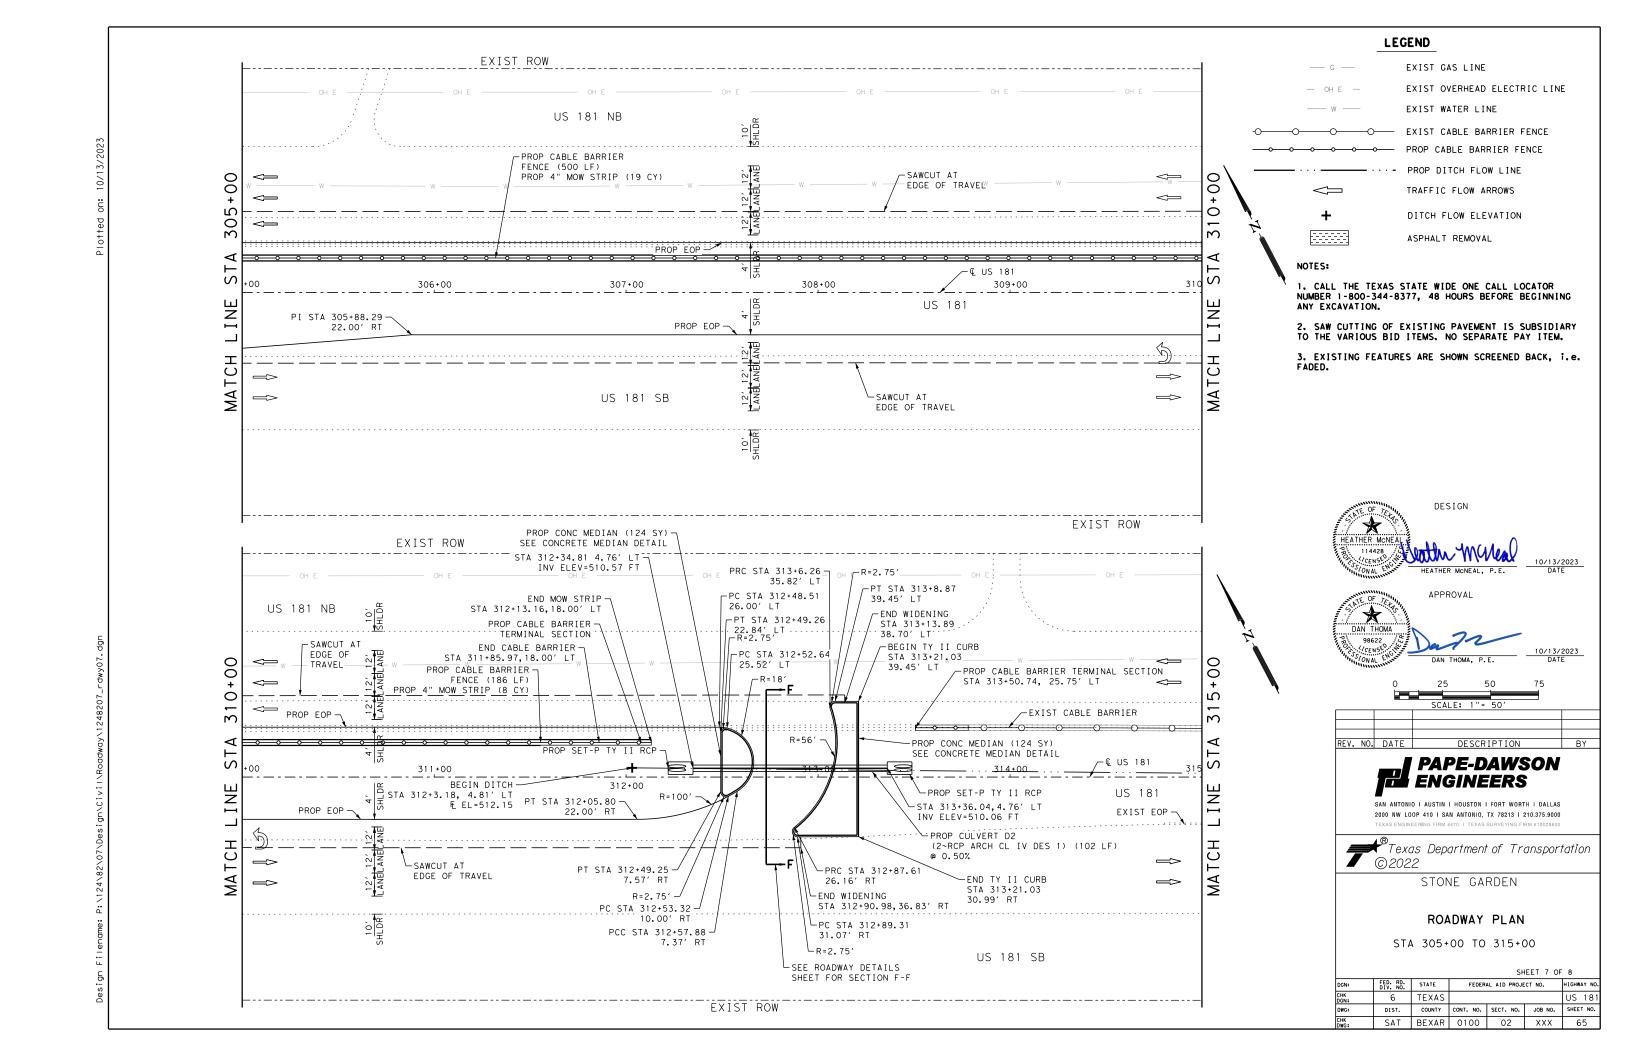

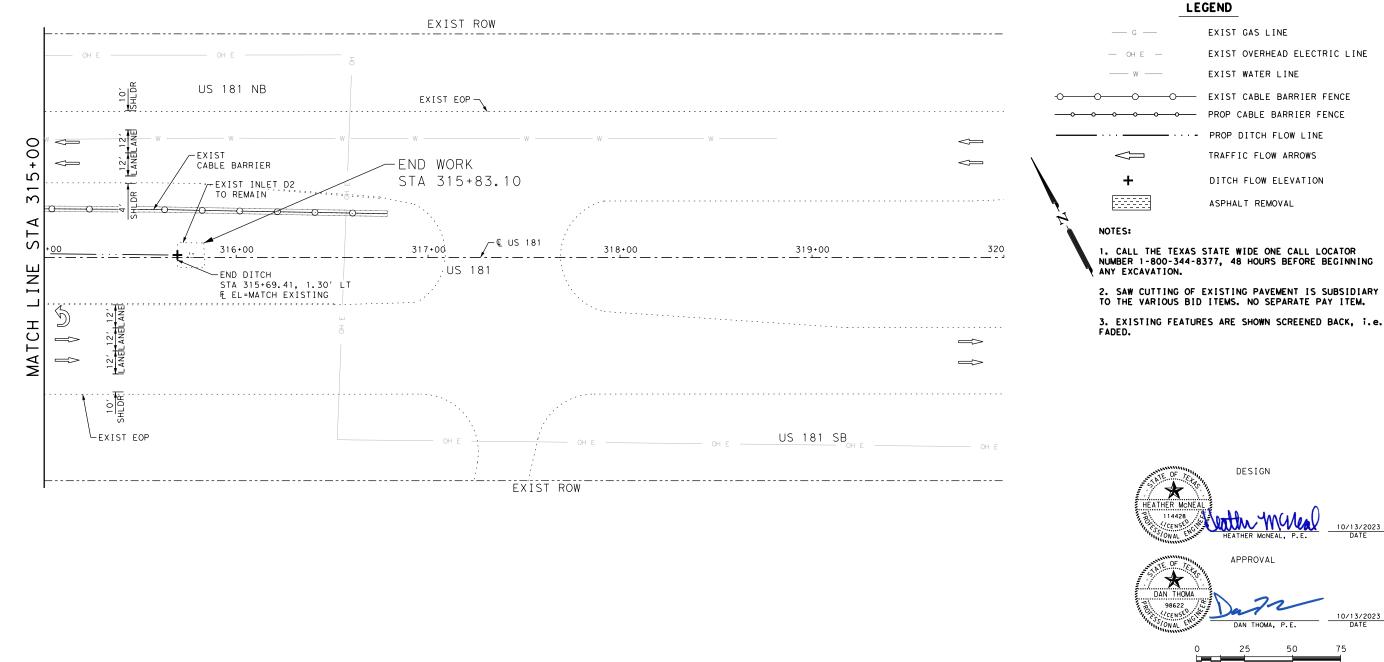

SCALE: 1"= 50'

NO. DATE DESCRIPTION E
PAPE-DAWSON
ENGINEERS

SAN ANTONIO I AUSTIN I HOUSTON I FORT WORTH I DALLAS 2000 NW LOOP 410 I SAN ANTONIO, TX 78213 I 210.375.9000 TEXAS ENGINEERING FIRM #470 I TEXAS SURVEYING FIRM #10028800




STONE GARDEN

ROADWAY PLAN

STA 305+00 TO END PROJECT

DGN: CHK DGN: DWG:

SHEET 8 OF 8									
	FED. RD. DIV. NO.	STATE	FEDERAL AID PROJECT NO. HIGHWAY NO.						
	6	TEXAS							
	DIST.	COUNTY	CONT. NO.	SECT. NO.	JOB NO.	SHEET NO.			
	SAT	BEXAR	0100	02	XXX	66			

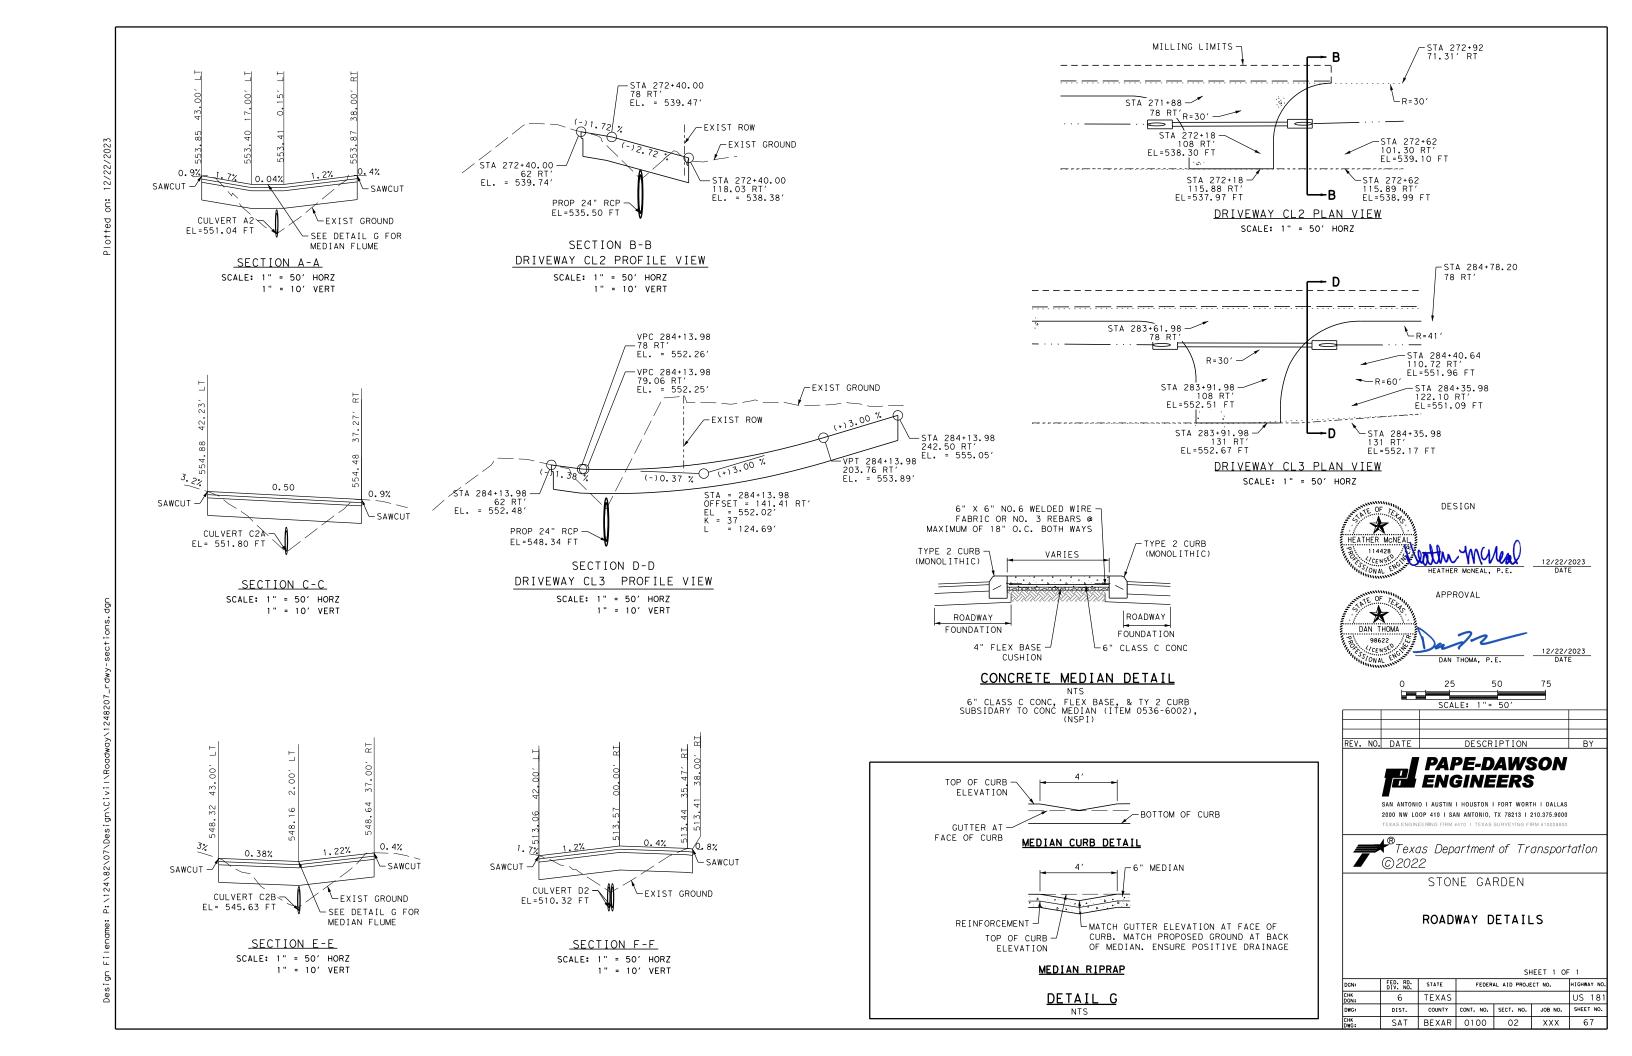

NOTE: STEEL I-BEAM POST W6 X 8.5 (6'-0") PN:533G STANDARD WOOD BLOCKOUTS (6"X8"X14") PN:4076F GENERAL NOTES %" X 10" HGR BOLT PN: 3500G LINE AT THE BACK OF POST #2 THRU #8 HGR NUT PN: 3340G FROM THE CENTERLINE OF POST(1) & POST(0) AT (POSTS 2 THRU 8) ANCHOR PADDLE ANGLE STRUT PN: 15204A-PN: 15202G POST (8) POST (7 POST (6) POST(5) POST (4) POST(3) ANCHOR RAIL TO - POST (2) DETAIL 1 POST(0) PLAN VIEW BEGIN LENGTH OF NEED MASH TEST LEVEL 3 (TL-3) LENGTH OF SoftStop TERMINAL (50'-9 1/2") TRAFFIC FLOW 50'-9 1/2" STANDARD INSTALLATION LENGTH (MASH TL-3 SoftStop) END PAYMENT FOR SGT BEGIN STANDARD ANCHOR RAIL WITH SLOTS - (THREADED THRU HEAD)
SEE SoftStop MANUAL FOR COMPLETE DETAILS MIDDLE SLOT CUTOUT OUTSIDE SLOTS CUTOUT- (1) 1 $\frac{3}{4}$ " X 6'-10 $\frac{1}{4}$ " $\frac{3}{4}$ " X 6'-9 $\frac{5}{8}$ " SEE GN(3) MBGF LAPPED IN DIRECTION OF TRAFFIC FLOW 8. POSTS SHALL NOT BE SET IN CONCRETE. 25'-0" DOWNSTREAM W-BEAM GUARDRAIL PN: 61G SoftStop ANCHOR RAIL (12GA) PN: 15215G & NOTE:B 3'-1 1/2" (+/-) **~**¬B ANCHOR PADDLE PN: 15204A SEE NOTE: C END OF ANCHOR RAIL PN: 15215G DO NOT BOLT ANCHOR RAIL TO RAIL 25'-0"— PN: 61G SEE A **HEIGHT** SEE DETAIL 2 PN: 15215G POST(2) RAIL HEIGHT 13/6" DIA. 13/6"DIA.~ YIELDING ∠ (8) 5/8"× 1- 1/4' HGR BOLTS ∠(8) 5/8"× 1- 1/4" GR BOLTS YIELDING HOLES HOLES PN: 3360G PN: 3360G DEPTH HEX NUTS %" HEX NUTS PN: 3340G (TYP 1-8) PN: 3340G SEE DETAIL 3 6'-1%' POST (2) 6'-0" (SYTP) POST(1) POST (8) POST (7) POST (6: POST(5) POST(4) POST(3) 4'-9 1/2" SYTP PN: 15000G HARDWARE FOR POST(2) THRU POST(8) **ELEVATION VIEW** PN: 15203G (1) %"× 10" HGR BOLT PN: 3500G (1) \(\frac{1}{8} \)" HGR HEX NUT PN: 3340G ANGLE STRUT PART QTY MAIN SYSTEM COMPONENTS (1) 5/8" × 1 3/4" -PN: 15202G POST (0) NOTE: DO NOT BOLT ANCHOR RAIL PANEL TO POST (2) HEX HD BOLT PN 3391G ALTERNATE BLOCKOUT PN: 15205/ SEE GENERAL NOTE: 6 (2) % " WASHERS 6" X 8" X 14" (1) 1/6 " HEX NUT 5%6" x 1 - 1/2" HEX HD BOLT-GR-5 ANCHOR PLATE WASHER " X 7 1/2" X 14" BLOCKOUT COMPOSITE PN 4372G -BLOCKOUT 1/2" THICK PN: 15206G HGR HEX NUT ANCHOR KEEPER WOOD -PN: 105286 1" ROUND WASHER F463 PN: 4902G -PN: 4076B PN 3340G PLATE (24 GA)-(2) % PN: 6777B NOTE:
DO NOT BOLT
ANCHOR RAIL TO ROUND WASHERS PN: 15207G DETAIL 1 PN: 3240G (2) \%6" x 2 \1/2" HEX HD BOLT GR-5 AL TERNATE SHOWN AT POST(1) - POST (2) BLOCKOUT BLOCKOUT WOOD -W-BEAM RAIL 6" X 8" X 14" -BLOCKOUT WOOD NEAR GROUND SEE PN: 105285G -W-BEAM RAIL DETAIL 2 GENERAL NOTE: 6 HGR NUT - HGR POST BOLT PN: 3500G SHOWN AT POST(1) PN: 3340G (2) 1/6 " ROUND WASHER -HGR POST BOLT PN: 3500G HGR POST BOLT (WIDE) PN: 3240G-PN: 3500G - 5/8" HGR NUT PN: 3340G 5% " HGR NUT POST 32" HEIGHT ANCHOR PADDLE--1" NUT PN:3908G SHALL BE SECURELY TIGHTENED HE I GH 31" RAIL (2) ‰ " HEX NUT[⊥] A563 GR.DH 31" RAIL %6"DIAMETER YIELDING HOLES AFTER FINAL ASSEMBLY LOCATED IN FLANGES BUT NOT DEFORMING THE W-BEAM FLATTENED KEEPER PLATE. (4 PLIES) POST 17" SEE A (HOLES APROXIMATELY CENTERED AT FINISHED GRADE) HEIGHT FINISHED FINISHED VF IN I SHED PN: 15202G GRADE GRADE 13//6" DIA. (2) 3/4" × 2 1/2" HEX BOLT (TYP) PN: 3717G YIELDING HOLES 9 1/2" LINE POST POST(2) (3, 4, 5, 6, 7 & 8) (4) ¾" FLAT WASHER (TYP) PN:3701G (2) ¾" HEX NUT (TYP) PN: 3704G POST(1) 1 3% " POST DEPTH ISOMETRIC VIEW SECTION VIEW B-B SECTION VIEW A-A (2) ANCHOR POST ANGLE POST (1 & 2) 6'-0" (W6 X 8.5) 6'-0" (W6 X 8.5) I-BEAM POST PN: 533G PN: 15201G (SYTP) I-BEAM POST PN: 15000G W6 X 8.5 I-BEAM POST SHOWING FRONT VIEW POST(1) STANDARD WOOD BLOCKOUT NOTE: DO NOT BOLT ANCHOR RAIL PANEL TO POST(2) $4'-9 \frac{1}{2}$ " (W6 X 8.5) (SYTP) I-BEAM POST PN: 15203G NOTE: NO BLOCKOUT INSTALLED AT POST(1) NOTE: NO BLOCKOUT INSTALLED AT POST(1) DETAIL 3 AT POST(0) 50' APPROACH GRADING APPROX 5'-10" 6'-5 3%" (W6 X 15) I-BEAM POST PN:15205A STANDARD MBGF TRAFFIC FLOW APPROACH GRADING 1V: 10H OR FLATTER EDGE OF PAVEMENT SEE PRODUCT ASSEMBLY MANUAL NOTE: ADJUST WIDTH ACCORDINGLY WHEN OFFSET IS USED. (OFFSET "OPTION" SHOWN) RAIL OFFSET FILE: S FOR ADDITIONAL GUIDANCE. C) TxD0 THIS STANDARD IS A BASIC REPRESENTATION OF THE SOf+S+op END TERMINAL, IT IS NOT INTENDED TO REPLACE THE PRODUCT DESCRIPTION ASSEMBLY MANUAL. APPROACH GRADING AT GUARDRAIL END TREATMENTS

o by

made sults

kind rect

anty of or for :

Engineer of this

"Texas ersion

rned by for the

this standard is gover es no responsibility

- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: TRINITY HIGHWAY AT 1 (888) 323-6374. 2525 N. STEMMONS FREEWAY, DALLAS, TX 75207
- 2. FOR INSTALLATION, REPAIR AND MAINTENANCE REFER TO THE; SOf+S+op END TERMINAL, PRODUCT DESCRIPTION ASSEMBLY MANUAL. PN:620237B
- 3. APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" ON THE FRONT FACE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS. OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
- 4. FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TXDOT'S LATEST ROADWAY MOW STRIP STANDARD.
- 5. HARDWARE (BOLTS, NUTS, & WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
- 6. A COMPOSITE MATERIAL BLOCKOUT THAT MEETS THE REQUIREMENTS OF DMS-7210, MAY BE SUBSTITUTED FOR BLOCKOUTS OF SIMILAR DIMENSIONS. SEE CONSTRUCTION DIVISION MATERIAL PRODUCER LIST (MPL) FOR CERTIFIED PRODUCERS.
- IF SOLID ROCK IS ENCOUNTERED SEE THE MANUFACTURER'S INSTALLATION MANUAL AND REFER TO THE LATEST ROADWAY MBGF STANDARD FOR INSTALLATION GUIDANCE
- IT IS ACCEPTABLE TO INSTALL THE SOFTSTOP IMPACT HEAD PARALLEL TO THE GRADE LINE OR WITH AN UPWARD TILT.
- 10. DO NOT ATTACH THE SoftStop SYSTEM DIRECTLY TO A RIGID BARRIER.
- 11. UNDER NO CIRCUMSTANCES SHALL THE GUARDRAIL WITHIN THE SOf†Stop SYSTEM BE CURVED.
- 12. A FLARE RATE OF UP TO 25:1 MAY BE USED TO PREVENT THE TERMINAL HEAD FROM ENCROACHING ON THE SHOULDER. THE FLARE MAY BE DECREASED OR ELIMINATED FOR SPECIFIC INSTALLATIONS, IF DIRECTED BY THE ENGINEER.

NOTE: A	THE INSTALLATION HEIGHT OF FULLY ASSEMBLED ANCHOR POST WILL VARY FROM 3-7/4" MIN. TO 4" MAX. ABOVE FINISHED GRADE.
NOTE: B	PART PN: 5852B RIGHT-SIDE (HIGH INTENSITY REFLECTIVE SHEETING)
	PART PN: 5851B LEFT-SIDE (HIGH INTENSITY REFLECTIVE SHEETING)
NOTE: C	W-BEAM SPLICE LOCATED BETWEEN LINE POST(4) AND LINE POST(5)
	GUARDRAIL PANEL 25'-0" PN: 61G
	ANCHOR RAIL 25'-0" PN: 15215G
	LAP GUARDRAIL IN DIRECTION OF TRAFFIC FLOW.

FANI	QII	MATH STSTEM COMI ONEINTS
620237B	1	PRODUCT DESCRIPTION ASSEMBLY MANUAL (LATEST REV.)
15208A	1	SoftStop HEAD (SEE MANUAL FOR RIGHT-LEFT APPROACH)
15215G	1	SoftStop ANCHOR RAIL (12GA) WITH CUTOUT SLOTS
61G	1	SoftStop DOWNSTREAM W-BEAM RAIL (12GA) (25'- 0")
15205A	1	POST #0 - ANCHOR POST (6'- 5 1/8")
15203G	1	POST #1 - (SYTP) (4'- 9 1/2")
15000G	1	POST #2 - (SYTP) (6'- 0")
533G	6	POST #3 THRU #8 - I-BEAM (W6 x 8.5) (6'- 0")
4076B	7	BLOCKOUT - WOOD (ROUTED) (6" x 8" x 14")
6777B	7	BLOCKOUT - COMPOSITE (4" \times 7 $\frac{1}{2}$ " \times 14")
15204A	1	ANCHOR PADDLE
15207G	1	ANCHOR KEEPER PLATE (24 GA)
15206G	1	ANCHOR PLATE WASHER (1/2" THICK)
15201G	2	ANCHOR POST ANGLE (10" LONG)
15202G	1	ANGLE STRUT
		HARDWARE
4902G	1	1" ROUND WASHER F436
3908G	1	1" HEAVY HEX NUT A563 GR.DH
3717G	2	¾" × 2 ½" HEX BOLT A325
3701G	4	¾" ROUND WASHER F436
3704G	2	¾" HEAVY HEX NUT A563 GR.DH
3360G	16	%" × 1 ¼" W-BEAM RAIL SPLICE BOLTS HGR
3340G	25	% " W-BEAM RAIL SPLICE NUTS HGR
3500G	7	%" × 10" HGR POST BOLT A307
3391G	1	%" × 1 ¾" HEX HD BOLT A325
4489G	1	%" × 9" HEX HD BOLT A325
4372G	4	%" WASHER F436
105285G	2	$\frac{1}{6}$ " × 2 $\frac{1}{2}$ " HEX HD BOLT GR-5
105286G	1	$\frac{1}{2}$ " HEX HD BOLT GR-5
3240G	6	% " ROUND WASHER (WIDE)
3245G	3	% " HEX NUT A563 GR.DH
5852B	1	HIGH INTENSITY REFLECTIVE SHEETING - SEE NOTE: B

Texas Department of Transportation

TRINITY HIGHWAY SOFTSTOP END TERMINAL MASH - TL-3

SGT (10S) 31-16

sg+10s3116	DN: TxDOT		ск: КМ	DW: VP		ck: MB/VP	
OT: JULY 2016	CONT	SECT	JOB		H I GHWAY		
REVISIONS	0100	02	XXX	XXX		US 181	
	DIST	COUNTY			SHEET NO.		
	SAT					68	

GENERAL NOTES

- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: LINDSAY TRANSPORTATION SOLUTIONS (LTS) - BARRIER SYSTEMS, INC. AT (707) 374-6800
- 2. FOR INSTALLATION, REPAIR, & MAINTENANCE REFER TO THE; MAX-TENSION INSTALLATION INSTRUCTION MANUAL. P/N MANMAX REV D (ECN 3516).
- 3. APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" ON THE FRONT FACE OF THE DEVICE PER MANUFACTURE'S RECOMMENDATIONS. OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
- 4. FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TXDOT'S LATEST ROADWAY MOW STRIP STANDARD.
- 5. ALL STEEL COMPONENTS ARE GALVANIZED PER ASTM A123 OR EQUIVALENT UNLESS OTHERWISE STATED.
- 6. SYSTEM SHOWN USING STEEL WIDE FLANGE POST WITH COMPOSITE BLOCKOUTS.
- 7. COMPOSITE MATERIAL BLOCKOUT THAT MEETS THE REQUIREMENTS OF DMS-7210, MAY BE SUBSTITUTED FOR BLOCKOUTS SIMILAR DIMENSIONS. SEE CONSTRUCTION DIVISION MATERIAL PRODUCER LIST(MPL) FOR CERTIFIED PRODUCERS.
- 8. REFER TO INSTALLATION MANUAL FOR SPECIFIC PANEL LAPPING GUIDANCE.
- IF SOLID ROCK IS ENCOUNTERED SEE THE MANUFACTURER'S INSTALLATION MANUAL FOR INSTALLATION GUIDANCE.
- 10. POSTS SHALL NOT BE SET IN CONCRETE.
- 11. A DRIVING CAP WITH A TIMBER OR PLASTIC INSERT SHALL BE USED WHEN DRIVING POST TO PREVENT DAMAGE TO THE GALVANIZING ON TOP OF THE POST.
- 12. MAX-TENSION SYSTEM SHALL NEVER BE INSTALLED WITHIN A CURVED SECTION OF GUARDRAIL.
- IF A DELINEATION MARKER IS REQUIRED, MARKER SHALL BE IN ACCORDANCE WITH TEXAS MUTCD.
- 14. THE SYSTEM IS SHOWN WITH 12'-6" MBGF PANELS, 25'-0" MBGF PANELS ARE ALSO ALLOWED.
- 15. A MINIMUM OF 12'-6" OF 12GA. MBGF IS REQUIRED IMMEDIATELY DOWNSTREAM OF THE MAX-TENSION SYSTEM.

I TEM#	PART NUMBER	DESCRIPTION	QTY
1	BSI-1610060-00	SOIL ANCHOR - GALVANIZED	1
2	BSI-1610061-00	GROUND STRUT - GALVANIZED	1
3	BSI-1610062-00	MAX-TENSION IMPACT HEAD	1
4	BSI-1610063-00	W6×9 I-BEAM POST 6FTGALVANIZED	1
5	BSI-1610064-00	TSS PANEL - TRAFFIC SIDE SLIDER	1
6	BSI-1610065-00	ISS PANEL - INNER SIDE SLIDER	1
7	BSI-1610066-00	TOOTH - GEOMET	1
8	BSI-1610067-00	RSS PLATE - REAR SIDE SLIDER	1
9	B061058	CABLE FRICTION PLATE - HEAD UNIT	1
10	BSI-1610069-00	CABLE ASSEMBLY - MASH X-TENSION	2
11	BSI-1012078-00	X-LITE LINE POST-GALVANIZED	8
12	B090534	8" W-BEAM COMPOSITE-BLOCKOUT XT110	8
13	BSI-4004386	12'-6" W-BEAM GUARD FENCE PANELS 12GA.	4
14	BSI-1102027-00	X-LITE SQUARE WASHER	1
15	BSI-2001886	5/8" X 7" THREAD BOLT HH (GR.5)GEOMET	1
16	BSI-2001885	¾" X 3" ALL-THREAD BOLT HH (GR.5)GEOMET	4
1 7	4001115	5/8" X 1 1/4" GUARD FENCE BOLTS (GR.2)MGAL	48
18	2001840	5/8" X 10" GUARD FENCE BOLTS MGAL	8
19	2001636	5/8" WASHER F436 STRUCTURAL MGAL	2
20	4001116	% " RECESSED GUARD FENCE NUT (GR.2)MGAL	59
21	BSI-2001888	% " X 2" ALL THREAD BOLT (GR.5)GEOMET	1
22	BSI-1701063-00	DELINEATION MOUNTING (BRACKET)	1
23	BSI-2001887	1/4" X 3/4" SCREW SD HH 410SS	7
24	4002051	GUARDRAIL WASHER RECT AASHTO FWRO3	1
25	SEE NOTE BELOW	HIGH INTENSITY REFLECTIVE SHEETING	1
26	4002337	8" W-BEAM TIMBER-BLOCKOUT, PDB01B	8
27	BSI-4004431	25' W-BEAM GUARDRAIL PANEL, 8-SPACE, 12GA.	2
28	MANMAX Rev-(D)	MAX-TENSION INSTALLATION INSTRUCTIONS	1

Texas Department of Transportation

Design Division Standard

MAX-TENSION END TERMINAL

MASH - TL-3

SGT (11S) 31-18

ILE: sg+11s3118.dgn	DN: TxDOT		CK: KM DW:		TxDOT	CK: CL	
TxDOT: FEBRUARY 2018	CONT	SECT	JOB		ΗI	GHWAY	
REVISIONS	0100	02	XXX		U	US 181	
	DIST		COUNTY			SHEET NO.	
	SAT		BEXAF	₹		69	

- 1. FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: ROAD SYSTEMS, INC. (432) 263-2435. 3616 OLD HOWARD COUNTY AIRPORT, BIG SPRING, TX 79720
- 2. FOR INSTALLATION, REPAIR AND MAINTENANCE REFER TO THE; MSKT END TERMINAL, PRODUCT DESCRIPTION ASSEMBLY MANUAL (PUBLICATION~062717).
- 3. APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" ON THE FRONT FACE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS. OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
- 4. FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TXDOT'S LATEST ROADWAY MOW STRIP STANDARD.
- 5. HARDWARE (BOLTS, NUTS, & WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
- 6. SYSTEM SHOWN USING STEEL WIDE FLANGE POSTS WITH COMPOSITE BLOCKOUTS.
- 7. A COMPOSITE MATERIAL BLOCKOUTS THAT MEETS THE REQUIREMENTS OF DMS-7210, MAY BE SUBSTITUTED FOR BLOCKOUTS OF SIMILAR DIMENSIONS. SEE CONSTRUCTION DIVISION MATERIAL PRODUCER LIST (MPL) FOR CERTIFIED PRODUCERS.
- 8. IF SOLID ROCK IS ENCOUNTERED IN THE AREA OF (POST 1) AND / OR (POST 2) CONTACT THE MANUFACTURER, & REFER TO THE LATEST ROADWAY MBGF STANDARD FOR INSTALLATION GUIDANCE
- 9. POSTS SHALL NOT BE SET IN CONCRETE.

SEE NOTES: *

- 10. SYSTEM MUST BE ATTACHED TO STANDARD 31" MBGF.
- 11. UNDER NO CIRCUMSTANCES SHALL THE GUARDRAIL WITHIN THE MSKT SYSTEM BE CURVED.
- 12. A FLARE RATE OF UP TO 25:1 MAY BE USED TO PREVENT THE TERMINAL HEAD FROM ENCROACHING ON THE SHOULDER. THE FLARE MAY BE DECREASED OR ELIMINATED FOR SPECIFIC INSTALLATIONS, IF DIRECTED BY THE ENGINEER.
- 13. THE SYSTEM IS SHOWN WITH TWO 12'-6" MBGF PANELS, ONE 25'-0" MBGF PANEL IS ALSO ALLOWED IN THEIR PLACE.
 - A DRIVING CAP WITH A TIMBER OR PLASTIC INSERT SHALL BE USED WHEN DRIVING POSTS 3-8 TO PREVENT DAMAGE TO THE GALVANIZING ON TOP OF THE POST. SPECIAL DRIVING CAP TO BE USED ON LOWER POSTS 1 & 2 TO PREVENT DAMAGE TO THE WELDED PLATES.

ITEM QTY MAIN SYSTEM COMPONENTS NUMBERS MSKT IMPACT HEAD MS3000 W-BEAM GUARDRAIL END SECTION, 12 Ga. SF1303 C | 1 | POST 1 - TOP (6" X 6" X 1/8" TUBE) MTPHP1A D | 1 | POST 1 - BOTTOM (6' W6X15) MTPHP1B POST 2 - ASSEMBLY TOP UHP2A POST 2 - ASSEMBLY BOTTOM (6' W6X9) HP2B G 1 BEARING PLATE E750 CABLE ANCHOR BOX S760 J 1 BCT CABLE ANCHOR ASSEMBLY F770 K 1 GROUND STRUT MS785 │ 6 │ W6×9 OR W6×8.5 STEEL POST P621 M 6 COMPOSITE BLOCKOUTS CBSP-14 N 1 W-BEAM MGS RAIL SECTION (9'-4 1/2") G12025 O 2 W-BEAM MGS RAIL SECTION (12'-6") G1203A 6 WOOD BLOCKOUT 6" X 8" X 14" P675 Q 1 W-BEAM MGS RAIL SECTION (25'-0") G1209 SMALL HARDWARE B5160104A W0516 C 2 5/6" HEX NUT N0516 d | 25 | $\frac{5}{8}$ " Dia. x 1 $\frac{1}{4}$ " SPLICE BOLT (POST 2) B580122 %" Dia. × 9" HEX BOLT (GRD A449) B580904A f 3 %" WASHER W050 9 | 33 | 1/8" Dia. H.G.R NUT N050 $\frac{3}{4}$ " Dia. x 8 $\frac{1}{2}$ " HEX BOLT (GRD A449) B340854A j 1 ¾" Dia. HEX NUT N030 k 2 1 ANCHOR CABLE HEX NUT N100 W100 m 8 1/2" x 1 1/4" A325 BOLT WITH CAPTIVE WASHER SB12A n 8 1/2" STRUCTURAL NUTS N012A 8 1 1/6 " O.D. x 16 " I.D. STRUCTURAL WASHERS WO12A 1 BEARING PLATE RETAINER TIE CT-100S1 9 6 %" × 10" H.G.R. BOLT B581002 1 OBJECT MARKER 18" X 18 E3151

Texas Department of Transportation

Design Division Standard

SINGLE GUARDRAIL TERMINAL MSKT-MASH-TL-3


SGT (12S) 31-18

ILE: sgt12s3118.dgr DN:TxDOT CK:KM DW:VP CK: CL TxDOT: APRIL 2018 CONT SECT JOB HIGHWAY REVISIONS 0100 02 XXX US 181 DIST COUNTY SHEET NO SAT BEXAR

APPROACH GRADING AT GUARDRAIL END TREATMENTS

NOTE: TXDOT GENERIC APPROACH GRADING LAYOUT USED FOR ALL TANGENT TYPE END TREATMENTS.

NOTE: THIS STANDARD IS A BASIC REPRESENTATION OF THE MSKT END TERMINAL, IT IS NOT INTENDED TO REPLACE THE PRODUCT DESCRIPTION ASSEMBLY MANUAL.

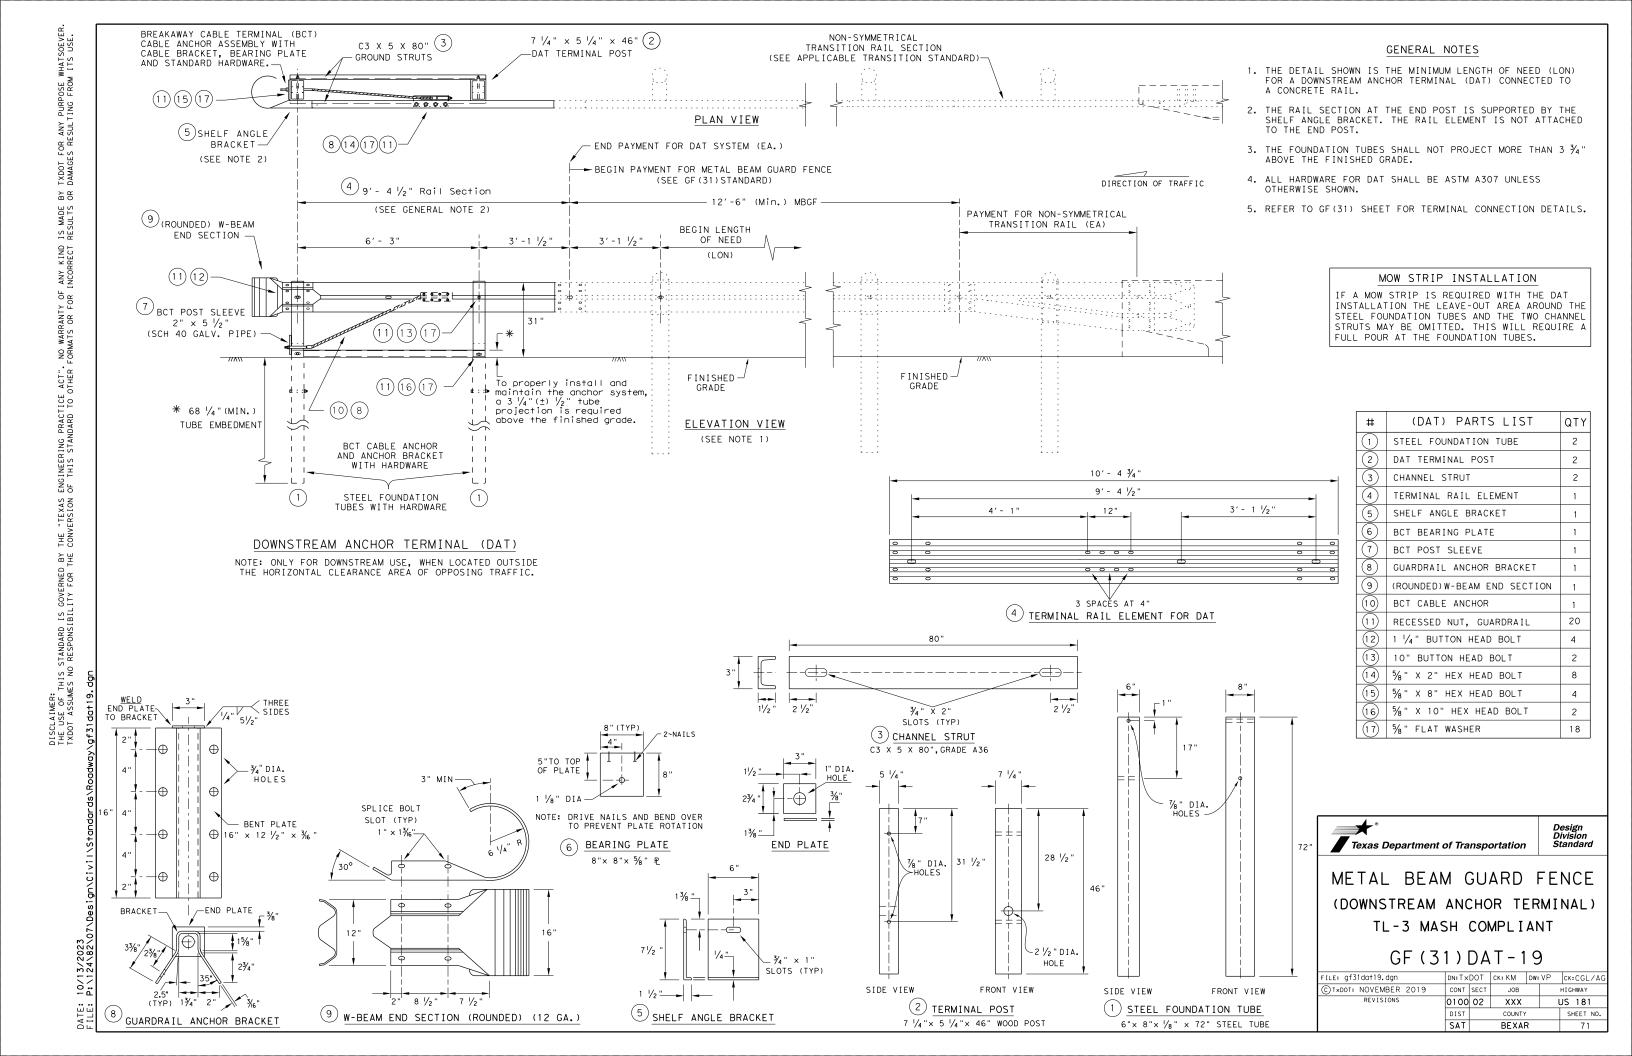

Curb shown on top of mow strip

HIGHWAY

US 181

72


0100 02

SAT

XXX

BEXAR

embedment throughout the system.

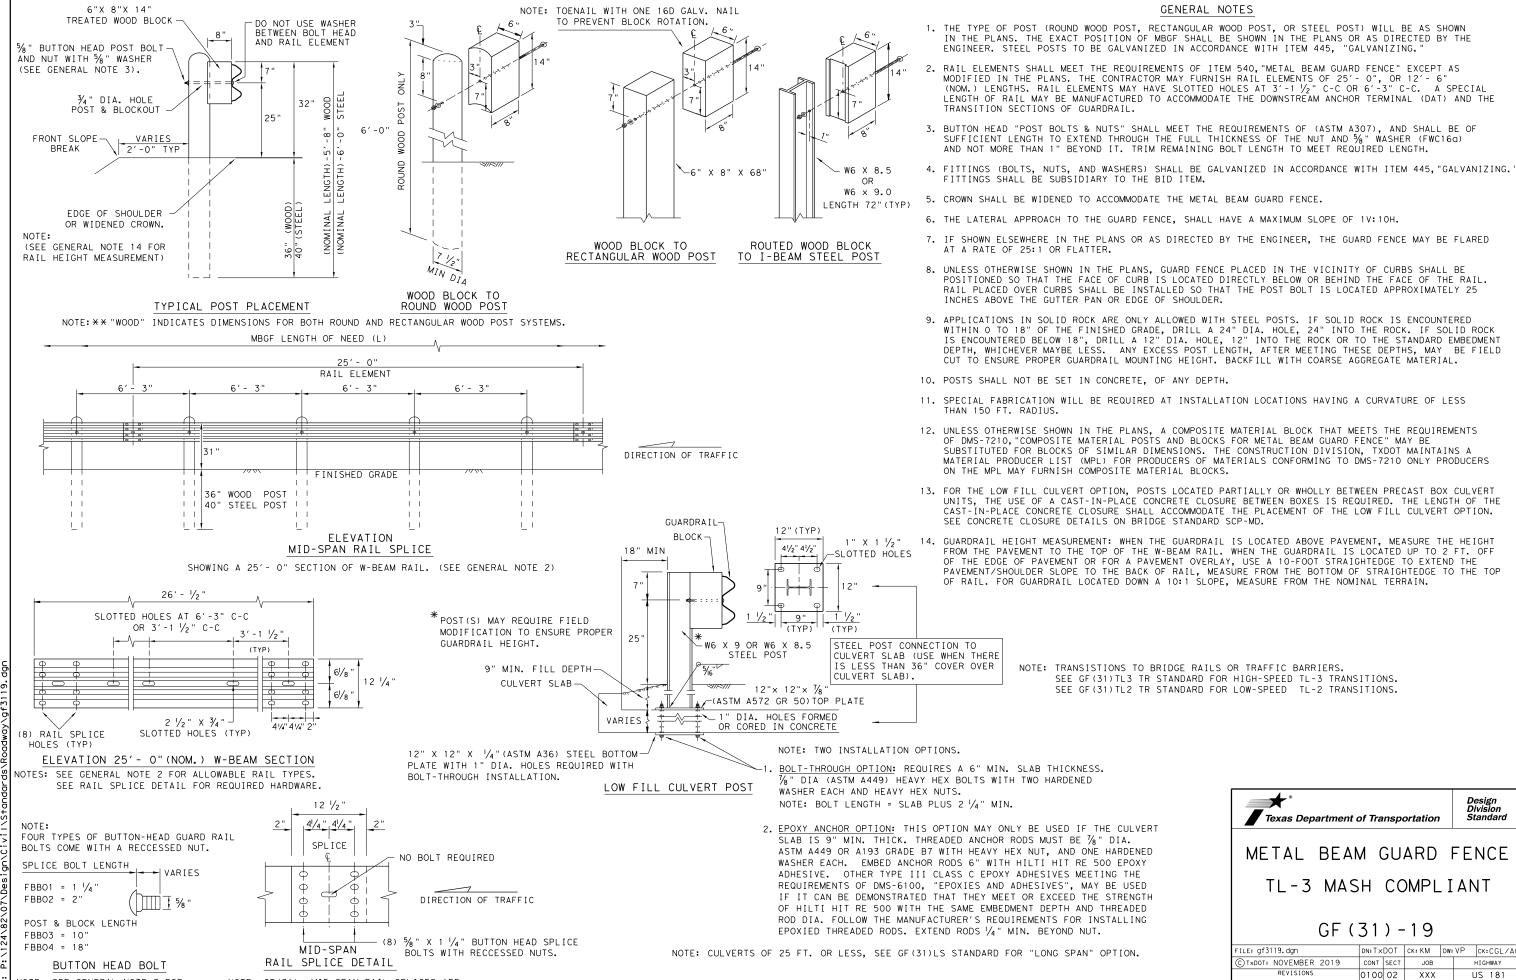

SAT

BEXAR

73

ANY SUL 1

BY OR

MADE SUL TS

ANTY OF

NS PORN

ENGINEERING PRACTICE ACT". OF THIS STANDARD TO OTHER

"TEXAS

THE


DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY TXDOT ASSUMES NO RESPONSIBILITY FOR THE

NOTE: SEE GENERAL NOTE 3 FOR

SPLICE & POST BOLT DETAILS.


NOTE: GF(31), MID-SPAN RAIL SPLICES ARE

REQUIRED WITH 6'-3" POST SPACINGS.

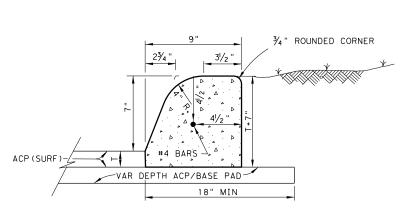


CONCRETE CURB (TYPE I)

W/ ACP

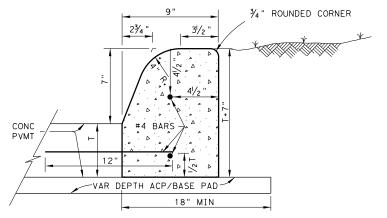


CONCRETE CURB (TYPE I)

W/ CONC PAVEMENT

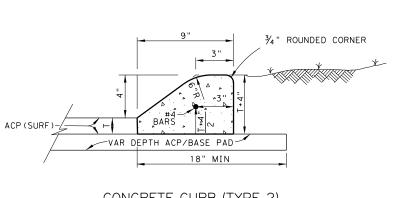


CONCRETE CURB (TYPE 2)

W/ ACP

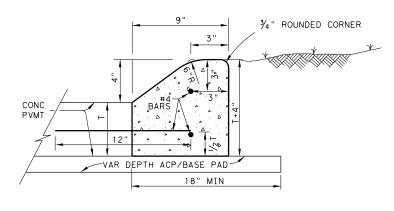

CONCRETE CURB (TYPE 2)

W/ CONC PAVEMENT

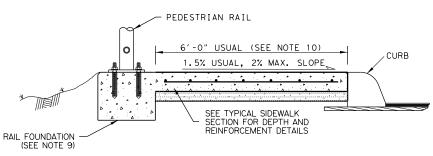

GENERAL NOTES:

CONCRETE CURB TYPE I AND 2 SHOWN SHALL MEET THE MINIMUM SPECIFICATION REQUIREMENTS OF CLASS "A"

WHERE CONCRETE CURB IS PLACED ON EXISTING CONCRETE PAVEMENT, THE PAVEMENT SHALL BE DRILLED AND THE

4. EXPANSION AND CONTRACTION JOINTS SHALL BE CONSTRUCTED

5. VERTICAL AND HORIZONTAL DOWEL BARS AND TRANSVERSE REINFORCING BARS SHALL BE PLACED AT 4 FEET C-C, UNLESS

6. ONE-HALF INCH EXPANSION JOINT MATERIAL SHALL BE PROVIDED WHERE CURB OR CURB AND GUTTER IS ADJACENT TO SIDEWALK

FOR SIDEWALK DETAILS AT DRIVEWAYS, SEE SAN ANTONIO DISTRICT

SEE PEDESTRIAN HANDRAIL DETAILS STANDARD "PRD" FOR MORE INFORMATION. CONCRETE RAIL FOUNDATION TO BE POURED WITH THE SIDEWALK BUT PAYMENT IS SUBSIDIARY TO ITEM 450 "RAILING".

IO. CLEAR SIDEWALK WIDTH EXCLUDING THE PEDESTRIAN RAIL FOUNDATION SHALL BE 6' UNLESS OTHERWISE SPECIFIED IN

OR RIPRAP. THIS IS SUBSIDIARY TO THE CURB, ITEM 529.

LAYDOWN CURB AT DRIVEWAYS WILL BE PAID AS SUBSIDIARY TO

TO MATCH PAVEMENT JOINTS IN ALL CURBS AND CURB AND

GUTTER ADJACENT TO JOINTED CONCRETE PAVEMENT. WHERE PLACEMENT OF CURB OR CURB AND GUTTER IS NOT ADJACENT TO CONCRETE PAVEMENT, EXPANSION JOINTS SHALL BE PROVIDED

AT STRUCTURES, CURB RETURNS AT STREETS, AND AT LOCATIONS

CONCRETE PER ITEM 529 AND 421.

2. ALL REINFORCING STEEL SHALL BE GRADE 60

REINFORCING BARS GROUTED IN PLACE.

DIRECTED BY THE ENGINEER.


STANDARD "DRIVEWAY DETAILS".

OTHERWISE SHOWN.

ITEM 530.


THE PLANS

TYPICAL SIDEWALK SECTION WITH PEDESTRIAN RAIL




TYPICAL SIDEWALK SECTION

GROOVED JOINTS IN THE SIDE WALK SHALL BE AT A MAX. SPACING OF 10 FT. AND SHALL HAVE $\frac{3}{4}$ " EXPANSION JOINTS AT A MAX. SPACING OF 60' AND TO COINSIDE WITH THE CURB EXP. JOINTS.



TYPICAL CURB EXPANSION JOINT DETAIL

EXPANSION JOINTS TO BE PLACED AT BEGINNING AND END OF CURVES, DRIVEWAYS WHEELCHAIR RAMPS, INLETS, ILLUMINATION/SIGNAL FOUNDATIONS AND OTHER FIXED OBJECTS.



TRANSITION FOR CONCRETE CURB ENDS

SEE CURB DETAIL FOR REINFORCEMENT



MISCELLANEOUS CURB AND SIDEWALK DETAILS

San Antonio District Standard Sheet (I of 2)

	_						
T:Engdata/Standards/MiscCurbdetails.dgn		PREP	ARED BY	AND FOR	R USE OF	TxDo	Τ.
ORIGINAL DRAWING DATE:	STATE DISTRICT	FEDERAL REGION	FE	EDERAL AI	D PROJEC	т ө	SHEET
REVISIONS 09-01-08	SAT	6					74
10-10-17 sidewalk width equals 6' usual 07-22-20 9" curb + curb w/ conc pvmt det.		COUNTY		CONTROL	SECTION	JOB	HIGHWAY
b/ 22 20 / coro · coro w/ conc pvint det.		RFΥΛ	R			XXX	IIS 18

δy

kind rect

ty of for i

a P

Engi

exds sion

GENERAL NOTES

- This drawing is a general overview of CASS TL-4 Barrier System. See SS-740 (latest version) for specific details of CASS cable terminal (CCT) and cable safety system (CASS) requirements, proper installation, options and specification.
- 2. CASS is designed for bi-directional traffic flows and can be installed on either side of the median. Contact Trinity (800-527-6050) or consult the design, installation, or repair manual(s) for additional information.
- All concrete for CASS footings shall be TxDOT class A. If class A or stronger concrete is utilized for the mowstrip, please see chart below for allowable footing depth and sleeve deviations.
- 4. All posts shall be socketed unless otherwise specified.
 All cables shall be pre-stretched unless otherwise specified.
- For payment see Special Specification "Cable Barrier System".
- CASS-TL4 shall be installed on shoulders or medians with slopes of 6:1 or flatter without obstructions, depressions, etc. That may significantly affect the stability of an errant vehicle. Grading of site and/or appropriate fill materials may be required. The designer/installer shall "Flatten" or "Round" various topographical inconsistencies that could interfere with the ability of the installer to consistently maintain the design height (in relation to the terrain) of the cables. Please consult manual(s) and/or TXDOT Memo(s) for installations in "Ditch Sections".
- CASS TL-4 post spacing may be modified to avoid obstacles that conflict with the installation of cass-tl4 line posts or to reduce deflection on radiuses. No post space can exceed the maximum post TxDOT space limit of 20'. Reducing or increasing post spacing affects deflection. CASS TL-4 may be laterally transferred at a rate not to exceed 30:1.
- 8. Post foundations may be drilled through existing pavement. Please see line post foundation chart for minimum footing requirements in various applications.
- 9. For desthetic purposes Trinity recommends all sleeves, driven posts, and lower cable release posts to be installed reasonably plumb (approximately 1/8" per foot).
- 10. CASS TL-4 shall be installed in well-drained, compacted, NCHRP Report 350 Standard soil. If soil does not meet this classification, if soild rock/concrete is encountered below grade or if soil is susceptable to severe freeze/thaw cycles, please contact Trinity about alternate footing design(s). Trinity suggests the use of "Mow strips" for erosion prevention and ease of maintenance / installation.
- 11. See the Texas MUTCD for proper "Barrier" Delineation.

MOW S	TRIP DET	AIL*	CONCRETE FOOTING CHART						
MOW STRIP	DEPTH	WIDTH	FOOTING	TUBE SLEEVE	REBAR RING				
NONE			30" Min.	27" Min.	YES				
HMA	6" Min.	3′ Min.	27" Min.	15" Min.	NO				
НМА	8" Min.	3′ Min.	24" Min.	15" Min.	NO				
RC	3" Min.	3′ Min.	24" Min.	15" Min.	NO				

Chart does not apply to Terminal Posts 1 thru 9.

* Mow strip or pavement.

HMA = Hot Mix Asphalt (Not Recycled Asphalt Pavement).
RC = Reinforced Concrete (TXDOT Class A Minimum).

Trinity Highway Products, LLC. 2525 Stemmons Freeway Dallas, TX 75207

Product. INFO@TRIN. NET

	CARLE LE	NSION CHART
	FAHRENHEIT	PRE-STRETCHED
	DEGREES	LB / FORCE
	-10	7300
	0	7000
	10	6600
	20	6300
	30	6000
	40	5600
	50	5300
	60	5000
	70	4600
	80	4300
	90	4000
	100	3600
	110	3300
	120	3000
	130	2700
	140	2500
	150	2300
n	chart in ta	ngent sections:

CABLE TENSION CHART

Allowable deviation from chart in tangent sections: +800, -200 pounds/force. Cable tension readings are typically higher in curved cable sections.



TRINITY CABLE SAFETY SYSTEM

CASS(TL4)-14

(TL-4)

LE: casst 414, dgn	DN: TxDOT		ck: RM Dw		VP	CK:	
)TxD0T: March 2014	CONT	SECT	JOB		н	IGHWAY	
REVISIONS	0100 02 XXX		U	S 181			
	DIST COUNTY				SHEET NO.		
	SAT		BEXAR	₹		75	

GENERAL NOTES 2000' Nominal Between Splices. (3) 3/4" Wire Ropes -27'-6" Minimum One Set of Splices Per Run 1. For additional information contact Gibraltar, Inc. at 1-800-495-8957, Begin Length of Need for System 830-798-5444, or see the manufacturer's product manual. 1-1/4" ± 1/2" Begin 20' Post Spacing 2. All concrete shall be CLASS A. ~ 12" 3. The Cable Barrier System shall be installed on shoulders or on medians CRP with slopes of 6:1 or flatter. 4. The Cable Barrier System is accepted by the FHWA Test Level - 3. Line Post (TYP) Driven or Socketed 5. See the Texas MUTCD for proper "Barrier" delineation. 6. Rock Clause: Where solid rock is encountered: A. For socketed post, continue digging 12" diameter, 15" deep into TP3/4-3 TP3/4-3 rock or the required plan depth, whichever comes first. Anchor Post B. For driven post, core drill a 4" diameter hole 18" deep into HSS 8" x 8"x 3' rock or the required plan depth, whichever comes first. 2' Dia. x 8' Min. Deep C. For Anchor post, continue digging 24" diameter, 30" deep into Reinforced Foundation rock or the required plan depth, whichever comes first. (No Rebar Shown) 7. Tolerances: * LP = 3" out of plumb, at top 6'-3" ±1' 6'-3" ±1' 7'-6" ±1' 7'-6" ±1' * Cable height = 1' Alternate posts for barrier installation * Anchor Post = 5" off of Cable Reference Line 8. The Gibraltar cable barrier system shall be installed in NCHRP Cable Reference Line Report 350 standard compacted soil. Soil must be well drained. Hairpin 9. All non-welded rebar by others. (3) Anchor Terminal Fittings Lockplate 10. Minimum recommended line post foundation. Delineator A. Without mowstrip, 36" Deep x 12" diameter foundations with #3 4 - 5/8' 3/4" MIN 3⁄4" MIN rebar ring x 8" diameter with two #4 rebar vertical bars 30" long Concrete wedge T/B CABLE SPLICE FITTING TERMINAL FITTING anchors per Bolt B. With 4" minimum depth hot mix asphalt, 30" deep x 12" diameter @ 2'-6 Manufacturer's foundations with #3 rebar ring \times 8" diameter with two #4 rebar Recommendation (8) Vertical #6 Bar vertical bars 30" long. @ 2'-1 X 7'-10" Line of Cable Line of Cable Rebar Bars C. With 3" minimum depth concrete mowstrip, 24" deep \times 12" diameter Rebar Ring 30 Welded to Socket (10) Horz. #4 Rings and Bars foundations. (No rebar required) @ 1'-8' (By Others) X 18" Dia. D. Direct drive post 42" deep. 2-1/2" GRADE 3-1/4 CABLE TENSION CHART* C-SECTION POST -10 °F 8000 LINE POST SECTION A SECTION B C-Section Post 0 °F 7600 (BASE-PLATED OPTION) 3-1/4" X 2-1/2" X 4 Low-Fill Box Culvert Less than 15" Fill 10 ° F 7200 36 C-Section Post C-Section Post 7 Rings Spaced 3-1/4" X 2-1/2" X 4 3-1/4" X 2-1/2" X 4' 20 ° F 6800 @ 6" O.C. C-Section Post 30 °F 6400 DEFLECTION $(TP1-4) 3-\frac{1}{4}$ " X 2- $\frac{1}{2}$ " X 4' 40 ° F 6000 "C" slot this side Post 50 °F 5600 Deflection for TP1-4 Spacina 60 °F 5200 8'-0' 20 FT ¾" Dia. Wire Rope ¾" J-Bo∣+ 70 ° F 4800 7′-0" 12 FT 80 ° F 4400 3"X4"X15" 3/6" X 3" X 4" 3" x 4" x 15" 90 °F 4000 3" x 4" x 15" 6′-8" 10 FT Steel Socket Driven Socket Steel or Plastic Steel or Plastic $1-\frac{1}{2}$ " Dia. Hole W/4 #4 100 ° F 3600 Socket Socket GRADE 3 Sides Allowable Deviation Rebar Welded 110 ° F 3200 (TP1 & TP2 Only) from Chart +/- 10% to Socket GRADE GRADE GRADE 60 Texas Department of Transportation 15" 42' GIBRALTAR #3 Ring x 8"Dia. 4" Overlap 3" Min. Post Below Grade Stop CABLE BARRIER SYSTEM (By Others) 2-#4 Rebar x 30" (TL-3)(By Others) ---12"--- Plastic or Plastic or Steel Cap 36" Steel Cap GBRLTR(TL3)-14 LINE POST DN: TxDOT CK: RM DW: VP ILE: gbr|trt|314.dgn (DRIVEN OPTION) TERMINAL POST C)TxD0T: March 2014 CONT SECT LINE POST SOCKETED JOB HIGHWAY LINE POST SOCKETED (SHOWN WITH CONCRETE MOWSTRIP) (Shown with Driven 010002 XXX US 181 CABLE RELEASE AND ANCHOR POST Socket Option) (Shown with Rebar Ring/Bars Socket Option) (Shown with Welded Rebar Socket Option) (Shown with Tube Plate Option) (See Note 9)

(See Note 9)

(See Note 9)


76

SAT

BEXAR

(See Note 9)

any purpose w esulting from TxD0T damage δy any kind incorrect anty of or for : Engineering Practice Act". of this standard to other "Texas ersion this standard is governed by es no responsibility for the

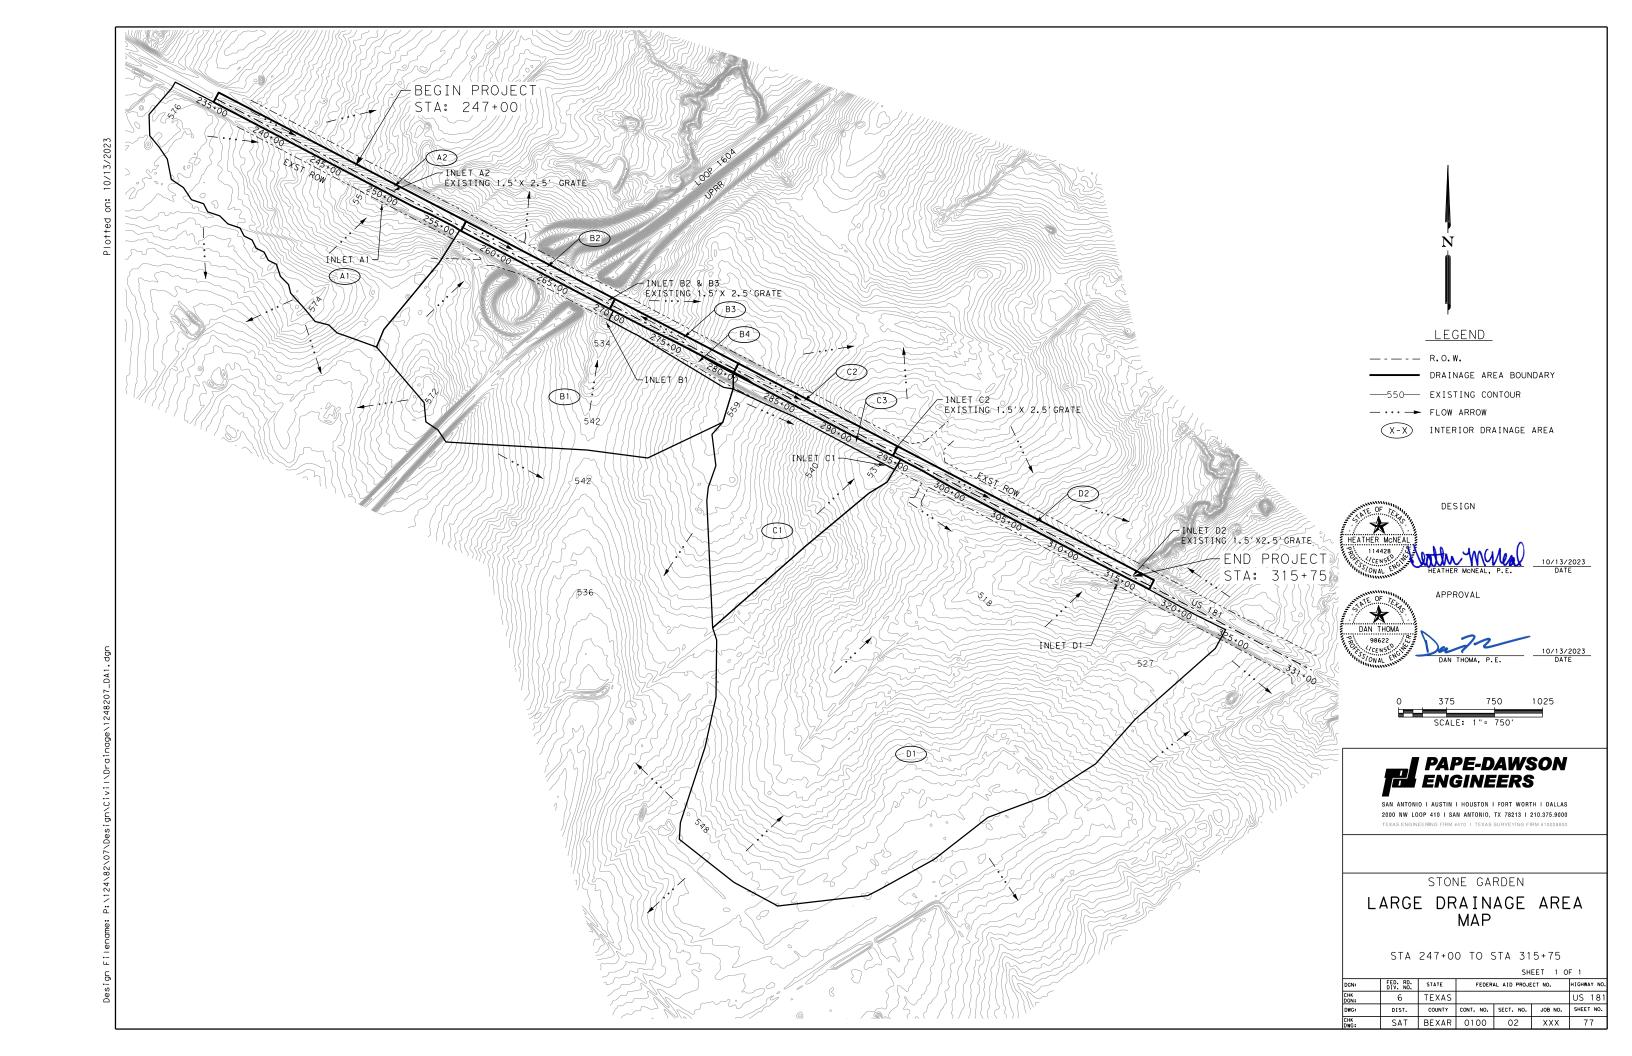

NOTE: WITH 50% CLOGGING

	E	XIST C-VALU	E COMPUTATION	ONS		
DRAINAGE AREA	GRASS	ROAD	INDUSTRIAL	RESIDENTIAL	TOTAL AREA	COMPOSITE RUNOFF COEFFICIENT
	0.35	0.90	0.60	0.40	AC	
A 1	31.54	3.09	7.94	7.13	49.70	0.44
B1	60.48	5.96	1.02	0.54	68.00	0.41
C1	33.410	1.30	0.00	0.00	34.71	0.38
D1	81.58	3.15	8.77	104.14	197.64	0.40
A2	3.29	1.03	0.00	0.00	4.32	0.49
B2	1.83	0.75	0.00	0.00	2.58	0.51
В3	1.490	0.61	0.00	0.00	2.10	0.51
C2	2.317	0.49	0.00	0.00	2.81	0.45
D2	3.31	1.10	0.00	0.00	4.41	0.49
A1+A2	34.83	4.12	7.94	7.13	54.02	0.44
B1+B2+B3+B4	63.80	7.32	1.02	0.54	72.68	0.41
C1+C2	35.73	1.79	0.00	0.00	37.52	0.38
D1+D2	84.89	4.25	8.77	104.14	202.05	0.40

	PRO	POSED C-VA	LUE COMPUTAT	IONS		
DRAINAGE AREA	GRASS	GRASS ROAD		RESIDENTIAL	TOTAL AREA	COMPOSITE RUNOFF COEFFICIENT
	0.35	0.90	0.60	0.40	AC	
A 1	31.54	3.35	7.94	7.13	49.96	0.44
A2	2.86	1.20	0.00	0.00	4.06	0.52
A1+A2	34.40	4.55	7.94	7.13	54.02	0.44
B1	60.35	6.18	1.02	0.54	68.09	0.41
B2	1.95	0.63	0.00	0.00	2.58	0.49
В3	1.35	0.66	0.00	0.00	2.01	0.54
B4	1.41	1.29	0.00	0.00	2.70	0.62
B2 & B3	3.30	1.29	0.00	0.00	4.59	0.51
B1+B2+B3+B4	63.65	7.47	1.02	0.54	72.68	0.42
C1	33.210	1.83	0.00	0.00	35.04	0.38
C2	1.55	0.93	0.00	0.00	2.48	0.56
C3	1.41	1.54	0.00	0.00	2.95	0.64
C1+C2+C3	34.76	2.76	0.00	0.00	37.52	0.40
D1	81.58	3.36	8.77	104.14	197.85	0.40
D2	2.76	1.44	0.00	0.00	4.20	0.54
D1+D2	84.34	4.80	8.77	104.14	202.05	
Culvert A2	1.83	0.65	0.00	0.00	2.48	0.50
Culvert B1	0.07	0.93	0.00	0.00	1.00	0.87
Culvert C2A	0.14	0.26	0.00	0.00	0.40	0.71
Culvert C2B	0.56	0.42	0.00	0.00	0.98	0.59
Culvert C1	0.37	0.30	0.00	0.00	0.67	0.60
Culvert D2	2.12	1.47	0.00	0.00	3.59	0.58

Culve	rt D2		2.12	1.47	0.00	0.0	0 3.59	0.5	8		Culvert
					O						
					CULVERT CO	DMPUTATIONS					
PROP CULVERT PIPE		UTED (cfs)	LONG. SLOPE	N-VALUE	# BOXES/ PIPES	TYPE	CUL VERT S I Z E	LENGTH	VELC	FALL OCITY	CAPACITY (cfs)
	Q5	Q10	(%)		FIFE3		3126	(LF)	٧5	V10	Q Max
Culvert A2	7.6	9.0	1.62%	0.012	1	ARCH RCP	DES 1	100	8.0	8.3	14.4
Culvert B1	5.4	6.3	0.50%	0.012	1	RCP	24"	60	4.7	4.9	17.3
Culvert C2A	1.8	2.1	0.52%	0.012	1	ARCH RCP	DES 1	118	3.7	3.9	8.2
Culvert C1	2.5	2.9	1.00%	0.012	1	RCP	24"	70	5.0	5.2	24.5
Culvert C2B	3.6	4.2	1.60%	0.012	1	ARCH RCP	DES 1	102	7.1	7.4	14.4
Culvert D2	12.8	15.1	0.50%	0.012	2	ARCH RCP	DES 1	102	4.6	4.5	16.1

	DITCH COMPUTATIONS - RATIONAL METHOD														
STA OFFSE		DRN AREA	COMP FLOW	UTED (cfs)		DITCH	N-VALUE	BOTTOM WIDTH	FRONT SLOPE	BACK SLOPE		l VEL. ∵∕s)	DITCH DEPTH	FLOW (ft)	
JIA	011321	DIN AILE	Q5	Q100	(%)	(f+)	IN VALUE	(f+)	(H: 1)	(H: 1)	V5	V100	D5	D100	
287+00	O'RT	C2	7.3	13.0	1.600%	3	0.035	0	4	4	2.85	3.25	0.80	1.00	
313+50	0' RT	D2	13.5	23.8	0.50%	3	0.035	0	4	4	2.13	2.48	1.26	1.55	
270+50	90' RT	B4	10.3	18.2	2.87%	3	0.035	0	6	25	2.77	3.16	0.49	0.61	
294+00	90' RT	C3	11.6	20.5	0.90%	3	0.035	0	6	25	1.83	2.12	0.65	0.79	

ORIFICE CALCULATIONS											
-CA(2qh)°0.5											
I	INLET AREA A2	INLET AREA B2&B3	INLET AREA C2	INLET AREA D2							
C =	0.67	0.67	0.67	0.67	ORIFICE FLOW COEFFICIENT						
Δ=	4.023	3.75	3.89	3.49	ft* GRATE OPENING ONLY W/O 50% CLOGGING						
g=	32.2	32.2	32.2	32.2	ft/ GRAVITATIONAL CONSTANT						
h=	3.82	3.67	1.85	2.88	ft *ALLOWABLE HEAD						
Q= 21.138 CFS											

			WEIR	CALCULATIONS			ORIFICE
Q=CPh°		INLET AREA B2&B3	INLET AREA C2	INLET AREA D2]		
C =	3.087	3.087	3.087	3.087		WEIR COEFFICIENT	
P=	8.26	8	8.14	7.72	f+	PERIMETER OF OPENING W/O 50% CLOGGING	
h=	3.82	3.67	1.85	2.88	f+	ALLOWABLE HEAD	
Q=	95.188 CFS	86.815 CFS	3 <u>1.615 CFS</u>	58.239 CFS			

	EXIST	ING HY	OROLOGY	EXISTING HYDROLOGY - RATIONAL METHOD													
AREA ID	AREA (AC)	С	Tc (min)	INTENS	ITIES	(in/hr)	СОМІ	PUTED F (cfs)	LOW								
	(AC)		(111117	I 5	I10	I100	Q5	Q10	Q100								
Α1	49.70	0.44	25	4.05	4.82	7.43	88.6	105.5	162.5								
A2	4.32	0.49	10	6.12	7.22	10.83	13.0	15.3	23.0								
A1+A2	54.02	0.44	25	4.05	4.82	7.43	96.3	114.6	176.7								
В1	68.00	0.41	18	4.79	5.67	8.66	133.6	158.1	241.5								
B2	2.58	0.51	15	5.21	6.16	9.35	6.9	8.2	12.4								
В3	2.10	0.51	10	6.12	7.22	10.83	6.6	7.8	11.6								
B1+B2+B3+B4	72.68	0.41	18	4.79	5.67	8.66	142.8	169.0	258.1								
C1	34.71	0.38	17	4.92	5.83	8.87	64.9	76.9	117.0								
C2	2.81	0.45	15	5.21	6.16	9.35	6.6	7.8	11.9								
C1+C2	37.52	0.38	17	4.92	5.83	8.87	70.2	83.2	126.5								
D1	197.64	0.40	25	4.05	4.82	7.43	320.2	381.1	587.4								
D2	4.41	0.49	11	5.91	6.97	10.49	12.8	15.1	22.7								
D1+D2	202.05	0.40	25	4.05	4.82	7.43	327.4	389.6	600.5								

	PROPOSED HYDROLOGY - RATIONAL METHOD													
AREA ID	AREA (AC)	С	Tc (min)	INTENS	ITIES	PUTED F (cfs)	LOW							
	(40)		(111117	15	I10	I100	Q5	Q10	Q100					
A 1	49.96	0.44	25	4.05	4.82	7.43	89.1	106.0	163.4					
A2	4.06	0.52	10	6.12	7.22	10.83	13.0	15.3	22.9					
A1+A2	54.02	0.44	25	4.05	4.82	7.43	96.3	114.6	176.7					
B1	68.09	0.41	18	4.79	5.67	8.66	133.8	158.3	241.8					
B2	2.58	0.49	15	5.21	6.16	9.35	6.6	7.8	11.9					
B3	2.01	0.54	10	6.12	7.22	10.83	6.7	7.9	11.8					
B4	2.70	0.62	10	6.12	7.22	10.83	10.3	12.1	18.2					
B2 + B3	4.59	0.51	15	5.21	6.16	9.35	12.3	14.5	22.0					
B1+B2+B3+B4	72.68	0.42	18	4.79	5.67	8.66	146.3	173.1	264.4					
C1	35.04	0.38	17	4.92	5.83	8.87	65.6	77.7	118.2					
C2	2.48	0.56	15	5.21	6.16	9.35	7.3	8.6	13.0					
C3	2.95	0.64	10	6.12	7.22	10.83	11.6	13.7	20.5					
C1+C2+C3	37.52	0.40	17	4.92	5.83	8.87	73.9	87.5	133.2					
D1	197.85	0.40	25	4.05	4.82	7.43	320.6	381.5	588.1					
D2	4.20	0.54	1.1	5.91	6.97	10.49	13.5	15.9	23.8					
D1+D2	202.05	0.40	25	4.05	4.82	7.43	327.4	389.6	600.5					
Culvert A2	2.48	0.50	10	6.12	7.22	10.83	7.6	9.0	13.5					
Culvert B1	1.00	0.87	10	6.12	7.22	10.83	5.4	6.3	9.5					
Culvert C2A	0.40	0.71	10	6.12	7.22	10.83	1.8	2.1	3.1					
Culvert C2B	0.98	0.59	10	6.12	7.22	10.83	3.6	4.2	6.3					
Culvert C1	0.67	0.60	10	6.12	7.22	10.83	2.5	2.9	4.4					
Culvert D2	3.59	0.58	10	6.12	7.22	10.83	12.8	15.1	22.6					

<u>NOTES</u>

1. COMPUTED FLOWS CALCULATED USING RATIONAL METHOD. RAINFALL DATA OBTAINED FROM EDBLKUP-vC6.2.10.xism
2. RUNOFF COEFFICIENTS WERE USED BASED OFF TXDOT COEFFICIENTS.
3. CULVERTS DESIGNED FOR 5YR STORM.
4. DITCHES DESIGNED FOR 5YR STORM & 100YR STORM CHECK

STORM CHECK.


DESIGN

APPROVAL



PAPE-DAWSON ENGINEERS

SAN ANTONIO I AUSTIN I HOUSTON I FORT WORTH I DALLAS 2000 NW LOOP 410 I SAN ANTONIO, TX 78213 I 210.375.9000




STONE GARDEN

HYDROLOGY & HYDRAULIC COMPUTATIONS

SHEET 1 OF 1

l:	FED. RD. DIV. NO.	STATE	FEDER	HIGHWAY NO.		
:	6	TEXAS				US 181
;:	DIST.	COUNTY	CONT. NO.	SECT. NO.	JOB NO.	SHEET NO.
	SAT	BEXAR	0100	02	XXX	78

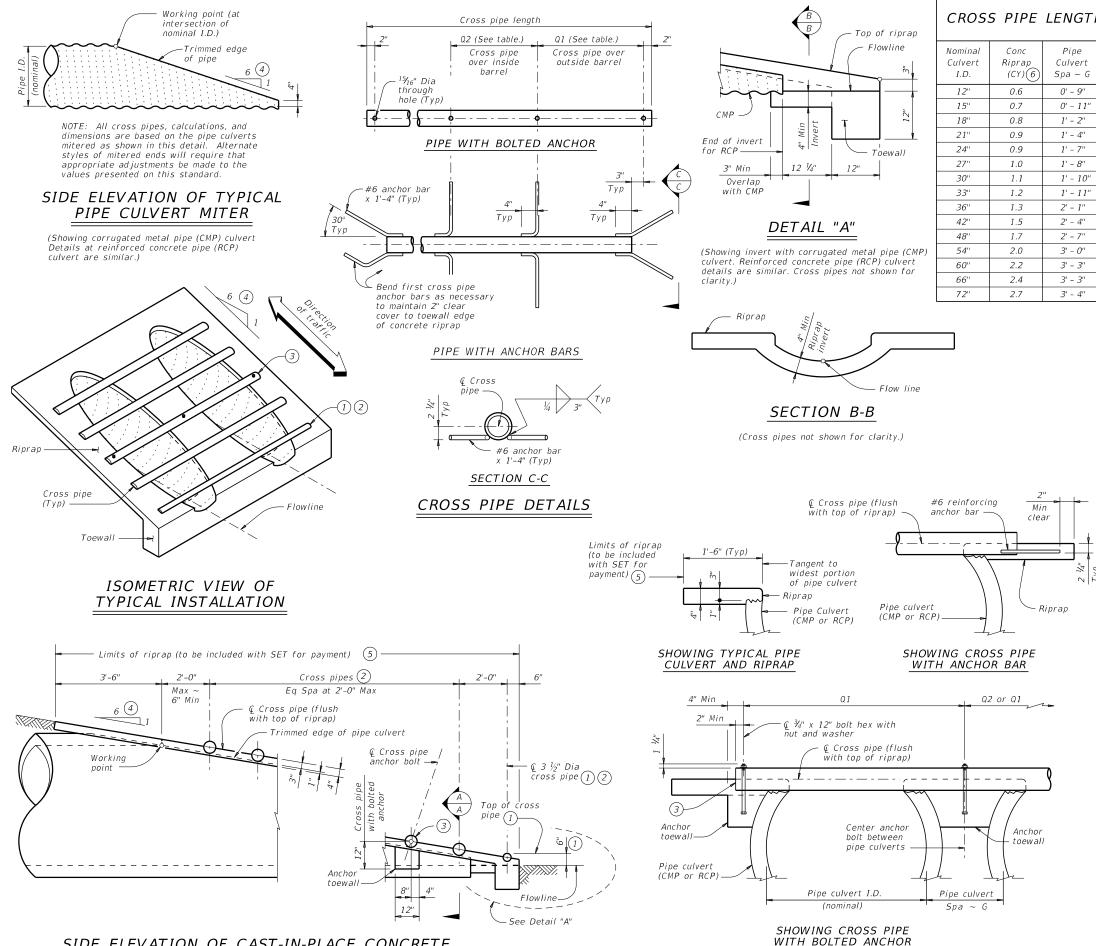

CROSS PIPE LENGTHS, REQUIRED PIPE SIZES, AND RIPRAP QUANTITIES

Nominal Culvert I.D.	Conc Riprap (CY) 6	Pipe Culvert Spa ~ G	Single Barrel ~ Q1	Multi- Barrel ~ Q1	Q2	Conditions for Use of Cross Pipes	Cross Pipe Sizes	
12"	0.6	0' - 9''	N/A	2' - 1''	1' - 9''			
15"	0.7	0' - 11''	N/A	2' - 5"	2' - 2"			
18"	0.8	1' - 2"	N/A	2' - 10''	2' - 8"	3 or more pipe culverts	3" Std	
21"	0.9	1' - 4"	N/A	3' - 2"	3' - 1"		(3.500" O.D.)	
24"	0.9	1' - 7"	N/A	3' - 6"	3' - 7"			
27"	1.0	1' - 8''	N/A	3' - 10''	3' - 11"	3 or more pipe culverts		
30"	1.1	1' - 10''	N/A	4' - 2"	4' - 4"	2 or more pipe culverts	3 ½" Std (4.000" 0.D.)	
33"	1.2	1' - 11''	4' - 2"	4' - 5"	4' - 8"	All pipe culverts		
36"	1.3	2' - 1"	4' - 5''	4' - 9''	5' - 1"	All pipe culverts	4" Std	
42"	1.5	2' - 4"	4' - 11''	5' - 5"	5' - 10''	All pipe culverts	(4.500" O.D.)	
48"	1.7	2' - 7"	5' - 5''	6' - 0''	6' - 7"			
54"	2.0	3' - 0"	5' - 11''	6' - 9''	7' - 6"			
60"	2.2	3' - 3"	6' - 5"	7' - 4"	8' - 3"	All pipe culverts	5" Std	
66"	2.4	3' - 3"	6' - 11''	7' - 10''	8' - 9"		(5.563" O.D.)	
72"	2.7	3' - 4''	7' - 5"	8' - 5"	9' - 4''			

- 1) The proper installation of the first cross pipe is critical for vehicle safety. Place the top of the first cross pipe no more than 6" above the flow line.
- 2) Provide cross pipes, except the first bottom pipe, of the size shown in the table. Provide a 3 1#2" standard pipe (4" 0.D.) for the first bottom pipe.
- (3) Install the third cross pipe from the bottom of the culvert using a bolted connection. Ensure that riprap concrete does not flow into the cross pipe so as to permit disassembly of the bolted connection to allow cleanout access. At the Contractor's option, install all other cross pipes using the bolted connection details.
- (4) Match cross slope as shown elsewhere in the plans. Cross slope of 6:1 or flatter is required for vehicle safety.
- (5) Riprap placed beyond the limits shown will be paid for as concrete riprap in accordance with Item 432, "Riprap."
- (6) Quantities shown are for one end of one reinforced concrete pipe (RCP) culvert. For multiple pipe culverts or for corrugated metal pipe (CMP) culverts, quantities will need to be adjusted. Riprap quantities are for contractor's information only.

MATERIAL NOTES:

Synthetic fibers listed on the "Fibers for Concrete" Material Producer List (MPL) may be used in lieu of steel

reinforcing in riprap concrete unless noted otherwise.
Provide cross pipes that meet the requirements of ASTM A53
(Type E or S, Gr B), ASTM A500 (Gr B), or API 5LX52. Provide ASTM A307 bolts and nuts.

Galvanize all steel components, except concrete reinforcing, after fabrication. Repair galvanizing damaged during transport or construction in accordance with the specifications.

GENERAL NOTES:

Cross pipes are designed for a traversing load of 10,000 pounds at yield as recommended by Research Report 280-2F, "Safety Treatment of Roadside Parallel-Drainage Structures", Texas Transportation Institute, March 1981.

Safety end treatments (SET) shown herein are intended for use in those installations where out of control vehicles are likely to traverse the openings approximately perpendicular to the cross pipes.

Construct concrete riprap and all necessary inverts in accordance with the requirements of Item 432, "Riprap." Payment for riprap and toewall is included in the Price

Bid for each Safety End Treatment.




SAFETY END TREATMENT FOR 12" DIA TO 72" DIA PIPE CULVERTS TYPE II ~ PARALLEL DRAINAGE

SETP-PD

ILE: CD-SE	DN: GAF	7	CK: CAT	DW:	JRP	CK: GAF	
C)T x D0T	February 2020	CONT	SECT	JOB			SHWAY
	REVISIONS		02	XXX	XXX US 181		
		DIST		COUNTY			SHEET NO.
		SAT		BEXA	R		79


SIDE ELEVATION OF CAST-IN-PLACE CONCRETE

(Showing reinforced concrete pipe (RCP) culvert Details at corrugated metal pipe (CMP) culvert are similar.) SECTION A-A

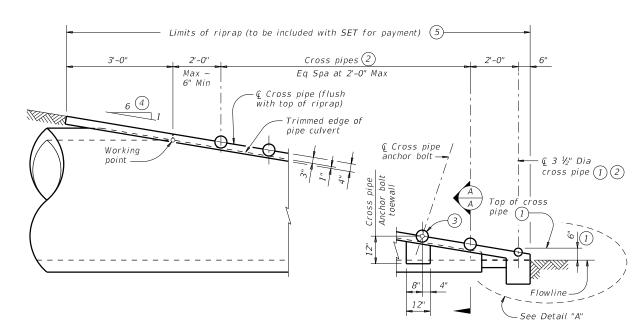

SIDE ELEVATION OF CAST-IN-PLACE CONCRETE

(Showing reinforced concrete pipe (RCP) culvert. Details of corrugated metal pipe (CMP) culvert are similar, pipe runners not shown for clarity.)

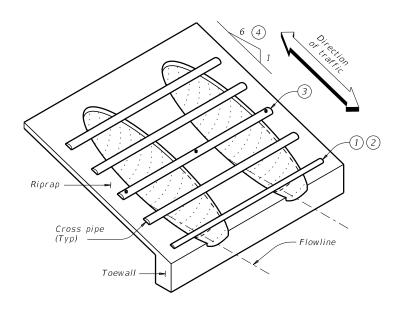

ISOMETRIC VIEW OF TYPICAL INSTALLATION

CROSS PIPE LENGTHS AND REQUIRED PIPE SIZES ②


Corrugated Metal Pipe (CMP) Culverts

Design	Conc Riprap (CY) 6	Pipe Culvert Span	Pipe Culvert Rise	Pipe Culvert Spa ~ G	Single Barrel ~ Q1	Multi- Barrel ~ Q1	Q2	Conditions for Use of Cross Pipes	Cross Pipe Sizes	
1	0.6	17"	13"	1' - 0"	N/A	2' - 8"	2' - 5"	3 or more pipe culverts	211 Ct-1 (2 E0011 0 D)	
2	0.7	21"	15"	1' - 2"	N/A	3' - 1"	2' - 11"	3 of more pipe curverts	3" Std (3.500" 0.D.)	
3	0.9	28"	20"	1' - 5''	N/A	3' - 9''	3' - 9''	3 or more pipe culverts	3 ½" Std (4.000" 0.D.)	
4	1.0	35"	24"	1' - 8"	4' - 4"	4' - 6''	4' - 7''	All pipe culverts	4" Std (4.500" 0.D.)	
5	1.2	42"	29"	1' - 11"	4' - 11''	5' - 2"	5' - 5''	All pipe cuiverts	4 5ta (4.500 0.D.)	
6	1.4	49"	33"	2' - 2"	5' - 6"	5' - 11''	6' - 3''			
7	1.6	57"	38"	2' - 5"	6' - 2"	6' - 8''	7' - 2"	All pipe sulvests	E!! C+d /E E63!! 0 D \	
8	1.8	64"	43"	2' - 10"	6' - 9''	7' - 6"	8' - 2"	- All pipe culverts	5" Std (5.563" 0.D.)	
9	1.9	71"	47"	3' - 2"	7' - 4"	8' - 3"	9' - 1''		i	
						•		•		

Reinforced Concrete Pipe (RCP) Culverts

Design	Conc Riprap (CY) 6	Pipe Culvert Span	Pipe Culvert Rise	Pipe Culvert Spa ~ G	Single Barrel ~ Q1	Multi- Barrel ~ Q1	Q2	Conditions for Use of Cross Pipes	Cross Pipe Sizes	
1	0.6	22"	13 ½"	1' - 0"	N/A	3' - 1"	2' - 10''	3 or more pipe culverts	3" Std (3.500" 0.D.)	
2	0.7	26"	15 ½"	1' - 2"	N/A	3' - 6''	3' - 4"	3 of more pipe curverts	3 510 (3.500 0.0.)	
3	0.9	28 ½"	18"	1' - 5"	N/A	3' - 10''	3' - 9 ½"	3 or more pipe culverts	3 ½" Std (4.000" 0.D.)	
4	1.0	36 ¼"	22 ½"	1' - 8"	4' - 5"	4' - 7''	4' - 8 1/4"	All pipe culverts	411 C+4 (4 E0011 0 D)	
5	1.2	43 ¾"	26 %"	1' - 11"	5' - 1"	5' - 4''	5' - 6 34"	All pipe cuiverts	4" Std (4.500" O.D.)	
6	1.4	51 1/8"	31 ½"	2' - 2"	5' - 8''	6' - 1''	6' - 5 1/4"			
7	1.6	58 ½"	36"	2' - 5"	6' - 4"	6' - 10''	7' - 3 ½"	All nine sulvents	Ell Chd (E EGGIL O D)	
8	1.8	65"	40''	2' - 10''	6' - 10''	7' - 7"	8' - 3''	All pipe culverts	5" Std (5.563" 0.D.)	
9	1.9	73"	45"	3' - 2"	7' - 6"	8' - 5"	9' - 3"			

- 1) The proper installation of the first cross pipe is critical for vehicle safety. Place the top of the first cross pipe no more than 6" above the flow line
- (2) Provide cross pipes, except the first bottom pipe, of the size shown in the table. Provide a 3 1#2" standard pipe (4" O.D.) for the first bottom pipe.
- (3) Install the third Cross Pipe from the bottom of the culvert using a bolted connection. Ensure that riprap concrete does not flow into the cross pipe so as to permit disassembly of the bolted connection to allow cleanout access. At the Contractor's option, install all other cross pipes using the bolted connection details.
- 4 Match cross slope as shown elsewhere in the plans. Cross slope of 6:1 or flatter is required for vehicle safety.
- (5) Riprap placed beyond the limits shown will be paid as concrete riprap in accordance with Item 432, "Riprap".
- (6) Quantities shown are for one end of one pipe culvert. For multiple Pipe Culverts, quantities will need to be adjusted. Riprap quantities are for Contractor's information only.



NOTE: All cross pipes, calculations, and dimensions are based on the pipe culverts mitered as shown in this detail. Alternate styles of mitered ends will require that appropriate adjustments be made to the values presented on this standard.

SIDE ELEVATION OF TYPICAL PIPE CULVERT MITER

(Showing corrugated metal pipe (CMP) culvert. Details at reinforced concrete cipe (RCP) culvert are similar.)

MATERIAL NOTES:

Synthetic fibers listed on the "Fibers for Concrete" Material Producer List (MPL) may be used in lieu of steel reinforcing in riprap concrete unless noted otherwise.

Provide cross pipes that meet the requirements of ASTM A53 (Type E or S, Gr B), ASTM A500 Gr B, or API 5LX52. Provide ASTM A307 bolts and nuts. Galvanize all steel components, except concrete reinforcing,

after fabrication. Repair galvanizing damaged during transport or construction in accordance with the specifications.

GENERAL NOTES:

Pipe runners are designed for a traversing load of 10,000 pounds at yield as recommended by Research Report 280-2F, "Safety Treatment of Roadside Parallel-Drainage Structures", Texas Transportation Institute, March 1981.

Safety end treatments (SET) shown herein are intended for use in those installations where out of control vehicles are likely to traverse the openings approximately perpendicular to the Pipe Runners.

Construct concrete riprap and all necessary inverts in accordance with the requirements of Item 432, "Riprap". Payment for riprap and toewall is included in the price bid for each safety end treatment.

SHEET 1 OF 2



Texas Department of Transportation


SAFETY END TREATMENT

FOR DESIGN 1 TO 9 ARCH PIPE CULVERTS TYPE II ~ PARALLEL DRAINAGE

SETP-PD-A


E:	setppase-20.dgn	DN: GAF	=	ск: ТхD0Т	DW:	JRP	CK: GAF	
TxD0T	February 2020	CONT	SECT	CT JOB		HIGHWAY		
	REVISIONS		02	XXX		U:	US 181	
				COUNTY	COUNTY SHEET NO		SHEET NO.	
	SAT	BEYAR 80			80			



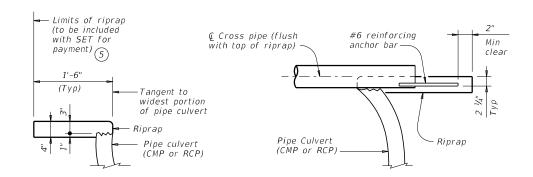


SHOWING TYPICAL PIPE CULVERT AND RIPRAP

SHOWING CROSS PIPE WITH ANCHOR BAR

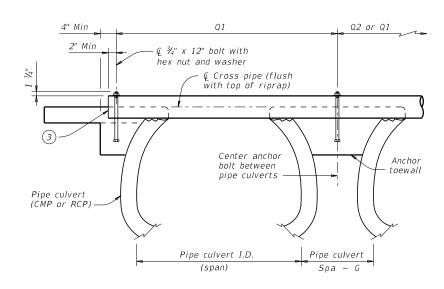


SHOWING CROSS PIPE WITH BOLTED ANCHOR

SECTION A-A




DETAIL "A"

(Showing invert with corrugated metal pipe (CMP) culvert. Reinforced concrete pipe (RCP) culvert details are similar. Cross pipes not shown for clarity.)




SECTION B-B

(Cross pipes not shown for clarity.)

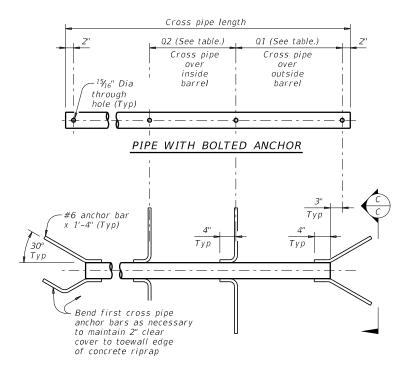

PIPE WITH ANCHOR BARS



CROSS PIPE DETAILS

SHEET 2 OF 2





SAFETY END TREATMENT


FOR DESIGN 1 TO 9 ARCH PIPE CULVERTS TYPE II ~ PARALLEL DRAINAGE


SETP-PD-A


E:	setppase-20.dgn	DN: GAF		ск: ТхD0Т	DW:	JRP	CK: GAF	
TxD0T	February 2020	CONT	SECT	JOB			HIGHWAY	
	REVISIONS		02	XXX		U	US 181	
				COUNTY		SHEET NO.		
		SAT		BEXA	R		81	

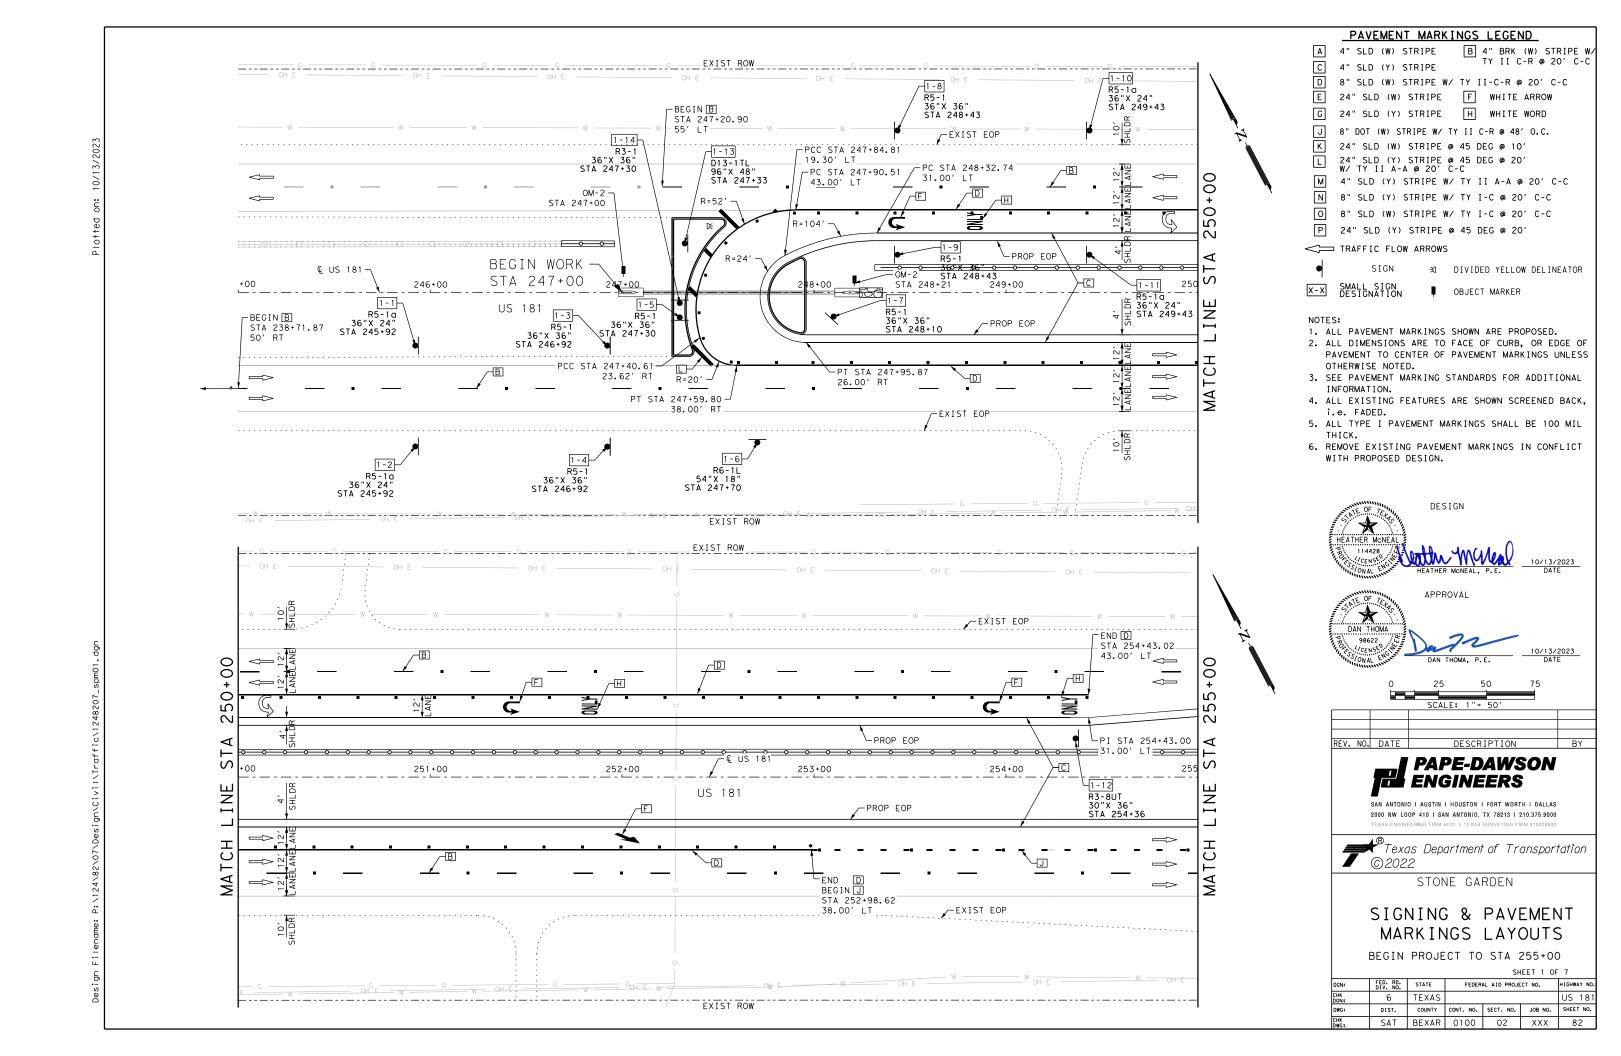


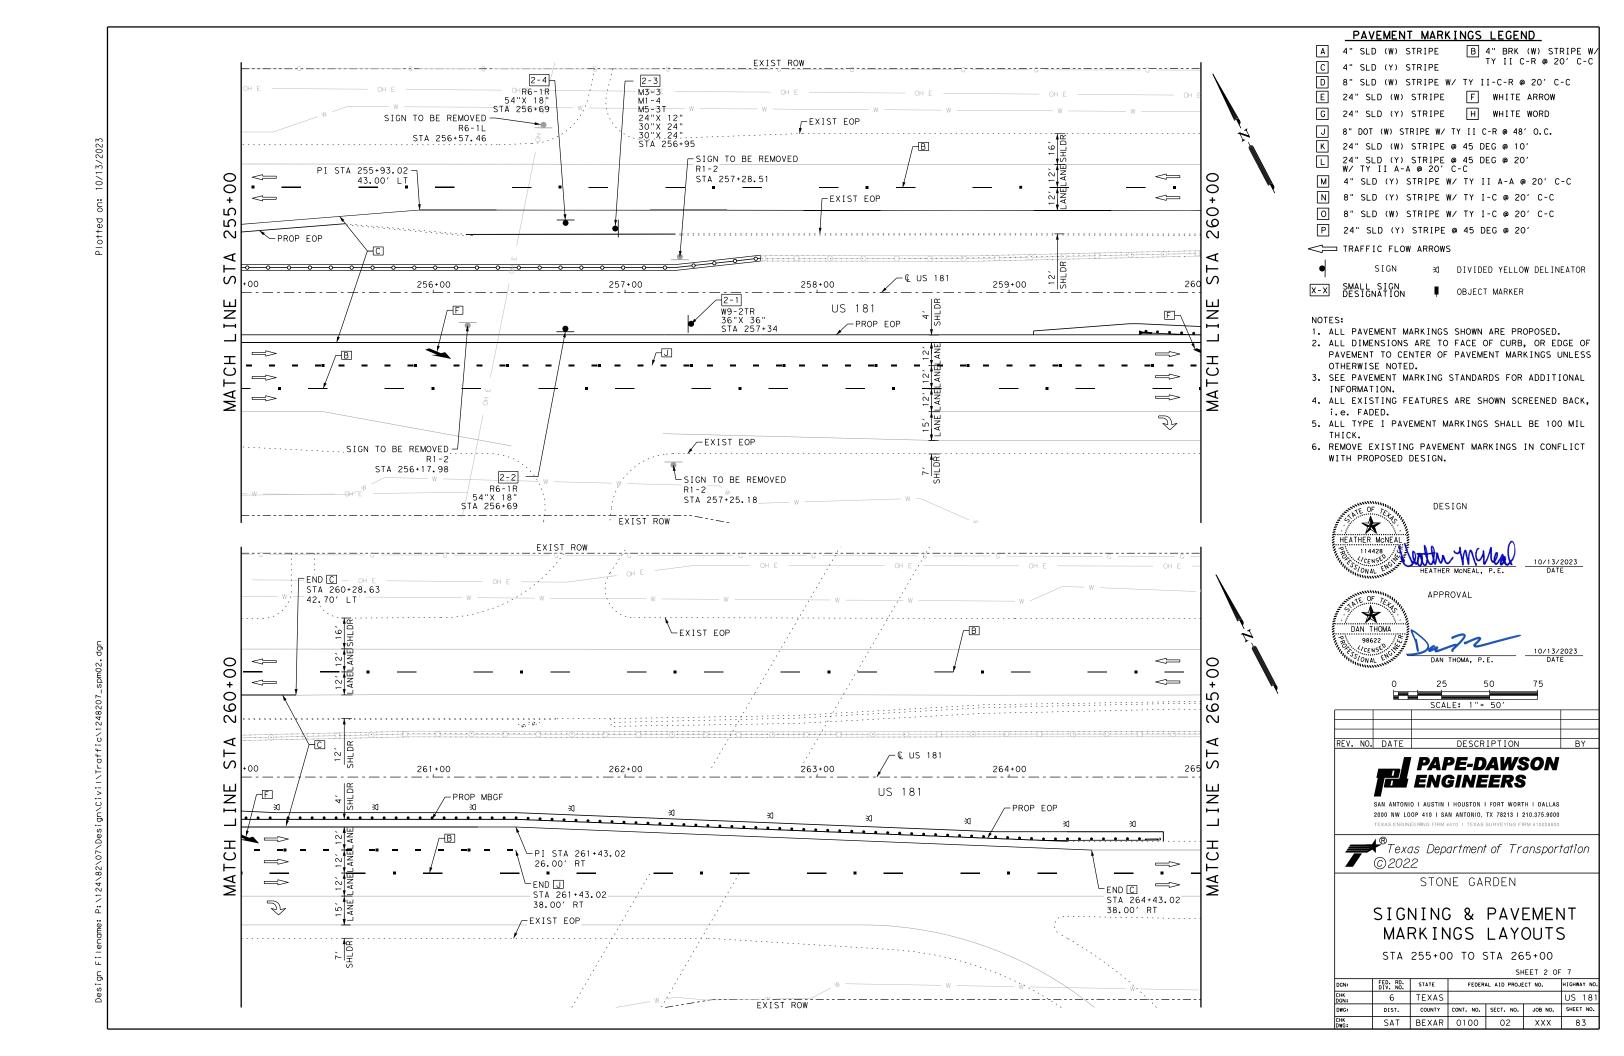


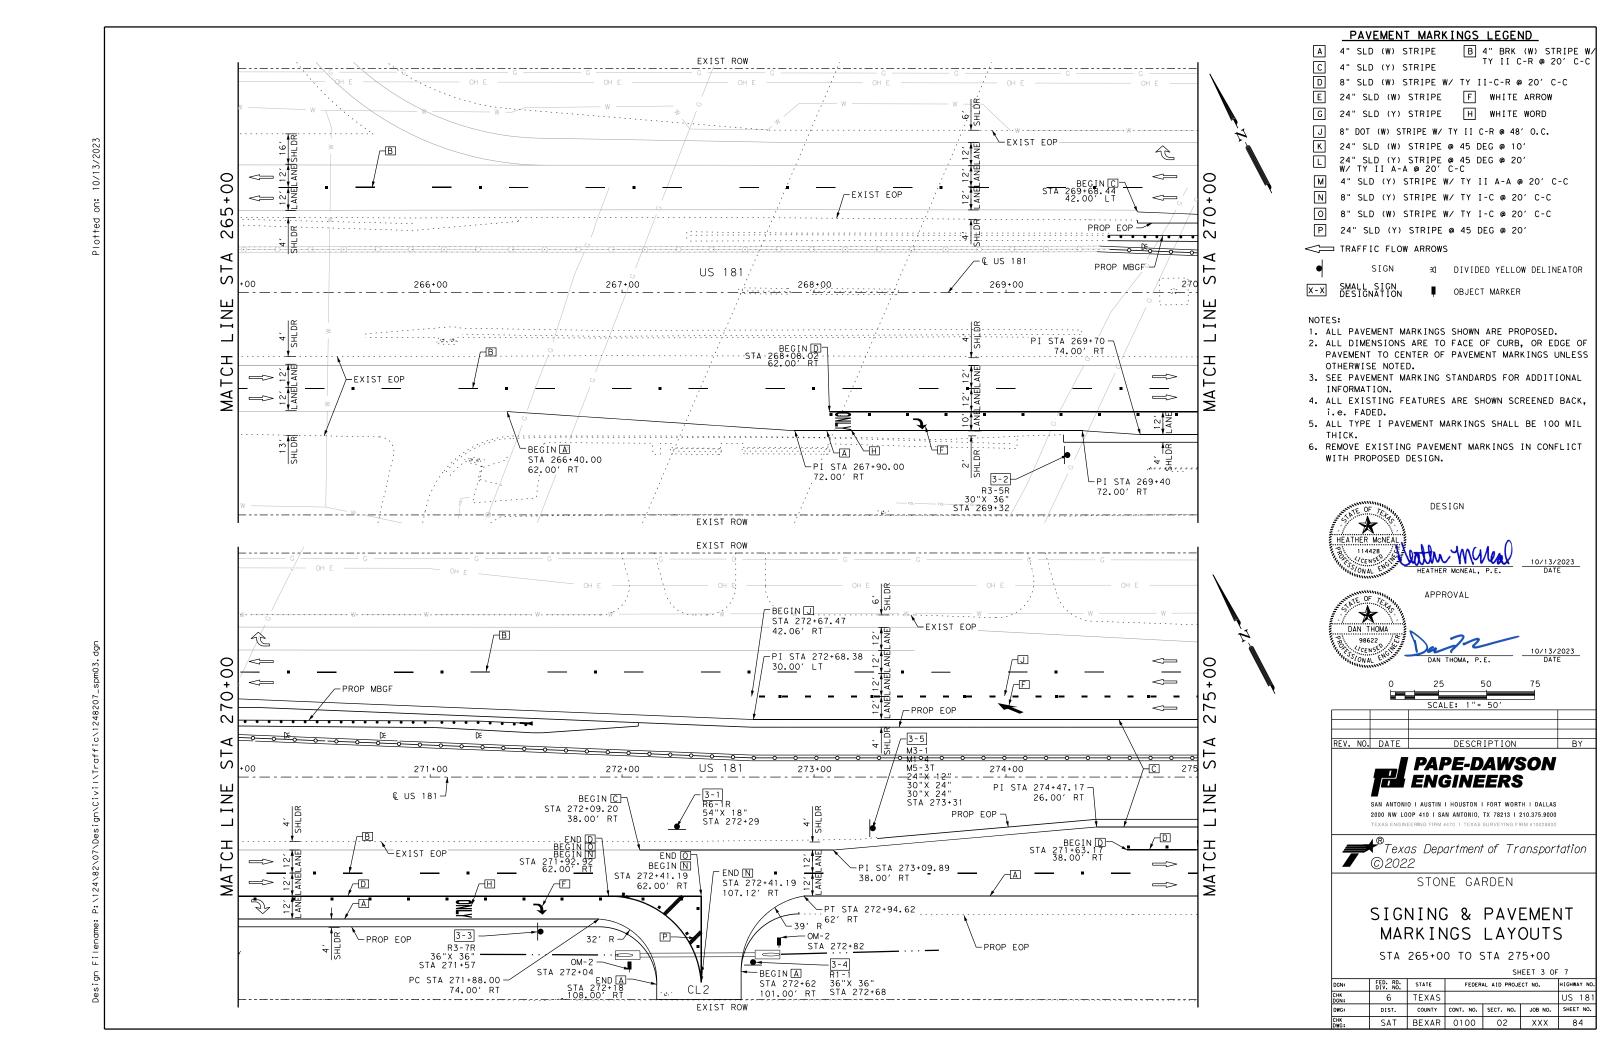

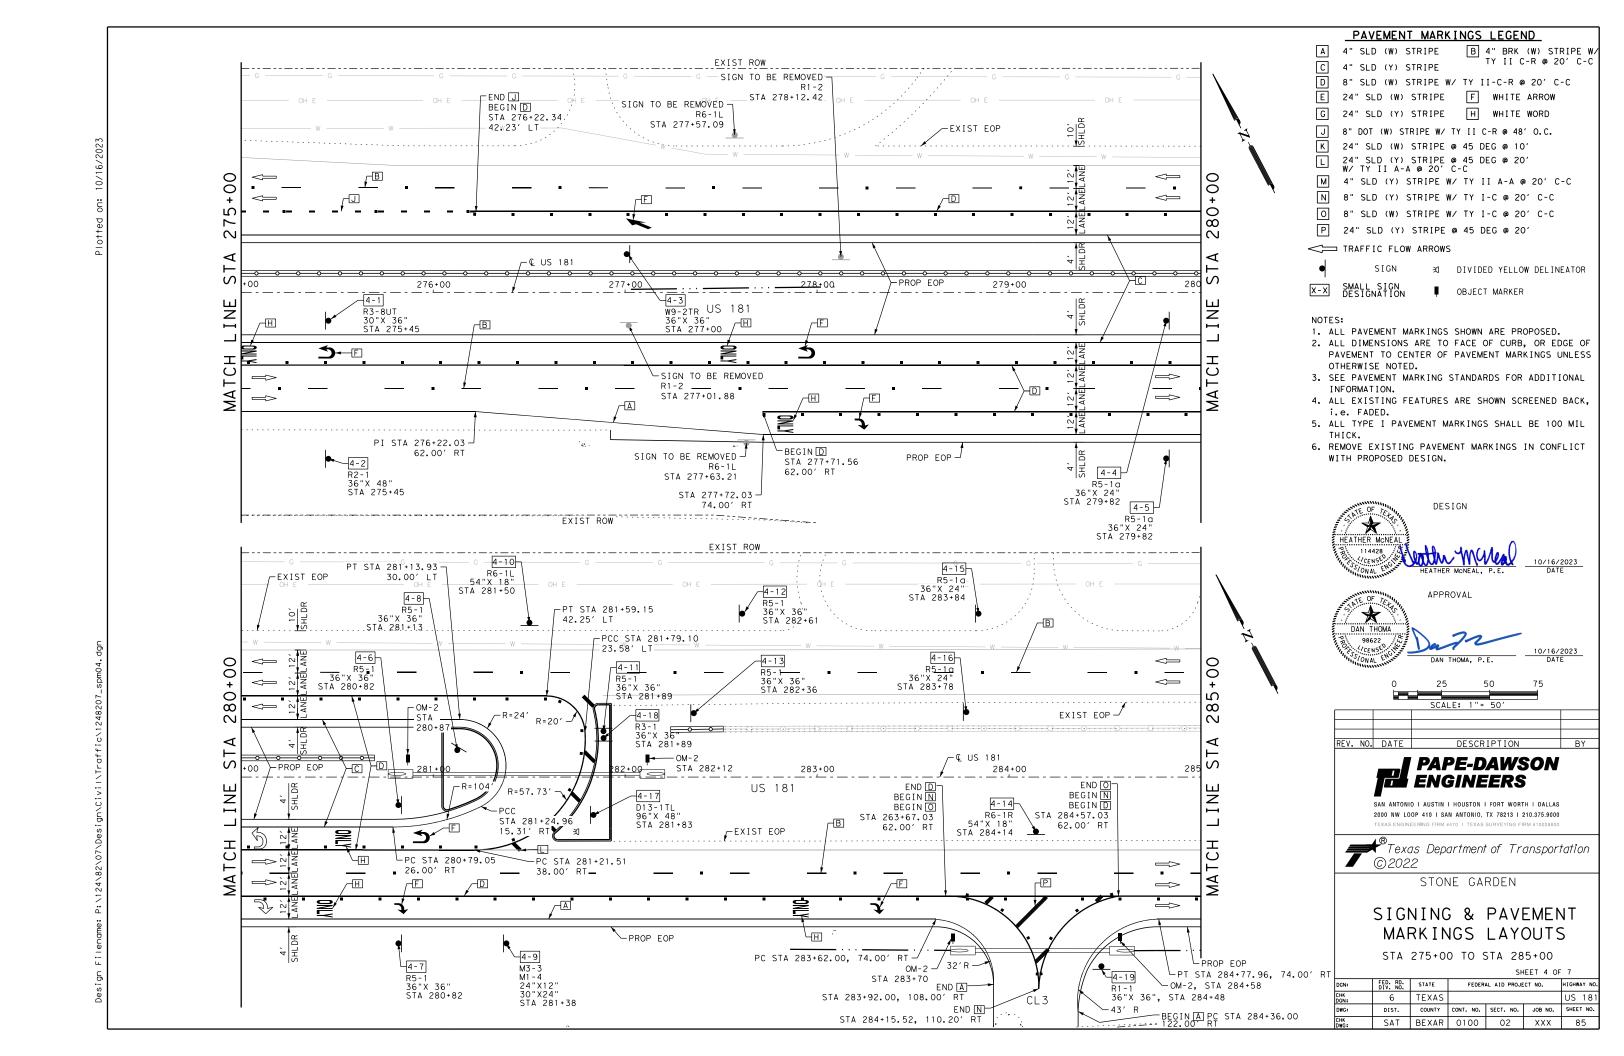

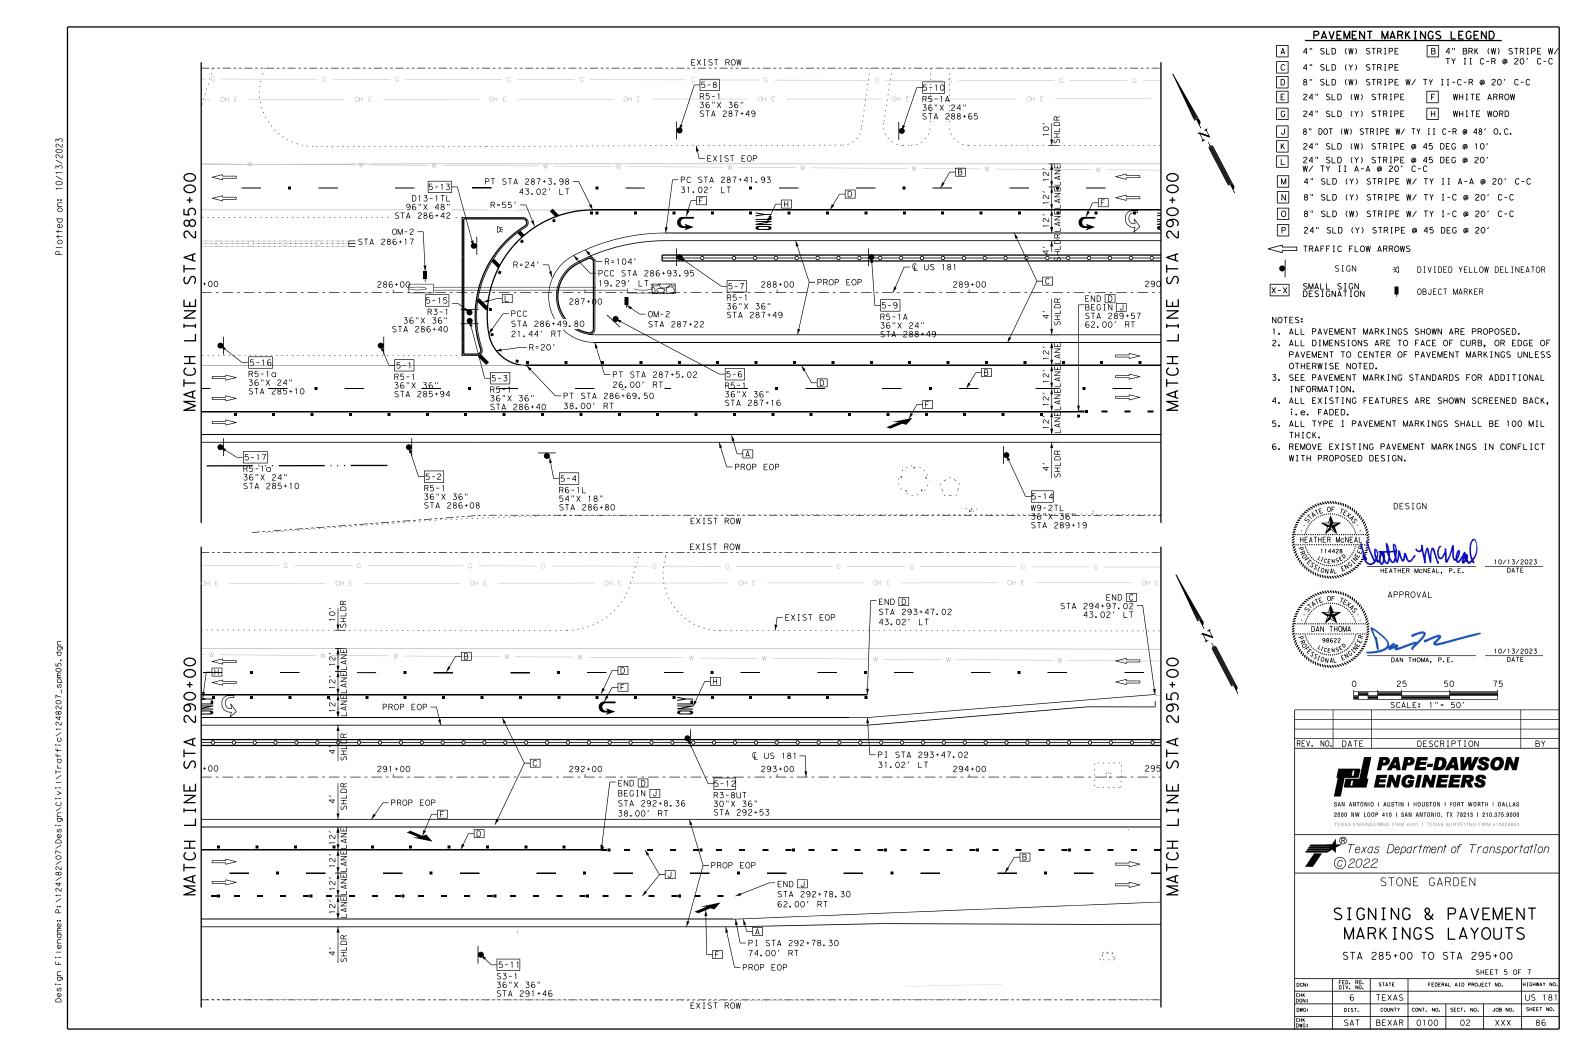


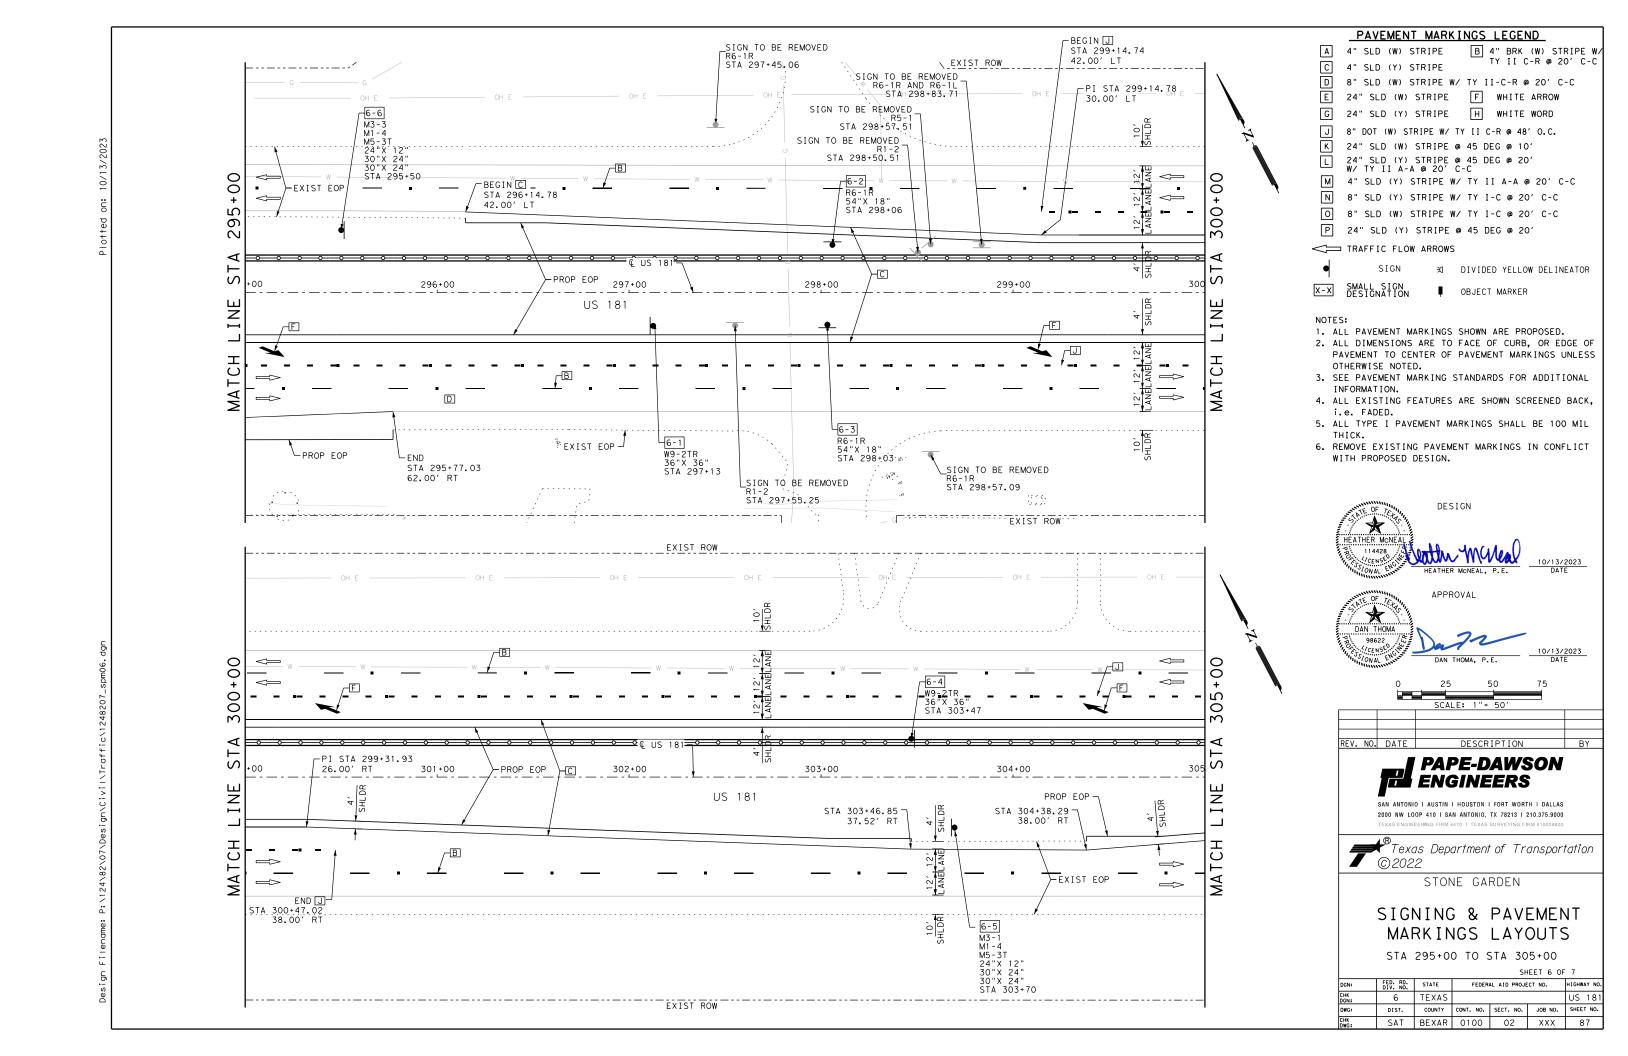

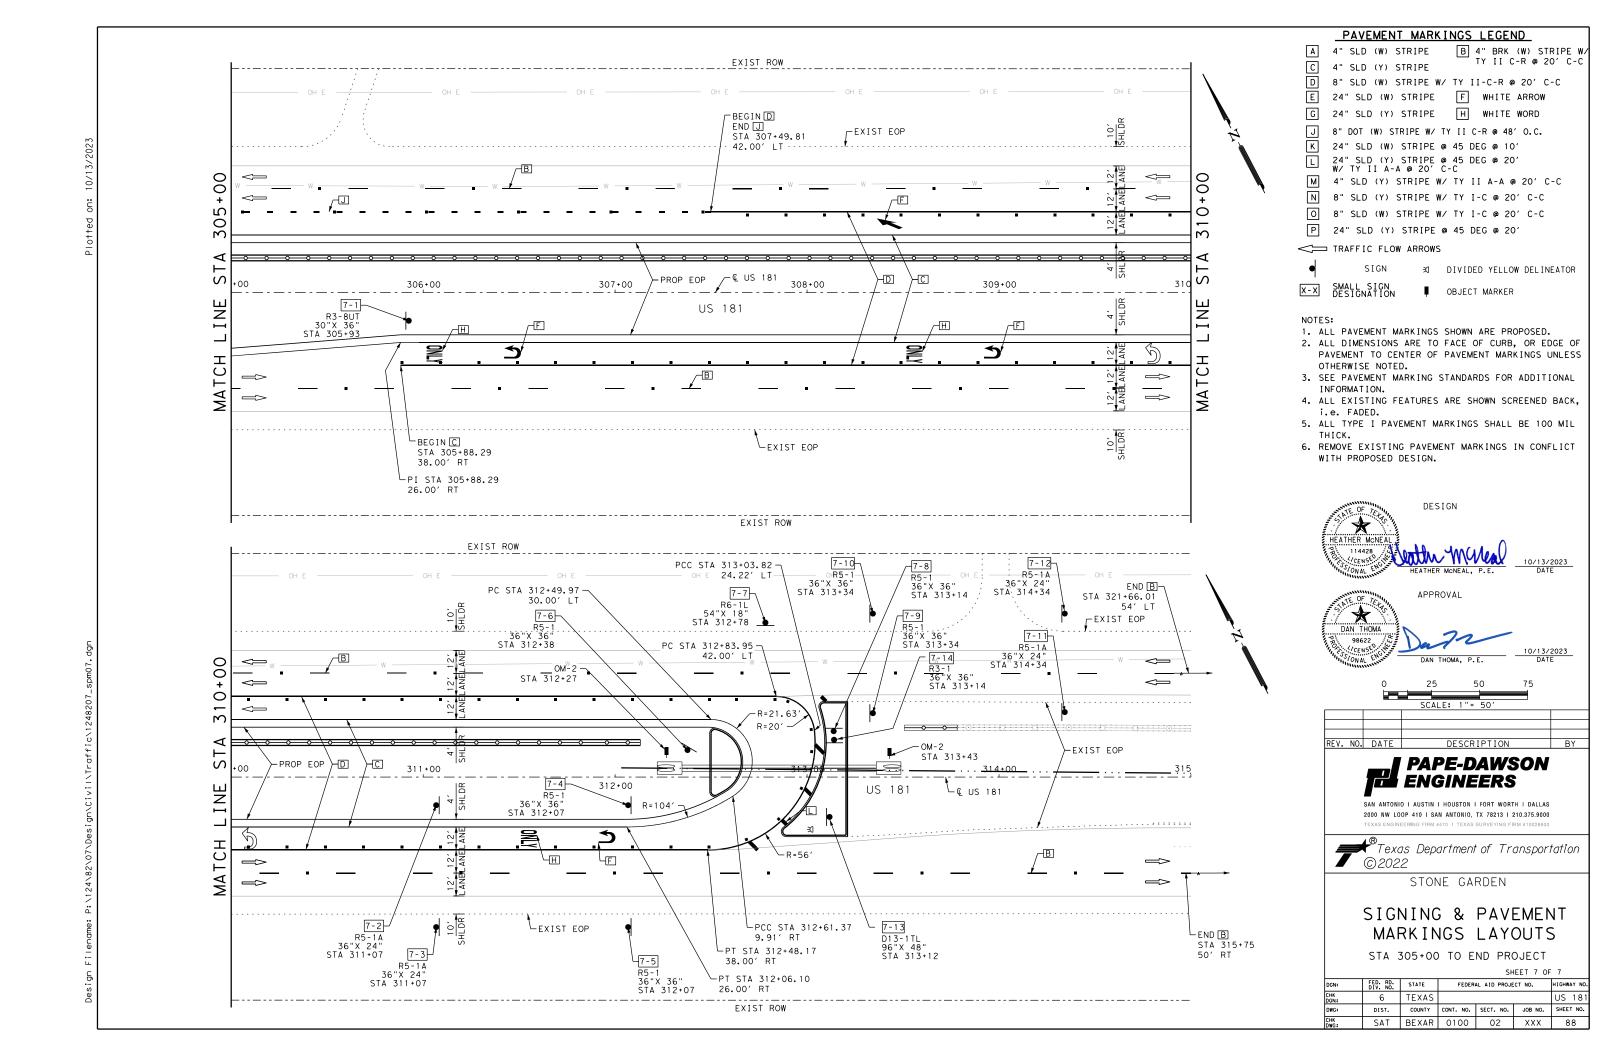

2:57:00

Shoulder

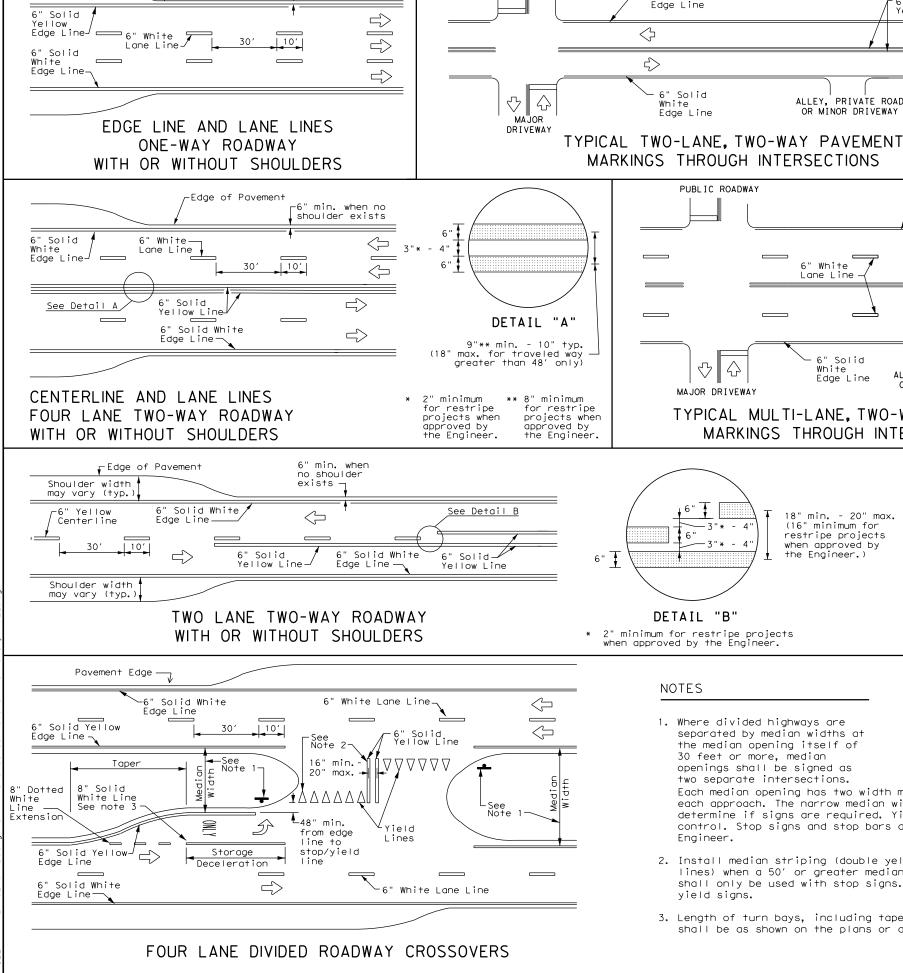

-6" min. when no

shoulder exists


-Edge of Pavement

GENERAL NOTES

- 1. Edge line striping shall be as shown in the plans or as directed by the Engineer. The edge line should not be placed less than 6 inches from the edge of pavement. This distance may vary due to pavement raveling or other conditions. Edge lines are not required in curb and gutter sections of roadways.
- 2. The traveled way includes only that portion of the roadway used for vehicular travel. It does not include the parking lanes, sidewalks, berms and shoulders. The traveled ways shall be measured from the center of edge line to the center of edge line of a two lane roadway.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

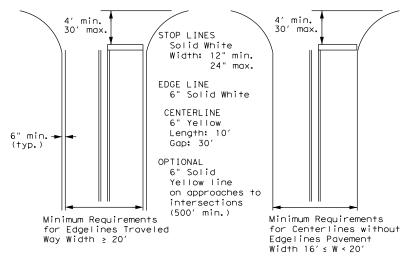

NOTE: Traveled way is exclusive of shoulder widths. Refer to General Note 2 for additional details.

GUIDE FOR PLACEMENT OF STOP LINES, EDGE LINE & CENTERLINE

Based on Traveled Way and Pavement Widths for Undivided Roadways



TYPICAL STANDARD PAVEMENT MARKINGS

Traffic Safety Division Standard

PM(1) - 22

LE: pm1-22.dgn	DN:		CK:	DW:		CK:		
TxDOT December 2022	CONT	SECT	JOB		ніс	CHWAY		
REVISIONS 1-78 8-00 6-20	0100	02	XXX		US	181		
3-95 3-03 12-22	DIST		COUNTY		٠,	SHEET NO.		
5-00 2-12	SAT		BEXA	7		89		

18" min. - 20" max.

6" Solid Yellow Line

-6" Solid White

Edge Line

ALLEY, PRIVATE ROAD

OR MINOR DRIVEWAY

6" Solid Yellow Line

 $\langle \rangle$

 \Diamond

<>

<>

ALLEY. PRIVATE ROAD

OR MINOR DRIVEWAY

6" White

Lane Line

Solid

TYPICAL MULTI-LANE, TWO-WAY PAVEMENT

MARKINGS THROUGH INTERSECTIONS

(16" minimum for

the Engineer.)

restripe projects when approved by

Edge Line

For posted speed on road being marked equal to or greater than 45 MPH.

3" to 12"→ |

YIELD LINES

12" 3"+o12"-| |-

For posted speed on road being marked equal to or less than 40 MPH.

NOTES

DETAIL "B"

6" Solid White

Edge Line

Solid

PUBLIC ROADWAY

 \triangle

MAJOR DRIVEWAY

— 3" * ·

Edge Line

White

 $\langle \rangle$

5>

ROADWAY

1. Where divided highways are separated by median widths at the median opening itself of 30 feet or more, median openings shall be signed as two separate intersections.


Each median opening has two width measurements, with one measurement for each approach. The narrow median width will be the controlling width to determine if signs are required. Yield signs are the typical intersection control. Stop signs and stop bars are optional as determined by the Engineer.

- 2. Install median striping (double yellow centerlines and stop lines/yield lines) when a 50' or greater median centerline can be placed. Stop lines shall only be used with stop signs. Yield lines shall only be used with yield signs.
- 3. Length of turn bays, including taper, deceleration, and storage lengths shall be as shown on the plans or as directed by the Engineer.


10/13/2023 2:57:01 P:\124\82\07\Design

REFLECTIVE RAISED PAVEMENT MARKERS FOR VEHICLE POSITIONING GUIDANCE


of 45 MPH or less.



CENTERLINE FOR ALL TWO LANE TWO-WAY ROADWAYS

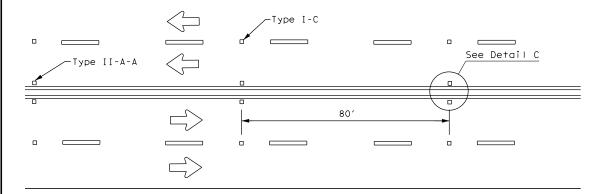


CENTERLINE & LANE LINES FOR FOUR LANE TWO-WAY ROADWAYS

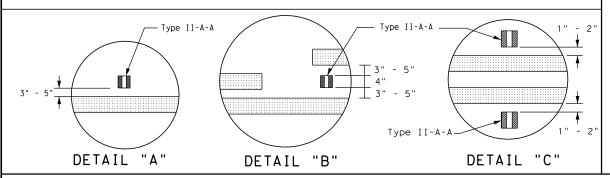


Centerline Symmetrical around centerline Type II-A-A 40' 40' Type I-C

CENTERLINE AND LANE LINES FOR TWO-WAY LEFT TURN LANE

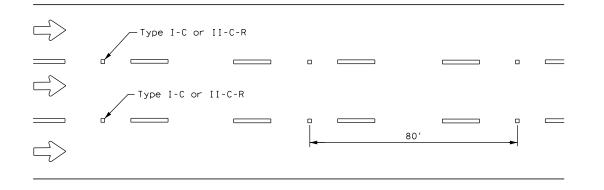

LANE LINES FOR ONE-WAY ROADWAY (NON-FREEWAY FACILITIES)

Raised pavement markers Type II-C-R shall have clear face toward normal traffic and red face toward wrong-way traffic. See Note 3.

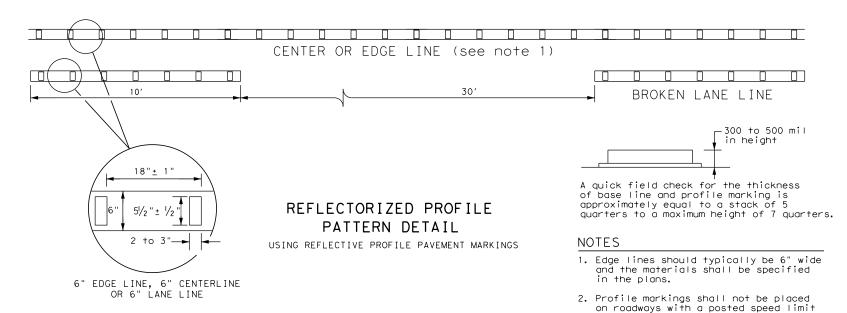


GENERAL NOTES


- 1. All raised pavement markers placed along broken lines shall be placed in line with and midway between
- 2. On concrete pavements the raised pavement markers should be placed to one side of the longitudinal injurts.
- 3. Use raised pavement marker Type I-C with undivided roadways, flush medians and two way left turn lanes. Use raised pavement marker Type II-C-R with divided highways and raised medians.

	MATERIAL SPECIFICATIONS	
	PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
	EPOXY AND ADHESIVES	DMS-6100
	BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
	DMS-8200	
	HOT APPLIED THERMOPLASTIC	DMS-8220
	PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.




Type I (Top View)



Roadway Surface SECTION A

RAISED PAVEMENT MARKERS



POSITION GUIDANCE USING RAISED MARKERS RELECTORIZED PROFILE MARKINGS PM(2)-22

Traffic Safety Division Standard

ILE: pm2-22.dgn	DN:		CK:	DW:		CK:
C)TxDOT December 2022	CONT	SECT	JOB		HIG	HWAY
REVISIONS 4-77 8-00 6-20	0100	02	XXX		US 181	
4-92 2-10 12-22	DIST		COUNTY		s	HEET NO.
5-00 2-12	SAT		BEXA	7		90

22B


2:57:02

RIGHT LANE

W9-1R

 \Diamond

(Optional)

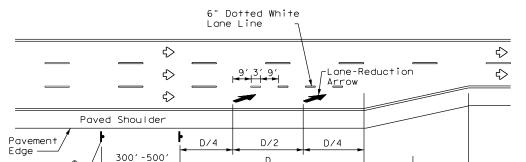

MERGE LEFT

W9-2TL

SEE DETAIL A

NOTES

- Lane reduction pavement markings are used where the number of through lanes is reduced because of narrowing of the roadway or because of a section of on-street parking in what would otherwise be a through lane. For Texas Super 2 Passing Lanes, see TS2(PL) standard sheets.
- 2. On divided highways, an additional RIGHT LANE ENDS (W9-1R) sign may be installed in the median aligned with the W9-1R sign on the right side of the highway.
- 3. Lane reduction arrows are required for speeds of 45 mph or greater. An optional third lane reduction arrow may be added based on engineering judgement. If used, the optional third lane reduction arrow should be centered between the first and last lane reduction arrows.
- 4. For lane reductions on Freeways and Expressways, signing shall conform to the TxDOT Freeway Signing Handbook.

	ADVANCED WARNING SIGN DISTANCE (D)									
Posted Speed	D (ft)	L (f+)								
30 MPH	460	wc2								
35 MPH	565	$L = \frac{WS^2}{60}$								
40 MPH	670	00								
45 MPH	775									
50 MPH	885									
55 MPH	990									
60 MPH	1,100	L=WS								
65 MPH	1,200									
70 MPH	1,250									
75 MPH	1,350									

Type II-A-A Markers

A two-way left-turn (TWLT) lane-use arrow pavement marking should be used at or just downstream from the beginning of a two-way left-turn lane within a corridor. Repeating the marking after each intersection or dedicated turn bay is not required unless stated elsewhere in the plans.


TYPICAL TRANSITION FOR TWLTL AND DIVIDED HIGHWAY

GENERAL NOTES


- 1. Lane use word and arrow markings shall be used where through lanes approaching an intersection become mandatory turn lanes. Lane use word and arrow markings should be used in auxiliary lanes of substantial length. Lane use arrow markings or word and arrow markings may be used in other lanes and turn bays for emphasis. Details for words and arrows are as shown in the Standard Highway Sign Designs for Texas.
- When lane-use words and arrow markings are used, two sets of arrows should be used if the length of the bay is greater than 180 feet. When a single lane use arrow or word and arrow marking is used for a short turn lane, it should be located at or near the upstream end of the full-width turn lane.
- Use raised pavement marker Type I-C with undivided highways, flush medians and two way left turn lanes. Use raised pavement marker Type II-C-R with divided highways and raised medians.
- 4. Length of turn bays, including taper, deceleration, and storage lengths shall be as shown on the plans or as directed by the Engineer. See Chapter 3 of the Roadway Design Manual for additional information on turning lanes or storage lengths.

MATERIAL SPECIFICATIONS				
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200			
EPOXY AND ADHESIVES	DMS-6100			
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130			
TRAFFIC PAINT	DMS-8200			
HOT APPLIED THERMOPLASTIC	DMS-8220			
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240			

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

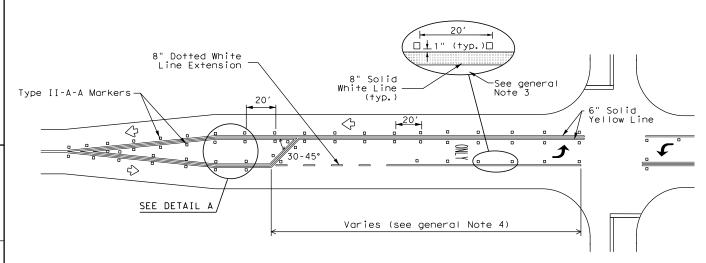

TYPICAL TWO-LANE ROADWAY INTERSECTION WITH LEFT TURN BAYS

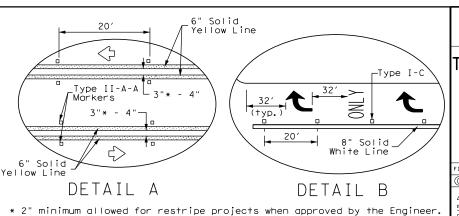



Traffic Safety Division Standard

TURN LANES,
TURN BAYS.

TWO-WAY LEFT TURN LANES,


RURAL LEFT TURN BAYS,

AND LANE REDUCTION

PAVEMENT MARKINGS

PM(3)-22


FILE: pm3-22.dgn	DN:		CK:	DW:	CK:
©⊺xDOT December 2022	CONT	SECT	JOB		HIGHWAY
REVISIONS 4-98 3-03 6-20 5-00 2-10 12-22	0100	02	XXX		US 181
	DIST		COUNTY		SHEET NO.
8-00 2-12	SAT		BEXA	7	91

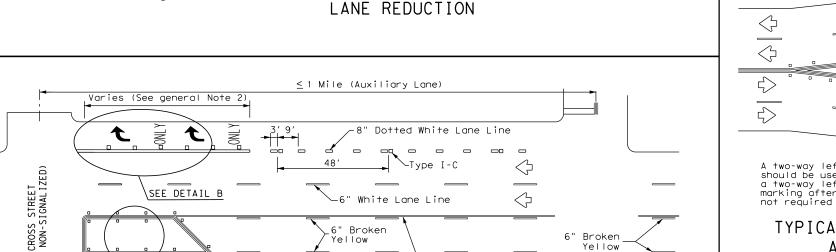

Solid Yellow Line


TYPICAL TWLTL AT ONE-WAY STREET AND RIGHT TURN AUXILIARY LANE

6" White Lane Line

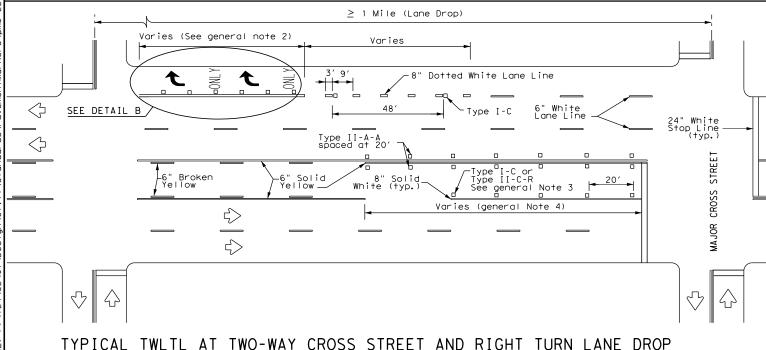


REQUIREMENTS FOR OVERHEAD AND LARGE GROUND-MOUNTED SIGNS

TYPICAL EXAMPLES

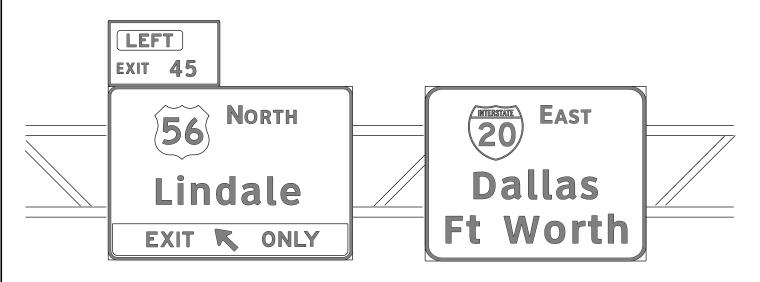





GENERAL NOTES

- Signs to be furnished shall be as detailed elsewhere in the plans and/or as shown on sign summary sheet. Standard sign designs and arrow dimensions can be found in the "Standard Highway Sign Designs for Texas" (SHSD).
- 2. Black legend shall use the Federal Highway Administration (FHWA) Standard Highway Alphabets (B, C, D, E, Emod, or F). White legend shall use the Clearview Alphabet. The following Clearview fonts shall be used to replace the existing white FHWA lettering, when not specified in the SHSD or in the plans.

В	CV-1W
С	CV-2W
D	CV-3W
E	CV-4W
Emod	CV-5WF
F	CV-6W

- 3. Lateral spacing between letters and numerals shall conform with the SHSD, and any approved changes thereto. Lateral spacing of legend shall provide a balanced appearance when spacing is not shown.
- Black legend shall be applied by screening process or cut-out acrylic non-reflective black film to background sheeting, or combination thereof.
- 5. White legend and borders shall be cut-out white sheeting applied to colored background sheeting.
- 6. Information regarding borders and radii for signs is found in the "Standard Highway Sign Designs for Texas". Dimensions shown and described for borders and corner radii on parent sign are nominal. Borders may vary in width as much as 1/2 inch. Corner radii above 3 inches may vary in width as much as 1 inch. Borders and corner radii within a parent sign must be of matching widths. The sign area outside the corner radius need not be trimmed or rounded if fabricated from an extruded material.
- 7. Sign substrate for ground-mounted signs shall be any material that meets the Departmental Material Specification requirements of DMS-7110 or approved alternative. Sign substrate for overhead signs shall be any material that meets DMS-7110. Exit Number Panels attached above the parent sign shall be made with the same substrate and sheeting as the parent sign.
- 8. Mounting details of attachments to parent sign face are shown on Standard Plan Sheet TSR(5). Mounting details of exit number panels above parent sign are shown in the "SMD series" Standard Plan Sheets.
- Background sheeting shall be applied to the substrate per sheeting manufacturer's recommendations. Sheeting will not be allowed to bridge the horizontal gap between panels.
- 10. Cut all legend, symbols, borders, and direct applied sign attachments at panel joints.



Texas Southern University
EXIT 45

DEPARTMENTAL MATERIAL SPEC	IFICATIONS
ALUMINUM SIGN BLANKS	DMS-7110
SIGN FACE MATERIALS	DMS-8300

The Standard Highway Sign Designs for Texas (SHSD) can be found at the following website.

http://www.txdot.gov/

SHEETING REQUIREMENTS					
USAGE COLOR		SIGN FACE MATERIAL			
BACKGROUND	WHITE	TYPE B OR C SHEETING			
BACKGROUND ALL OTHERS		TYPE B OR C SHEETING			
LEGEND & BORDERS	WHITE	TYPE D SHEETING			
LEGEND & BORDERS	BLACK	ACRYLIC NON-REFLECTIVE FILM			



Traffic Operations Division Standard


TYPICAL SIGN REQUIREMENTS


TSR(1)-13


tsr1-13.dgn	DN: T	<dot< th=""><th>ck: TxDOT</th><th>DW:</th><th>TxDOT</th><th>ck: TxDOT</th></dot<>	ck: TxDOT	DW:	TxDOT	ck: TxDOT
TxDOT October 2003	CONT	SECT	JOB		н	GHWAY
REVISIONS	0100	02	XXX		US	181
-03 7-13 -08	DIST		COUNTY			SHEET NO.
.00	SAT		BEXAF	₹		92


23 2:57:04 PM 2\07\Design\Civil\Standards\Signing\tsr2-13.dgn | |


REQUIREMENTS FOR ATTACHMENTS TO OVERHEAD AND LARGE GROUND MOUNTED SIGNS

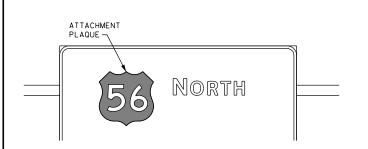










TYPICAL EXAMPLES

DEPARTMENTAL MATERIAL SPEC	IFICATIONS
ALUMINUM SIGN BLANKS	DMS-7110
SIGN FACE MATERIALS	DMS-8300

SHEETING REQUIREMENTS					
USAGE COLOR SIGN FACE MATERIAL					
BACKGROUND	ALL	TYPE B OR C SHEETING			
LEGEND & BORDERS	BLACK	ACRYLIC NON-REFLECTIVE FILM			
LEGEND & BORDERS	ALL OTHERS	TYPE B OR C SHEETING			

GENERAL NOTES

- Signs to be furnished shall be as detailed elsewhere in the plans and/or as shown on sign tabulation sheet. Standard sign designs and arrow dimensions can be found in the "Standard Highway Sign Designs for Texas" (SHSD).
- 2. Route Marker legends (ie. IH, US, SH and FM shields) shall use the Federal Highway Administration (FHWA) Standard Highway Alphabets (B, C, D, E, Emod, or F).
- Lateral spacing between letters and numerals shall conform with the SHSD, and any approved changes thereto. Lateral spacing of legend shall provide a balanced appearance when spacing is not shown
- 4. Black legend and borders shall be applied by screening process or cut-out acrylic non-reflective black film to background sheeting, or combination thereof.
- 5. White legend and borders shall be applied by screening process with transparent colored ink, transparent colored overlay film to white background sheeting or cut-out white sheeting to colored background sheeting, or combination thereof.
- Colored legend and borders shall be applied by screening process with transparent colored ink, transparent colored overlay film or colored sheeting to white background sheeting, or combination thereof
- 7. Route markers and other attachments within the parent sign face shall be direct applied unless otherwise specified in the plans. Attachments not direct applied shall use 0.063 inch thick one piece sheet aluminum signs (Type A).
- 8. General Service Plaques shall be 0.080 inch thick and Routing Plaques shall be 0.100 inch thick.
- The priority for Routing Plaques shall be (left to right)
 Hazardous Material, Airport then Hospital. See examples for
 mounting location.
- 10. Mounting details of attachments to parent signs face are shown on Standard Plan Sheet TSR(5). Mounting details of sign plaque attachments above and below parent sign are shown in the "SMD series" Standard Plan Sheets.
- 11. Plaques shall be horizontally centered at the top of the parent sign. If an exit number panel exists, the plaque shall be centered between the edge of the parent sign and the edge of the exit number panel. The plaque may be placed above the exit number panel when there is insufficient space.



REQUIREMENTS FOR EXIT ONLY AND LEFT EXIT PANELS

DEPARTMENTAL MATERIAL SPEC	IFICATIONS
ALUMINUM SIGN BLANKS	DMS-7110
SIGN FACE MATERIALS	DMS-8300

SHEETING REQUIREMENTS FOR OVERHEAD EXIT PANELS					
USAGE	COLOR SIGN FACE MATERIAL				
BACKGROUND	FLUORESCENT YELLOW	TYPE B _{FL} OR C _{FL} SHEETING			
LEGEND	BLACK	ACRYLIC NON-REFLECTIVE FILM			







TYPICAL EXAMPLES

GENERAL NOTES

- Signs to be furnished shall be as detailed elsewhere in the plans and/or as shown on sign tabulation sheet. Standard sign designs and arrow dimensions can be found in the "Standard Highway Sign Designs for Texas" (SHSD). Individual panel sizes shown in the plans may be adjusted to fit actual parent sign sizes if necessory.
- Exit Panel legend shall use the Federal Highway Administration (FHWA)Standard Highway Alphabets E Series.
- 3. Lateral spacing between letters and numerals shall conform with the SHSD, and any approved changes thereto. Lateral spacing of legend shall provide a balanced appearance when spacing is not shown.
- Black legend shall be applied by screening process or cut-out acrylic non-reflective black film to yellow background sheeting, or combination thereof.
- Exit Only and Left Exit panels within the parent sign face shall be direct applied unless otherwise specified in the plans. Panels not direct applied shall use 0.063 inch thick one piece sheet aluminum signs (Type A).
- 6. Mounting details of Exit Only and Left Exit panel attachments to parent signs face are shown on Standard Plan Sheet TSR(5).

The Standard Highway Sign Designs for Texas (SHSD) can be found at the following website.

http://www.txdot.gov/



Traffic Operations Division Standard

TYPICAL SIGN REQUIREMENTS

TSR(2)-13

.E: 1	tsr2-13.dgr	1	DN: T	×DOT	ck: TxDOT	DW:	TxDOT	ck: TxDOT
)T×DOT	October	2003	CONT	SECT	JOB		н	IGHWAY
	REVISIONS		0100	02	XXX		U:	S 181
2-03 7-1	13		DIST		COUNTY			SHEET NO.
9-08			SAT		BEXAR	₹		93

10/13/2023 2:57:04 PM P:\124\82\07\Design\Civil\Standards\Signing\tsr3-13.dg

REQUIREMENTS FOR INDEPENDENT MOUNTED ROUTE SIGNS

SHEETING REQUIREMENTS						
USAGE	COLOR	SIGN FACE MATERIAL				
BACKGROUND	WHITE	TYPE A SHEETING				
BACKGROUND	ALL OTHERS	TYPE B OR C SHEETING				
LEGEND & BORDERS	WHITE	TYPE A SHEETING				
LEGEND & BORDERS	BLACK	ACRYLIC NON-REFLECTIVE FILM				
LEGEND & BORDERS	ALL OTHERS	TYPE B or C SHEETING				








TYPICAL EXAMPLES

REQUIREMENTS FOR BLUE, BROWN & GREEN D AND I SERIES GUIDE SIGNS

SHEETING REQUIREMENTS					
USAGE	COLOR	SIGN FACE MATERIAL			
BACKGROUND	ALL	TYPE B OR C SHEETING			
LEGEND & BORDERS	WHITE	TYPE D SHEETING			
LEGEND, SYMBOLS & BORDERS	ALL OTHERS	TYPE B OR C SHEETING			













TYPICAL EXAMPLES

GENERAL NOTES

- Signs to be furnished shall be as detailed elsewhere in the plans and/or as shown on sign tabulation sheet. Standard sign designs and arrow dimensions can be found in the "Standard Highway Sign Designs for Texas" (SHSD).
- 2. White legend shall use the Clearview Alphabet. The following Clearview fonts shall be used to replace the existing white Federal Highway Administration (FHWA) Standard Highway Alphabets, when not specified in the SHSD, or in the plans.

В	CV-1W
С	CV-2W
D	CV-3W
E	CV-4W
Emod	CV-5WR
F	CV-6W

- 3. Route sign legend (ie. IH, US, SH and FM shields) shall use the Federal Highway Administration (FHWA) Standard Highway Alphabets B, C, D, E, Emod or F).
- 4. Lateral spacing between letters and numerals shall conform with the SHSD, and any approved changes thereto. Lateral spacing of legend shall provide a balanced appearance when spacing is not shown.
- 5. Independent mounted route sign with white or colored legend and borders shall be applied by screening process with transparent color ink, transparent colored overlay film to white background sheeting or cut-out white sheeting to colored background sheeting, or combination thereof. White legend, symbols and borders on all other signs shall be cut-out white sheeting applied to colored background sheeting.
- 6. Information regarding borders and radii for signs is found in the "Standard Highway Sign Designs for Texas". Dimensions shown and described for borders and corner radii on parent sign are nominal. Borders may vary in width as much as 1/2 inch. Corner radii above 3 inches may vary in width as much as 1 inch. Borders and corner radii within a parent sign must be of matching widths. The sign area outside the corner radius should be trimmed or rounded.
- 7. Sign substrate shall be any material that meets the Departmental Material Specification requirements of DMS-7110 or approved alternative.
- 8. Mounting details of roadside signs are shown in the "SMD series" Standard Plan Sheets.

DEPARTMENTAL MATERIAL SPEC	CIFICATIONS
ALUMINUM SIGN BLANKS	DMS-7110
SIGN FACE MATERIALS	DMS-8300

ALUMINUM SIGN BLANKS THICKNESS		
Square Feet	Minimum Thickness	
Less than 7.5	0.080	
7.5 to 15	0.100	
Greater than 15	0.125	

The Standard Highway Sign Designs for Texas (SHSD) can be found at the following website.

http://www.txdot.gov/





Traffic Operations Division Standard

TYPICAL SIGN REQUIREMENTS

TSR(3) - 13

LE:	tsr3-13.dgn	DN: T	<dot< td=""><td>ck: TxDOT</td><td>DW:</td><td>TxDOT</td><td>ck: TxDOT</td></dot<>	ck: TxDOT	DW:	TxDOT	ck: TxDOT
)TxDOT	October 2003	CONT	SECT	JOB		нго	CHWAY
	REVISIONS	0100	02	XXX		US	181
2-03 7-13 9-08		DIST		COUNTY			SHEET NO.
		SAT		BEXA	₹		94

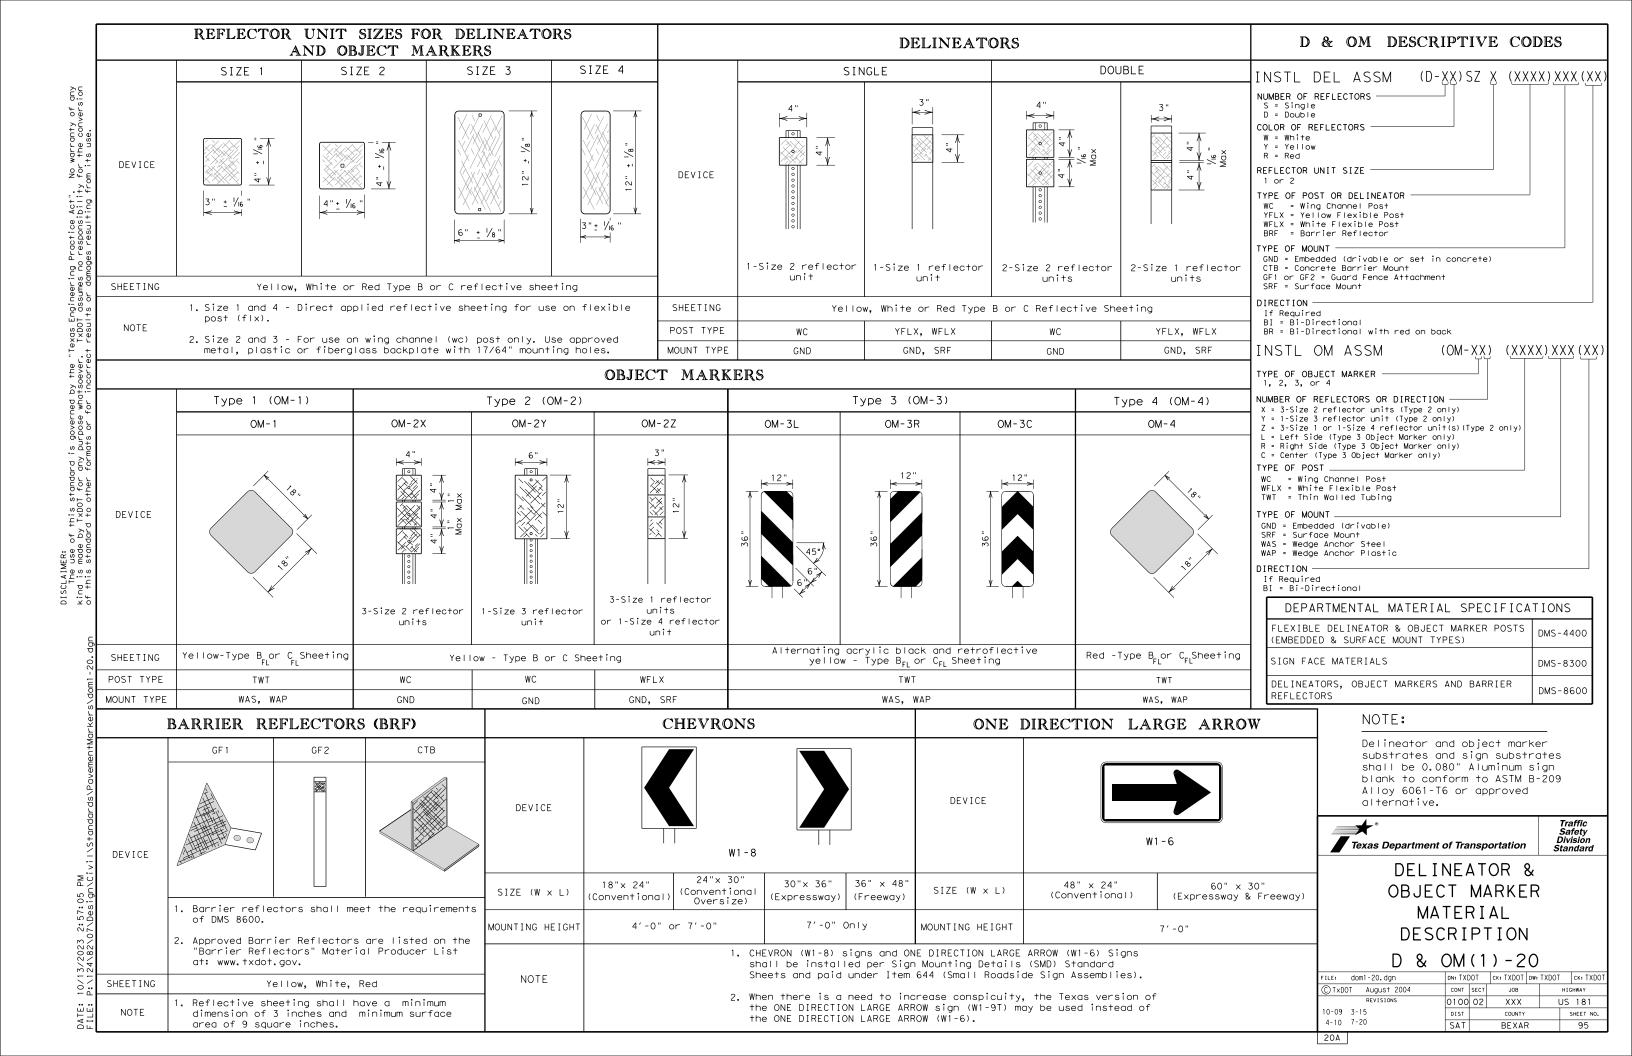

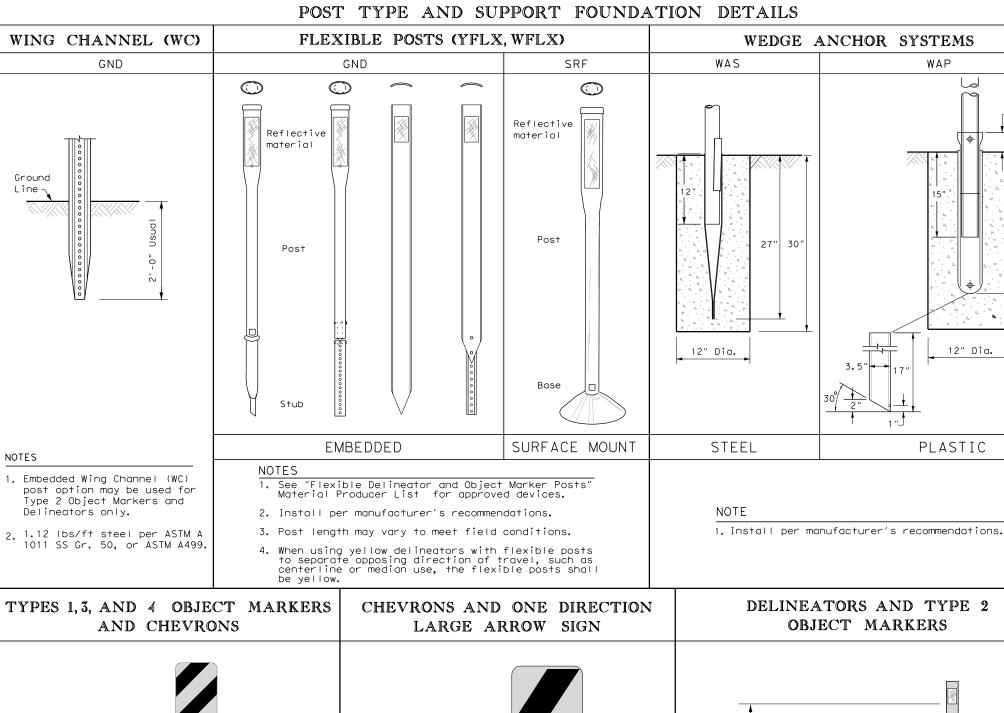

DELINEATORS AND TYPE 2

Pavement Line 2'-0" to 8'-0" or in front of object being marked See general notes 1, 2 and 3.

TYPE OF BARRIER MOUNTS

GUARD FENCE ATTACHMENT


GF1

(Approx.)

20'


12" Dia.

PLASTIC



GF2

CONCRETE TRAFFIC BARRIER (CTB)

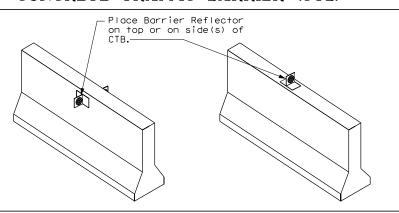

GENERAL NOTES

- 1. Place delineators on a section of roadway at a consistent distance from the edge of pavement.
- 2. Where a restriction prevents consistent placement from the pavement edge, place the affected object markers in line with the innermost edge of the obstruction.
- 3. When Type 2 object markers and delineators are more than 8'-0" from the edge of the pavement, it may not be possible to maintain a height of approximately 4'-0". If this is the case, place the object marker or delineator as close to the desired height as possible.
- 4. Install all delineators, object markers and barrier reflectors in accordance with the manufacturer's recommendation.
- 5. Barrier reflectors should be installed a minimum of 18 inches above the edge of the pavement surface.
- 6. Diagonal stripes on Type 3 object markers shall slope down toward the intended travel lane.



DELINEATOR & OBJECT MARKER INSTALLATION

ile: dom2-20.dgn	DN: TX[T00	ck: TXDOT	DW:	TXDOT	ck: TXDOT
TxDOT August 2004	CONT	SECT	JOB		н	GHWAY
REVISIONS	0100	02	XXX		US	181
0-09 3-15	DIST		COUNTY			SHEET NO.
4-10 7-20	SAT		BEXAR	₹		96

-Ground

Line


Pavement surface

Mounting at 4 feet to the bottom of the chevron is permitted for

chevrons that will not exceed

a height of 6'-6" to the top of

the chevron (sizes $24" \times 30"$ and



of the chevron. Chevron sign and ONE paid under item 644.

Chevrons 30" x 36" and larger shall be mounted at a height of 7' to the bottom DIRECTION LARGE ARROW sign (W1-9T) shall be installed per SMD standard sheets and

2:57:06

this standard is governed by the "Texas Engineering Practice Act". No warranty of any TxDO1 for any purpose whatsoever. TxDO1 assumes no responsibility for the conversion of to other formats or for incorrect results or damages resulting from its use

D & OM(2) - 20

20B

10/13/2023 2:57:07 P:\124\82\07\Design


MINIMUM WARNING DEVICES AT CURVES WITH ADVISORY SPEEDS Amount by which

Advisory Speed	Curve Advisory Speed		
is less than Posted Speed	Turn (30 MPH or less)	Curve (35 MPH or more)	
5 MPH & 10 MPH	• RPMs	• RPMs	
5 MPH & 20 MPH	RPMs and One Direction Large Arrow sign	RPMs and Chevrons; or RPMs and One Direction Large Arrow sign where geometric conditions or roadside obstacles prevent the installation of chevrons.	
25 MPH & more	RPMs and Chevrons; or RPMs and One Direction Large Arrow sign where	• RPMs and Chevrons	


SUGGESTED SPACING FOR DELINEATORS ON HORIZONTAL CURVES

geometric conditions or roadside obstacles prevent the installation of

chevrons

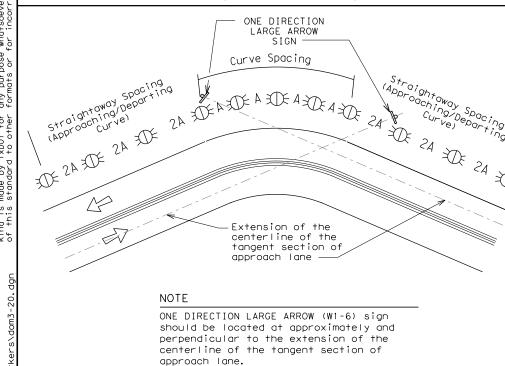

SUGGESTED SPACING FOR CHEVRONS ON HORIZONTAL CURVES

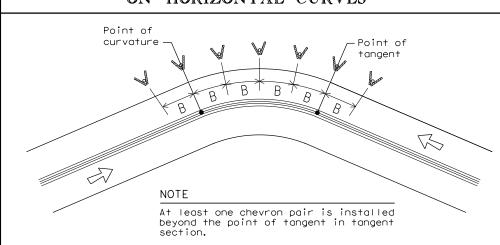

DELINEATOR AND CHEVRON SPACING

WHEN DEGREE OF CURVE OR RADIUS IS KNOWN

			FEET	
Degree of Curve	Radius of Curve	Spacing in Curve	Spacing in Straightaway	Chevron Spacing in Curve
		Α	2A	В
1	5730	225	450	
2	2865	160	320	
3	1910	130	260	200
4	1433	110	220	160
5	1146	100	200	160
6	955	90	180	160
7	819	85	170	160
8	716	75	150	160
9	637	75	150	120
10	573	70	140	120
11	521	65	130	120
12	478	60	120	120
13	441	60	120	120
14	409	55	110	80
15	382	55	110	80
16	358	55	110	80
19	302	50	100	80
23	249	40	80	80
29	198	35	70	40
38	151	30	60	40
57	101	20	40	40
				<u> </u>

Curve delineator approach and departure spacing should include 3 delineators spaced at 2A. This spacing should be used during design preparation or when the degree of curve is known.

DELINEATOR AND CHEVRON SPACING

WHEN DEGREE OF CURVE OR RADIUS IS NOT KNOWN

Advisory Speed (MPH)	Spacing in Curve	Spacing in Straightaway	Chevron Spacing in Curve
	А	2×A	В
65	130	260	200
60	110	220	160
55	100	200	160
50	85	170	160
45	75	150	120
40	70	140	120
35	60	120	120
30	55	110	80
25	50	100	80
20	40	80	80
15	35	70	40

If the degree of curve is not known, delineator spacing may be determined based on the Advisory Speed of the curve. Use the delineator curve spacing for each Advisory Speed (MPH).

CONDITION	REQUIRED TREATMENT	MINIMUM SPACING
······································	DDMc	See PM-series and FPM-series

DELINEATOR AND OBJECT MARKER APPLICATION AND SPACING

CONDITION	REQUIRED TREATMENT	MINIMUM SPACING
Frwy./Exp. Tangent	RPMs	See PM-series and FPM-series standard sheets
Frwy./Exp. Curve	Single delineators on right side	See delineator spacing table
	Single delineators on at least one	100 feet on ramp tangents
Frwy/Exp.Ramp	side of ramp (should be on outside of curves) (see Detail 3 on D&OM(4))	Use delineator spacing table for ramp curves ("straightway spacing" does not apply to ramp curves)
Acceleration/Deceleration Lane	Double delineators (see Detail 3 on D&OM(4))	100 feet (See Detail 3 on D & OM (4))
Truck Escape Ramp	Single red delineators on both sides	50 feet
Bridge Rail (steel or concrete)and Metal Beam Guard Fence	Bi-Directional Delineators when undivided with one lane each direction Single Delineators when multiple lanes each direction	Equal spacing (100'max) but not less than 3 delineators
Concrete Traffic Barrier (CTB) or Steel Traffic Barrier	Barrier reflectors matching the color of the edge line	Equal spacing 100′ max
Cable Barrier	Reflectors matching the color of the edge line	Every 5th cable barrier post (up to 100'max)
Guard Rail Terminus/Impact Head	Divided highway - Object marker on approach end Undivided 2-lane highways - Object marker on approach and departure end	Requires reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end See D & OM (5) and D & OM (6)
Bridges with no Approach Rail	Type 3 Object Marker (OM-3) at end of rail and 3 single delineators approaching rail	See D & OM(5)
Reduced Width Approaches to Bridge Rail	Type 2 and Type 3 Object Markers (OM-3) and 3 single delineators approaching bridge	Requires reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end
		See D & OM (5)
Culverts without MBGF	Type 2 Object Markers	See Detail 2 on D & OM(4)
Crossovers	Double yellow delineators and RPMs	See Detail 1 on D & OM (4)
Pavement Narrowing (lane merge) on Freeways/Expressway	Single delineators adjacent to affected lane for full length of transition	100 feet
NOTES		

NOTES

- 1. Unless indicated otherwise, the delineator or barrier reflector color shall conform to the color of the pavement edge line on the side of the road where the delineators or barrier reflectors are placed.
- 2. Barrier reflectors may be used to replace required delineators.
- 3. Single red delineators may be mounted on the back side of delineator posts for wrong way driver applications


LEGEND	
	Bi-directional Delineator
\mathbb{R}	Delineator
•	Sign



DELINEATOR & OBJECT MARKER PLACEMENT DETAILS

D & OM(3) - 20

			_	-		
E: dom3-20.dgn	DN: TXDOT CK: TXDOT DW:		DW: T	XDOT	ck: TXDOT	
TxDOT August 2004	CONT	SECT	JOB		HIG	HWAY
REVISIONS	0100	02	XXX		US	181
15 8-15	DIST		COUNTY		s	HEET NO.
15 7-20	SAT		BEXAR	₹		97



SIGN SUPPORT DESCRIPTIVE CODES (Descriptive Codes correspond to project estimate and quantities sheets)

SM RD SGN ASSM TY XXXXX(X)XX(X-XXXX)

Post Type

FRP = Fiberglass Reinforced Plastic Pipe (see SMD(FRP)) TWT = Thin-Walled Tubing (see SMD(TWT))

10BWG = 10 BWG Tubing (see SMD(SLIP-1) to (SLIP-3)) S80 = Schedule 80 Pipe (see SMD(SLIP-1) to (SLIP-3))

Number of Posts (1 or 2) -

Anchor Type

UA = Universal Anchor - Concreted (see SMD(FRP) and (TWT)) UB = Universal Anchor - Bolted down (see SMD(FRP) and (TWT))

- WS = Wedge Anchor Steel (see SMD(TWT))
- WP = Wedge Anchor Plastic (see SMD(TWT))
- SA = Slipbase Concreted (see SMD(SLIP-1) to (SLIP-3))
- SB = Slipbase Bolted Down (see SMD(SLIP-1) to (SLIP-3))

Sign Mounting Designation

P = Prefab. "Plain" (see SMD(SLIP-1) to (SLIP-3), (TWT), (FRP))

- T = Prefab. "T" (see SMD(SLIP-1) to (SLIP-3), (TWT)) U = Prefab. "U" (see SMD(SLIP-1) to (SLIP-3))

No more than 2 sign

posts should be located

within a 7 ft. circle.


- 1EXT or 2EXT = Number of Extensions (see SMD(SLIP-1) to (SLIP-3), (TWT))
- BM = Extruded Wind Beam (see SMD(SLIP-1) to (SLIP-3))
- WC = 1.12 #/ft Wing Channel (see SMD(SLIP-1) to (SLIP-3))

diameter

circle / Not Acceptable

EXAL = Extruded Aluminum Sign Panels (see SMD(SLIP-3))

REQUIRED CLEARANCE FOR BREAKAWAY SUPPORT



To avoid vehicle undercarriage snagging, any substantial remains of a breakaway support. when it is broken away, should not project more than 4 inches above a 60-inch chord (i.e., typical space between wheel paths).


7 ft.

diameter

circle


Not Acceptable

Not Acceptable



LESS THAN 6 FT. WIDE

When the shoulder is 6 ft. or less in width. the sign must be placed at least 12 ft. from the edge of the travel lane.



SIGN LOCATION

GREATER THAN 6 FT. WIDE

When the shoulder is greater than 6 ft in width. the sign must be placed at least 6 ft. from the edge of the shoulder.

When this sign is needed at the end of a two-lane, two way roadway, the right edge of the sign should be in line with the centerline of the roadway. Place as close to ROW as practical.

Paved

Shoulder


T-INTERSECTION

· 12 ft min

← 6 ft min –

7.5 ft max


7.0 ft min *



Edge of Travel Lane

Travel

Lane



* Signs shall be mounted using the following condition that results in the greatest sign elevation:

- (1) a minimum of 7 to a maximum of 7.5 feet above the edge of the travel lane or (2) a minimum of 7 to a maximum of 7.5 feet above the
- grade at the base of the support when sign is installed on the backslope.

The maximum values may be increased when directed by the Engineer.

See the Traffic Operations Division website for detailed drawings of sign clamps, Triangular Slipbase System components and Wedge Anchor System components.


The website address is: http://www.txdot.gov/publications/traffic.htm

Texas Department of Transportation Traffic Operations Division


SMALL ROADSIDE SIGNS GENERAL NOTES & DETAILS

ℂTxDOT July 2002	DN: TXD	DOT CK: TXDOT DW:		DW:	TXDOT		CK: TXDOT
O8 REVISIONS	CONT	SECT	JOB		-	ΗIG	HWAY
	0100	02	XXX		U	S	181
	DIST		COUNTY			S	SHEET NO.
	SAT		BEXAF	₹			101

BEHIND BARRIER



BEHIND GUARDRAIL




**Sign clearance based on distance required for proper guard rail or concrete barrier performance.

TYPICAL SIGN ATTACHMENT DETAIL

7 ft.

diameter


circle



Bolts used to mount sign panels to the clamp are 5/16-18 UNC galvanized square head with nut, nylon washer, flat washer and lock washer. The bolt length is 1 inch for aluminum.

When two sign clamps are used to mount signs back-to-back, use a 5/16-18 UNC galvanized hex head per ASTM A307 with nut and helical-spring lock washer. The approximate bolt lengths for various post sizes and sign clamp types are given in the table at right. The bolt length may need to be adjusted depending upon field conditions.

Sign clamps may be either the specific size clamp




diameter

circle


Acceptable


Dia Diametra	Approximate Bolt Length							
Pipe Diameter	Specific Clamp	Universal Clamp						
2" nominal	3"	3 or 3 1/2"						
2 1/2" nominal	3 or 3 1/2"	3 1/2 or 4"						
3" nominal	3 1/2 or 4"	4 1/2"						



SIGNS WITH PLAQUES

CURB & GUTTER OR RAISED ISLAND






In situations where a lateral restriction prevents the minimum horizontal clearance from the edge of the travel lane, signs should be placed as far from the travel lane as practical.

*** Post may be shorter if protected by guardrail or if Engineer determines the post could not be hit due to extreme





RESTRICTED RIGHT-OF-WAY

(When 6 ft min. is not possible.)

SIGN MOUNTING DETAILS

SMD (GEN) - 08

) IXDOI July 2002	DN: TXE	тоот	CK: TXDOT	DW:	TXDOT	CK: TXDOT
3 REVISIONS	CONT	SECT	JOB		н	GHWAY
	0100	02	XXX		US	181
	DIST		COUNTY			SHEET NO.
	SAT		BEXAF	₹		101


26A

neering Pract assumes no r results or c

is governed by the "Texas Engin any purpose whatsoever. TxDOT other formats or for incorrect

by TxDOT for standard to o


TRIANGULAR SLIPBASE INSTALLATION GENERAL REQUIREMENTS

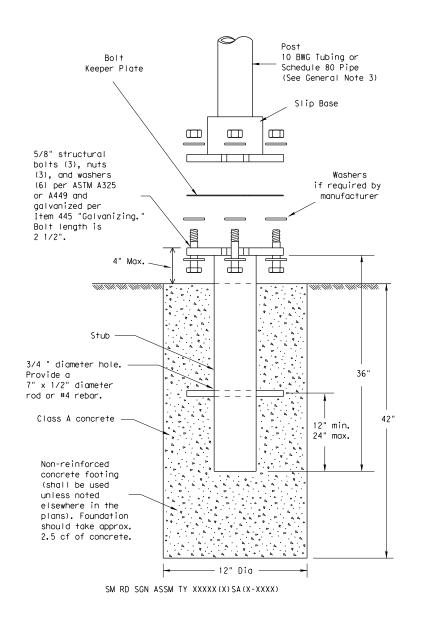

NOTE

There are various devices approved for the Triangular Slipbase System. Please reference the Material Producer List for approved slip base systems. http://www.txdot.gov/business/producer list.htm The devices shall be installed per manufacturers' recommendations. Installation procedures shall be provided to the Engineer by Contractor.

CONCRETE ANCHOR



SM RD SGN ASSM TY XXXXX(X)SB(X-XXXX)

diameter stud bolt with UNC series bolt threads on the upper end. Heavy hex nut per ASTM A563, and hardened washer per ASTM F436. The stud bolt shall have a minimum yield and ultimate tensile strength of 50 and 75 KSI, respectively. Nuts, bolts and washers shall be galvanized per Item 445, "Galvanizing." Adhesive type anchors shall have stud bolts installed with Type III epoxy per DMS-6100, "Epoxies and Adhesives." Adhesive anchors may be loaded after adequate epoxy cure time per the manufacturer's recommendations. Top of bolt shall extend at least flush with top of the nut when installed. The anchor, when installed in 4000 psi normalweight concrete with a 5 1/2" minimum embedment, shall have a minimum allowable tension and shear of 3900 and 3100 psi, respectively.

Concrete anchor consists of 5/8"

GENERAL NOTES:

- 1. Slip base shall be permanently marked to indicate manufacturer. Method, design, and location of marking are subject to approval of the TxDOT Traffic Standards Engineer.
- 2. Material used as post with this system shall conform to the following specifications:

10 BWG Tubing (2.875" outside diameter)

0.134" nominal wall thickness

Seamless or electric-resistance welded steel tubing or pipe

Steel shall be HSLAS Gr 55 per ASTM A1011 or ASTM A1008

Other steels may be used if they meet the following:

55,000 PSI minimum yield strength 70,000 PSI minimum tensile strength

20% minimum elongation in 2"

Wall thickness (uncoated) shall be within the range of 0.122" to 0.138"

Outside diameter (uncoated) shall be within the range of 2.867" to 2.883"

Galvanization per ASTM A123 or ASTM A653 G210. For precoated steel tubing (ASTM A653), recoat tube outside diameter weld seam by metallizing with zinc wire per ASTM B833.

Schedule 80 Pipe (2.875" outside diameter)

0.276" nominal wall thickness

Steel tubing per ASTM A500 Gr C

Other seamless or electric-resistance welded steel tubing or pipe with equivalent

outside diameter and wall thickness may be used if they meet the following:

46,000 PSI minimum yield strength

62,000 PSI minimum tensile strength

21% minimum elongation in 2"

Wall thickness (uncoated) shall be within the range of 0.248" to 0.304" Outside diameter (uncoated) shall be within the range of 2.855" to 2.895"

Galvanization per ASTM A123

3. See the Traffic Operations Division website for detailed drawings of sign clamps and Texas Universal Triangular Slipbase System components. The website address is:

http://www.txdot.gov/publications/traffic.htm

4. Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.

ASSEMBLY PROCEDURE

Foundation

- 1. Prepare 12-inch diameter by 42-inch deep hole. If solid rock is encountered, the depth of the foundation may be reduced such that it is embedded a minimum of 18 inches into the solid rock.
- 2. The Engineer may permit batches of concrete less than 2 cubic yards to be mixed with a portable. motor-driven concrete mixer. For small placements less than 0.5 cubic yards, hand mixing in a suitable container may be allowed by Engineer. Concrete shall be Class A.
- 3. Push the pipe end of the slip base stub into the center of the concrete. Rotate the stub back and forth while pushing it down into the concrete to assure good contact between the concrete and stub. Continue to work the stub into the concrete until it is between 2 to 4 inches above the ground.
- 4. Plumb the stub. Allow a minimum of 4 days to set, unless otherwise directed by the Engineer.
- 5. The triangular slipbase system is multidirectional and is designed to release when struck from any direction.

Support

- 1. Cut support so that the bottom of the sign will be 7 to 7.5 feet above the edge of the travelway (i.e., edge of the closest lane) when slip plate is below the edge of pavement or 7 to 7.5 feet above slip plate when the slip plate is above the edge of the travelway. The cut shall be plumb and
- 2. Attach sign to support using connections shown. When multiple signs are installed on the same support, ensure the minimum clearance between each sign is maintained. See SMD(SLIP-2) for clearances based on sign types.




SIGN MOUNTING DETAILS SMALL ROADSIDE SIGNS TRIANGULAR SLIPBASE SYSTEM

SMD(SLIP-1)-08

© TxDOT July 2002	DN: TXDOT		CK: TXDOT	: TXDOT DW: T		CK: TXDOT	
0-08 REVISIONS	CONT	SECT	JOB			HIGHWAY	
	0100	02	XXX		US 181		
	DIST		COUNTY			SHEET NO.	
	SAT		BEXAF	₹		102	



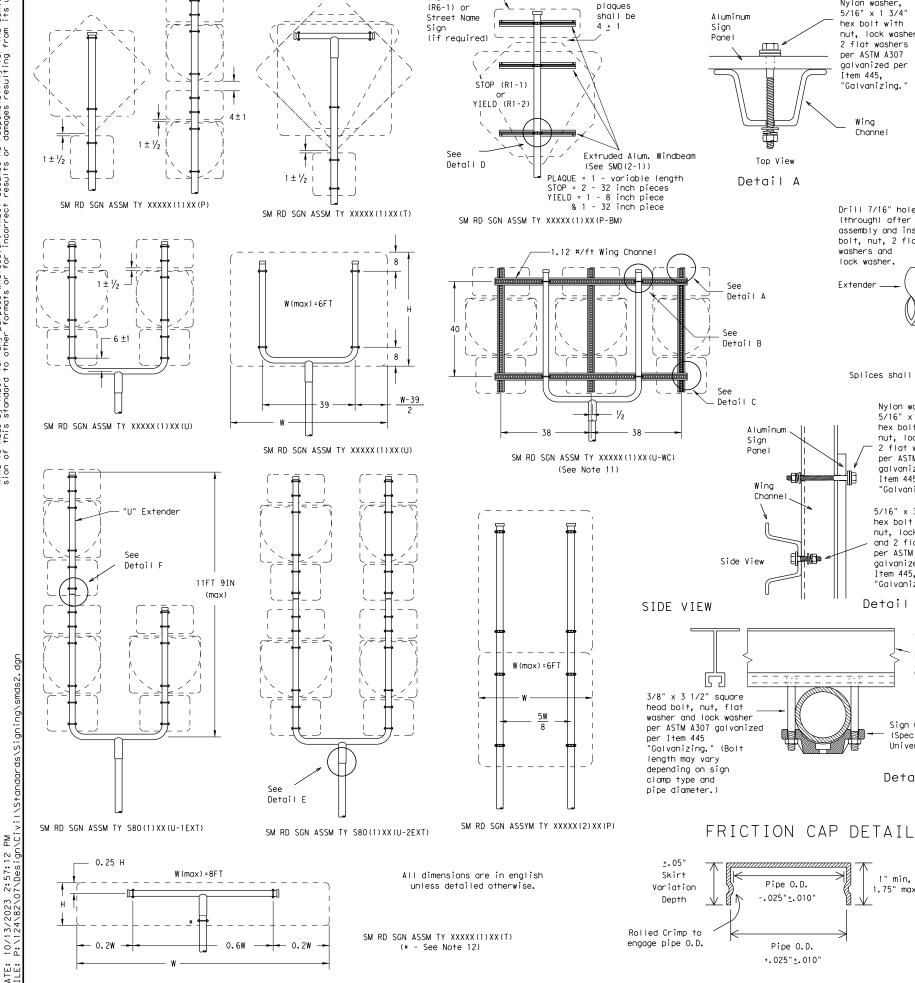

ONF-WAY

Gap between

Nylon washer. 5/16" x 1 3/4" hex bolt with nut, lock washer, 2 flat washers per ASTM A307 Wing galvanized per Channe I Item 445, Sign Clamp "Galvanizing. (Specific or Universal) 5/16" x 3 3/4" Wina hex bolt with nut. lock washer Top View and flat washer per ASTM A307 Top View Detail B aalvanized per Item 445, "Galvanizing. Detail A Drill 7/16" hole 3/8" x 3 1/2" heavy hex (through) after bolt with nut, lock washer

assembly and install and 2 flat washers per ASTM bolt, nut, 2 flat A307 galvanized per 1 1/2" washers and Item 445 "Galvanizing. lock washer. Extender ___ Detail F U-Bracket

Splices shall only be allowed behind the sign substrate.

Item 445.

Detail C

TOP VIEW


Sian Clamp

Universal)

Detail D

1.75" max

(Specific or



REQUIRED SUPPORT SIGN DESCRIPTION SUPPORT TY 10BWG(1)XX(T) 48-inch STOP sign (R1-1) TY 10BWG(1)XX(P-BM) 10BWG(1)XX(T) 60-inch YIELD sign (R1-2) TY 10BWG(1)XX(P-BM) TY 10BWG(1)XX(T) 48x16-inch ONE-WAY sign (R6-1) TY 10BWG(1)XX(P-BM) TY 10BWG(1)XX(T) 36x48, 48x36, and 48x48-inch signs 48x60-inch signs TY S80(1)XX(T) TY 10BWG(1)XX(T) 48x48-inch signs (diamond or square) TY S80(1)XX(T) 48x60-inch signs TY 10BWG(1)XX(T) 48-inch Advance School X-ing sign (S1-1)

Detail E Sign Clamp Extruded (Specific or Aluminum Universal) Windbeam (see SMD(2-1)) 0

> Friction caps may be manufactured from hot rolled or cold rolled steel sheets. The minimum sheet metal thickness shall be 24 gauge for all cap sizes.

The rim edges shall be reasonably straight and smooth. Caps shall be sized and formed in such a manner as to produce a drive-on friction fit and have no tendency to rock when seated on the pipe. The depth shall be sufficient to give positive protection against entrance of rainwater. They shall be free of sharp creases or indentations and show no evidence of metal fracture.

Caps shall have an electrodeposited coating of zinc in accordance with the requirements of ASTM B633 Class FE/ZN 8.

Texas Department of Transportation Traffic Operations Division

SIGN MOUNTING DETAILS SMALL ROADSIDE SIGNS TRIANGULAR SLIPBASE SYSTEM

SMD(SLIP-2)-08

TY 10BWG(1)XX(T)

TY 10BWG(1)XX(T)

© TxDOT July 2002	DN: TXDOT		CK: TXDOT	TXDOT DW:		CK: TXDOT	
0-08 REVISIONS	CONT	SECT	JOB			HIGHWAY	
	0100	02	XXX		US 181		
	DIST	COUNTY				SHEET NO.	
	SAT		BEXAF	₹		103	

32 SE Sch 80 Sch 80 64 SE The Engineer may require that a Schedule 80 post be used in place of a 10 BWG where a sign height is abnormally high due to a fill slope. 3. Sign supports shall not be spliced except where shown.

MAX. SIGN AREA

16 SF

32 SE

Sign support posts shall not be spliced. 4. Aluminum sign blanks shall conform to Departmental

GENERAL NOTES:

10 BWG

10 BWG

SIGN SUPPORT # OF POSTS

Material Specifications DMS-7110 and shall have the following minimum thicknesses: 0.080 for signs less than 7.5 sq. ft., 0.100 for signs 7.5 to 15 sq. ft., and 0.125 for signs greater than 15 sq. ft.

5. Signs that require specific supports due to reasons in addition to windloading are indicated on the "REQUIRED SUPPORT" table on this sheet.

6. For horizontal rectangular signs fabricated from flat aluminum, T-brackets are used for signs 24 inches or less in height. U-brackets are used for signs of areater height.

7. When two triangular slipbase supports are used to support a single sign, they shall not be "rigidly" connected to each other except through the sign panel. This will allow each support to act independently when impacted by an errant vehicle.

Wing channel shall meet ASTM A 1011 SS Gr 50 and be galvanized per ASTM A 123.

 Excess pipe, wing channel, or windbeam shall be cut off so that it does not extend beyond the sign panel (i.e., excess support shall not be visible when the sign is viewed from the front.) Repair galvanized coating at cut support ends per Item 445, "Galvanizing.

10. Additional route markers may be added vertically, provided the total sign area does not exceed the maximum allowable amount per Note 1.

11. Additional sign clamp required on the "T-bracket" post for 24 inch height signs. Place the clamp 3 inches above bottom of sign when possible.

12. Post open ends shall be fitted with Friction Caps.

13. Sign blanks shall be the sizes and shapes shown on the plans.

48-inch School X-ing sign (S2-1)


Large Arrow sign (W1-6 & W1-7)







ALUMINUM SIGN PANEL EXTRUSION DETAILS

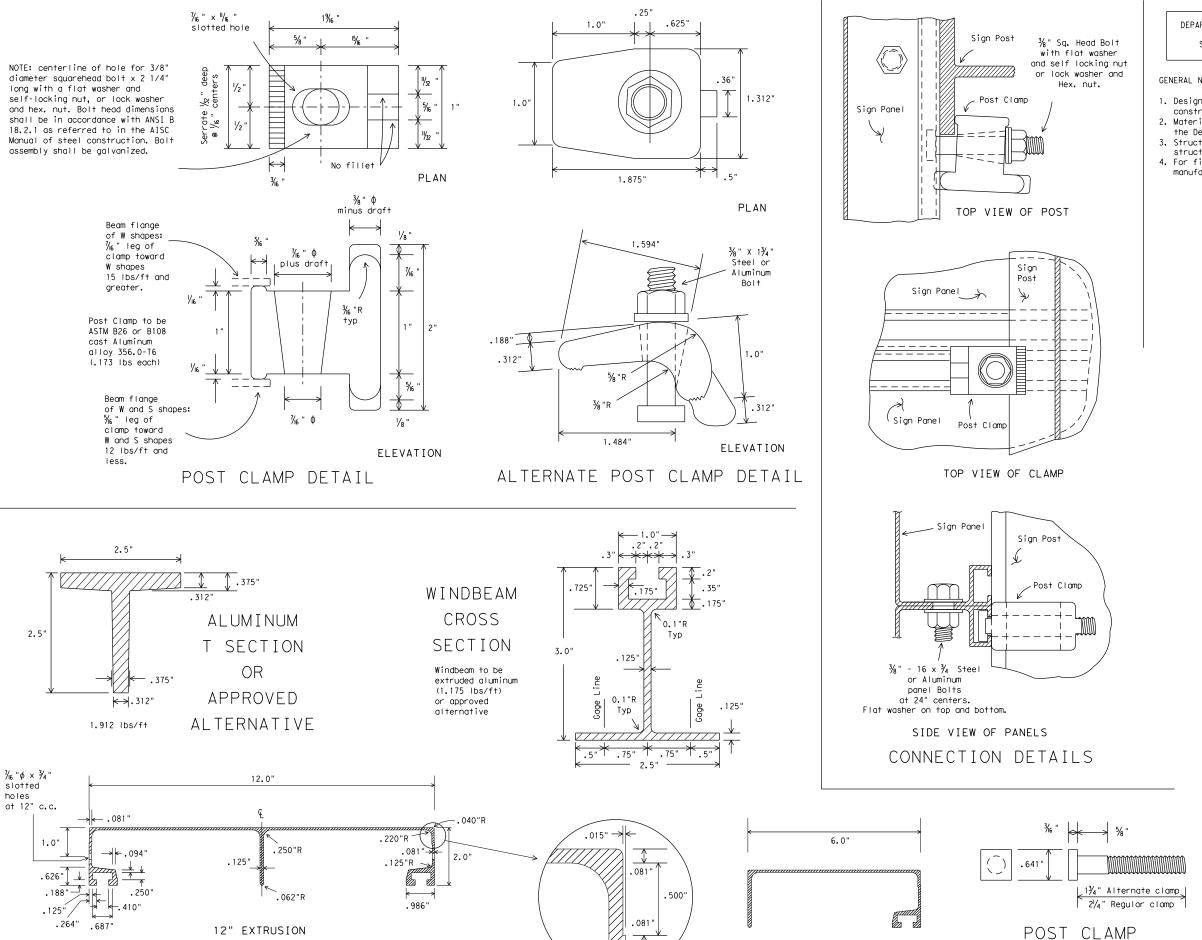

DEPARTMENTAL MATERIAL SPECIFICATIONS

SIGN HARDWARE

DMS-7120

GENERAL NOTES:

- 1. Design conforms with AASHTO Specifications for the design and construction of structural supports for highway signs.
- 2. Materials and fabrication shall conform to the requirements of the Department material specifications.
- 3. Structural steel shall be "low-alloy steel" for non-bridge structures per Item 442, "Metal For Structures."
- 4. For fiberglass substrate connection details, see manufacturer's recommendations.

Texas Department of Transportation Traffic Operations Division

SIGN MOUNTING DETAILS-EXTRUDED ALUMINUM SIGN PANELS & HARDWARE


SMD(2-1)-08

0	TxD0T 2001	DN: TXDOT		CK: TXDOT	DW:	TXDOT	CK: TXDOT
9-08 REVISIONS	CONT	SECT	JOB		н	IGHWAY	
	0100	02	XXX		US 181		
		DIST		COUNTY			SHEET NO.
		SAT	T BEXAR				104

BOLT DETAIL

6" EXTRUSION



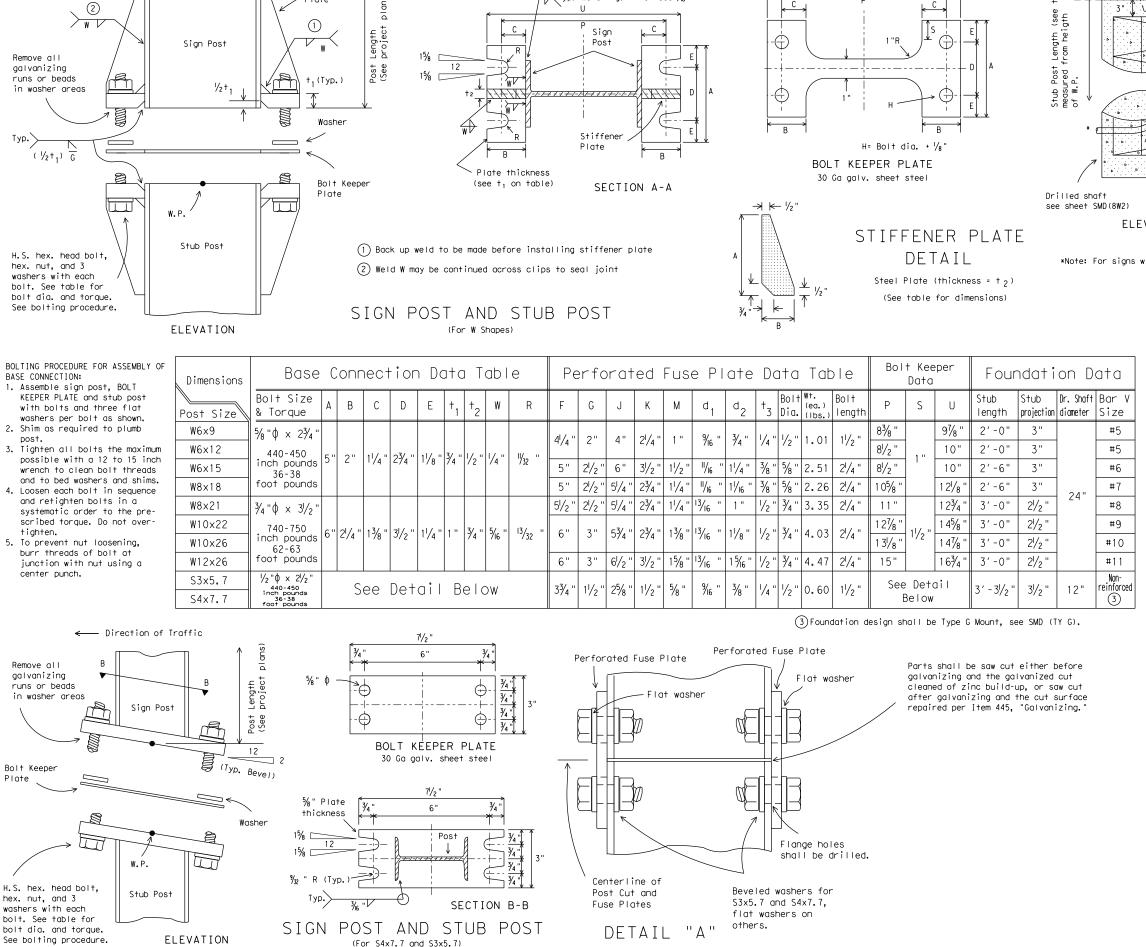

Typ. Weld=Flg. thickness-1/16


Stiffener

Stub Post Stub projection length measured from height of W.P. (see table - $\pm \frac{1}{2}$ ") Finished Post Reinforcing bar, #2 plain spiral, 6" pitch 8 required Three flat turns top and (see V on one flat turn bottom #2 plain spiral table for size) PLAN

ELEVATION

FOUNDATION DETAIL

*Note: For signs with electrical apparatus, see ED(10) for conduit required in founation.



PERFORATED FUSE PLATE DETAIL

Use H.S. hex head bolts, hex head nut and bevel or flat washer (where reg'd) under nut. All holes shall be drilled, sub-punched and reamed. All plate cuts shall preferably be saw cuts. However, flame cutting will be permitted provided all edges are ground. Metal projecting beyond the plane of the plate face will not be permitted. Steel fuse plates shall conform to the requirements of ASTM A36. ASTM A572 Grade 50 or ASTM A588 may be substituted for A36 at the option of the fabricator Mill test reports shall be submitted for Fuse Plates. Steel used shall have an ultimate tensile strength not to exceed 80 KSI. For alternative Fuse Plate contact Traffic Operations Division.




SIGN MOUNTING DETAILS-LARGE ROADSIDE SIGNS FOUNDATION & STUB

SMD(2-2)-08

(C)TxDOT August 1995	DN: TXD	OT	CK: TXDOT	DW: TXDOT	CK: TXDOT
-98 REVISIONS	CONT	SECT	JOB		HIGHWAY
1-08	0100	02	XXX	l	JS 181
	DIST		COUNTY		SHEET NO.
	SAT		BEXAF	₹	105





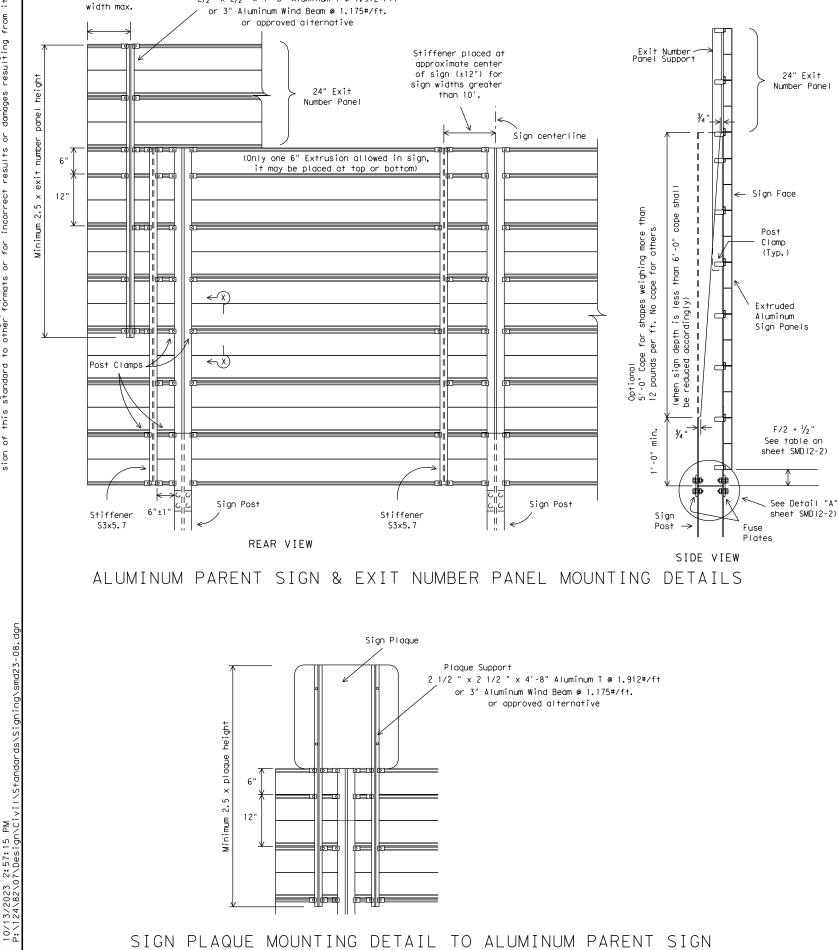

Exit Number Panel Support

 $2^{1}/_{2}$ " x $2^{1}/_{2}$ " x 4'-8" Aluminum T @ 1.912#/f†

12" min., 0.2 of

number panel

20' or 30' or more desirable. May be reduced dependmore ing on cross section, desirable viewing conditions and EXIT 645 other related factors. **Texas** 357 Curb of Ft Worth >V ٩ FRONTAGE MAIN Traveled des of15W .35W . 35W .15W ب ∑ Edge . ° Middle Post required for sign Types 130, 230 and 330 Series

TYPICAL SIGN INSTALLATION AND LOCATION

LATERAL CLEARANCE NOTES:

Lateral clearances of signs mounted on median side of main lanes are the same as shown above where space will permit.

Where a sign is to be located behind guardrail, an allowable minimum clearance of five feet may be used, measured from the face of the guardrail to the near edge of sign.

 $\frac{1}{2}$ - 6' minimum and desirable may be used only in areas of limited lateral clearance and when approved by the Engineer.

POST SPACING NOTES:

Post spacing on a two post sign may vary a maximum of plus or minus 10% of total sign width to fit field conditions.

Post spacing on a three post sign may vary a maximum of plus or minus 5% of total sign width to fit field conditions.

SIGN HEIGHT NOTES:

** The 8′ 6" maximum may be exceeded when placing signs on extreme slopes. In these conditions, a 7′ minimum from natural ground to bottom of sign must be maintained.

DEPARTMENTAL MATERIAL SPECIFICATIONS

ALUMINUM SIGN BLANKS SIGN HARDWARE DMS-7110 DMS-7120

GENERAL NOTES:

- 1. Exit number panel shall be mounted to the right hand side of the parent sign for right exits and to the left hand side for left exits. The number panel shall be mounted with two uprights so its right edge is even with the right edge of the parent sign or vice-versa for left hand exits.
- 2. Exit number panel support shall be symmetrical about number panel centerline.
- Exit number panel support shall be ASTM A36 structural steel galvanized after fabrication, or ASTM B221 aluminum alloy 6061-T6 or approved alternative.
- All bolts, nuts and washers shall be galvanized per ASTM Designation: B695 Class 50, or A153 Class C or D.
- 5. Posts, parent sign panels, and exit number panels shall comply with notes on sheets SMD(2-1) and SMD(2-2).
- Signs (such as exit number panels) attached above a parent sign shall be made of the same type material as the parent sign. General Service and Routing signs may be fabricated from flat sheet aluminum.
- 7. Exit number panel support and other connection hardware required to fasten exit number panel to parent sign shall be subsidiary to "Aluminum Signs" or "Fiberglass Signs."
- For fiberglass sign installation details, see manufacturer's recommendations.




SIGN MOUNTING DETAILS-LARGE ROADSIDE SIGNS


SMD(2-3)-08


C TxDOT August 1995	DN: TXD	тоот	CK: TXDOT	DW:	TXDOT	CK: TXDOT
-08	CONT	SECT	JOB		H	IGHWAY
	0100	02	XXX		U	S 181
	DIST		COUNTY			SHEET NO.
	SAT		BEXAF	₹		106

WING CHANNEL CLAMP DETAIL FOR TYPE G MOUNT

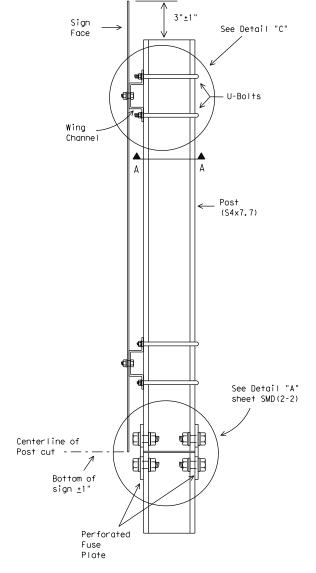


SIDE VIEW






Galvanized steel or aluminum self-locking hex. head nut. 3/8 " - 16 x 3/4 " hex. head bolt for sheet metal. 3/8 " - 16×1 1/4 " hex. head bolt for plywood. 3/8 " galvanized medium washer.

DETAIL "C"




WING CHANNEL

Wing channel, 4" width x $1\frac{1}{8}$ " depth x $\frac{1}{8}$ " thickness, shall be aluminum (ASTM B221 6061-T6 or B308 6061-T6), galvanized steel (ASTM A36) or stainless steel (ASTM A167 type 304, No. 2B



The weight of one S4x7.7 post is equal to 112.2 lbs. plus 7.7 lbs./ft x (post length in feet minus 10 ft). The weight of 112.2 lbs. includes 10 feet of post length, post foundation stub, related connection plates, friction fuse plate, and all high strength bolts, nuts and

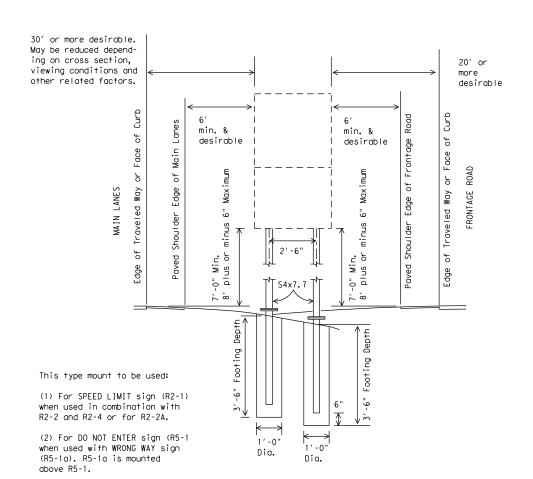

DEPARTMENTAL MATERIAL SPECIFICATIONS SIGN HARDWARE

DMS-7120

GENERAL NOTES:

- 1. Design conforms with AASHTO Specifications for the design and construction of structural supports for highway signs.
- 2. Materials and fabrication shall conform to the require-
- ments of the Department material specifications.

 3. Structural steel shall be "Low-Alloy Steel" for non-bridge structures per Item 442, "Metal For Structures."

 4. Parts shall be saw cut either before galvanizing and the
- galvanized cut cleaned of zinc build-up, or saw cut after galvanizing and the cut surface repaired per Item 445, "Galvanizing." (Cut surface will not be treated until plate is installed and all bolts fully tightened.)



SIGN MOUNTING DETAILS, TYPE G SUPPORT

SMD(TY G) - 08

© TxDOT August 1995	DN: TXDOT		CK: TXDOT	DW:	TXDOT	CK: TXDOT	
-97	CONT	SECT	JOB		HIGHWAY		
	0100	02	XXX		US 181		
	DIST		COUNTY			SHEET NO.	
	SAT		BEXAF	₹		107	

