

# REVISED GEOTECHNICAL ENGINEERING REPORT

## Espada Tract Units 4 thru 9 & 12 thru 20

Loop-410 and US-281/South Flores Road  
San Antonio, Bexar County, Texas

*Prepared for:*

Lennar  
San Antonio, Texas

*Prepared by:*

TTL, Inc.  
San Antonio, Texas

Project No. 00230901641.02  
February 13, 2024





17215 Jones Maltsberger Rd.  
Suite 101  
San Antonio, TX 78247  
210.888.6100  
**www.TTLUSA.com**

February 13, 2024

Mr. Richard Mott, P.E.  
Vice President of Land Development  
Lennar  
1922 Dry Creek Way, Suite 101  
San Antonio, TX 78259

O: 210.403.6282

E: Richard.Mott@Lennar.com

**RE: Revised Geotechnical Engineering Report - Pavement Design**  
Espada Tract – Units 4 thru 9 & 12 thru 20  
Loop-410 and US-281/South Flores Road  
San Antonio, Bexar County, Texas  
TTL Project No.00230901641.02

Dear Mr. Mott:

TTL, Inc. (TTL) is pleased to submit this *Revised Geotechnical Engineering Report* providing final pavement section designs for the above-referenced project. If you have any questions regarding our report, or if additional services are needed, please do not hesitate to contact us.

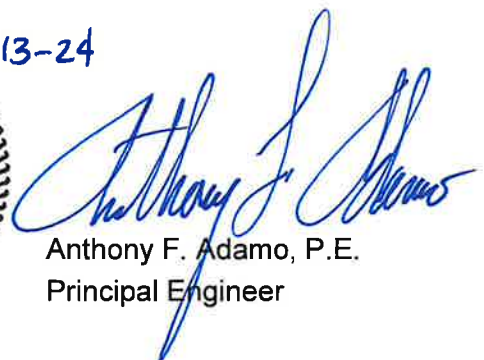
The final pavement section design recommendations contained within This report our understanding of the proposed development, the results of our field exploration and laboratory tests, and our experience with similar projects.

We appreciate the opportunity to provide these Geotechnical Services for your project and look forward to continuing participation during the design and construction phases of this project.

Respectfully submitted,  
TTL, Inc.



June M. Potter, P.E.  
Senior Project Engineer



Anthony F. Adamo, P.E.  
Principal Engineer

TABLE OF CONTENTS

1.0 PROJECT INFORMATION ..... 1

1.1 Project Description..... 1

1.2 Authorization..... 1

2.0 EXPLORATION FINDINGS..... 1

2.1 Site Conditions..... 1

2.2 Site Geology ..... 2

2.3 Subsurface Stratigraphy..... 2

2.4 Subsurface Water Conditions ..... 2

3.0 GEOTECHNICAL CONSIDERATIONS..... 3

3.1 Expansive Soils ..... 3

3.2 Corrosion Considerations..... 4

4.0 EARTHWORK RECOMMENDATIONS..... 5

4.1 Subgrade Preparation and Stabilization ..... 5

4.1.1 Stripping ..... 6

4.1.2 Proof-rolling ..... 6

4.1.3 Subgrade Stabilization ..... 7

4.1.4 Existing Foundations..... 7

4.1.5 Underground Storage Tanks and Septic Tanks..... 7

4.1.6 Pond Areas..... 8

4.2 Compacted Fill Materials..... 8

4.3 Excavation Conditions .....10

4.3.1 Temporary Slopes and OSHA Soil Types .....10

4.3.2 Anticipated Excavation Conditions .....11

4.3.3 Drainage During Construction .....11

4.4 Long-Term Drainage Considerations .....11

5.0 INFRASTRUCTURE RECOMMENDATIONS.....12

5.1 Utilities .....12

5.2 Landscape Considerations.....12

5.3 Pavement Design Considerations .....13

5.3.1 Pavement Section Recommendations .....14

5.3.2 General Guidelines for Pavements .....16

5.3.3 Drainage Adjacent to Pavements.....17



5.3.4	Pavement Section Materials .....	18
5.3.5	Pavement Earthwork.....	20
6.0	LIMITATIONS .....	24

**GBA Informational Document**

**APPENDIX A (ILLUSTRATIONS)**

Site Location Map  
Boring Location Plan  
Legend Sheet - Soil  
Boring Logs (B-1 thru B-39)  
Lab Summary  
CBR Plots (CBR Plots 1, 2, 3, and 4)  
Lime Series Tests (Lime Series Plot for CBR Samples 2 and 4)  
Cement Series Tests (Cement Series for CBR Sample 1)

**APPENDIX B (REFERENCE MATERIALS)**

Exploration Procedures  
Laboratory Procedures

## 1.0 PROJECT INFORMATION

### 1.1 Project Description

Item	Description
Project Location	The project site is located in the southeastern quadrant of the intersection of Loop 410 and US-281/South Flores Road in San Antonio, Texas. (See the Site Location Maps and Project Boundary in Appendix A).
Proposed Development	Based on the information provided to us by Lennar, we understand that this subdivision will involve the construction of single-family homes and associated streets.
Proposed Construction	This geotechnical engineering study will pertain to the design and construction of the streets within this subdivision for Units 4 through 9 and 12 through 20. The streets are expected to consist of Local Type A, Local Type B, Collector, and Arterial streets designed as per Bexar County design criteria.

This report has been revised to include the pavement section design for a Arterial. The previous TTL Report No. 00230901641.00, was issued on October 18, 2023 and TTL Report No. 00230901641.01 was issued on October 27, 2023

If the above information is not correct, please contact us so that we can make the necessary modifications to this document and our recommendations, if needed.

### 1.2 Authorization

This Project was authorized on May 25, 2023, by Mr. Richard Mott with Lennar by acceptance of our Agreement for Services, TTL Proposal No. P00230901641.00, dated May 2, 2023.

## 2.0 EXPLORATION FINDINGS

### 2.1 Site Conditions

Item	Description
Existing Conditions	Based on Google Earth imagery, the Site was historically used for agricultural purposes. Homesteads were likely present but have been torn down or are in ruins. After conducting a Site Reconnaissance, <b>TTL identified a number of oil wells, as well as, at least two water wells.</b> Much of the Site is situated within Zone X, an area determined to be outside the 100-year floodplain. However, the creek/drainage area located near the center of the Site that drains towards Cassin Lake is associated with Zone A-01, an area subject to flooding. <b>For more information, please refer to the Environmental Site Assessment Phase I report 22-09-00316.00, dated February 24, 2022 and Phase II report 22-09-00528.00, dated May 2, 2022.</b> The site is currently in various stages of development.
Existing topography	Based on the preliminary site layout provided to us by Pape-Dawson Engineers, the topography of the units varies in elevation, but generally ranges from about El. 550 feet on the eastern side to about El. 578 feet on the western side.

## 2.2 Site Geology

We reviewed the Geologic Atlas of Texas to determine the geologic setting of the project site and surrounding area. Our review indicated the Project Site is located primarily over Fluvial terrace deposits (Qt) of Quaternary geologic age. These deposits are underlain by either the Leona Formation (Qle) of Quaternary geologic age, the Midway Group (Emi), or the Wilcox Group (Ewi) of Tertiary geologic age. The Fluvial terrace deposits consist of gravel, sand, silt, and clay, ranging in thickness from a few feet to several tens of feet. The Leona Formation generally consists of gravel, sand, silt, and clay and ranges in thickness from a few feet to several tens of feet. The Midway Group generally consists of clay and sand and is typically about 100 to 400 feet in thickness. The Wilcox Group generally consists of mudstone, sandstone, sand, and clay, with varying amounts of lignite. This formation is typically about 400 to 1,200 feet in thickness. Key geotechnical engineering considerations for development supported on these materials are the expansive nature of the clays and the granular sand materials that may be encountered at relatively shallow depths.

## 2.3 Subsurface Stratigraphy

Subsurface conditions within the limits of the project were evaluated by drilling thirty-nine (39) exploratory borings at the approximate locations shown on the Boring Location Plans included in Appendix A. Samples obtained during our field exploration were transported to our laboratory where they were reviewed by geotechnical engineering personnel. Representative samples were selected and tested to determine pertinent engineering properties and characteristics for use in our evaluation of the project site. Based on the information developed during our field exploration and laboratory testing, we have determined the stratigraphy of the site is generally as shown on the boring logs in Appendix A.

The boring logs presented in Appendix A represent our interpretation of the subsurface conditions at each individual boring location. Our interpretation is based on tests and observations performed during drilling operations, visual examination of the soil samples by a geotechnical engineer, and laboratory tests conducted on the retrieved soil samples. The USCS classifications shown on the boring logs represent classifications based on either visual examination, laboratory testing, or both. The lines designating the interfaces between various strata on the boring logs represent the approximate strata boundary. The transition between strata may be more gradual than shown, especially where indicated by a broken line. All data should only be considered accurate at the exact boring locations.

## 2.4 Subsurface Water Conditions

Subsurface water was not detected either during or upon completion of our exploratory borings. Upon completion of subsurface water observations, the boreholes were backfilled with the spoils generated during drilling operations.

Subsurface water is generally encountered as a 'true' or permanent continuous water source that is generally present year-round or as a discontinuous, isolated "perched" or temporary water

source that is temporary. Permanent subsurface water is generally present year-round, which may or may not be influenced by seasonal changes in climate, precipitation, vegetation, surface runoff, water levels in nearby water bodies, and other factors. The subsurface water level below the site may fluctuate up or down in response to such changes and may be at different levels than indicated on the exploration logs at times after the exploration. Temporary subsurface water generally develops as a result of seasonal and climatic conditions.

It should be noted that CLAYEY SAND (SC) materials, as well as clay with various percentages of sand were encountered in the borings. Furthermore, these materials are granular in nature and are preferential pathways for the transfer of subsurface water levels due to seasonal fluctuations and precipitation.

Furthermore, it should be noted there is a creek/drainage area located west of Units 13 and 19 that drains towards Cassin Lake. In addition, Espada Ditch is located on the east side of the project site. These areas are subject to flooding. Due to the close vicinity of Cassin Lake, there is an increased likelihood that subsurface water may be encountered during construction, particularly during periods of heavy rainfall or extended wet weather. Therefore, the contractor should check for subsurface water before the commencement of excavation activities and be prepared to control subsurface water infiltration.

### 3.0 GEOTECHNICAL CONSIDERATIONS

The following geotechnical considerations have been prepared based on the information developed during this Project, our experience with similar projects, and our knowledge of sites with similar surface and subsurface conditions.

#### 3.1 Expansive Soils

The expansive potential of a given soil profile may be characterized using the Potential Vertical Rise (PVR) methodology as described in the Texas Department of Transportation (TxDOT) Method TEX-124-E. This methodology is used to estimate how much a given point located on the ground surface may move due to volumetric changes in the soil resulting from fluctuations in soil moisture content. **Based on our laboratory test results, the estimated PVR of this site ranges from about one and one-half (1½) inches to three and one-half (3½) inches in its present condition. These estimated PVR values indicate the soils at this site range from moderately to highly expansive.**

In pavement areas, volumetric changes in the expansive clay subgrade may cause vertical and horizontal movements that result in undulating surface effects. These movements may eventually lead to curb and pavement cracking (both transverse and longitudinal). Therefore, even with the pavements being properly designed and constructed for the traffic loads, the pavement section may still not perform as intended due to the expansive clay movement. Remedial methods to address this issue include: removing the expansive soils and replacing them with a non-expansive cohesive soil; chemical injection of the expansive soils; a combination of moisture conditioning,



cement treatment and installation of a vertical moisture barrier; other subgrade preparation methods are also available. If additional earthwork preparation methods will be used or evaluated, please contact us.

**Please note that the pavement subgrade in areas of the development is to be cement treated.** The purpose of cement treatment of an expansive clay pavement subgrade is to 1) improve the strength of the clay soil, 2) make the soil more resistant to water absorption, which reduces the potential for soil softening, and 3) lower the plasticity index (PI) of the treated zone to reduce volume changes. However, the cement treatment is limited to the upper 6 to 8 inches of the pavement subgrade. This depth of treatment is not sufficient to reduce the expansive soil movements associated with the active zone (i.e., the zone of seasonal moisture variation) which extends to a depth of about 15 feet below the ground surface. Therefore, shrink/swell soil movements and related pavement distress will still occur even if the upper 6 to 8 inches of the subgrade is cement treated.

Large bushes and trees adjacent to the pavements will also contribute to future distress to the pavement system. Vegetation placed in landscape beds that are adjacent to the pavements should be limited to small plants and shrubs that will not exceed a mature height of about 4 feet and that are not ‘water demanding’.

Large bushes and trees that will generally exceed 4-foot heights should be planted at a distance away from the pavement edge so that their canopy or ‘drip line’ does not extend to the pavement edge when the tree reaches maturity. Plants and shrubs that are ‘water demanding’ should not be planted within 5 feet of the pavement edge.

Utility trenches that traverse beneath the pavements are potential avenues for subsurface water to migrate beneath the pavements. We recommend that, a ‘clay soil plug’ should be used for the bedding and backfill.

**3.2 Corrosion Considerations**

According to the 2021 IBC, concrete that is exposed to sulfate-containing solutions should be selected for sulfate resistance in accordance with ACI 318. To evaluate if sulfate exposure was a concern at this site, laboratory testing was conducted on soil samples recovered during the field exploration to assess the risk of sulfate attack at the site. The soil samples were submitted to an analytical lab to determine the sulfate content. The results of the laboratory tests are presented in the following table.

Summary of Laboratory Testing			
Boring No.	Sample Depth (ft.)	Sulfate (% by Mass)	ACI 318 Exposure Class
B-01	6½ - 8	0.02	S0
B-04	4½ - 6	0.02	S0
B-07	6½ - 8	0.03	S0
B-10	4½ - 6	0.02	S0





Summary of Laboratory Testing			
Boring No.	Sample Depth (ft.)	Sulfate (% by Mass)	ACI 318 Exposure Class
B-11	2½ - 4	0.01	S0
B-16	6½ - 8	1.10	S2
B-19	2½ - 4	0.05	S0
B-28	4½ - 6	0.16	S1
B-31	8½ - 10	0.26	S2
B-33	2½ - 4	0.04	S0
B-35	2½ - 4	0.03	S0

According to the 2021 International Residential Code, concrete that will be exposed to sulfate-containing solutions should be designed in accordance with ACI 318. The sulfate test results indicate that the sulfate exposure levels classify as S0 to S2, which infers that sulfate exposure to concrete may be an issue. Therefore, we suggest that Type V cement should be used with a minimum 28-day design compressive strength ( $f'_c$ ) of 4,500 psi and a maximum water to cement ratio of 0.45, **and one of the following should be incorporated in the concrete used for these foundations:**

Option 1: Type V cement (ASTM C150)

Option 2: Type I/II cement with 20 to 25 percent Class F fly ash.

Option 3: Use of waterproofing admixture in concrete mix design (i.e. Penetron Admix SB, Eucon Vandex AM-10, Sikacrete-950 DP, etc.).

The following options are also acceptable:

Option 4: Type I/II cement with use of full depth permanent casing.

Option 5: Use of aggregate backfill for direct embed structures.

Selection of an appropriate mix design based on the anticipated sulfate content of the soil at this site is the responsibility of the project engineer.

## 4.0 EARTHWORK RECOMMENDATIONS

### 4.1 Subgrade Preparation and Treatment

***Please note that mass grading at the site had not been performed before the drilling of TTL's exploratory borings.*** The intended performance of earth-supported elements such as streets and utilities are contingent upon following the earthwork recommendations and guidelines outlined in this section. Earthwork activities on the project should be observed and evaluated by TTL personnel. The evaluation of earthwork should include observation and testing of all fill and backfill soils placed at the site, along with subgrade preparation beneath the residential structures, pavements, and other areas to receive fill materials.

If possible, site development should be performed during seasonably dry weather (typically May through October), and excavation and site preparation should not be performed during or

immediately following periods of heavy precipitation or freezing temperatures. Positive surface drainage should be maintained during grading operations and construction to prevent water from ponding on the surface. Surface water run-off from off-site areas should be diverted around the site using berms or ditches. The surface can be rolled smooth to enhance drainage if precipitation is expected but should then be scarified prior to resuming fill placement operations. Subgrades damaged by construction equipment should be promptly repaired to avoid further degradation in adjacent areas and water ponding. Our geoprofessional should provide recommendations for treatment if the subgrade materials become wet, dry, or frozen. When work activities are interrupted by heavy rainfall, fill operations should not be resumed until the moisture content and density of the previously placed fill materials are as recommended in this report. The following earthwork recommendations must be performed prior to pavement and utility construction.

#### 4.1.1 Stripping

Subgrade preparation should begin with stripping the existing vegetation and any otherwise unsuitable materials from planned construction areas.

- Stripping should extend at least 3 feet (horizontal) beyond the construction limits or to the property lines, whichever is less. Where tree and brush vegetation are present at the site, the stripping depth may need to be at least 12 to 18 inches to completely grub and remove the roots.
- Organic-laden strippings including root masses and loose topsoil should be removed from the site or disposed of at designated on-site areas located outside the limits of current or future development.

#### 4.1.2 Proof-rolling

After stripping and excavating to the design subgrade elevation, the stability of exposed subgrades in areas to receive fill should be evaluated by proof-rolling. The stability of subgrades exposed by cutting to final grades should also be evaluated by proof-rolling.

- Perform proof-rolling with a rubber-tired vehicle having a gross vehicle weight of at least 20 tons (such as a loaded tandem-axle dump truck, or similar size/weight construction equipment).
- Proof-rolling equipment should make multiple closely-spaced overlapping passes in perpendicular directions over the subgrade at a walking pace.
- The subgrade should be relatively smooth and free of wheel ruts, sheepfoot roller dimples, loose clods of soil, or loose gravel, and the subgrade should not be desiccated, cracked, wet, or frozen.
- A TTL geotechnical engineer or their representative should observe the proof-rolling to identify, document, and mark areas of unstable subgrade response, such as pumping, rutting, or shoving, if any.

#### 4.1.3 Subgrade Treatment

Unstable subgrades should be stabilized as recommended below.

- Undercut soft, weak, and unstable soils by excavating below subgrade level to expose stable soils. The excavated soil can be used to restore the excavation subgrade, provided that the soils are relatively free and clean of deleterious material or materials exceeding 3 inches in maximum dimension. The excavated soil, or imported fill soil, shall be placed in maximum 6-inch compacted lifts. Each lift of soil shall be moisture conditioned between plus and minus two ( $\pm 2$ ) percentage points of the optimum moisture content and compacted to at least 95 percent of the maximum dry density determined in accordance with the Standard compaction effort (ASTM D 698). If undercutting deeper than about 3 feet is needed, contact TTL.
- Soil subgrade areas requiring fill placement should be scarified to a depth of about eight (8) inches and moisture conditioned between plus and minus two ( $\pm 2$ ) points of the optimum moisture content. The moisture-conditioned subgrade should then be compacted to at least 95 percent of the maximum dry density determined in accordance with ASTM D 698. The subgrade should be moisture conditioned just prior to fill placement so the subgrade maintains its compaction moisture levels and does not dry out.
- On-site soils (general fill), Select Fill, or Granular Select Fill soil should be placed to achieve the desired elevation as described in **Compacted Fill Materials Section 4.2** of this report.

#### 4.1.4 Existing Foundations

If applicable, existing foundations at the project site should be completely removed prior to the commencement of mass grading or construction of pavements or new foundations. Upon demolition of the existing foundations and the removal of all debris, the area should be restored to the desired grade by backfilling the hole with lean clay select fill meeting the specification provided in Section 4.2 of this report. The lean clay select fill should be placed in lifts and compacted as specified in Section 4.2 of this report. In lieu of the placement of a lean clay select fill, the grade may be restored with flowable fill meeting the specification of 2014 TxDOT Item 401 and having a minimum strength of 100 psi at 28 days. All old utilities should also be removed and backfilled with flowable fill.

#### 4.1.5 Underground Storage Tanks and Septic Tanks

If applicable, underground storage tanks, septic tanks, and any associated piping should be excavated and completely removed. On-site soils (i.e., general fill) or select fill meeting the specifications provided in Section 4.2 of this report should then be placed to match the desired final grade. It is likely that the excavation required to remove these tanks and piping will result in excavation depths greater than 5 feet. Even with proper compaction, it is likely that fill soils placed

within this excavation will experience settlement over time. As a result, residential foundations, pavements, and/or utilities may be adversely affected by that settlement. Once final grades are determined and the tanks and piping are removed, an evaluation should be undertaken to determine the most appropriate approach for backfilling the excavation to ensure that any structures or other facilities constructed over the area perform as intended.

4.1.6 Pond Areas

If applicable, the area of the existing pond should be drained (if water is present) and the soils within the pond be mucked out down to stable soils. Muck from the pond should be removed from the site or disposed of at designated on-site areas located outside the limits of current or future development. On-site soils (i.e., general fill) or select fill meeting the specifications provided in Section 4.2 of this report should then be placed to match the desired final grade. **It is likely that the excavation required to reach stable soils will result in excavation depths greater than 5 feet. Even with proper compaction, it is likely that fill soils placed within this excavation will experience settlement over time. As a result, residential foundations, pavements, and/or utilities may be adversely affected by that settlement. Once final grades are determined and the pond is mucked out, an evaluation should be undertaken to determine the most appropriate approach for backfilling the excavation to ensure that any structures or other facilities constructed over the area perform as intended.**

4.2 **Compacted Fill Materials**

Compacted fill materials may consist of select or general fill depending upon its intended use. General fill materials may consist of on-site soils, select fill materials or clean imported fill soils that possess good compaction characteristics that will provide suitable, uniform support for pavements and other non-habitable facilities that are not extremely sensitive to movements. General fill material may be used in open areas where such facilities will not be constructed. Select fill material, on the other hand, is selected based on specific engineering characteristics and performance criteria for the proposed purposes. These selection characteristics and criteria typically depend on the requirements of the pavements, structures, or other facilities they are intended to support.

General and select fill materials should be clean and free of any vegetation, roots, organic materials, trash or garbage, construction debris, or other deleterious materials. These materials should contain stones no larger than two and one-half (2½) inches in maximum dimension. The following table provides more specific requirements for general and select fill materials.

Material Type	Characteristics	Compaction Procedures	Compaction Control <sup>1, 2</sup>
GENERAL FILL	Shall consist of CH, CL, SM, SC, GM, GC, SW, or GW as defined by ASTM D 2487.  Plasticity Index: Not more than 35.  Maximum allowable organic content: 3 percent by weight.	Maximum loose lift thickness: 8 inches.  Compaction requirement:  Compaction should be at least 95 percent of the standard Proctor (ASTM D 698) maximum dry density for fill bodies less than 5 feet in thickness.	General Fill Areas: One field test for every 10,000 square feet per lift, with a minimum of two tests per lift.  Utility Trenches (in areas where Select Fill is not



Material Type	Characteristics	Compaction Procedures	Compaction Control <sup>1, 2</sup>
	<b>This fill material type shall not be used in areas where select fill materials are specified. It is not the intent of this material to control differential soil movements and it shall not be used in areas where control of soil movements is required.</b>	Compaction should be at least 95 percent of the modified Proctor (ASTM D 1557) maximum dry density for fill bodies 5 feet or greater in thickness.  Moisture content at time of compaction: within plus to minus 3 percent of the material's optimum moisture content.	required): One field density test per every 100 linear feet, per lift.
<b>SELECT FILL (FLEXIBLE BASE)</b>	2014 Texas Department of Transportation (TxDOT) Item 247, Types A or B, Grades 1 or 2.	Maximum loose lift thickness: 8 inches with compacted thickness of about 6 inches.	Pavement Areas and Slopes: One field density test every 10,000 square feet per lift, with a minimum of two tests per lift.
<b>SELECT LEAN CLAY FILL (COMPACTED FILL)</b>	Maximum particle size: 3 inches.  Maximum gravel and oversize particle content: 15 percent retained on a ¾-inch sieve.  At least 70 percent of total material (by weight) passing the No. 200 sieve  Maximum allowable organic content: 3 percent by weight, but large roots are not allowed.  Liquid Limit: Not more than 40.  Plasticity Index: Between 8 and 15.  Designation as a CL in accordance with the Unified Soil Classification System (USCS).	Compaction requirement: Compaction should be to at least 95 percent of the standard Proctor maximum (ASTM D 698) dry density for non-roadway areas and TEX-114-E for roadway areas.  Moisture content at time of compaction: within minus 2 to plus 3 percent of the material's optimum moisture content.	Utility Trenches: One field density test per structure or one test per every 100 linear feet, per lift.
<b>SELECT GRANULAR FILL (COMPACTED FILL)</b>	Crushed stone (limestone) meeting Type A, Grades 1, 2, or 3; Crushed or uncrushed gravel meeting Type B, Grades 1, 2, or 3; Crushed concrete meeting Type D, Grades 1, 2, or 3; of the 2014 TxDOT Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges. Designation as a GC or GM in accordance with the USCS  Clayey gravel (may locally be referred to as "pit-run" material) or caliche having no particle sizes greater than 3 inches in any dimension, at least 50 percent of total material retained on the No. 200 sieve, a Liquid Limit (LL) no greater than 40, and a PI between 7 and 20. Designation as a GC in accordance with the USCS.  Commercial Grade Base (may locally be referred to as "three-quarters to dust" material) that is produced by some local/regional quarries having nothing retained on the 2-inch sieve, at least 60 percent retained on the No. 40 sieve, at least 80 percent retained on the No. 200 sieve, an LL no greater than 30, and a PI of 7 or less. Designation as a GM in accordance with the USCS.	Maximum loose lift thickness: 8 inches.  Compaction requirement: Compaction should be to at least 98 percent of the TEX-113-E dry density.  Moisture content at time of compaction: within minus 2 to plus 3 percent of the material's optimum moisture content.	Pavement Areas and Slopes: One field density test every 10,000 square feet per lift, with a minimum of two tests per lift.  Utility Trenches: One field density test per structure or one test per every 100 linear feet, per lift.
<sup>1</sup> For preliminary planning only. Our technician/engineer should determine the actual test frequency. <sup>2</sup> In addition, the fill must be stable under the influence of compaction equipment. Heavy construction traffic should not be allowed to travel on compacted fill areas, except on designated haul roads, to reduce the potential for damaging a previously compacted fill subgrade			

If grading occurs during wet, cool weather, when drying soils is more difficult and time-consuming, the grading contractor may have difficulty achieving suitable moisture conditions for proper compaction of soil fill.

The surface of any filled area can experience settlement due to compression of the underlying soils, and sometimes additional settlement results from consolidation of thick soil fills due to their own self-weight.

#### 4.3 Excavation Conditions

##### 4.3.1 Temporary Slopes and OSHA Soil Types

The Occupational Safety and Health Administration (OSHA) Safety and Health Standards (29 CFR Part 1926) require that excavations be constructed in accordance with the current OSHA guidelines. The contractor is **solely** responsible for designing and constructing stable, temporary excavations and should shore, slope, or bench the sides of the excavations as required to maintain stability of both the excavation sides and bottom. To that end, the contractor's 'responsible person' as defined in 29 CFR Part 1926 should evaluate the required excavations and the soils exposed by those excavations and determine appropriate means as part of the contractor's safety procedures.

OSHA requires that excavations in excess of 5 feet be shored or appropriately sloped. Currently, available and practiced methods for achieving excavation stability include sloping, benching, shoring, and the use of trench shields. In excavations that are less than 20 feet deep, OSHA addresses maximum allowable slopes on a Table as reproduced below.

Soil or Rock Type	Maximum Allowable Slopes (H:V) <sup>1</sup> for Excavations Less Than 20 Feet Deep <sup>2</sup>	
Stable Rock	Vertical	90°
Type A <sup>3</sup>	¾:1	53°
Type B	1:1	45°
Type C	1½:1	34°
<p>1. Numbers shown in parentheses next to maximum allowable slopes are angles expressed in degrees from the horizontal. Angles have been rounded off.</p> <p>2. Slopes or benching for excavations that exceed 20 feet shall be designed by a licensed professional engineer.</p> <p>3. For Type A soils, a short-term maximum allowable slope of ½:1 (63°) is allowed in excavations that are 12 feet deep or less. For excavations deeper than 12 feet, the short-term allowable slope shown above applies. OSHA defines short-term as a period of 24 hours or less.</p>		

Based on the results of our field and laboratory testing, it is our opinion that the FAT CLAY (CH) and LEAN CLAY (CL) soils materials encountered in our soil borings may generally be considered as Type B soils. If those clay soils become saturated or submerged, they should be downgraded to Type C soils. The CLAYEY SAND (SC) encountered in our soil borings may be considered Type C soils. We have provided this information solely as a service to our client. The actual OSHA



regulations should be consulted prior to any excavations that would be subject to OSHA regulations. TTL does not assume responsibility for any construction site safety or the contractor's or other parties' compliance with local, state, and federal safety or other regulations.

#### 4.3.2 Anticipated Excavation Conditions

As is shown on the boring logs in Appendix A, clay and sand materials were encountered at this site. Typically, clay and sand soils penetrated by geotechnical drilling equipment such as those encountered at this site can be removed with conventional earthmoving equipment. Although not encountered in our borings, it should be noted that the Wilcox Group contains boulders which may be encountered during construction.

#### 4.3.3 Drainage During Construction

Water should not be allowed to collect in foundation excavations, on foundation surfaces, or on prepared subgrades within the construction area during construction. Excavated areas should be sloped toward designated drainage points to facilitate removal of any collected rainwater, subsurface water, or surface runoff. Positive surface drainage at the site should be provided to reduce infiltration of surface water into subgrades and fill bodies during construction and promote prompt removal of water from the project site.

Water should not be allowed to collect on completed pavement surfaces after construction. Excavated areas should be sloped to facilitate the removal of any collected water. Positive site surface drainage should be provided to reduce infiltration of surface water beneath the pavement surface. The grades should be sloped and surface drainage should be collected such that water is channeled to collection points and discharged away from the roadway or into storm sewers. In addition, curbs should be designed as full-depth curbs that extend through the base section and at least three (3) inches into the subgrade to help reduce the potential for water infiltration into the pavement section. Consideration may also be given to the installation of wick drains behind the curbs to intercept and remove water from the pavement perimeter before the water infiltrates the pavement section. All concrete/asphalt interfaces should be sealed using a sealant compatible with both materials.

### 4.4 Long-Term Drainage Considerations

Long-term drainage conditions can have a significant impact on the performance of structures, pavements, utilities, and other ancillary facilities on a project site. We recommend that site drainage be developed such that long-term ponding does not occur except in areas specifically designed for such purposes. When establishing final grades, the design team should be reminded that in expansive clay environments, it is common for ground surface movements to occur that could potentially cause a reversal of site drainage patterns and unwanted ponding of surface water. We recommend that sufficient slope of the ground surface should be maintained around pavements and other ancillary facilities to ensure long-term positive drainage.



## 5.0 INFRASTRUCTURE RECOMMENDATIONS

### 5.1 Utilities

Various utilities will be installed at these Sites. The utilities will likely include storm drains, waterlines, sanitary sewer lines, electrical lines, and possibly telecommunication lines. Installation of these utilities should conform to the applicable specifications of the appropriate utility entities. At a minimum, all utilities should meet the following installation guidelines.

- The bottoms of the utility trench excavations should be clean of loose soils and debris prior to placement of the utility pipe or cable.
- Utility trenches may be backfilled with general or select fill in accordance with Section 4.3 of this report.
- As an alternate, utility trenches may be backfilled with flowable fill materials that terminate at a depth sufficient to allow for the construction of structure foundations or any pavements constructed as a part of this project. Flowable fill should have a minimum 28-day compressive strength of 100 psi. The flowable fill should not have an unreasonably high compressive strength to ensure that it remains excavatable should the need arise in the future. Flowable fill is defined as materials complying with Item 401 of the 2014 TxDOT Standard Specifications.
- Where granular bedding is used for pipe bedding, consideration should be given to the placement of filter fabric around the bedding materials within the trench to reduce the potential for piping fines through the bedding material. Piping of fines within utility trenches often results in pronounced subsidence of the ground surface over time that could affect foundations and pavements constructed over the utility trenches.

### 5.2 Landscape Considerations

TTL realizes landscaping is vital to the aesthetics of any project and is generally typical for residential construction. The owner and design team should be made aware that placing large bushes and trees adjacent to the structures and pavements may contribute to future distress. Vegetation placed in landscape beds adjacent to the structure should be limited to plants and shrubs that will not exceed a mature height of about 3 to 4 feet. Large bushes and trees that will generally exceed these heights should be planted at a reasonable distance away from structures and pavements so their canopy or “drip line” does not extend over the pavement when the tree reaches maturity.

Watering of vegetation should be performed in a timely and controlled manner and in sufficient quantity to maintain healthy vegetative cover. Excessive watering should be avoided as excessive irrigation of landscaped areas adjacent to, near or up gradient from pavements can lead to water migration into building pads and base sections. This migration could cause moisture fluctuations

in the underlying clay subgrade which could result in excessive soil movements and loss of subgrade strength.

### 5.3 Pavement Design Considerations

Based on the Bexar County design guidelines, the following design parameters were used for design of the pavement sections:

Acceptable Pavement Parameters				
Design Considerations	Local Type A	Local Type B	Collector Street	Arterial
Reliability, %	70	90	90	95
Initial Serviceability Index, po	4.2	4.2	4.2	4.2
Terminal Serviceability Index, pt	2.0	2.0	2.5	2.5
Standard Deviation, So	0.45	0.45	0.45	0.45
Design Life, years	20	20	20	20
18-kip ESALs	100,000	2,000,000	2,000,000	3,000,000
Minimum Structural Number	2.02	2.92	2.92	3.80
Maximum Structural Number	3.18	5.08	5.08	5.76

Four (4) soil bulk samples were collected to determine the California Bearing Ratio (CBR) value to be used for our pavement design recommendations. The locations at which the CBR bulk samples were taken are indicated on the Boring Location Plans in Appendix A. We performed CBR tests at three compaction levels (i.e., 90%, 95% and 100% for a total of three (3 CBR tests) on each sample location. Based on laboratory test results, CBR values of about 4.8, 4.6, 5.3, and 5.1 percent were obtained for the existing untreated subgrade compacted to at least 95 percent of the maximum dry density determined in accordance with ASTM D 698. TTL recommends that a CBR value of 4.0 percent be used to represent the pavement subgrade conditions at this site. There are a number of published correlations relating CBR to the Resilient Modulus (MR). In accordance with the COSA and Bexar County design guidelines, we used a Resilient Modulus (MR) = 1,500 times the CBR in psi, to convert CBR to MR.

**The Bexar County pavement guidelines require treatment of clay subgrades with a PI greater than 20. CBR samples obtained from this subdivision indicates a PI value over 20. Therefore, the subgrade at this site shall be treated.** As can be seen in the Lime Series Curves in Appendix A, the plasticity (PI) is reduced to below 20 at about 8% lime. However, the Bexar County requirement for a pH of 12.4 or greater is **not** being met. In tested samples, the maximum pH is 12.20 at 10% lime.

**In lieu of lime, the subgrade may be treated with Portland cement in accordance with TxDOT Item 275.** We anticipate that approximately six (6) percent of Portland cement will be required (about 28 pounds per square yard). It is anticipated that even after the mass grading is completed that the soils will require cement treatment. Furthermore, we understand the cement treated subgrade will meet the Bexar County/COSA requirement for cement stabilization. If

excavations extend beyond a depth of 8 feet, the cement treatment curves to determine the percent Portland Cement should be retested using Type V cement or equivalent mix with sulfate resistance.

**Even after subgrade cement treatment, eliminating the risk of movement and distress may not be feasible, but it may be possible to further reduce the risk of movement if additional measures are used during construction.** Removal of the highly expansive soil and replacement with fill having a plasticity index of 20 or less is an acceptable alternative to Bexar County/COSA's lime or cement treatment requirements. The removal/replacement option will most likely not initially be the most cost-effective method, but provides a permanent solution and an excavatable layer unlike cement stabilized subgrade.

For Units 4 thru 9, a removal and replacement depth of three and one half (3½) feet immediately below the pavement section would reduce the PVR to about one inch or less without cement treatment. If the top six inches of fill is cement stabilized, a removal and replacement depth of two (2) feet underlying the cement stabilized material (total of 2½ feet of fill) would provide a stable subgrade.

For Units 12 thru 20, a removal and replacement depth of four (4) feet immediately below the pavement section would reduce the PVR to about one inch or less without cement treatment. If the top six inches of fill is cement stabilized, a removal and replacement depth of two (2) feet underlying the cement stabilized material (total of 2½ feet of fill) would provide a stable subgrade.

#### 5.3.1 Pavement Section Recommendations

Following are the recommended pavement sections for Local Type A, Local Type B, Collector, and Arterial.

Flexible Pavement System - Local Type A		
Component	Pavement Material Thickness, inches	
Hot Mixed Asphaltic Concrete – Type D	2 inches	2 inches
Prime Coat	Yes	Yes
Granular Base Course (Type A, Grade 1 or 2)	10 inches	8 inches
TX-Type 3 Geogrid	---	Yes
Cement Treated Subgrade <sup>1</sup>	6 inches	6 inches
Required Structural Number	2.24	2.24
Provided Structural Number <sup>1</sup>	2.24	2.54

<sup>1</sup>Structural Number for Cement Treatment of subgrade was not used in the Pavement Section Calculations.

Flexible Pavement System - Local Type B				
Component	Pavement Material Thickness, inches			
Hot Mixed Asphaltic Concrete – Type D	3 inches	1½ inches	3 inches	1½ inches
Hot Mixed Asphaltic Concrete – Type C	----	3 inches	----	3 inches
Dense-Grade Hot-Mix Asphaltic Concrete Base Course (Type B, Item- 341)	6 inches	----	6 inches	----
Prime Coat	Yes	Yes	Yes	Yes
Granular Base Course (Type A, Grade 1 or 2)	8 inches	15 inches	8 inches	11½ inches
TX-Type 3 Geogrid	---	---	Yes	Yes
Cement Treated Subgrade <sup>1</sup>	6 inches	6 inches	6 inches	6 inches
Required Structural Number	3.97	3.97	3.97	3.97
Provided Structural Number <sup>1</sup>	4.72	4.02	5.21	3.97

<sup>1</sup>Structural Number for Cement Treatment of subgrade was not used in the Pavement Section Calculations.

Flexible Pavement System - Collector			
Component	Pavement Material Thickness, inches		
Hot Mixed Asphaltic Concrete – Type D	2 inches	1½ inches	1½ inches
Hot Mixed Asphaltic Concrete – Type C	4 inches	3 inches	3½ inches
Dense-Grade Hot-Mix Asphaltic Concrete Base Course (Type B, Item- 341)	---	---	---
Prime Coat	Yes	Yes	Yes
Granular Base Course (Type A, Grade 1 or 2)	12 inches	16½ inches	12 inches
TX-Type 3 Geogrid	---	---	Yes
Cement Treated Subgrade	6 inches	6 inches	6 inches
Required Structural Number	4.22	4.22	4.22
Provided Structural Number <sup>1</sup>	4.24	4.23	4.31

<sup>1</sup>Structural Number for Cement Treatment of subgrade was not used in the Pavement Section Calculations.

Flexible Pavement System –Arterial			
Component	Pavement Material Thickness, inches		
Hot Mixed Asphaltic Concrete – Type D	2 inches	1½ inches	2 inches
Hot Mixed Asphaltic Concrete – Type C	4 inches	4 inches	4 inches
Dense-Grade Hot-Mix Asphaltic Concrete Base Course (Type B, Item- 341)	---	---	---
Prime Coat	Yes	Yes	Yes
Granular Base Course (Type A, Grade 1 or 2)	16½ inches	17½ inches	13 inches
TX-Type 3 Geogrid	---	---	Yes
Cement Treated Subgrade	6 inches	6 inches	6 inches
Required Structural Number	4.75	4.75	4.75
Provided Structural Number <sup>1</sup>	4.95	4.79	4.78

<sup>1</sup>Structural Number for Cement Treatment of subgrade was not used in the Pavement Section Calculations.

**For the pavements located in the flood hazard area or natural drainage path areas, one of the following additional measures should be constructed beneath the soil subgrade level:**

- Prepare the subgrade with 12 inches of moisture conditioned soils beneath 6 to 8 inches of cement treated soils, or
- Prepare the subgrade with at least 12 inches of cement treated soils.

### 5.3.2 General Guidelines for Pavements

**All pavement design and construction shall conform to the latest edition of Bexar County Flexible Pavement Design Criteria/ City of San Antonio Design and Construction Standards.** Pavement design methods are intended to provide structural sections with adequate thickness over a particular subgrade such that wheel loads are reduced to a level the subgrade can support. **The support characteristics of the subgrade for pavement design do not account for shrink/swell movements of an expansive clayey subgrade. Thus, the pavement may be adequate from a structural standpoint, yet still experience cracking and deformation due to shrink/swell related movement of the subgrade. It is, therefore, important to minimize moisture changes in the subgrade to reduce shrink/swell movements by stabilizing the subgrade.**

On most projects, rough site grading is accomplished relatively early in the construction phase. However, as construction proceeds, excavations are made into these areas; dry weather may desiccate some areas; rainfall and surface water saturate some areas; heavy traffic from concrete and other delivery vehicles disturbs the subgrade; and many surface irregularities are filled in with loose soils to improve trafficability temporarily. As a result, the pavement subgrade should be

carefully evaluated as the time for pavement construction approaches. This is particularly important in and around utility trench cuts through the cement stabilized subgrade.

Thorough proof-rolling of pavement areas using appropriate construction equipment weighing at least 20 tons should be performed no more than 24 hours prior to surface paving. Any problematic areas should be reworked and compacted at that time.

Long-term pavement performance will be dependent upon several factors, including maintaining subgrade moisture levels and providing for preventive maintenance. The following recommendations should be considered at a minimum:

- Maintain and promote proper surface drainage away from pavement edges;
- Consider appropriate edge drainage systems;
- Install drainage in areas anticipated for frequent wetting (e.g., landscape beds, discharge area, collection areas, etc.).
- Place joint sealant and seal cracks immediately;
- Seal all landscaped areas in, or adjacent to pavements, to minimize or prevent moisture migration to subgrade soils;
- Placing compacted, low permeability backfill against the exterior side of curb and gutter; and,
- Extending the base of the curb and gutter system through the pavement base material and cement stabilized subgrade soils and at least six (6) inches into the pavement subgrade.

Preventive maintenance should be planned and provided for through an on-going pavement management program. These activities are intended to slow the rate of pavement deterioration and to preserve the pavement investment. This consists of both localized maintenance (e.g., crack and joint sealing and patching) and global maintenance (e.g., surface sealing). Preventive maintenance is usually the first priority when implementing a planned pavement maintenance program and provides the highest return on investment for pavements. Prior to implementing any maintenance, additional engineering observation is recommended to determine the type and extent of preventive maintenance.

### 5.3.3 Drainage Adjacent to Pavements

The performance of the pavement system will not only be dependent upon the quality of construction but also upon the stability of the moisture content of the soils and base underlying the pavement surface. Proper drainage along or adjacent to the pavement edge or curbs is very important and should be provided so infiltration of surface water from unpaved areas surrounding the pavement is minimized. The Project Civil Engineer should design final grades so that there is positive drainage away from the pavement/curb edge. Also, surface slopes for asphaltic concrete pavement areas should be no flatter than two (2) percent to reduce the potential for ponding of water on the asphaltic concrete surface. The importance of proper runoff and drainage cannot

be overemphasized and should be thoroughly considered by the Project Civil Engineer. Post-construction accumulation or ponding of surface runoff near structures must be avoided.

Since water penetration usually results in degradation of the pavement section with time as vehicular traffic traverses the affected area, we recommend that the curbs extend vertically through the aggregate base course, cement stabilized layer and at least six (6) inches into the pavement subgrade.

5.3.4 Pavement Section Materials

**All pavement materials shall conform to the latest edition of City of San Antonio/ Bexar County design and construction guidelines.** Presented below are selection and preparation guidelines for various materials that may be used to construct the pavement sections. Submittals should be made for each pavement material. The submittals should be reviewed by TTL and any appropriate members of the Project Team. The submittals should provide test information necessary to verify full compliance with the recommended or specified material properties.

Hot Mix Asphaltic Concrete Surface - The paving mixture and construction methods shall conform to Item 340, “Hot Mix Asphaltic Concrete, Type C or D” of the Standard Specifications by TxDOT. The mix should be compacted between 91 and 95 percent of the maximum theoretical density as measured by TEX-227-F. The asphalt cement content by percent of total mixture weight should fall within a tolerance of  $\pm 0.3$  percent asphalt cement from the specific mix. In addition, the mix should be designed so 75 to 85 percent of the voids in the mineral aggregate (VMA) are filled with asphalt cement. The asphalt cement grades should conform to the table shown below.

Asphalt Cement Grades			
Street Classifications	Minimum PG Asphalt Cement Grade		
	Surface Courses	Binder and Level up courses	Base Courses
Arterials	PG 76-22	PG 70-22	PG 64-22
Collector and Local Type B Streets	PG 70-22		
Local Type A Street with Bus Traffic		PG 64-22	
Local Type A Street without Bus Traffic	PG 64-22		

Aggregates known to be prone to stripping should not be used in the hot mix. If such aggregates are used, measures should be taken to mitigate this concern. The mix should have at least 70 percent strength retention when tested in accordance with TEX-531-C.

Pavement specimens, which shall be either cores or sections of asphaltic pavement, will be tested according to Test Method TEX-207-F. The nuclear-density gauge or other methods which correlate satisfactorily with results obtained from Project pavement specimens may be used when approved by the Engineer. Unless otherwise shown on the plans, the Contractor shall be responsible for obtaining the required pavement specimens at their expense and in a manner and at locations selected by the Engineer.

Hot Mix Asphaltic Concrete Base – The paving mixture and construction methods shall conform to Item 340, “Hot Mix Asphaltic Concrete, Type B” of the standard specifications by TxDOT. The



mix should be compacted between 95 and 98 percent of the maximum theoretical density as measured by Tex-227-F. The asphalt cement content by percent of total mixture weight should fall within a tolerance of  $\pm 0.3$  percent asphalt cement from the specific mix. In addition, the mix should be designed so 77 to 87 percent of the VMA are filled with asphalt cement.

Prime Coat - The prime coat should consist of sealing the base with an oil such as MC-30 or AE-P asphalt cement. The prime coat should be applied at a rate not to exceed 0.35 gallons per square yard with materials which meet TxDOT Item 300. The prime coat will help to minimize penetration of rainfall and other moisture that penetrates the base.

Granular Base Material - Base material may be composed of crushed limestone base meeting all of the requirements of 2014 TxDOT Item 247, Type A, Grade 1 or 2; and should have no more than 15 percent of the material passing the No. 200 sieve. The base should be compacted to at least 95 percent of the maximum dry density determined in accordance with test method TEX-113-E at moisture contents ranging between -2 and +3 percentage points of the optimum moisture content.

Geogrid – Tensar TX-Type 3 triaxial geogrid may be used to provide additional structural support to flexible base materials. The geogrid should be placed as per the manufacturer's recommendations at the interface between the flexible base and subgrade.

Cement Treatment – Subsurface soil conditions exhibit a Plasticity Index (PI) greater than 20; Cement treatment of the on-site subgrade soils may be used for soil shrink and swell mitigation and to increase the structural capacity of the subgrade as a platform for the pavement. For cement treatment of the subgrade beneath asphalt pavements, we anticipate a minimum of six (6) percent Portland cement (TxDOT Item 275), by dry weight, should be used. The cement should be thoroughly mixed and blended with the top 6 inches of the subgrade (TxDOT, Item 275). Treatment should extend a minimum of two feet beyond the edge of the pavement.

The cement should be blended into the soil and preferably with a mixing device such as a pulvermixer to produce a uniform soil-cement mixture. The soil-cement mixture shall be placed in accordance with TxDOT 2014 Specification Item 275 and compacted to a minimum 95 percent of the maximum dry density determined in accordance with ASTM D 698 at moisture contents ranging from two percentage points below optimum to two percentage points above the optimum moisture content (-2 to +2)

Prevention of moisture intrusion is extremely important to the life of a pavement. Cracking of the subgrade can be expected when using cement treatment due to the increased rigidity of the soil. Maintenance of any reflected cracks will require immediate sealing to keep moisture from penetrating to the pavement layers below the surface. If reflective cracking on the pavement from the treated subgrade is a concern, we recommend that microcracking of the subgrade be performed and the procedure outlined in TxDOT 2014 Specification Item 275 be used to mitigate reflective cracking. Microcracking should be performed on treated subgrade layers not to exceed

8 inches compacted thickness. We recommend that a suitable and thorough inspection and testing plan be put in place to mitigate deficiencies in the construction process.

Details regarding subgrade preparation are presented in the Pavement Earthwork section below.

#### 5.3.5 Pavement Earthwork

The intended performance of roadway pavement is contingent upon following the earthwork recommendations and guidelines outlined in this section. Earthwork activities on the Project should be observed and evaluated by TTL personnel. The evaluation of earthwork should include observation and testing of all fill and backfill soils placed at the Site, and subgrade preparation beneath the streets.

**Pavements located in the flood hazard area or natural drainage path areas will require additional measures. One of the following options should be constructed beneath the soil subgrade level:**

- **Prepare the subgrade with 12 inches of moisture conditioned soils beneath 6 to 8 inches of cement treated soils, or**
- **Prepare the subgrade with at least 12 inches of cement treated soils.**

**The clay soils across the site have a moderate to high potential to undergo expansion and contraction with fluctuations in their moisture content.** Expansion and contraction of the clay subgrade can lead to cracking and undulating/corrugation in the pavement and curbs. Remedial methods to address this issue include: removing the expansive soils and replacing them with non-expansive cohesive soil; chemical injection of the expansive soils; a combination of moisture conditioning, cement treatment, and installation of a vertical moisture barrier; other subgrade preparation methods are also available.

This report provides recommendations to help mitigate the effects of soil shrinkage and expansion. However, even if these procedures are followed, some movement and cracking in the pavements should be anticipated. The severity of cracking and other damage will probably increase if any modification of the site results in excessive wetting or drying of the expansive soils. Eliminating the risk of movement and distress may not be feasible, but it may be possible to further reduce the risk of movement if other measures are used during construction.

**The pavement sections represent minimum recommended thicknesses and, as such, periodic maintenance should be anticipated. Therefore, preventive maintenance should be planned and provided for through an on-going pavement management program. Maintenance activities are intended to slow the rate of pavement deterioration and to preserve the pavement investment.**

**Based on the request from Lennar, the recommendations for Cement Treated Subgrade, Removal and Replacement, and Chemical Injection of the expansive soils are presented in Options 1 through 4 below.**

### Option 1: Cement Treatment

The following earthwork recommendations must be performed prior to pavement construction.

- Strip vegetation, loose topsoil, vegetation, and any otherwise unsuitable materials from the pavement area. The pavement area is defined as the area that extends at least 3 feet (horizontal) beyond the perimeter of the proposed pavement and any adjacent flatwork (sidewalks).
- Perform cut and fill to accommodate the design pavement subgrade elevation (also referenced as the bottom of the base course). On-site soils can be used for grade adjustments in fill areas. Refer to Section 4.0 of this report for requirements for the placement of on-site soils and select fill materials.
- After achieving the required excavation depth, and before placing any fill, the exposed excavation subgrade should be proof-rolled with at least a 20-ton roller, or equivalent equipment, to evidence any weak yielding zones. A technical representative of our firm should be present to observe the proof-rolling operations. If any weak yielding zones are present, they should be over-excavated, both vertically and horizontally, until competent soils are exposed. The excavated soil can be used to restore the excavation subgrade, provided that the soils are relatively free and clean of deleterious material or materials exceeding 3 inches in maximum dimension. The excavated soil or imported fill soil shall be placed in maximum 6-inch compacted lifts. Each lift of soil shall be moisture conditioned and compacted as described in Section 4.0.
- After proof-rolling and replacing any weak yielding zones, the clay subgrade should be cement treated in accordance with TxDOT Item 275. We anticipate that 5% cement (at the rate of about 28 lbs. of cement per square yard of soil) be added to the dark grayish-brown clay subgrade. The soil-cement mixture shall be placed in accordance with TxDOT 2014 Specification Item 275 and compacted to a minimum 95 percent of the maximum dry density determined in accordance with ASTM D 698 at moisture contents ranging from two percentage points below optimum to two percentage points above the optimum moisture content (-2 to +2).
- For pavement subgrades the earthwork described here should result in approximately six (6) inches of cement treated soil below the design pavement subgrade elevation.

**Note: Regardless of the reason, the soil-cement treated subgrade should not be reworked. Instead, the Cement treated soil shall be removed completely, and a new mixture of soil-cement will have to be used.**

### Option 2: Removal and Replacement of Existing Subgrade Soils

- Strip vegetation, loose topsoil, and any otherwise unsuitable materials to a depth of six (6) inches.

- Excavate 3½ feet below the design pavement subgrade elevation in Units 4 thru 9 and excavate 4 feet below the design pavement subgrade elevation in Units 12 thru 20. Dispose of this material in areas not planned for current or future development of roads or buildings.
- After achieving the required excavation depth and before placing any fill, the exposed excavation subgrade should be proof-rolled with at least a 20-ton roller, or equivalent equipment, to evidence any weak yielding zones. A technical representative of our firm should be present to observe the proof-rolling operations. If any weak yielding zones are present, they should be over-excavated, both vertically and horizontally, until competent soils are exposed. The excavated soil can be used to restore the excavation subgrade, provided that the soils are relatively free and clean of deleterious material or materials exceeding 3 inches in maximum dimension. The excavated soil or imported fill soil shall be placed in maximum 6-inch compacted lifts. Each lift of soil shall be moisture conditioned and compacted as described in Section 4.0.
- After proof-rolling and replacing any weak yielding zones, place and compact Select Lean Clay fill as described in Section 4.2 to establish the design pavement subgrade elevation for each road in all 15 units.
- For pavement subgrades, the earthwork described herein should result in approximately 3½ feet of compacted Select Lean Clay fill below the design pavement subgrade elevation in Units 4 thru 9 and 4 feet of compacted Select Lean Clay fill below the design pavement subgrade elevation in Units 12 thru 20.

#### Option 3: Removal and Replacement with Cement Treatment

- Strip vegetation, loose topsoil, and any otherwise unsuitable materials to a depth of six (6) inches.
- Excavate 2½ feet, in Units 4 thru 9 and 12 thru 20, below the design pavement subgrade elevation and dispose of this material in areas not planned for current or future development of roads or buildings.
- After achieving the required excavation depth, and before placing any fill, the exposed excavation subgrade should be proof-rolled with at least a 20-ton roller, or equivalent equipment, to evidence any weak yielding zones. A technical representative of our firm should be present to observe the proof-rolling operations. If any weak yielding zones are present, they should be over-excavated, both vertically and horizontally, until competent soils are exposed. The excavated soil can be used to restore the excavation subgrade, provided that the soils are relatively free and clean of deleterious material or materials exceeding 3 inches in maximum dimension. The excavated soil or imported fill soil shall be placed in maximum 6-inch compacted lifts. Each lift of soil shall be moisture conditioned and compacted as described in Section 4.0.

- After proof-rolling and replacing any weak yielding zones, place and compact Select Lean Clay fill as described in Section 4.2 to establish the design pavement subgrade elevation for each road in all 15 units.
- For pavement subgrades, the earthwork described herein should result in approximately 2½ feet of compacted Select Lean Clay fill, in Units 4 thru 9 and Units 12 thru 20, below the design pavement subgrade elevation.
- After placing the Select Lean Clay fill to achieve the design pavement subgrade elevation, the top six (6) inches should be cement treated in accordance with TxDOT Item 275. We anticipate that 6% cement (at the rate of about 28 lbs. of cement per square yard of soil) be added to the dark grayish-brown clay subgrade. The soil-cement mixture shall be placed in accordance with TxDOT 2014 Specification Item 275 and compacted to a minimum 95 percent of the maximum dry density determined in accordance with ASTM D 698 at moisture contents ranging from two percentage points below optimum to two percentage points above the optimum moisture content (-2 to +2).
- For pavement subgrade the earthwork herein should result in six (6) inches of cement treated soil and 24 inches of Select Lean Clay fill below the design pavement subgrade elevation.

#### Option 4: Chemical Injection Treatment

- Strip vegetation, loose topsoil, and any otherwise unsuitable materials to a depth of six (6) inches.
- The proposed road perimeter should then be chemically injected to a depth of 8 feet as measured from the existing grade using a potassium-based chemical.
- Injections should have a center to center spacing not greater than 2½ feet.
- After passing the swell testing, the road way surface should be scarified to a depth of about six (6) inches to mix the excess chemical slurry into the subgrade soils.
- The scarified subgrade should then be moisture conditioned between +2 and +4 percentage points above the optimum moisture content and compacted between 92 and 97 percent of the maximum dry density determined in accordance with ASTM D 698.
- The final six (6) inches below the roadway granular base course should consist of Select Lean Fill or crushed stone base to provide an all-weather working surface and uniform support to the roadway. The Select Lean Fill should be moisture conditioned between -2 and +3 percentage points of the optimum moisture content and compacted to at least 95 percent of the maximum dry density determined in accordance with the Standard effort (ASTM D 698).

## 6.0 LIMITATIONS

This geotechnical engineering report has been prepared for the exclusive use of our Client for specific application to this Project. This geotechnical engineering report has been prepared in accordance with generally accepted geotechnical engineering practices using that level of care and skill ordinarily exercised by licensed members of the engineering profession currently practicing under similar conditions in the same locale. No warranties, express or implied, are intended or made.

TTL understands that this geotechnical engineering report will be used by the Client and various individuals and firms' designers and contractors involved with the preliminary design of the Project. TTL should be invited to attend Project meetings (in person or teleconferencing) or be contacted in writing to address applicable issues relating to the geotechnical engineering aspects of the Project. The information provided in this report is intended for planning purposes only and should not be used for final design considerations.

This geotechnical engineering report is based upon the information provided to us by the Client and various other individuals and entities associated with the Project, along with the field exploration, laboratory testing, and engineering analyses and evaluations performed by TTL as described in this report. The Client and readers of this geotechnical engineering report should realize that subsurface variations and anomalies may exist across the site which may not be revealed by our field exploration. Furthermore, the Client and readers should realize that site conditions can change due to the modifying effects of seasonal and climatic conditions and conditions at times after our exploration may be different than reported herein.

The nature and extent of such site or subsurface variations may not become evident until construction commences or is in progress. If site and subsurface anomalies or variations exist or develop, TTL should be contacted immediately so that the situation can be properly evaluated and, if necessary, addressed with provide applicable recommendations.

Unless stated otherwise in this report or in the contract documents between TTL and Client, our scope of services for this Project did not include, either specifically or by implication, any environmental or biological assessment of the site or buildings, or any identification or prevention of pollutants, hazardous materials or conditions at the site or within buildings. If the Client is concerned about the potential for such contamination or pollution, TTL should be contacted to provide a scope of additional services to address the environmental concerns. In addition, TTL is not responsible for permitting, site safety, excavation support, and dewatering requirements.

Should the nature, design, or location of the Project, as outlined in this geotechnical engineering report be modified, the geotechnical engineering recommendations and guidelines provided in this document will not be considered valid unless TTL is authorized to review the changes and either verifies or modifies the applicable Project changes in writing.

Additional information about the use and limitations of a geotechnical report is provided within the Geoprofessional Business Association document included at the end of this report.



# Important Information about This Geotechnical-Engineering Report

Subsurface problems are a principal cause of construction delays, cost overruns, claims, and disputes.

While you cannot eliminate all such risks, you can manage them. The following information is provided to help.

**The Geoprofessional Business Association (GBA) has prepared this advisory to help you – assumedly a client representative – interpret and apply this geotechnical-engineering report as effectively as possible. In that way, you can benefit from a lowered exposure to problems associated with subsurface conditions at project sites and development of them that, for decades, have been a principal cause of construction delays, cost overruns, claims, and disputes. If you have questions or want more information about any of the issues discussed herein, contact your GBA-member geotechnical engineer. Active engagement in GBA exposes geotechnical engineers to a wide array of risk-confrontation techniques that can be of genuine benefit for everyone involved with a construction project.**

## Understand the Geotechnical-Engineering Services Provided for this Report

Geotechnical-engineering services typically include the planning, collection, interpretation, and analysis of exploratory data from widely spaced borings and/or test pits. Field data are combined with results from laboratory tests of soil and rock samples obtained from field exploration (if applicable), observations made during site reconnaissance, and historical information to form one or more models of the expected subsurface conditions beneath the site. Local geology and alterations of the site surface and subsurface by previous and proposed construction are also important considerations. Geotechnical engineers apply their engineering training, experience, and judgment to adapt the requirements of the prospective project to the subsurface model(s). Estimates are made of the subsurface conditions that will likely be exposed during construction as well as the expected performance of foundations and other structures being planned and/or affected by construction activities.

The culmination of these geotechnical-engineering services is typically a geotechnical-engineering report providing the data obtained, a discussion of the subsurface model(s), the engineering and geologic engineering assessments and analyses made, and the recommendations developed to satisfy the given requirements of the project. These reports may be titled investigations, explorations, studies, assessments, or evaluations. Regardless of the title used, the geotechnical-engineering report is an engineering interpretation of the subsurface conditions within the context of the project and does not represent a close examination, systematic inquiry, or thorough investigation of all site and subsurface conditions.

## Geotechnical-Engineering Services are Performed for Specific Purposes, Persons, and Projects, and At Specific Times

Geotechnical engineers structure their services to meet the specific needs, goals, and risk management preferences of their clients. A geotechnical-engineering study conducted for a given civil engineer

will not likely meet the needs of a civil-works constructor or even a different civil engineer. Because each geotechnical-engineering study is unique, each geotechnical-engineering report is unique, prepared *solely* for the client.

Likewise, geotechnical-engineering services are performed for a specific project and purpose. For example, it is unlikely that a geotechnical-engineering study for a refrigerated warehouse will be the same as one prepared for a parking garage; and a few borings drilled during a preliminary study to evaluate site feasibility will not be adequate to develop geotechnical design recommendations for the project.

*Do not rely on this report if your geotechnical engineer prepared it:*

- for a different client;
- for a different project or purpose;
- for a different site (that may or may not include all or a portion of the original site); or
- before important events occurred at the site or adjacent to it; e.g., man-made events like construction or environmental remediation, or natural events like floods, droughts, earthquakes, or groundwater fluctuations.

Note, too, the reliability of a geotechnical-engineering report can be affected by the passage of time, because of factors like changed subsurface conditions; new or modified codes, standards, or regulations; or new techniques or tools. *If you are the least bit uncertain about the continued reliability of this report, contact your geotechnical engineer before applying the recommendations in it. A minor amount of additional testing or analysis after the passage of time – if any is required at all – could prevent major problems.*

## Read this Report in Full

Costly problems have occurred because those relying on a geotechnical-engineering report did not read the report in its entirety. Do not rely on an executive summary. Do not read selective elements only. *Read and refer to the report in full.*

## You Need to Inform Your Geotechnical Engineer About Change

Your geotechnical engineer considered unique, project-specific factors when developing the scope of study behind this report and developing the confirmation-dependent recommendations the report conveys. Typical changes that could erode the reliability of this report include those that affect:

- the site's size or shape;
- the elevation, configuration, location, orientation, function or weight of the proposed structure and the desired performance criteria;
- the composition of the design team; or
- project ownership.

As a general rule, *always* inform your geotechnical engineer of project or site changes – even minor ones – and request an assessment of their impact. *The geotechnical engineer who prepared this report cannot accept*



responsibility or liability for problems that arise because the geotechnical engineer was not informed about developments the engineer otherwise would have considered.

### Most of the “Findings” Related in This Report Are Professional Opinions

Before construction begins, geotechnical engineers explore a site’s subsurface using various sampling and testing procedures. *Geotechnical engineers can observe actual subsurface conditions only at those specific locations where sampling and testing is performed.* The data derived from that sampling and testing were reviewed by your geotechnical engineer, who then applied professional judgement to form opinions about subsurface conditions throughout the site. Actual site-wide subsurface conditions may differ – maybe significantly – from those indicated in this report. Confront that risk by retaining your geotechnical engineer to serve on the design team through project completion to obtain informed guidance quickly, whenever needed.

### This Report’s Recommendations Are Confirmation-Dependent

The recommendations included in this report – including any options or alternatives – are confirmation-dependent. In other words, they are not final, because the geotechnical engineer who developed them relied heavily on judgement and opinion to do so. Your geotechnical engineer can finalize the recommendations *only after observing actual subsurface conditions* exposed during construction. If through observation your geotechnical engineer confirms that the conditions assumed to exist actually do exist, the recommendations can be relied upon, assuming no other changes have occurred. *The geotechnical engineer who prepared this report cannot assume responsibility or liability for confirmation-dependent recommendations if you fail to retain that engineer to perform construction observation.*

### This Report Could Be Misinterpreted

Other design professionals’ misinterpretation of geotechnical-engineering reports has resulted in costly problems. Confront that risk by having your geotechnical engineer serve as a continuing member of the design team, to:

- confer with other design-team members;
- help develop specifications;
- review pertinent elements of other design professionals’ plans and specifications; and
- be available whenever geotechnical-engineering guidance is needed.

You should also confront the risk of constructors misinterpreting this report. Do so by retaining your geotechnical engineer to participate in prebid and preconstruction conferences and to perform construction-phase observations.

### Give Constructors a Complete Report and Guidance

Some owners and design professionals mistakenly believe they can shift unanticipated-subsurface-conditions liability to constructors by limiting the information they provide for bid preparation. To help prevent the costly, contentious problems this practice has caused, include the complete geotechnical-engineering report, along with any attachments or appendices, with your contract documents, *but be certain to note*

*conspicuously that you’ve included the material for information purposes only.* To avoid misunderstanding, you may also want to note that “informational purposes” means constructors have no right to rely on the interpretations, opinions, conclusions, or recommendations in the report. Be certain that constructors know they may learn about specific project requirements, including options selected from the report, *only* from the design drawings and specifications. Remind constructors that they may perform their own studies if they want to, and *be sure to allow enough time* to permit them to do so. Only then might you be in a position to give constructors the information available to you, while requiring them to at least share some of the financial responsibilities stemming from unanticipated conditions. Conducting prebid and preconstruction conferences can also be valuable in this respect.

### Read Responsibility Provisions Closely

Some client representatives, design professionals, and constructors do not realize that geotechnical engineering is far less exact than other engineering disciplines. This happens in part because soil and rock on project sites are typically heterogeneous and not manufactured materials with well-defined engineering properties like steel and concrete. That lack of understanding has nurtured unrealistic expectations that have resulted in disappointments, delays, cost overruns, claims, and disputes. To confront that risk, geotechnical engineers commonly include explanatory provisions in their reports. Sometimes labeled “limitations,” many of these provisions indicate where geotechnical engineers’ responsibilities begin and end, to help others recognize their own responsibilities and risks. *Read these provisions closely.* Ask questions. Your geotechnical engineer should respond fully and frankly.

### Geoenvironmental Concerns Are Not Covered

The personnel, equipment, and techniques used to perform an environmental study – e.g., a “phase-one” or “phase-two” environmental site assessment – differ significantly from those used to perform a geotechnical-engineering study. For that reason, a geotechnical-engineering report does not usually provide environmental findings, conclusions, or recommendations; e.g., about the likelihood of encountering underground storage tanks or regulated contaminants. *Unanticipated subsurface environmental problems have led to project failures.* If you have not obtained your own environmental information about the project site, ask your geotechnical consultant for a recommendation on how to find environmental risk-management guidance.

### Obtain Professional Assistance to Deal with Moisture Infiltration and Mold

While your geotechnical engineer may have addressed groundwater, water infiltration, or similar issues in this report, the engineer’s services were not designed, conducted, or intended to prevent migration of moisture – including water vapor – from the soil through building slabs and walls and into the building interior, where it can cause mold growth and material-performance deficiencies. Accordingly, *proper implementation of the geotechnical engineer’s recommendations will not of itself be sufficient to prevent moisture infiltration.* Confront the risk of moisture infiltration by including building-envelope or mold specialists on the design team. *Geotechnical engineers are not building-envelope or mold specialists.*



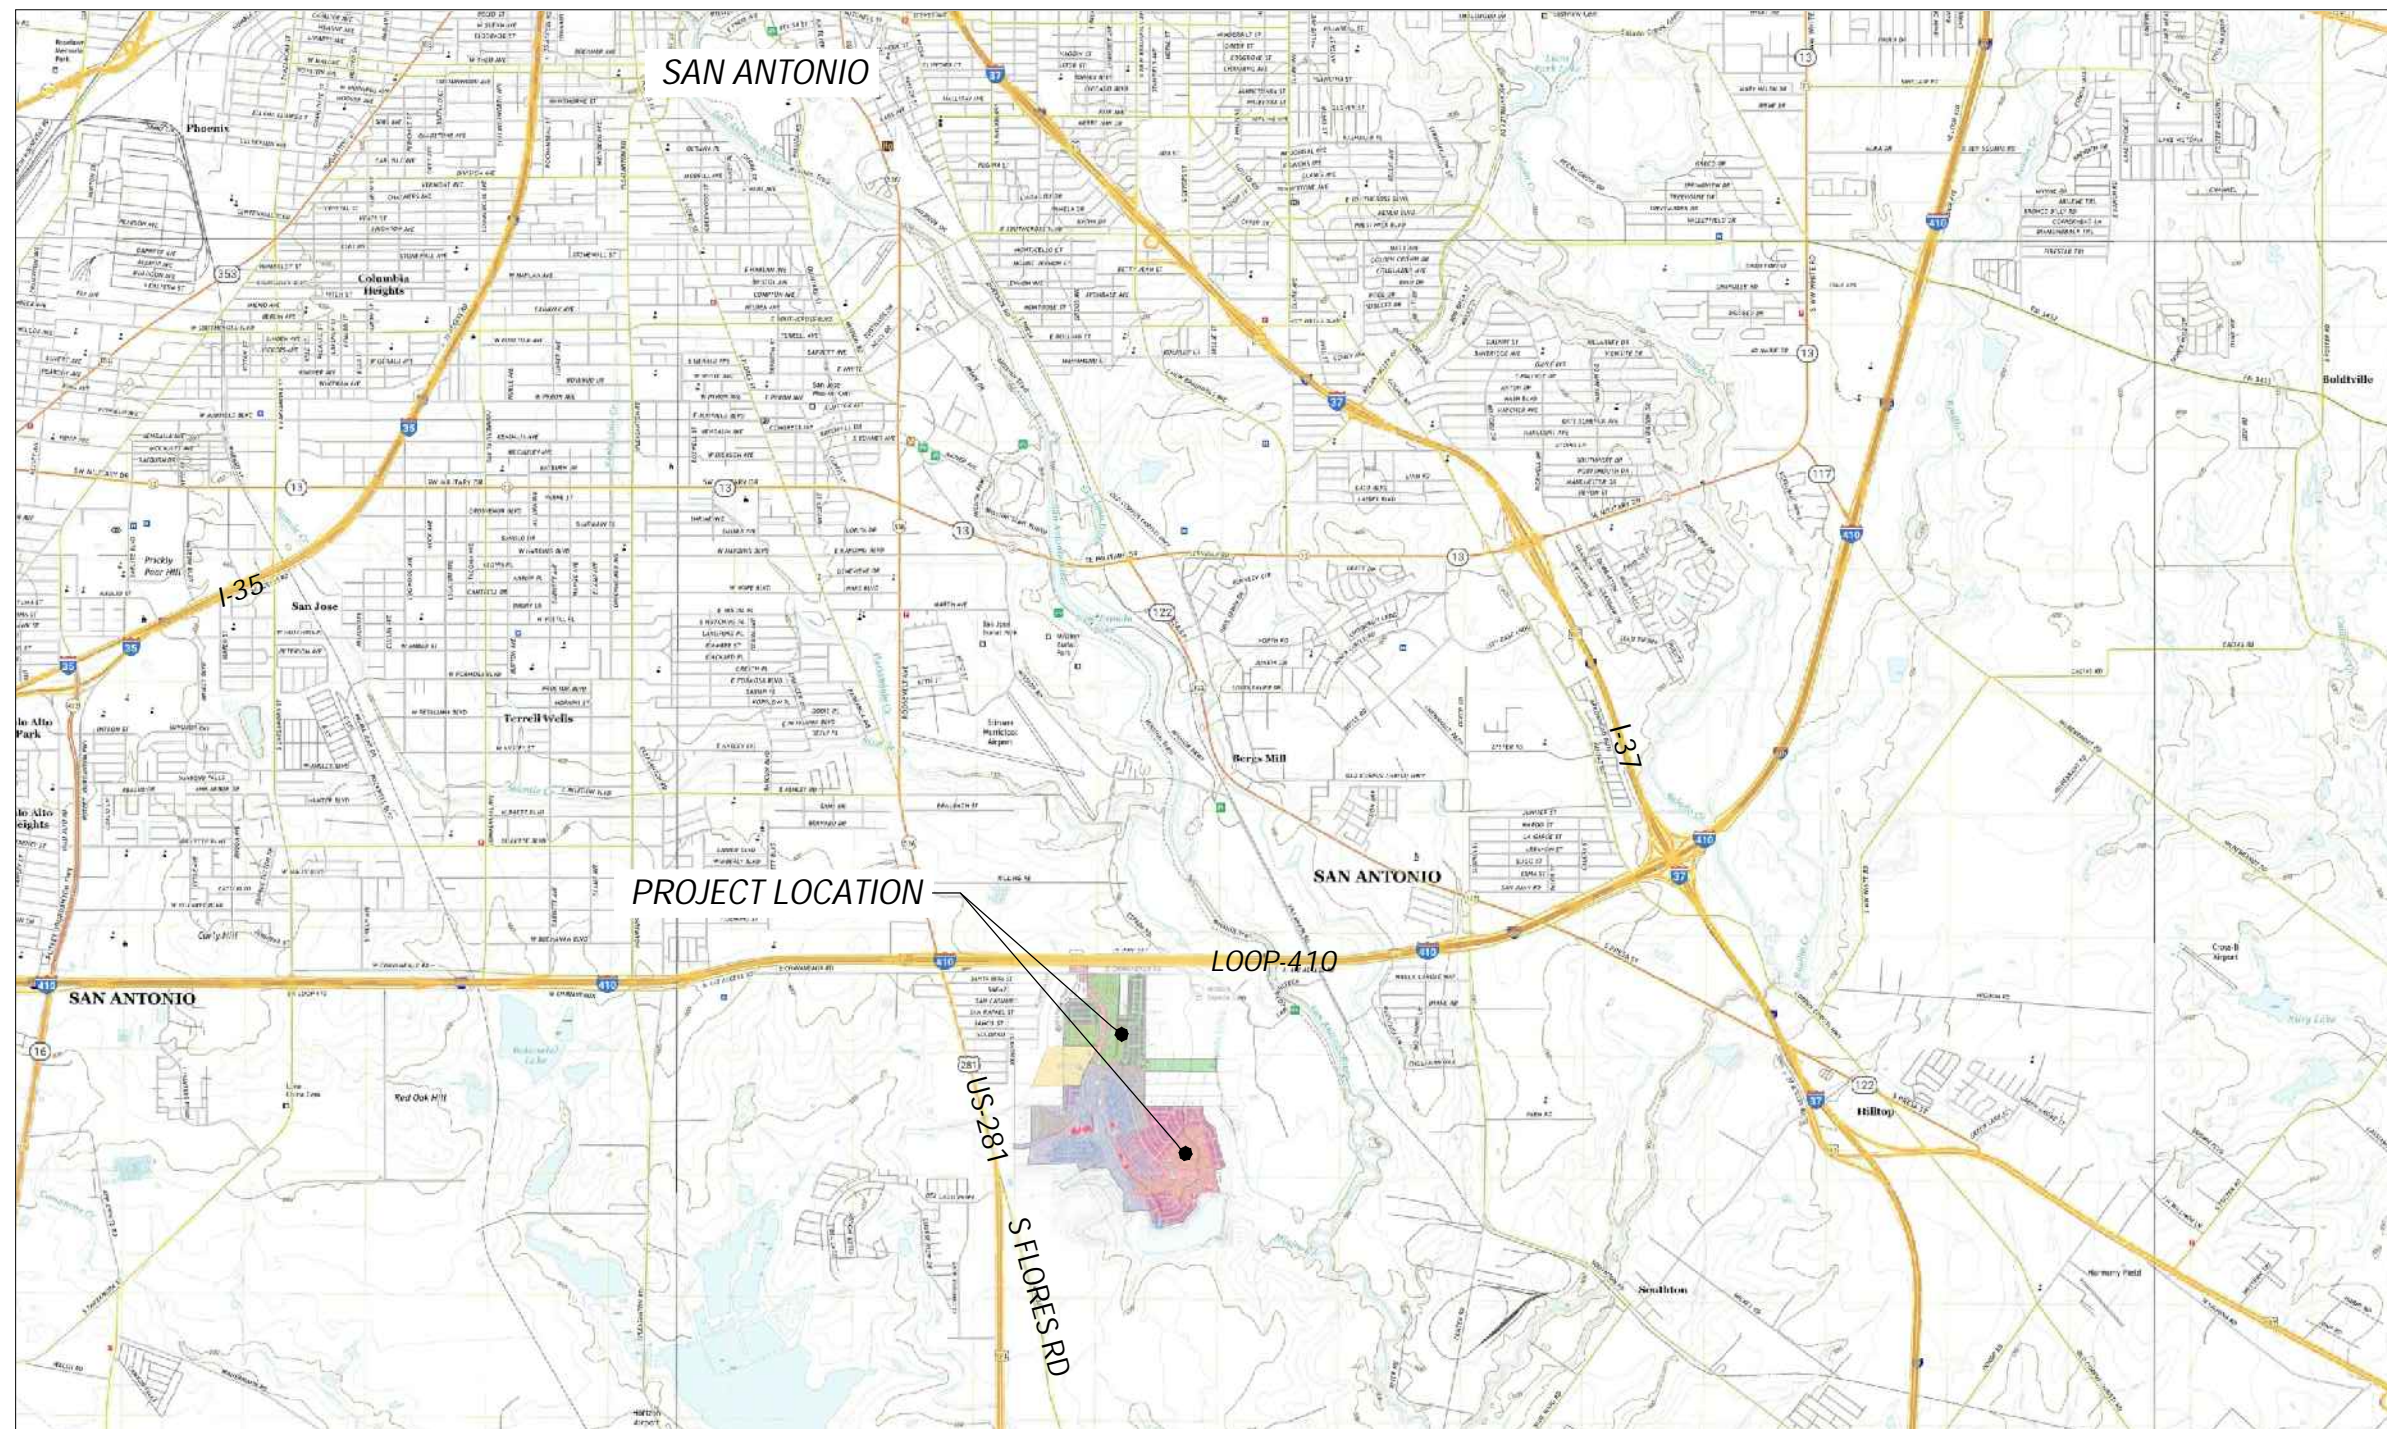
**GEOPROFESSIONAL  
BUSINESS  
ASSOCIATION**

Telephone: 301/565-2733

e-mail: [info@geoprofessional.org](mailto:info@geoprofessional.org) [www.geoprofessional.org](http://www.geoprofessional.org)

## APPENDIX A ILLUSTRATIONS





<u>Legend</u>	SITE LOCATION MAP		Date:	9/27/2023	Exhibit 1
	<div style="text-align: center;"> <p>ESPADA TRACT UNITS 4 THRU 9 &amp; 12 THRU 20</p> <p>LOOP 410 AND US-281/SOUTH FLORES ROAD SAN ANTONIO, BEXAR COUNTY, TEXAS</p> </div>		Drawn By:	JMP	<div style="display: flex; align-items: center;"> <div> <p>17215 Jones Maltsberger Rd., Suite 101 San Antonio, TX 78247 210.888.6100</p> <p>TBPE Registration: F-12622 TBPG Registration: 50456</p> </div> </div>
			Checked By:	AMJ	
			Approved By:	TA	
			Project No.: 00230901641.02		





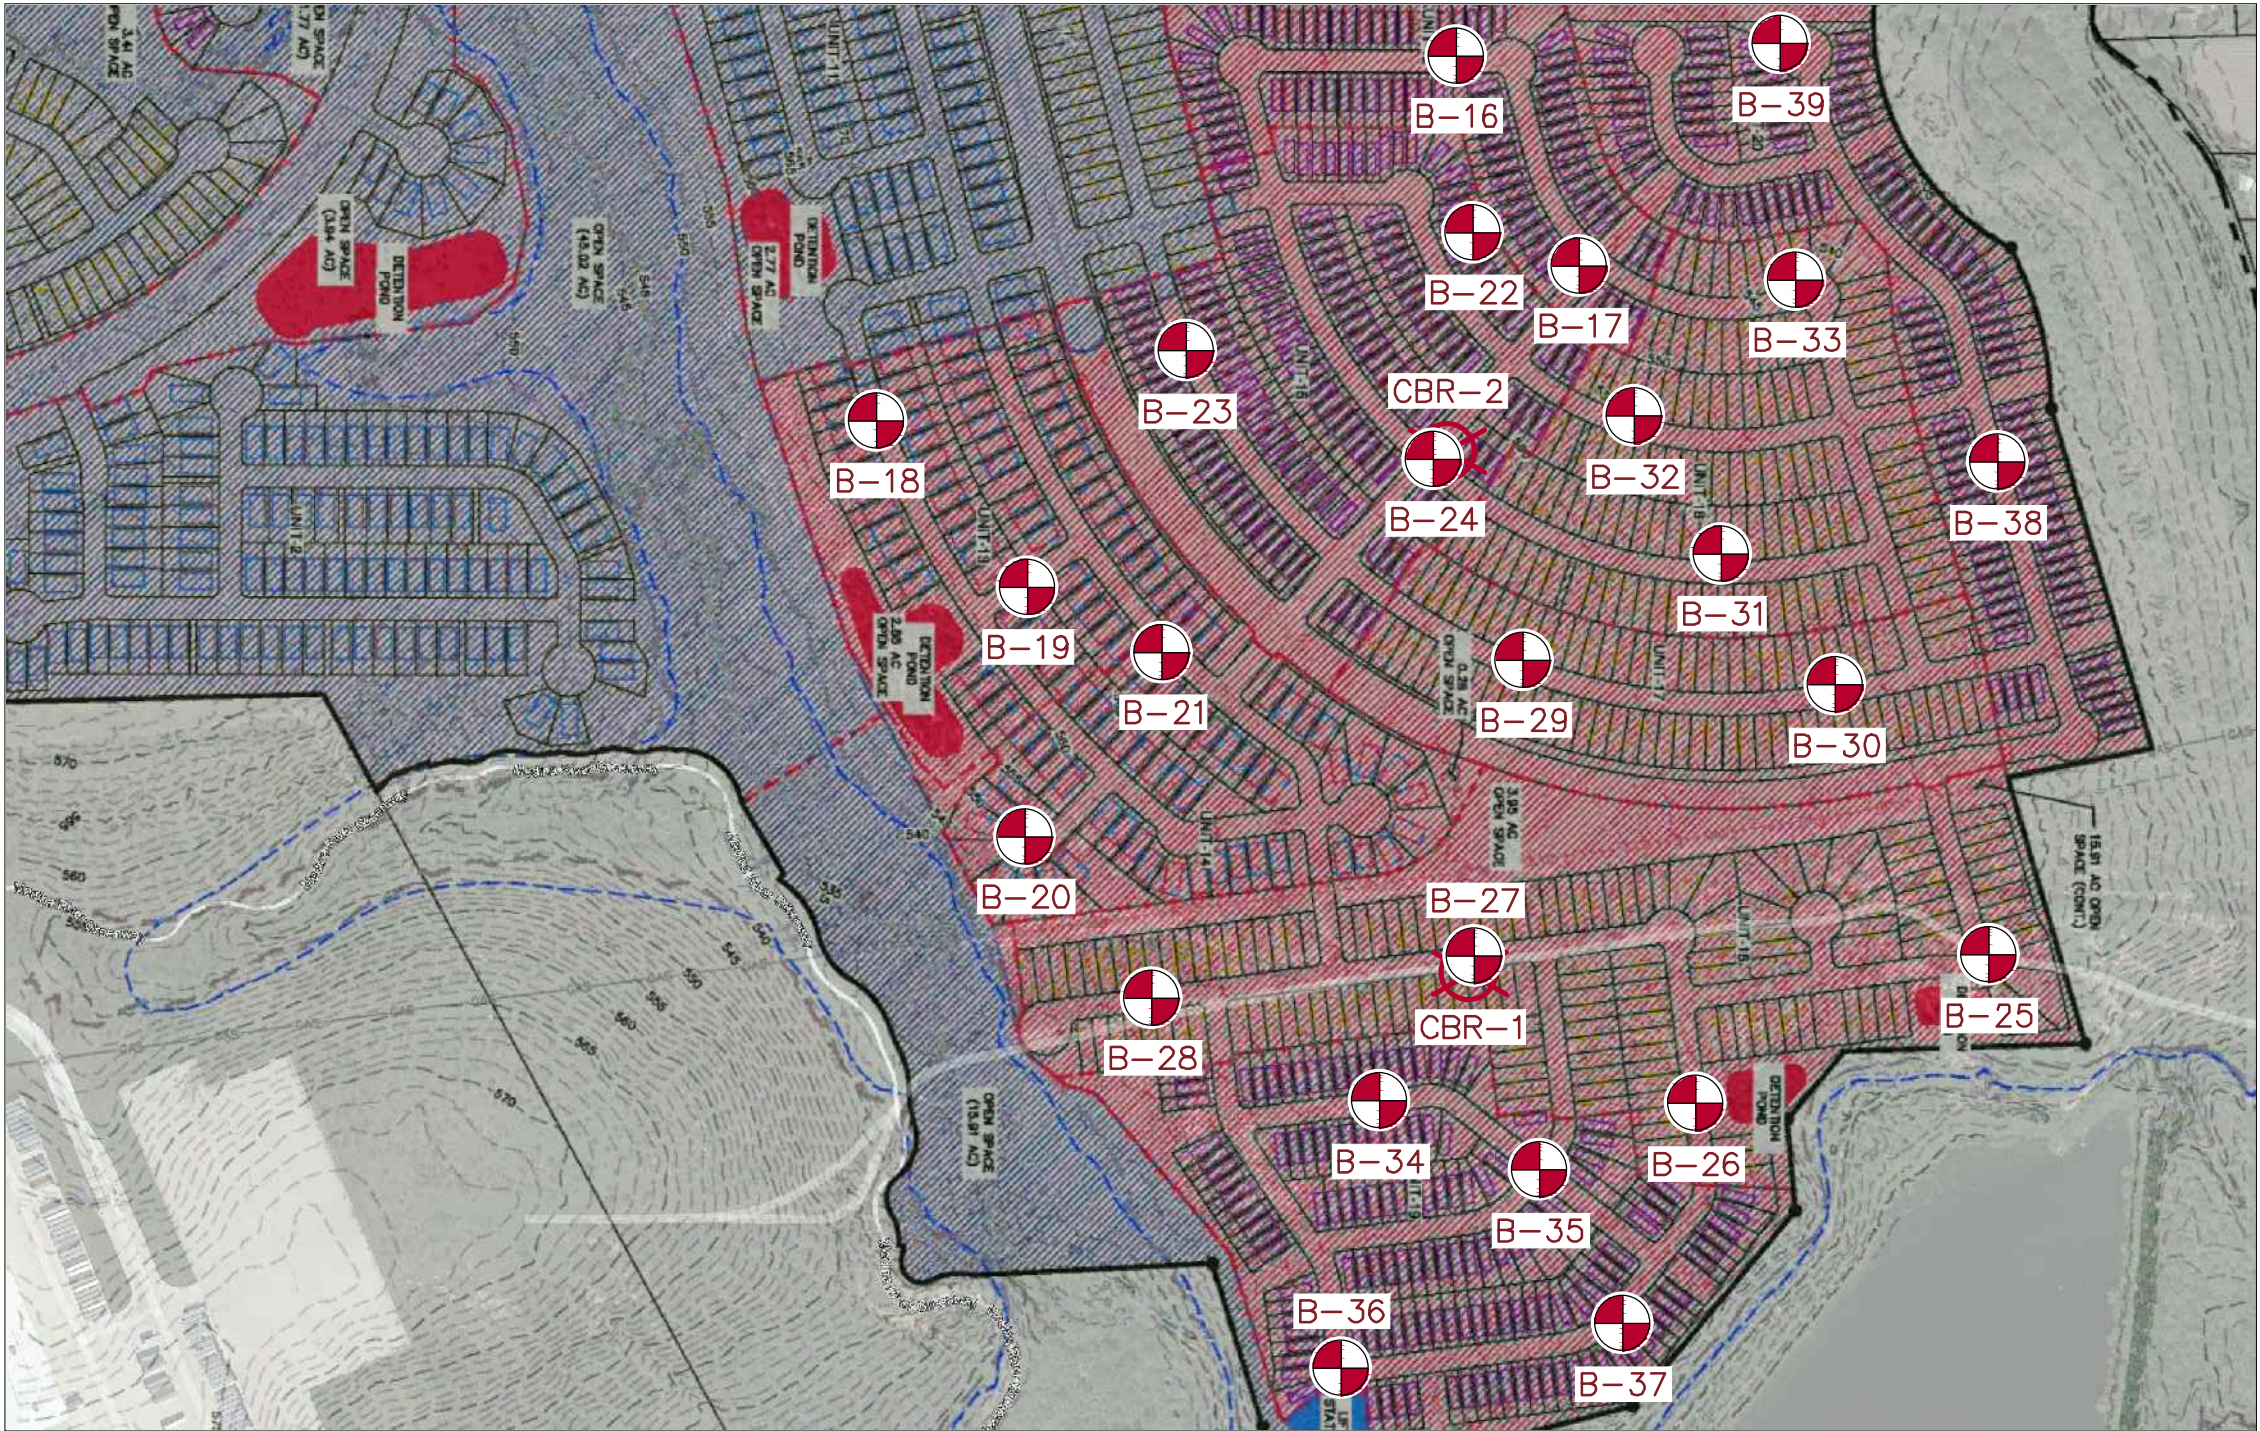
Legend


Boring Location and Identifier

California Bearing Ratio Sample Location and Identifier

BORING LOCATIONS	Date: 9/27/2023	<div>Exhibit 2A</div> <div><div>TTL</div><div>17215 Jones Maltsberger Rd., Suite 101 San Antonio, TX 78247 210.888.6100 TBPE Registration: F-12622 TBPG Registration: 50456</div></div>
	Drawn By: JMP	
ESPADA TRACT UNITS 4 THRU 9	Checked By: AMJ	
	Approved By: TA	
	Project No.: 00230901641.02	
LOOP 410 AND US-281/SOUTH FLORES ROAD SAN ANTONIO, BEXAR COUNTY, TEXAS		





<div>Legend</div> <div><div></div><div>B-X</div><div>Boring Location and Identifier</div></div> <div><div></div><div>CBR-X</div><div>California Bearing Ratio Sample Location and Identifier</div></div>		BORING LOCATIONS		Date: 9/27/2023	Exhibit 2B	
		ESPADA TRACT 12 THRU 20  LOOP 410 AND US-281/SOUTH FLORES ROAD SAN ANTONIO, BEXAR COUNTY, TEXAS		Drawn By: JMP	<div></div> <div>17215 Jones Maltsberger Rd., Suite 101 San Antonio, TX 78247 210.888.6100 TBPE Registration: F-12622 TBPG Registration: 50456</div>	
				Checked By: AMJ		
				Approved By: TA		
				Project No.: 00230901641.02		



# SOIL LEGEND

## FINE- AND COARSE-GRAINED SOIL INFORMATION
















FINE-GRAINED SOILS (SILTS AND CLAYS)			COARSE-GRAINED SOILS (SANDS AND GRAVELS)		PARTICLE SIZE	
SPT N-Value	Consistency	Estimated $Q_u$ (TSF)	SPT N-Value	Relative Density	Name	Size (US Std. Sieve)
0 - 1	Very Soft	0 - 0.25	0 - 4	Very Loose	Boulders	>300 mm (>12 in.)
2 - 4	Soft	0.25 - 0.5	5 - 10	Loose	Cobbles	75 mm to 300 mm (3 - 12 in.)
5 - 8	Firm	0.5 - 1.0	11 - 30	Medium Dense	Coarse Gravel	19 mm to 75 mm (3/4 - 3 in.)
9 - 15	Stiff	1.0 - 2.0	31 - 50	Dense	Fine Gravel	4.75 mm to 19 mm (#4 - 3/4 in.)
16 - 30	Very Stiff	2.0 - 4.0	51+	Very Dense	Coarse Sand	2 mm to 4.75 mm (#10 - #4)
31+	Hard	4.0+			Medium Sand	0.425 mm to 2 mm (#40 - #10)
$Q_u$ = Unconfined Compression Strength					Fine Sand	0.075 mm to 0.425 mm (#200 - #40)
					Silts and Clays	< 0.075 mm (< #200)

RELATIVE PROPORTIONS OF SAND AND GRAVEL		RELATIVE PROPORTIONS OF CLAYS AND SILTS	
Descriptive Terms	Percent of Dry Weight	Descriptive Terms	Percent of Dry Weight
"Trace"	< 15	"Trace"	< 5
"With"	15 - 30	"With"	5 - 12
Modifier	> 30	Modifier	> 12

CRITERIA FOR DESCRIBING MOISTURE CONDITION		CRITERIA FOR DESCRIBING CEMENTATION	
Description	Criteria	Description	Criteria
Dry	Absence of moisture, dusty, dry to the touch	Weak	Crumbles or breaks with handling or little finger pressure
Moist	Damp, but no visible water	Moderate	Crumbles or breaks with considerable finger pressure
Wet	Visible free water, usually soil is below water table	Strong	Will not crumble or break with finger pressure

CRITERIA FOR DESCRIBING STRUCTURE	
Description	Criteria
Stratified	Alternating layers of varying material or color with layers at least 6 mm thick; note the thickness
Laminated	Alternating layers of varying material or color with the layers less than 6 mm thick; note thickness
Fissured	Breaks along definite planes of fracture with little resistance to fracturing
Slickensided	Fracture planes appear polished or glossy, sometimes striated
Blocky	Cohesive soil that can be broken down into small angular lumps which resist further breakdown
Lensed	Inclusion of small pockets of different soils such as small lenses of sand scattered through a mass of clay; note thickness
Homogeneous	Same color and appearance throughout

ABBREVIATIONS AND ACRONYMS			
WOH	Weight of Hammer	N-Value	Sum of the blows for last two 6-in increments of SPT
WOR	Weight of Rod		
Ref.	Refusal	NA	Not Applicable or Not Available
ATD	At Time of Drilling	OD	Outside Diameter
DCP	Dynamic Cone Penetrometer	PPV	Pocket Penetrometer Value
Elev.	Elevation	SFA	Solid Flight Auger
ft.	feet	SH	Shelby Tube Sampler
HSA	Hollow Stem Auger	SS	Split-Spoon Sampler
ID	Inside Diameter	SPT	Standard Penetration Test
in.	inches	USCS	Unified Soil Classification System
lbs	pounds		

SAMPLERS AND DRILLING METHODS	
	AUGER CUTTINGS
	BAG/BULK SAMPLE
	GRAB SAMPLE
	CONTINUOUS SAMPLES
	SHELBY TUBE SAMPLE
	PITCHER SAMPLE
	STANDARD PENETRATION SPLIT-SPOON SAMPLE
	SPLIT-SPOON SAMPLE WITH NO RECOVERY
	DYNAMIC CONE PENETROMETER
	ROCK CORE
WATER LEVEL SYMBOLS	
	WATER LEVEL AT TIME OF DRILLING
	PERCHED WATER OBSERVED AT DRILLING
	DELAYED WATER LEVEL OBSERVATION
	CAVE-IN DEPTH
	OBSERVED SEEPAGE

**TTL**

UNIFIED SOIL CLASSIFICATION SYSTEM (USCS)					
FINE GRAINED SOILS (>50% of material is smaller than the #200 sieve)	GRAVELS (>50% of coarse fraction is larger than the #4 sieve)	SANDS (>50% of coarse fraction is smaller than the #4 sieve)	GRAVELS WITH MORE THAN 12% FINES	SANDS WITH MORE THAN 12% FINES	SILTS & CLAYS (Liquid Limit less than 50)
COARSE GRAINED SOILS (>50% of the material is larger than the #200 sieve)	CLEAN GRAVEL WITH <5% FINES	Cu > 4 Cc = 1-3		GW	Well-graded gravels, gravel-sand mixtures with trace or no fines
				GP	Poorly-graded gravels, gravel-sand mixtures with trace or no fines
		Cu > 4 Cc = 1-3		GW-GM	Well-graded gravels, gravel-sand mixtures with silt fines
				GW-GC	Well-graded gravels, gravel-sand mixtures with clay fines
	GRAVEL WITH 5% TO 12% FINES	Cu ≤ 4 and/or Cc < 1 Cc > 3		GP-GM	Poorly-graded gravels, gravel-sand mixtures with silt fines
				GP-GC	Poorly-graded gravels, gravel-sand mixtures with clay fines
				GM	Silty gravels, gravel-silt-sand mixtures
				GC	Clayey gravels, gravel-sand-clay mixtures
	GRAVEL WITH MORE THAN 12% FINES			GC-GM	Clayey gravels, gravel-sand-clay-silt mixtures
	CLEAN SAND WITH <5% FINES	Cu > 6 Cc = 1-3		SW	Well-graded sands, sand-gravel mixtures with trace or no fines
				SP	Poorly-graded sands, sand-gravel mixtures with trace or no fines
		Cu > 6 Cc = 1-3		SW-SM	Well-graded sands, sand-gravel mixtures with silt fines
				SW-SC	Well-graded sands, sand-gravel mixtures with clay fines
	SAND WITH 5% TO 12% FINES	Cu ≤ 6 and/or Cc < 1 Cc > 3		SP-SM	Poorly-graded sands, sand-gravel mixtures with silt fines
				SP-SC	Poorly-graded sands, sand-gravel mixtures with clay fines
				SM	Silty sands, sand-gravel-silt mixtures
				SC	Clayey sands, sand-gravel-clay mixtures
	SAND WITH MORE THAN 12% FINES			SC-SM	Clayey sands, sand-gravel-clay-silt mixtures
	SILTS & CLAYS (Liquid Limit less than 50)			ML	Inorganic silts with low plasticity
				CL	Inorganic clays of low plasticity, gravelly or sandy clays, silty clays, lean clays
				CL-ML	Inorganic clay-silts of low plasticity, gravelly clays, sandy clays, silty clays, lean clays
				OL	Organic silts and organic silty clays of low plasticity
	SILTS & CLAYS (Liquid Limit more than 50)			MH	Inorganic silts of high plasticity, elastic silts
				CH	Inorganic clays of high plasticity, fat clays
				OH	Organic clays and organic silts of high plasticity

USCS - HIGHLY ORGANIC SOILS		
Primarily organic matter, dark in color, organic odor		
	PT	Peat, humus, swamp soils with high organic contents
OTHER MATERIALS		
	BITUMINOUS CONCRETE (ASPHALT)	
	CONCRETE	
	CRUSHED STONE/AGGREGATE BASE	
	TOPSOIL	
	FILL	
	UNDIFFERENTIATED ALLUVIUM	
	UNDIFFERENTIATED OVERBURDEN	
	BOULDERS AND COBBLES	

#### UNIFORMITY COEFFICIENT

$$C_u = D_{60}/D_{10}$$

#### COEFFICIENT OF CURVATURE

$$C_c = (D_{30})^2/(D_{60} \times D_{10})$$

Where:

$D_{60}$  = grain diameter at 60% passing

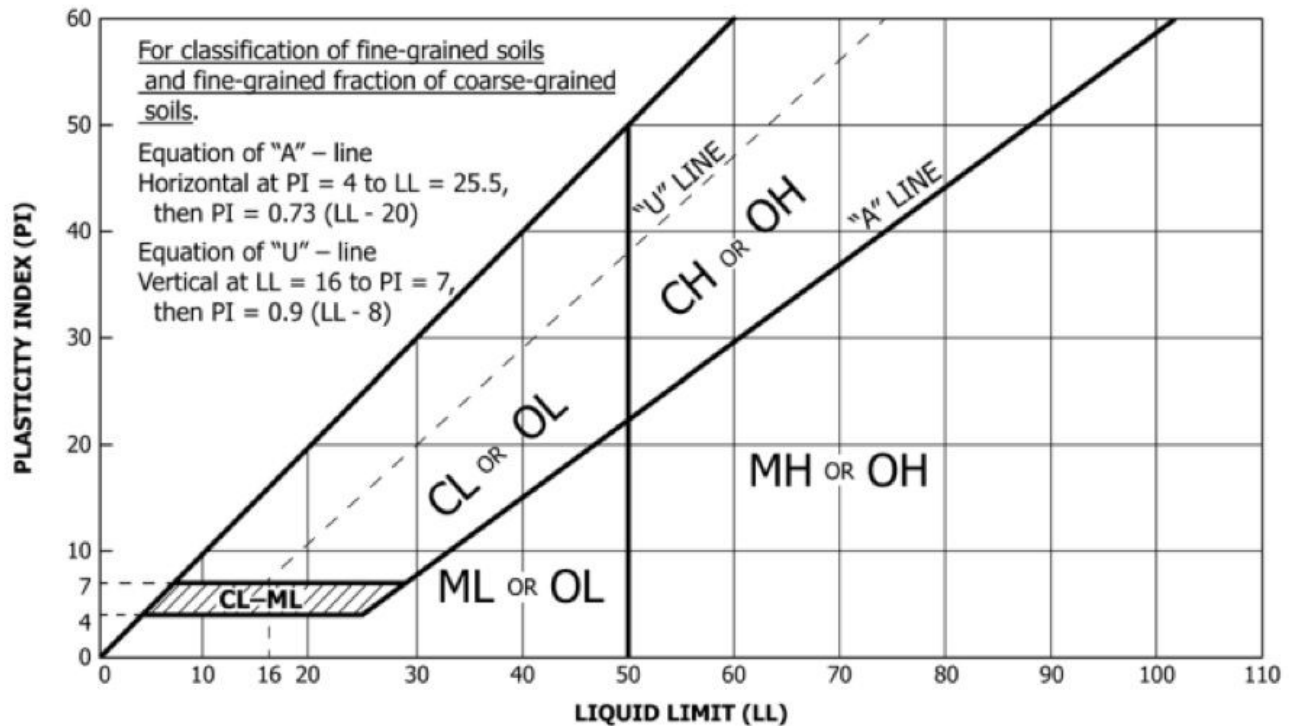
$D_{30}$  = grain diameter at 30% passing

$D_{10}$  = grain diameter at 10% passing

**TTL**



## PLASTICITY CHART FOR USCS CLASSIFICATION OF FINE-GRAINED SOILS



### IMPORTANT NOTES ON TEST BORING RECORDS




- 1) The report and graphics key are an integral part of these logs. All data and interpretations in this log are subject to the explanations and limitations stated in the report.
- 2) Lines separating strata on the logs represent approximate boundaries only. Actual transitions may be gradual or differ from those shown. Solid lines are used to indicate a change in the material type, particularly a change in the USCS classification. Dashed lines are used to separate two materials that have the same material type, but that differ with respect to two or more other characteristics (e.g. color, consistency).
- 3) No warranty is provided as to the continuity of soil or rock conditions between individual sample locations.
- 4) Logs represent general soil and rock conditions observed at the point of exploration on the date indicated.
- 5) In general, Unified Soil Classification System (USCS) designations presented on the logs were based on visual classification in the field and were modified where appropriate based on gradation and index property testing.
- 6) Fine-grained soils that plot within the hatched area on the Plasticity Chart, and coarse-grained soils with between 5% and 12% passing the #200 sieve require dual USCS symbols as presented on the previous page.
- 7) If the sampler is not able to be driven at least 6 inches, then 50/X" indicates that the sampler advanced X inches when struck 50 times with a 140-pound hammer falling 30 inches.
- 8) If the sampler is driven at least 6 inches, but cannot be driven either of the subsequent two 6-inch increments, then either 50/X" or the sum of the second 6-inch increment plus 50/X" for the third 6-inch increment will be indicated.  
 Example 1: Recorded SPT blow counts are 16 - 50/4", the SPT N-value will be shown as  $N = 50/4"$   
 Example 2: Recorded SPT blow counts are 18 - 25 - 50/2", the SPT N-value will be shown as  $N = 75/8"$



**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**  
San Antonio, Bexar County, Texas

**Log of  
B-01**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/13/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4648    Latitude: 29.3202</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/SQFT		RQD % REC	LIQUID LIMIT	PLASTIC LIMIT						PLASTICITY INDEX
			LEAN CLAY WITH SAND; stiff to hard, dark brown to brown, calcareous (CL)															
	1																	
	2																	
	3																	
	4																	
	5																	
	6																	
	7																	
	8																	
	9		- becomes olive brown below 8½ feet															
	10		Boring terminated at 10 feet.															
	11																	
	12																	
	13																	
	14																	

R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACK UNITS.GPJ 10/16/23 Report:1-GEOTECH LOG - LAT LONG






**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**

San Antonio, Bexar County, Texas

**Log of  
B-02**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/13/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4631    Latitude: 29.3204</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>




ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA													
				TYPE	BORE/CORE DATA			MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (psf)	SHEAR STRENGTH (psf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6"	2nd 6"	P: TONS/FOOT		RQD % REC	LIQUID LIMIT	PLASTIC LIMIT						PLASTICITY INDEX
					N-VALUE BLOWS/FT												
	1		FAT CLAY WITH SAND; firm to very stiff, dark brown (CH)		2 - 2 - 6 N = 8			11								79.3	
	2																
	3		5 - 7 - 10 N = 17			12	64	18	46								
	4																
	5		- becomes calcareous below 4½ feet		7 - 10 - 14 N = 24			10									
	6		LEAN CLAY WITH SAND; very stiff to hard, light brown to light tan, calcareous (CL)														
	7		7 - 11 - 13 N = 24			9	40	14	26								
	8																
	9		19 - 50/5 N = 50/5"			5							71.4				
	10		Boring terminated at 10 feet.														
	11																
	12																
	13																
	14																



**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**  
San Antonio, Bexar County, Texas

**Log of  
B-03**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/13/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4638    Latitude: 29.3189</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/SQFT		RQD % REC	LIQUID LIMIT LL	PLASTIC LIMIT PL						PLASTICITY INDEX PI
	1		FAT CLAY WITH SAND; stiff to very stiff, dark brown, calcareous (CH)		3 - 4 - 5 N = 9				10								78.5	
	2																	
	3		6 - 9 - 12 N = 21				16											
	4																	
	5		8 - 12 - 13 N = 25				17	65	21	44								
	6		LEAN CLAY; hard, olive-brown, calcareous (CL)															
	7		7 - 18 - 34 N = 52				11								94.2			
	8																	
	9		14 - 27 - 50/5 N = 77/11"				10	39	13	26								
	10		Boring terminated at 10 feet.															
	11																	
	12																	
	13																	
	14																	




R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACK UNITS.GPJ 10/16/23 Report-1-GEOTECH LOG - LAT LONG



**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**  
San Antonio, Bexar County, Texas

**Log of  
B-04**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/13/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4632    Latitude: 29.3174</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/FT		RQD % REC	LIQUID LIMIT	PLASTIC LIMIT						PLASTICITY INDEX
	1		LEAN CLAY WITH SAND; stiff to hard, dark brown to light gray, calcareous (CL)  - becomes olive brown between 6½ and 8 feet  - becomes olive brown and reddish-brown below 8½ feet		3 - 4 - 8 N = 12				8									
	2																	
	3				P = 4.5+				11	48	20	28				76.4		
	4																	
	5				12 - 15 - 15 N = 30				9									
	6																	
	7				9 - 18 - 23 N = 41				7	33	16	17						
	8																	
	9				17 - 29 - 50/5 N = 79/11"				9							73.0		
	10					Boring terminated at 10 feet.												
	11																	
	12																	
	13																	
	14																	

R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACT UNITS.GPJ 10/16/23 Report 1-GEOTECH LOG - LAT LONG






**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**

San Antonio, Bexar County, Texas

**Log of  
B-05**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/12/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4666    Latitude: 29.3183</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/SQFT		RQD % REC	LIQUID LIMIT LL	PLASTIC LIMIT PL						PLASTICITY INDEX PI
	1		FAT CLAY WITH SAND; very stiff to hard, dark brown to light brown (CH)		5 - 8 - 9 N = 17				9	52	27	25	121	8665	3.3		77.4	
	2																	
	3		P = 4.5+				13											
	4																	
	5		- becomes calcareous below 4½ feet				14											
	6		LEAN CLAY WITH SAND; very stiff to hard, light brown, calcareous (CL)		7 - 12 - 17 N = 29				13	46	13	33						
	7																	
	8		28 - 50/5 N = 50/5"				5											
	9																	
	10		Boring terminated at 10 feet.															
	11																	
	12																	
	13																	
	14																	

This boring log shall not be separated from the corresponding Instrument of Service; no third party may rely upon this boring log or the corresponding Instrument of Service absent a written TTL Secondary Client Agreement.








**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**  
San Antonio, Bexar County, Texas

**Log of  
B-06**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/13/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4647    Latitude: 29.3176</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/SQFT		RQD % REC	LIQUID LIMIT	PLASTIC LIMIT						PLASTICITY INDEX
	1		FAT CLAY WITH SAND; stiff to hard, dark brown to brown, calcareous (CH)		3 - 5 - 9 N = 14				8								74.5	
2																		
3																		
4																		
	5		LEAN CLAY WITH SAND; hard to very stiff, light brown, calcareous (CL)		10 - 16 - 15 N = 31				10	51	21	30						
6																		
7																		
8																		
9																		
10																		
	11		Boring terminated at 10 feet.		9 - 16 - 19 N = 35				9	46	16	30						
12																		
13																		
14																		
	15				4 - 9 - 16 N = 25				11								83.3	
16																		
17																		
18																		
	19				9 - 13 - 15 N = 28				11									
20																		
21																		
22																		
	23																	
24																		
25																		
26																		
	27																	
28																		
29																		
30																		
	31																	
32																		
33																		
34																		
	35																	
36																		
37																		
38																		
	39																	
40																		
41																		
42																		
	43																	
44																		
45																		
46																		
	47																	
48																		
49																		
50																		
	51																	
52																		
53																		
54																		
	55																	
56																		
57																		
58																		
	59																	
60																		
61																		
62																		
	63																	
64																		
65																		
66																		
	67																	
68																		
69																		
70																		
	71																	
72																		
73																		
74																		
	75																	
76																		
77																		
78																		
	79																	
80																		
81																		
82																		
	83																	
84																		
85																		
86																		
	87																	
88																		
89																		
90																		
	91																	
92																		
93																		
94																		
	95																	
96																		
97																		
98																		
	99																	
100																		
101																		
102																		
	103																	
104																		
105																		
106																		
	107																	
108																		
109																		
110																		
	111																	
112																		
113																		
114																		
	115																	
116																		
117																		
118																		
	119																	
120																		
121																		
122																		
	123																	
124																		
125																		
126																		
	127																	
128																		
129																		
130																		
	131																	
132																		
133																		
134																		
	135																	
136																		
137																		
138																		
	139																	
140																		
141																		
142																		
	143																	
144																		
145																		
146																		
	147																	
148																		
149																		
150																		
	151																	
152																		
153																		
154																		
	155																	
156																		
157																		
158																		
	159																	
160																		
161																		
162																		
	163																	
164																		
165																		
166																		
	167																	
168																		
169																		
170																		
	171																	
172																		
173																		
174																		
	175																	
176																		
177																		
178																		
	179																	
180																		
181																		
182																		
	183																	
184																		
185																		
186																		
	187																	
188																		
189																		
190																		
	191																	
192																		
193																		
194																		
	195																	
196																		
197																		
198																		
	199																	
200																		
201																		
202																		
	203																	
204																		
205																		
206																		
	207																	
208																		
209																		
210																		
	211																	
212																		
213																		
214																		
	215																	
216																		
217																		
218																		
	219																	
220																		
221																		
222																		
	223																	
224																		
225																		
226																		
	227																	
228																		
229																		
230																		
	231																	
232																		
233																		
234																		
	235																	
236																		
237																		
238																		
	239																	
240																		
241																		
242																		
	243																	
244																		
245																		
246																		
	247																	
248																		
249																		
250																		
	251																	
252																		
253																		
254																		
	255																	
256																		
257																		
258																		
	259																	
260																		
261																		
262																		
	263																	
264																		
265																		
266																		
	267																	
268																		
269																		
270																		
	271																	
272																		
273																		
274																		
	275																	
276																		
277																		
278																		
	279																	
280																		
281																		
282																		
	283																	
284																		
285																		
286																		
	287																	
288																		
289																		
290																		
	291																	
292																		
293																		
294																		
	295									</								

This boring log shall not be separated from the corresponding Instrument of Service; no third party may rely upon this boring log or the corresponding Instrument of Service absent a written TTL Secondary Client Agreement.


















**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**

San Antonio, Bexar County, Texas

**Log of  
B-07**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/12/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4666    Latitude: 29.3167</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA			MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (psf)	SHEAR STRENGTH (psf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE		
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"		P: TONS/FOOT	RQD % REC	LIQUID LIMIT LL						PLASTIC LIMIT PL	PLASTICITY INDEX PI
	1		LEAN CLAY; stiff, dark brown (CL)		3 - 4 - 5 N = 9			7	38	15	23							
	2		FAT CLAY WITH SAND; stiff to very stiff, dark brown to light brown, calcareous (CH)		5 - 7 - 8 N = 15			10										
	3			6 - 8 - 9 N = 17			12	54	15	39								
	4			5 - 8 - 10 N = 18			11											
	5																	
	6																	
	7																	
	8		LEAN CLAY; very stiff, light tan, calcareous (CL)		4 - 7 - 9 N = 16			12								91.6		
	9																	
	10		Boring terminated at 10 feet.															
	11																	
	12																	
	13																	
	14																	

This boring log shall not be separated from the corresponding Instrument of Service; no third party may rely upon this boring log or the corresponding Instrument of Service absent a written TTL Secondary Client Agreement.






**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**

San Antonio, Bexar County, Texas

**Log of  
B-08**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/13/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.465    Latitude: 29.316</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/SQFT		RQD % REC	LIQUID LIMIT	PLASTIC LIMIT						PLASTICITY INDEX
	1		LEAN CLAY WITH SAND; stiff to hard, dark brown to light brown, calcareous (CL)		4 - 5 - 7 N = 12				9								71.6	
	2																	
	3																	
	4																	
	5																	
	6																	
	7																	
	8		SANDY LEAN CLAY; hard, light tan, calcareous (CL)		7 - 16 - 29 N = 45				10	40	13	27						
	9																	
	10																	
	11		Boring terminated at 10 feet.		34 - 50/5 N = 50/5"				5								68.1	
	12																	
	13																	
	14																	




R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACK UNITS.GPJ 10/16/23 Report-1-GEOTECH LOG - LAT LONG



**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**  
San Antonio, Bexar County, Texas

**Log of  
B-09**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/13/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4625    Latitude: 29.3166</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/SQFT		RQD % REC	LIQUID LIMIT	PLASTIC LIMIT						PLASTICITY INDEX
	1		CLAYEY SAND WITH GRAVEL; medium dense, dark brown, calcareous (SC)		7 - 9 - 9 N = 18				3									
	2		FAT CLAY; very stiff, dark brown, calcareous (CH)		9 - 12 - 15 N = 27				9	50	14	36						
	3				3 - 9 - 16 N = 25				9								66.4	
	4		SANDY LEAN CLAY; very stiff to hard, dark brown and light brown, calcareous (CL)		7 - 18 - 29 N = 47				8	31	17	14						
	5				21 - 50/5 N = 50/5"				5								79.7	
	6																	
	7																	
	8		LEAN CLAY WITH SAND; hard, pale brown, calcareous (CL)															
	9																	
	10		Boring terminated at 10 feet.															
	11																	
	12																	
	13																	
	14																	

R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACK UNITS.GPJ 10/16/23 Report:1-GEOTECH LOG - LAT LONG






**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**

San Antonio, Bexar County, Texas

**Log of  
B-10**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/13/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4636    Latitude: 29.3148</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/SQFT		RQD % REC	LIQUID LIMIT	PLASTIC LIMIT						PLASTICITY INDEX
	1		SANDY LEAN CLAY; stiff to hard, dark brown to brown and light brown, calcareous (CL)		3 - 5 - 7 N = 12				7									
	2																	
	3					12 - 14 - 17 N = 31				8							60.1	
	4																	
	5					9 - 14 - 21 N = 35				17								
	6			LEAN CLAY WITH SAND; hard, pale brown (CL)														
	7				15 - 28 - 41 N = 69				3	17	9	8						
	8																	
	9				50/5 N = 50/5"				7							75.0		
	10		Boring terminated at 10 feet.															
	11																	
	12																	
	13																	
	14																	




R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACK UNITS.GPJ 10/16/23 Report-1-GEOTECH LOG - LAT LONG



**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**  
San Antonio, Bexar County, Texas

**Log of  
B-11**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/12/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.461    Latitude: 29.3203</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (psf)	SHEAR STRENGTH (psf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/FOOT		RQD % REC	LIQUID LIMIT	PLASTIC LIMIT						PLASTICITY INDEX
	1		LEAN CLAY WITH SAND; very stiff, dark brown to light brown, calcareous (CL)		4 - 7 - 11 N = 18				8								80.1	
	2			P = 4.5+				12										
	3																	
	4			- becomes hard between 4½ and 6 feet														
	5					14 - 18 - 27 N = 45				6	43	17	26					
	6																	
	7			- becomes olive gray below 6½ feet		11 - 14 - 16 N = 30				4								75.2
	8																	
	9					7 - 9 - 12 N = 21				15								
	10			Boring terminated at 10 feet.														
	11																	
	12																	
	13																	
	14																	

R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACK UNITS.GPJ 10/16/23 Report 1-GEOTECH LOG - LAT LONG








**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**

San Antonio, Bexar County, Texas

**Log of  
B-12**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/12/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4611    Latitude: 29.3188</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (psf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/SQFT		RQD % REC	LIQUID LIMIT LL	PLASTIC LIMIT PL						PLASTICITY INDEX PI
	1		SANDY LEAN CLAY; very stiff, dark brown (CL)		4 - 7 - 10 N = 17				7									
	2		- becomes calcareous below 2½ feet															
	3						7 - 11 - 11 N = 22				9						68.8	
	4		- trace gravel between 4½ and 6 feet															
	5						12 - 12 - 15 N = 27				5	36	15	21				
	6		LEAN CLAY; very stiff to hard, light brown to olive gray, calcareous (CL)															
	7						7 - 12 - 16 N = 28				9					95.5		
	8																	
	9						11 - 15 - 21 N = 36				9	44	17	27				
	10		Boring terminated at 10 feet.															
	11																	
	12																	
	13																	
	14																	

R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACK UNITS.GPJ 10/16/23 Report1-GEOTECH LOG - LAT LONG






**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**

San Antonio, Bexar County, Texas

**Log of  
B-13**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/12/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4613    Latitude: 29.3173</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	TYPE	SAMPLE DATA													
					BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (psf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/SQFT		RQD % REC	LIQUID LIMIT LL	PLASTIC LIMIT PL						PLASTICITY INDEX PI
	1		FAT CLAY; stiff to very stiff, dark brown (CH)		3 - 4 - 11 N = 15				9	52	17	35						
	2																	
	3																	
	4		- becomes calcareous below 2½ feet		5 - 12 - 16 N = 28				12									
	5																	
	6																	
	7																	
	8																	
	9																	
	10																	
	11		LEAN CLAY WITH SAND; very stiff to hard, brown and light brown (CL)		7 - 10 - 14 N = 24				10									
	12																	
	13																	
	14																	
	15																	
	16																	
	17																	
	18				7 - 16 - 23 N = 39				9	34	11	23						
	19																	
	20																	
	21																	
	22																	
	23																	
	24																	
	25				14 - 22 - 37 N = 59				8							74.8		
	26																	
	27																	
	28																	
	29																	
	30																	
	31																	
	32		Boring terminated at 10 feet.													82.0		
	33																	
	34																	
	35																	
	36																	
	37																	
	38																	
	39																	
	40																	
	41																	
	42																	
	43																	
	44																	
	45																	
	46																	
	47																	
	48																	
	49																	
	50																	
	51																	
	52																	
	53																	
	54																	
	55																	
	56																	
	57																	
	58																	
	59																	
	60																	
	61																	
	62																	
	63																	
	64																	
	65																	
	66																	
	67																	
	68																	
	69																	
	70																	
	71																	
	72																	
	73																	
	74																	
	75																	
	76																	
	77																	
	78																	
	79																	
	80																	
	81																	
	82																	
	83																	
	84																	
	85																	
	86																	
	87																	
	88																	
	89																	
	90																	
	91																	
	92																	
	93																	
	94																	
	95																	
	96																	
	97																	
	98																	
	99																	
	100																	

This boring log shall not be separated from the corresponding Instrument of Service; no third party may rely upon this boring log or the corresponding Instrument of Service absent a written TTL Secondary Client Agreement.






**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**

San Antonio, Bexar County, Texas

**Log of  
B-14**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/12/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4609    Latitude: 29.316</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (psf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/FT		RQD % REC	LIQUID LIMIT	PLASTIC LIMIT						PLASTICITY INDEX
	1		LEAN CLAY WITH SAND; stiff to very stiff, dark brown, calcareous (CL)		3 - 5 - 9 N = 14				7									
	2																	
	3				7 - 9 - 9 N = 18				11									
	4																	
	5				5 - 9 - 10 N = 19				9	37	13	24						
	6		SANDY LEAN CLAY; hard, pale brown (CL)															
	7				14 - 22 - 31 N = 53				5	20	11	9						
	8																	
	9				23 - 28 - 27 N = 55				4									
	10																	
	11		Boring terminated at 10 feet.															
	12																	
	13																	
	14																	

R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACT UNITS.GPJ 10/16/23 Report 1-GEOTECH LOG - LAT LONG






**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**

San Antonio, Bexar County, Texas

**Log of  
B-15**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/14/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4619    Latitude: 29.3149</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/FOOT		RQD % REC	LIQUID LIMIT LL	PLASTIC LIMIT PL						PLASTICITY INDEX PI
	1		LEAN CLAY WITH SAND; stiff to hard, dark brown to dark brown and gray, calcareous (CL)		3 - 4 - 6 N = 10				8									
	2																	
	3			12 - 16 - 21 N = 37	10										77.4			
	4																	
	5			13 - 16 - 21 N = 37	10	40	13	27										
	6			LEAN CLAY; hard, light brown to gray and brown, calcareous (CL)														
	7				14 - 19 - 26 N = 45	9									86.7			
	8																	
	9				13 - 17 - 22 N = 39	9	45	16	29									
	10			Boring terminated at 10 feet.														
	11																	
	12																	
	13																	
	14																	




R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACT UNITS.GPJ 10/16/23 Report1-GEOTECH LOG - LAT LONG



**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**  
San Antonio, Bexar County, Texas

**Log of  
B-16**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/12/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4584    Latitude: 29.3107</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (psf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
					1st 6" N-VALUE BLOWS/FT	2nd 6" P: TONS/FOOT	3rd 6" RQD % REC	LIQUID LIMIT LL		PLASTIC LIMIT PL	PLASTICITY INDEX PI																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	




This boring log shall not be separated from the corresponding Instrument of Service; no third party may rely upon this boring log or the corresponding Instrument of Service absent a written TTL Secondary Client Agreement.



**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**  
San Antonio, Bexar County, Texas

**Log of  
B-17**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/12/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4575    Latitude: 29.3094</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (psf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/FT		RQD % REC	LIQUID LIMIT	PLASTIC LIMIT						PLASTICITY INDEX
	1		FAT CLAY WITH SAND; very stiff, dark brown to brown, slightly calcareous (CH)		8 - 5 - 11 N = 16				8							72.9		
	2																	
	3			9 - 12 - 14 N = 26				9										
	4																	
	5			5 - 11 - 15 N = 26				11	59	15	44							
	6			FAT CLAY; hard to very stiff, light brown, calcareous (CH)														
	7			8 - 13 - 18 N = 31				11							86.8			
	8																	
	9			- trace gravel, gypsum below 8½ feet				11	74	26	48							
	10																	
	11		Boring terminated at 10 feet.															
	12																	
	13																	
	14																	

R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACT UNITS.GPJ 10/16/23 Report 1-GEOTECH LOG - LAT LONG








**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**

San Antonio, Bexar County, Texas

**Log of  
B-18**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/13/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.462    Latitude: 29.3085</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/FT		RQD % REC	LIQUID LIMIT	PLASTIC LIMIT						PLASTICITY INDEX
	1		LEAN CLAY WITH SAND; very stiff to hard, brown (CL)		5 - 8 - 16 N = 24				6							75.1		
	2																	
	3		11 - 24 - 27 N = 51				8	48	15	33								
	4																	
	5		FAT CLAY; hard, light brown, calcareous (CH)  - becomes calcareous below 4½ feet		13 - 19 - 23 N = 42				9							86.6		
	6																	
	7		12 - 17 - 19 N = 36				9	50	16	34								
	8																	
	9		P = 3.0				9							85.2				
	10																	
	11		Boring terminated at 10 feet.															
	12																	
	13																	
	14																	

R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACT UNITS.GPJ 10/16/23 Report:1-GEOTECH LOG - LAT LONG








**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**

San Antonio, Bexar County, Texas

**Log of  
B-19**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/13/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4614    Latitude: 29.3075</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (psf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/SQFT		RQD % REC	LIQUID LIMIT	PLASTIC LIMIT						PLASTICITY INDEX
	1		LEAN CLAY; very stiff, brown and light brown to light brown and light gray (CL)		12 - 12 - 12 N = 24				7							91.2		
	2																	
	3		7 - 9 - 10 N = 19				12	47	12	35								
	4																	
	5		9 - 11 - 16 N = 27				8							93.4				
	6		LEAN CLAY WITH SAND; hard, light grayish-brown (CL)															
	7																	
	8		19 - 28 - 30 N = 58				7							84.2				
	9																	
	10		11 - 21 - 27 N = 48				5	27	10	17								
	10	Boring terminated at 10 feet.																
	11																	
	12																	
	13																	
	14																	




R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACT UNITS.GPJ 10/16/23 Report1-GEOTECH LOG - LAT LONG



**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**  
San Antonio, Bexar County, Texas

**Log of  
B-20**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/13/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4614    Latitude: 29.306</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/SQFT		RQD % REC	LIQUID LIMIT LL	PLASTIC LIMIT PL						PLASTICITY INDEX PI
	1		LEAN CLAY WITH SAND; very stiff, brown to light brown (CL)		5 - 14 - 16 N = 30				6	31	14	17						
	2		- hard between 2½ and 4 feet															
	3						12 - 21 - 24 N = 45				10							
	4		- calcareous below 4½ feet															
	5						11 - 11 - 13 N = 24				7	49	13	36				
	6		FAT CLAY; very stiff, brown and light gray, calcareous (CH)															
	7		4 - 7 - 9 N = 16				17	72	21	51								
	8																	
	9		5 - 9 - 11 N = 20				19											
	10				Boring terminated at 10 feet.													
	11																	
	12																	
	13																	
	14																	




R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACT UNITS.GPJ 10/16/23 Report1-GEOTECH LOG - LAT LONG



**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**  
San Antonio, Bexar County, Texas

**Log of  
B-21**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/13/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4604    Latitude: 29.3071</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (psf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/SOFT		RQD % REC	LIQUID LIMIT LL	PLASTIC LIMIT PL						PLASTICITY INDEX PI
	1		LEAN CLAY WITH SAND; very stiff, dark gray to dark brown (CL)		4 - 7 - 11 N = 18				6	47	12	35						
	2																	
	3			7 - 9 - 11 N = 20				10										
	4																	
	5		- WITH GRAVEL between 4½ and 6 feet		7 - 11 - 16 N = 27				11									
	6		LEAN CLAY; hard, light brown, calcareous (CL)															
	7				P = 4.5				14	46	12	34	124	4805	3.0			
	8																	
	9				9 - 15 - 18 N = 33				13								92.4	
	10			Boring terminated at 10 feet.														
	11																	
	12																	
	13																	
	14																	




R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACT UNITS.GPJ 10/16/23 Report:1-GEOTECH LOG - LAT LONG



**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**  
San Antonio, Bexar County, Texas

**Log of  
B-22**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/12/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4583    Latitude: 29.3096</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/FT		RQD % REC	LIQUID LIMIT	PLASTIC LIMIT						PLASTICITY INDEX
	1		LEAN CLAY WITH SAND; stiff to hard, dark brown to grayish-brown (CL)		6 - 5 - 8 N = 13				9									
	2																	
	3		5 - 12 - 15 N = 27				11	41	15	26								
	4																	
	5		- becomes calcareous below 4½ feet		9 - 15 - 17 N = 32				9	37	14	23						
	6		SANDY LEAN CLAY; hard, light brown, calcareous (CL)															
	7		8 - 16 - 24 N = 40				7											
	8																	
	9		15 - 33 - 36 N = 69				5	35	13	22								
	10		Boring terminated at 10 feet.													68.4		
	11																	
	12																	
	13																	
	14																	




R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACT UNITS.GPJ 10/16/23 Report1-GEOTECH LOG - LAT LONG











**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**  
San Antonio, Bexar County, Texas

**Log of  
B-23**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/12/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4603    Latitude: 29.3089</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (psf)	SHEAR STRENGTH (psf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/SQFT		RQD % REC	LIQUID LIMIT LL	PLASTIC LIMIT PL						PLASTICITY INDEX PI
	1		LEAN CLAY WITH SAND; stiff to very stiff, dark brown to light brown (CL)  - becomes calcareous below 4½ feet		3 - 5 - 7 N = 12				12									
	2																	
	3				4 - 9 - 12 N = 21				13									
	4																	
	5				P = 4.5+				13	47	17	30						
	6																	
	7				9 - 12 - 18 N = 30				12	44	15	29						
	8																	
	9				7 - 8 - 11 N = 19				13									
	10				Boring terminated at 10 feet.													
	11																	
	12																	
	13																	
	14																	




R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACT UNITS.GPJ 10/16/23 Report:1-GEOTECH LOG - LAT LONG













Lennar  
Espada Tract Units 4 thru 9 & 12 thru 20  
Loop 410 and US-281/South Flores Road  
San Antonio, Bexar County, Texas

Log of  
B-24

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/18/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4585    Latitude: 29.3083</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA													
				TYPE	BORE/CORE DATA			MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (psf)	SHEAR STRENGTH (psf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6" 3rd 6"	P: TONS/SOFT		RQD % REC	LIQUID LIMIT LL	PLASTIC LIMIT PL						PLASTICITY INDEX PI
	1		LEAN CLAY WITH SAND; very stiff to hard, dark brown to light gray and brown, calcareous (CL)		4 - 9 - 12 N = 21	10											
	2																
	3			7 - 13 - 19 N = 32	10												
	4																
	5			15 - 27 - 31 N = 58	6	30	13	17									
	6			LEAN CLAY; hard, pale brown to pale brown and light gray, calcareous (CL)													
	7					11 - 17 - 23 N = 40	11									86.7	
	8																
	9					12 - 17 - 21 N = 38	7	36	14	22							
	10			Boring terminated at 10 feet.													
	11																
	12																
	13																
	14																








**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**  
San Antonio, Bexar County, Texas

**Log of  
B-25**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/14/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4547    Latitude: 29.3053</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA			MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE		
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"		P: TONS/FOOT	RQD % REC	LIQUID LIMIT LL						PLASTIC LIMIT PL	PLASTICITY INDEX PI
	1		LEAN CLAY WITH SAND; stiff to hard, dark brown, calcareous (CL)		4 - 5 - 9 N = 14			4	36	15	21							
	2																	
	3			8 - 15 - 19 N = 34			9								80.8			
	4			LEAN CLAY; hard to very stiff, light brown to light brown and light gray, calcareous (CL)														
	5				11 - 17 - 19 N = 36			10										
	6																	
	7				8 - 12 - 15 N = 27			10							89.5			
	8																	
	9				9 - 11 - 14 N = 25			11	45	15	30							
	10				Boring terminated at 10 feet.													
	11																	
	12																	
	13																	
	14																	

R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACT UNITS.GPJ 10/16/23 Report 1-GEOTECH LOG - LAT LONG






**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**

San Antonio, Bexar County, Texas

**Log of  
B-26**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/18/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4567    Latitude: 29.3044</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/FT		RQD % REC	LIQUID LIMIT LL	PLASTIC LIMIT PL						PLASTICITY INDEX PI
	1		SANDY LEAN CLAY; very stiff to hard, dark brown to olive-gray, calcareous (CL)		5 - 9 - 19 N = 28				7								67.3	
	2																	
	3				18 - 27 - 33 N = 60				6	31	13	18						
	4																	
	5				19 - 23 - 27 N = 50				7									
	6		FAT CLAY WITH SAND; very stiff, olive-brown, calcareous (CH)															
	7				7 - 11 - 13 N = 24				14							83.3		
	8																	
	9				7 - 10 - 13 N = 23				17	65	21	44						
	10																	
	10		Boring terminated at 10 feet.															
	11																	
	12																	
	13																	
	14																	

This boring log shall not be separated from the corresponding Instrument of Service; no third party may rely upon this boring log or the corresponding Instrument of Service absent a written TTL Secondary Client Agreement.






**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**

San Antonio, Bexar County, Texas

**Log of  
B-27**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/18/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4583    Latitude: 29.3053</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/FT		RQD % REC	LIQUID LIMIT	PLASTIC LIMIT						PLASTICITY INDEX
	1		LEAN CLAY WITH SAND; stiff to very stiff, dark brown (CL)		4 - 6 - 7 N = 13				11	42	16	26						
	2																	
	3			5 - 7 - 8 N = 15				15								77.4		
	4																	
	5			- becomes calcareous below 4½ feet	7 - 8 - 14 N = 22				16									
	6			LEAN CLAY; hard, pale brown, calcareous (CL)														
	7			11 - 17 - 22 N = 39				12	45	15	30							
	8																	
	9			9 - 18 - 21 N = 39				10								95.9		
	10																	
	11		Boring terminated at 10 feet.															
	12																	
	13																	
	14																	

R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACT UNITS.GPJ 10/16/23 Report 1-GEOTECH LOG - LAT LONG











**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**  
San Antonio, Bexar County, Texas

**Log of  
B-28**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/18/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4605    Latitude: 29.305</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	<div>▼ Water Level at Time of Drilling: <i>Not Encount.</i></div>	<div>▼ Delayed Water Level: <i>N/A</i></div>
	<div>⚠ Cave-In at Time of Drilling: <i>N/A</i></div>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/SQFT		RQD % REC	LIQUID LIMIT	PLASTIC LIMIT						PLASTICITY INDEX
	1		FAT CLAY WITH SAND; stiff to hard, dark brown to olive-brown (CH)		5 - 7 - 8 N = 15				12									
	2																	
	3			10 - 14 - 18 N = 32				16	56	18	38							
	4			FAT CLAY; very stiff, olive-brown and gray (CH)														
	5			5 - 11 - 12 N = 23				20										
	6																	
	7			P = 2.75				21	78	29	49	104	1165	2.1				
	8																	
	9				7 - 9 - 14 N = 23				24									
	10			Boring terminated at 10 feet.														
	11																	
	12																	
	13																	
	14																	




R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACT UNITS.GPJ 10/16/23 Report:1-GEOTECH LOG - LAT LONG



**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**  
San Antonio, Bexar County, Texas

**Log of  
B-29**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/14/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4579    Latitude: 29.3071</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/FT		RQD % REC	LIQUID LIMIT	PLASTIC LIMIT						PLASTICITY INDEX
	1		LEAN CLAY WITH SAND; stiff to very stiff, dark brown (CL)		2 - 4 - 7 N = 11				9									
	2																	
	3					4 - 7 - 9 N = 16				11							79.7	
	4			LEAN CLAY; very stiff, grayish-brown to light brown, calcareous (CL)														
	5					7 - 9 - 13 N = 22				8	38	14	24					
	6																	
	7					8 - 12 - 15 N = 27				11							89.6	
	8																	
	9					8 - 9 - 14 N = 23				13	44	15	29					
	10			Boring terminated at 10 feet.														
	11																	
	12																	
	13																	
	14																	




R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACT UNITS.GPJ 10/16/23 Report-1-GEOTECH LOG - LAT LONG



**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**  
San Antonio, Bexar County, Texas

**Log of  
B-30**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/14/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4558    Latitude: 29.3069</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA			MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (psf)	SHEAR STRENGTH (psf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE		
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"		P: TONS/FT	RQD % REC	LIQUID LIMIT LL						PLASTIC LIMIT PL	PLASTICITY INDEX PI
	1		LEAN CLAY WITH SAND; very stiff, dark brown, calcareous (CL)		4 - 7 - 10 N = 17			8	45	16	29							
	2																	
	3		9 - 10 - 11 N = 21			10												
	4																	
	5		SANDY LEAN CLAY; very stiff to hard, brown, calcareous (CL)		5 - 12 - 12 N = 24			7	35	14	21							
	6																	
	7		9 - 21 - 50/3 N = 71/9"			8							55.2					
	8																	
	9		CLAYEY SAND; very dense, light brown (SC)		31 - 50/2 N = 50/2"			3							40.3			
	10																	
	11		Boring terminated at 10 feet.															
	12																	
	13																	
	14																	




This boring log shall not be separated from the corresponding Instrument of Service; no third party may rely upon this boring log or the corresponding Instrument of Service absent a written TTL Secondary Client Agreement.



**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**  
San Antonio, Bexar County, Texas

**Log of  
B-31**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/14/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4566    Latitude: 29.3077</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/FT		RQD % REC	LIQUID LIMIT	PLASTIC LIMIT						PLASTICITY INDEX
			LEAN CLAY WITH SAND; very stiff, dark brown (CL)															
	1																	
	2																	
	3																	
	4																	
	5																	
	6		FAT CLAY; hard to very stiff, light brown and light gray, calcareous (CH)															
	7																	
	8																	
	9		- with gypsum below 8½ feet															
	10		Boring terminated at 10 feet.															
	11																	
	12																	
	13																	
	14																	

This boring log shall not be separated from the corresponding Instrument of Service; no third party may rely upon this boring log or the corresponding Instrument of Service absent a written TTL Secondary Client Agreement.

















Lennar  
Espada Tract Units 4 thru 9 & 12 thru 20  
Loop 410 and US-281/South Flores Road  
San Antonio, Bexar County, Texas

Log of  
B-32

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/12/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4572    Latitude: 29.3085</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/SQFT		RQD % REC	LIQUID LIMIT	PLASTIC LIMIT						PLASTICITY INDEX
	1		LEAN CLAY WITH SAND; very stiff to hard, dark brown to brown (CL)		4 - 5 - 11 N = 16				8									
	2																	
	3					10 - 12 - 17 N = 29				11	45	15	30					
	4																	
	5			- becomes calcareous below 4½ feet		9 - 13 - 19 N = 32				10							84.8	
	6		SANDY FAT CLAY; very stiff, light brown to light brown and light gray, calcareous (CH)															
	7					12 - 13 - 15 N = 28				15						53.6		
	8																	
	9					P = 4.5+				22	78	23	55					
	10			Boring terminated at 10 feet.														
	11																	
	12																	
	13																	
	14																	

R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACT UNITS.GPJ 10/16/23 Report1-GEOTECH LOG - LAT LONG






Lennar  
Espada Tract Units 4 thru 9 & 12 thru 20  
Loop 410 and US-281/South Flores Road

San Antonio, Bexar County, Texas

Log of  
B-33

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/14/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.456    Latitude: 29.3094</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (psf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/SQFT		RQD % REC	LIQUID LIMIT LL	PLASTIC LIMIT PL						PLASTICITY INDEX PI
	1		LEAN CLAY WITH SAND; stiff to very stiff, dark brown to brown, calcareous (CL)		3 - 5 - 7 N = 12				7									
	2					P = 4.5+				13								
	3																	
	4			- becomes hard between 4½ and 6 feet		12 - 18 - 21 N = 39				10	29	13	16					
	5																	
	6					5 - 9 - 18 N = 27				14								
	7																	
	8			SANDY LEAN CLAY; hard, pale brown, calcareous (CL)		16 - 35 - 50/4 N = 85/10"				6	41	14	27			81.0		
	9																	
	10			Boring terminated at 10 feet.														
	11																	
	12																	
	13																	
	14																	

R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACK UNITS.GPJ 10/16/23 Report-1-GEOTECH LOG - LAT LONG






**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**

San Antonio, Bexar County, Texas

**Log of  
B-34**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/18/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4589    Latitude: 29.3044</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA															
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (psf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE		
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/SQFT		RQD % REC	LIQUID LIMIT LL	PLASTIC LIMIT PL						PLASTICITY INDEX PI	
	1		LEAN CLAY WITH SAND; very stiff to hard, dark brown to olive-brown (CL)		5 - 7 - 11 N = 18				10										
	2		- becomes calcareous between 2½ and 6 feet																
	3						8 - 18 - 21 N = 39				9							81.6	
	4																		
	5						12 - 18 - 23 N = 41				10	45	15	30					
	6		FAT CLAY; hard, olive brown and gray (CH)																
	7		15 - 21 - 32 N = 53				10							94.1					
	8																		
	9		12 - 17 - 28 N = 45				13												
	10		Boring terminated at 10 feet.																
	11																		
	12																		
	13																		
	14																		




R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACK UNITS.GPJ 10/16/23 Report 1-GEOTECH LOG - LAT LONG



**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**  
San Antonio, Bexar County, Texas

**Log of  
B-35**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/18/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4578    Latitude: 29.304</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA			MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE		
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"		P: TONS/SQFT	RQD % REC	LIQUID LIMIT						PLASTIC LIMIT	PLASTICITY INDEX
	1		SANDY LEAN CLAY; very stiff, dark brown (CL)		5 - 9 - 11 N = 20			8								67.6		
	2		LEAN CLAY WITH SAND; very stiff to hard, pale brown, calcareous (CL)		8 - 12 - 15 N = 27			5	30	14	16							
	3				9 - 14 - 21 N = 35			6								79.6		
	4				19 - 31 - 46 N = 77			8	38	14	24							
	5				12 - 24 - 31 N = 55			9								90.3		
	6		LEAN CLAY; hard, light gray, calcareous (CL)															
	7																	
	8																	
	9																	
	10																	
	11		Boring terminated at 10 feet.															
	12																	
	13																	
	14																	

R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACK UNITS.GPJ 10/16/23 Report1-GEOTECH LOG - LAT LONG



**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**  
San Antonio, Bexar County, Texas

**Log of  
B-36**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/18/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4592    Latitude: 29.3028</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	<div>▽ Water Level at Time of Drilling: <i>Not Encount.</i></div> <div>⚠ Cave-In at Time of Drilling: <i>N/A</i></div>	<div>▼ Delayed Water Level: <i>N/A</i></div> <div>Delayed Water Observation Date: <i>N/A</i></div>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/SQFT		RQD % REC	LIQUID LIMIT	PLASTIC LIMIT						PLASTICITY INDEX
			SANDY FAT CLAY; stiff to hard, brown (CH)  - calcareous to 4 feet															
	1																	
	2																	
	3																	
	4																	
	5																	
	6			FAT CLAY; very stiff, olive-brown (CH)														
	7																	
	8																	
	9																	
	10			Boring terminated at 10 feet.														
	11																	
	12																	
	13																	
	14																	




This boring log shall not be separated from the corresponding Instrument of Service; no third party may rely upon this boring log or the corresponding Instrument of Service absent a written TTL Secondary Client Agreement.



**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**  
San Antonio, Bexar County, Texas

**Log of  
B-37**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/14/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4572    Latitude: 29.3031</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA			MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (psf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE		
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"		P: TONS/FT	RQD % REC	LIQUID LIMIT LL						PLASTIC LIMIT PL	PLASTICITY INDEX PI
	1		SANDY LEAN CLAY; very stiff to hard, dark brown, calcareous (CL)		7 - 8 - 12 N = 20			7								62.2		
	2		16 - 19 - 21 N = 40			10												
	3		8 - 15 - 16 N = 31			7	46	15	31									
	4		4 - 5 - 5 N = 10			16								75.8				
	5		LEAN CLAY WITH SAND; hard to stiff, light brown, calcareous (CL)		P = 4.0			18	68	26	42							
	6		Boring terminated at 10 feet.															
	7																	
	8																	
	9																	
	10																	
	11																	
	12																	
	13																	
	14																	




R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACT UNITS.GPJ 10/16/23 Report-1-GEOTECH LOG - LAT LONG



**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**  
San Antonio, Bexar County, Texas

**Log of  
B-38**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/14/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4546    Latitude: 29.3083</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (pcf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/FT		RQD % REC	LIQUID LIMIT LL	PLASTIC LIMIT PL						PLASTICITY INDEX PI
	1		LEAN CLAY WITH SAND; stiff to very stiff, dark brown to brown (CL)		4 - 4 - 8 N = 12				8	46	19	27						
	2																	
	3			8 - 7 - 14 N = 21				12										
	4																	
	5		- becomes calcareous between 4½ and 6 feet		10 - 14 - 16 N = 30				9							75.1		
	6		LEAN CLAY; hard, grayish-brown (CL)															
	7		- calcareous to 8 feet		7 - 17 - 25 N = 42				10	42	15	27						
	8																	
	9				11 - 21 - 33 N = 54				9							86.9		
	10		Boring terminated at 10 feet.															
	11																	
	12																	
	13																	
	14																	

R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACT UNITS.GPJ 10/16/23 Report1-GEOTECH LOG - LAT LONG








**Lennar**  
**Espada Tract Units 4 thru 9 & 12 thru 20**  
**Loop 410 and US-281/South Flores Road**

San Antonio, Bexar County, Texas

**Log of  
B-39**

Page 1 of 1

Drilling Co.: <i>Eagle Drilling</i>	TTL Project No.: <i>00230901641.02</i>	Remarks: Subsurface water was not encountered during drilling. The borehole was backfilled with soil cuttings after drilling activities were completed.
Driller: <i>S. Drash</i>	Date Drilled: <i>9/14/2023</i>	
Logged by: <i>D. Alfaro</i>	Boring Depth: <i>10 feet</i>	
Equipment: <i>B-47</i>	Boring Elevation: <i>Ground Surface</i>	
Hammer Type: <i>Automatic</i>	Coordinates: <i>Longitude: -98.4561    Latitude: 29.3108</i>	
Drilling Method: <i>Solid Flight Auger w/SPT Sampling</i>	 Water Level at Time of Drilling: <i>Not Encount.</i>	 Delayed Water Level: <i>N/A</i>
	 Cave-In at Time of Drilling: <i>N/A</i>	Delayed Water Observation Date: <i>N/A</i>

ELEVATION (ft)	DEPTH (ft)	GRAPHIC LOG	MATERIALS DESCRIPTION	SAMPLE DATA														
				TYPE	BORE/CORE DATA				MOISTURE CONTENT (%)	ATTERBERG LIMITS (%)			DRY DENSITY (pcf)	SHEAR STRENGTH (psf)	FAILURE STRAIN (%)	CONFINING PRESSURE (psi)	% PASSING #200 SIEVE	
					1st 6" N-VALUE BLOWS/FT	2nd 6"	3rd 6"	P: TONS/FT		RQD % REC	LIQUID LIMIT LL	PLASTIC LIMIT PL						PLASTICITY INDEX PI
	1		LEAN CLAY WITH SAND; firm to very stiff, dark brown to brown and light brown, calcareous (CL)		2 - 3 - 4 N = 7				6								73.7	
	2																	
	3			4 - 7 - 11 N = 18				7	41	16	25							
	4																	
	5			5 - 9 - 11 N = 20				9								75.8		
	6																	
	7			7 - 12 - 14 N = 26				7	37	14	23							
	8			LEAN CLAY; very stiff, brown and light brown, calcareous (CL)														
	9			7 - 13 - 16 N = 29				12								93.5		
	10			Boring terminated at 10 feet.														
	11																	
	12																	
	13																	
	14																	

R:\GINT\TTL\PROJECTS\2023\00230901641.00 - ESPADA TRACT UNITS.GPJ 10/16/23 Report:1-GEOTECH LOG - LAT LONG

Boring	Depth	USCS	Water Content (%)	Liquid Limit	Plastic Limit	Plasticity Index	% Gravel	% Sand	Maximum Size (mm)	% Passing #200 % Silt % Clay (If hydrometer data available)	D50 (mm)
B-01	0.5 - 2	---	8	43	18	25	---	---	---	---	---
B-01	2.5 - 4	---	12	---	---	---	0.0	0.0	0.075	76.3	---
B-01	8.5 - 10	---	10	40	14	26	---	---	---	---	---
B-02	0.5 - 2	---	11	---	---	---	0.0	0.0	0.075	79.3	---
B-02	2.5 - 4	---	12	64	18	46	---	---	---	---	---
B-02	6.5 - 8	---	9	40	14	26	---	---	---	---	---
B-02	8.5 - 10	---	5	---	---	---	0.0	0.0	0.075	71.4	---
B-03	0.5 - 2	---	10	---	---	---	0.0	0.0	0.075	78.5	---
B-03	4.5 - 6	---	17	65	21	44	---	---	---	---	---
B-03	6.5 - 8	---	11	---	---	---	0.0	0.0	0.075	94.2	---
B-03	8.5 - 10	---	10	39	13	26	---	---	---	---	---
B-04	2 - 4	CL	11	48	20	28	0.0	0.0	0.075	76.4	---
B-04	6.5 - 8	---	7	33	16	17	---	---	---	---	---
B-04	8.5 - 10	---	9	---	---	---	0.0	0.0	0.075	73.0	---
B-05	0.5 - 2	---	9	52	27	25	---	---	---	---	---
B-05	4.5 - 6	---	14	---	---	---	0.0	0.0	0.075	77.4	---
B-05	6.5 - 8	---	13	46	13	33	---	---	---	---	---
B-05	8.5 - 10	---	5	---	---	---	0.0	0.0	0.075	83.2	---
B-06	0.5 - 2	---	8	---	---	---	0.0	0.0	0.075	74.5	---
B-06	2.5 - 4	---	10	51	21	30	---	---	---	---	---
B-06	4.5 - 6	---	9	46	16	30	---	---	---	---	---
B-06	6.5 - 8	---	11	---	---	---	0.0	0.0	0.075	83.3	---
B-07	0.5 - 2	---	7	38	15	23	---	---	---	---	---
B-07	2.5 - 4	---	10	---	---	---	0.0	0.0	0.075	71.3	---
B-07	4.5 - 6	---	12	54	15	39	---	---	---	---	---
B-07	8.5 - 10	---	12	---	---	---	0.0	0.0	0.075	91.6	---
B-08	0.5 - 2	---	9	---	---	---	0.0	0.0	0.075	71.6	---
B-08	4.5 - 6	---	9	---	---	---	0.0	0.0	0.075	71.8	---
B-08	6.5 - 8	---	10	40	13	27	---	---	---	---	---
B-08	8.5 - 10	---	5	---	---	---	0.0	0.0	0.075	68.1	---
B-09	2.5 - 4	---	9	50	14	36	---	---	---	---	---
B-09	4.5 - 6	---	9	---	---	---	0.0	0.0	0.075	66.4	---
B-09	6.5 - 8	---	8	31	17	14	---	---	---	---	---
B-09	8.5 - 10	---	5	---	---	---	0.0	0.0	0.075	79.7	---
B-10	2.5 - 4	---	8	---	---	---	0.0	0.0	0.075	60.1	---
B-10	6.5 - 8	---	3	17	9	8	---	---	---	---	---
B-10	8.5 - 10	---	7	---	---	---	0.0	0.0	0.075	75.0	---
B-11	0.5 - 2	---	8	---	---	---	0.0	0.0	0.075	80.1	---
B-11	4.5 - 6	---	6	43	17	26	---	---	---	---	---
B-11	6.5 - 8	---	4	---	---	---	0.0	0.0	0.075	75.2	---
B-12	2.5 - 4	---	9	---	---	---	0.0	0.0	0.075	68.8	---
B-12	4.5 - 6	---	5	36	15	21	---	---	---	---	---



### Summary of Laboratory Test Results

Client: Lennar  
 Project: Espada Tract Units 4 thru 9 & 12 thru 20  
 Location: San Antonio, Bexar County, Texas  
 Project Number: 00230901641.02

Boring	Depth	USCS	Water Content (%)	Liquid Limit	Plastic Limit	Plasticity Index	% Gravel	% Sand	Maximum Size (mm)	% Passing #200 % Silt (if hydrometer data available) % Clay	D50 (mm)
B-12	6.5 - 8	---	9	---	---	---	0.0	0.0	0.075	95.5	---
B-12	8.5 - 10	---	9	44	17	27	---	---	---	---	---
B-13	0.5 - 2	---	9	52	17	35	---	---	---	---	---
B-13	4.5 - 6	---	10	---	---	---	0.0	0.0	0.075	74.8	---
B-13	6.5 - 8	---	9	34	11	23	---	---	---	---	---
B-13	8.5 - 10	---	8	---	---	---	0.0	0.0	0.075	82.0	---
B-14	2.5 - 4	---	11	---	---	---	0.0	0.0	0.075	76.4	---
B-14	4.5 - 6	---	9	37	13	24	---	---	---	---	---
B-14	6.5 - 8	---	5	20	11	9	---	---	---	---	---
B-14	8.5 - 10	---	4	---	---	---	0.0	0.0	0.075	65.8	---
B-15	2.5 - 4	---	10	---	---	---	0.0	0.0	0.075	77.4	---
B-15	4.5 - 6	---	10	40	13	27	---	---	---	---	---
B-15	6.5 - 8	---	9	---	---	---	0.0	0.0	0.075	86.7	---
B-15	8.5 - 10	---	9	45	16	29	---	---	---	---	---
B-16	0.5 - 2	---	10	64	15	49	---	---	---	---	---
B-16	4.5 - 6	---	14	---	---	---	0.0	0.0	0.075	83.5	---
B-16	6.5 - 8	---	9	56	14	42	---	---	---	---	---
B-16	8.5 - 10	---	18	---	---	---	0.0	0.0	0.075	65.8	---
B-17	0.5 - 2	---	8	---	---	---	0.0	0.0	0.075	72.9	---
B-17	4.5 - 6	---	11	59	15	44	---	---	---	---	---
B-17	6.5 - 8	---	11	---	---	---	0.0	0.0	0.075	86.8	---
B-17	8.5 - 10	---	11	74	26	48	---	---	---	---	---
B-18	0.5 - 2	---	6	---	---	---	0.0	0.0	0.075	75.1	---
B-18	2.5 - 4	---	8	48	15	33	---	---	---	---	---
B-18	4.5 - 6	---	9	---	---	---	0.0	0.0	0.075	86.6	---
B-18	6.5 - 8	---	9	50	16	34	---	---	---	---	---
B-18	8 - 10	---	9	---	---	---	0.0	0.0	0.075	85.2	---
B-19	0.5 - 2	---	7	---	---	---	0.0	0.0	0.075	91.2	---
B-19	2.5 - 4	---	12	47	12	35	---	---	---	---	---
B-19	4.5 - 6	---	8	---	---	---	0.0	0.0	0.075	93.4	---
B-19	6.5 - 8	---	7	---	---	---	0.0	0.0	0.075	84.2	---
B-19	8.5 - 10	---	5	27	10	17	---	---	---	---	---
B-20	0.5 - 2	---	6	31	14	17	---	---	---	---	---
B-20	2.5 - 4	---	10	---	---	---	0.0	0.0	0.075	83.9	---
B-20	4.5 - 6	---	7	49	13	36	---	---	---	---	---
B-20	6.5 - 8	---	17	72	21	51	---	---	---	---	---
B-21	0.5 - 2	---	6	47	12	35	---	---	---	---	---
B-21	2.5 - 4	---	10	---	---	---	0.0	0.0	0.075	74.1	---
B-21	6 - 8	---	14	46	12	34	---	---	---	---	---
B-21	8.5 - 10	---	13	---	---	---	0.0	0.0	0.075	92.4	---
B-22	2.5 - 4	---	11	41	15	26	---	---	---	---	---
B-22	4.5 - 6	---	9	37	14	23	---	---	---	---	---



### Summary of Laboratory Test Results

Client: Lennar  
 Project: Espada Tract Units 4 thru 9 & 12 thru 20  
 Location: San Antonio, Bexar County, Texas  
 Project Number: 00230901641.02

Boring	Depth	USCS	Water Content (%)	Liquid Limit	Plastic Limit	Plasticity Index	% Gravel	% Sand	Maximum Size (mm)	% Passing #200 % Silt (if hydrometer data available) % Clay	D50 (mm)
B-22	6.5 - 8	---	7	---	---	---	0.0	0.0	0.075	68.4	---
B-22	8.5 - 10	---	5	35	13	22	---	---	---	---	---
B-23	2.5 - 4	---	13	---	---	---	0.0	0.0	0.075	74.8	---
B-23	4 - 6	---	13	47	17	30	---	---	---	---	---
B-23	6.5 - 8	---	12	44	15	29	---	---	---	---	---
B-24	4.5 - 6	---	6	30	13	17	---	---	---	---	---
B-24	6.5 - 8	---	11	---	---	---	0.0	0.0	0.075	86.7	---
B-24	8.5 - 10	---	7	36	14	22	---	---	---	---	---
B-25	0.5 - 2	---	4	36	15	21	---	---	---	---	---
B-25	2.5 - 4	---	9	---	---	---	0.0	0.0	0.075	80.8	---
B-25	6.5 - 8	---	10	---	---	---	0.0	0.0	0.075	89.5	---
B-25	8.5 - 10	---	11	45	15	30	---	---	---	---	---
B-26	0.5 - 2	---	7	---	---	---	0.0	0.0	0.075	67.3	---
B-26	2.5 - 4	---	6	31	13	18	---	---	---	---	---
B-26	6.5 - 8	---	14	---	---	---	0.0	0.0	0.075	83.3	---
B-26	8.5 - 10	---	17	65	21	44	---	---	---	---	---
B-27	0.5 - 2	---	11	42	16	26	---	---	---	---	---
B-27	2.5 - 4	---	15	---	---	---	0.0	0.0	0.075	77.4	---
B-27	6.5 - 8	---	12	45	15	30	---	---	---	---	---
B-27	8.5 - 10	---	10	---	---	---	0.0	0.0	0.075	95.9	---
B-28	2.5 - 4	---	16	56	18	38	---	---	---	---	---
B-28	6 - 8	---	21	78	29	49	---	---	---	---	---
B-29	2.5 - 4	---	11	---	---	---	0.0	0.0	0.075	79.7	---
B-29	4.5 - 6	---	8	38	14	24	---	---	---	---	---
B-29	6.5 - 8	---	11	---	---	---	0.0	0.0	0.075	89.6	---
B-29	8.5 - 10	---	13	44	15	29	---	---	---	---	---
B-30	0.5 - 2	---	8	45	16	29	---	---	---	---	---
B-30	4.5 - 6	---	7	35	14	21	---	---	---	---	---
B-30	6.5 - 8	---	8	---	---	---	0.0	0.0	0.075	55.2	---
B-30	8.5 - 10	---	3	---	---	---	0.0	0.0	0.075	40.3	---
B-31	2.5 - 4	---	12	---	---	---	0.0	0.0	0.075	78.4	---
B-31	6 - 8	CH	17	52	18	34	0.0	0.0	0.075	94.5	---
B-32	2.5 - 4	---	11	45	15	30	---	---	---	---	---
B-32	4.5 - 6	---	10	---	---	---	0.0	0.0	0.075	84.8	---
B-32	6.5 - 8	---	15	---	---	---	0.0	0.0	0.075	53.6	---
B-32	8 - 10	---	22	78	23	55	---	---	---	---	---
B-33	4.5 - 6	---	10	29	13	16	---	---	---	---	---
B-33	6.5 - 8	---	14	---	---	---	0.0	0.0	0.075	81.0	---
B-33	8.5 - 10	---	6	41	14	27	---	---	---	---	---
B-34	2.5 - 4	---	9	---	---	---	0.0	0.0	0.075	81.6	---
B-34	4.5 - 6	---	10	45	15	30	---	---	---	---	---
B-34	6.5 - 8	---	10	---	---	---	0.0	0.0	0.075	94.1	---



### Summary of Laboratory Test Results

Client: Lennar  
 Project: Espada Tract Units 4 thru 9 & 12 thru 20  
 Location: San Antonio, Bexar County, Texas  
 Project Number: 00230901641.02

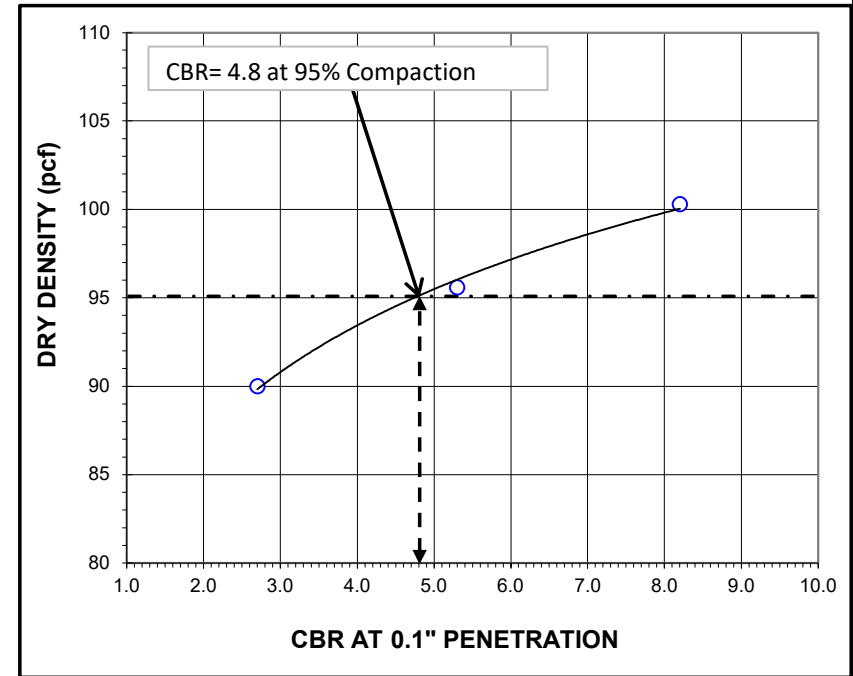
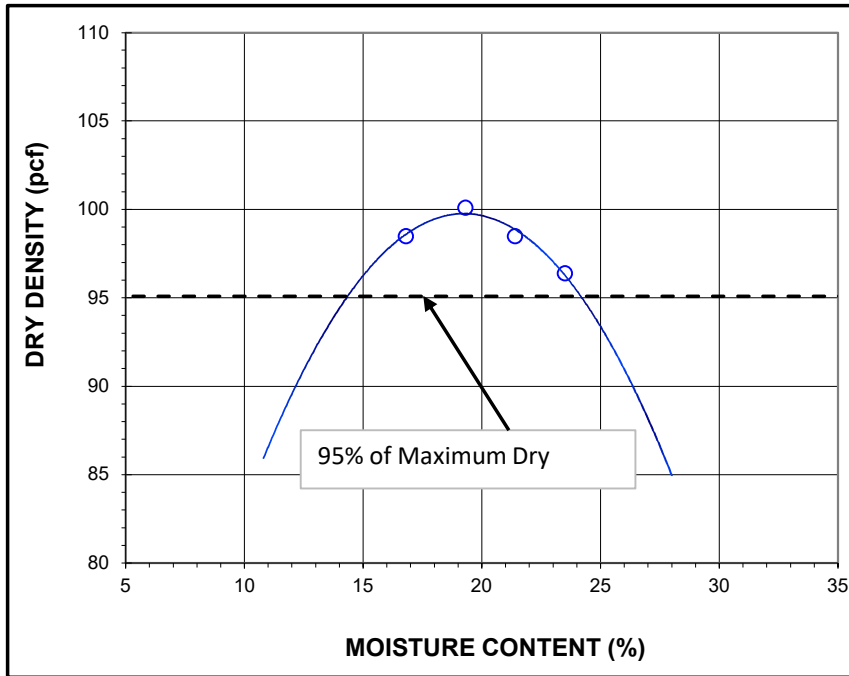
Boring	Depth	USCS	Water Content (%)	Liquid Limit	Plastic Limit	Plasticity Index	% Gravel	% Sand	Maximum Size (mm)	% Passing #200 % Silt % Clay (If hydrometer data available)	D50 (mm)
B-35	0.5 - 2	---	8	---	---	---	0.0	0.0	0.075	67.6	---
B-35	2.5 - 4	---	5	30	14	16	---	---	---	---	---
B-35	4.5 - 6	---	6	---	---	---	0.0	0.0	0.075	79.6	---
B-35	6.5 - 8	---	8	38	14	24	---	---	---	---	---
B-35	8.5 - 10	---	9	---	---	---	0.0	0.0	0.075	90.3	---
B-36	0.5 - 2	---	6	---	---	---	0.0	0.0	0.075	64.6	---
B-36	2.5 - 4	---	6	54	19	35	---	---	---	---	---
B-36	4.5 - 6	---	16	---	---	---	0.0	0.0	0.075	58.2	---
B-36	6.5 - 8	---	20	---	---	---	0.0	0.0	0.075	96.3	---
B-36	8.5 - 10	---	23	74	26	48	---	---	---	---	---
B-37	0.5 - 2	---	7	---	---	---	0.0	0.0	0.075	62.2	---
B-37	4.5 - 6	---	7	46	15	31	---	---	---	---	---
B-37	6.5 - 8	---	16	---	---	---	0.0	0.0	0.075	75.8	---
B-37	8 - 10	---	18	68	26	42	---	---	---	---	---
B-38	0.5 - 2	---	8	46	19	27	---	---	---	---	---
B-38	4.5 - 6	---	9	---	---	---	0.0	0.0	0.075	75.1	---
B-38	6.5 - 8	---	10	42	15	27	---	---	---	---	---
B-38	8.5 - 10	---	9	---	---	---	0.0	0.0	0.075	86.9	---
B-39	0.5 - 2	---	6	---	---	---	0.0	0.0	0.075	73.7	---
B-39	2.5 - 4	---	7	41	16	25	---	---	---	---	---
B-39	4.5 - 6	---	9	---	---	---	0.0	0.0	0.075	75.8	---
B-39	6.5 - 8	---	7	37	14	23	---	---	---	---	---
B-39	8.5 - 10	---	12	---	---	---	0.0	0.0	0.075	93.5	---

## Summary of Laboratory Test Results



Client: Lennar  
 Project: Espada Tract Units 4 thru 9 & 12 thru 20  
 Location: San Antonio, Bexar County, Texas  
 Project Number: 00230901641.02





Sample: **CBR Sample No. 1**  
 Proctor Test Method: Standard Proctor (ASTM D-698)  
 CBR Test Method: California Bearing Ratio (ASTM D-1883)  
 Material: LEAN CLAY WITH SAND (CL), brown

CBR Sample Location: 29.3052°, -98.4583°  
 Sample Depth: Between 0 and 5 feet below existing ground surface  
 Optimum Moisture Content: 19.2 %  
 Maximum Dry Unit Weight: 100.1 pcf  
 Atterberg Limits: LL = 41 , PL = 18 , PI = 23

**TTL**

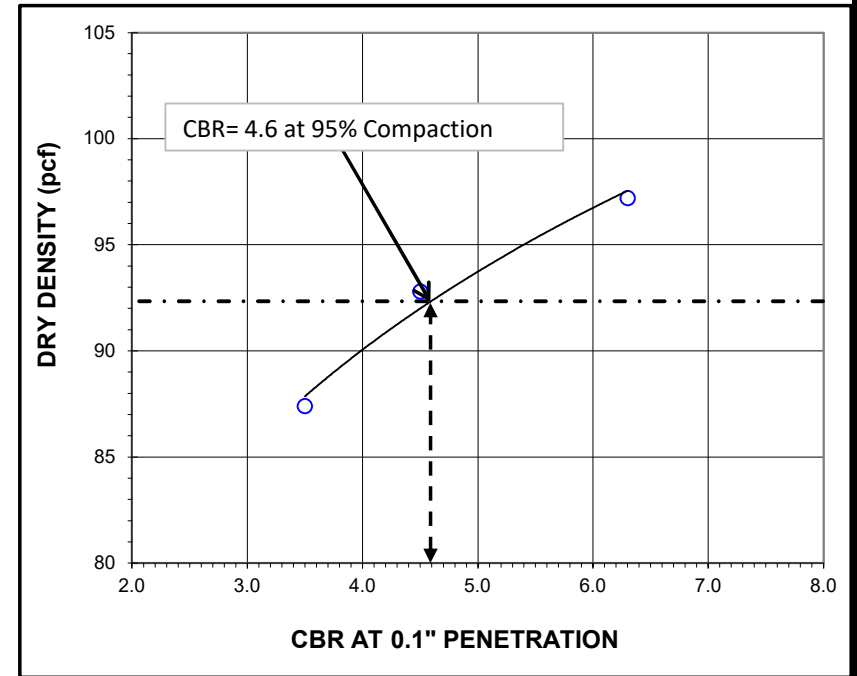
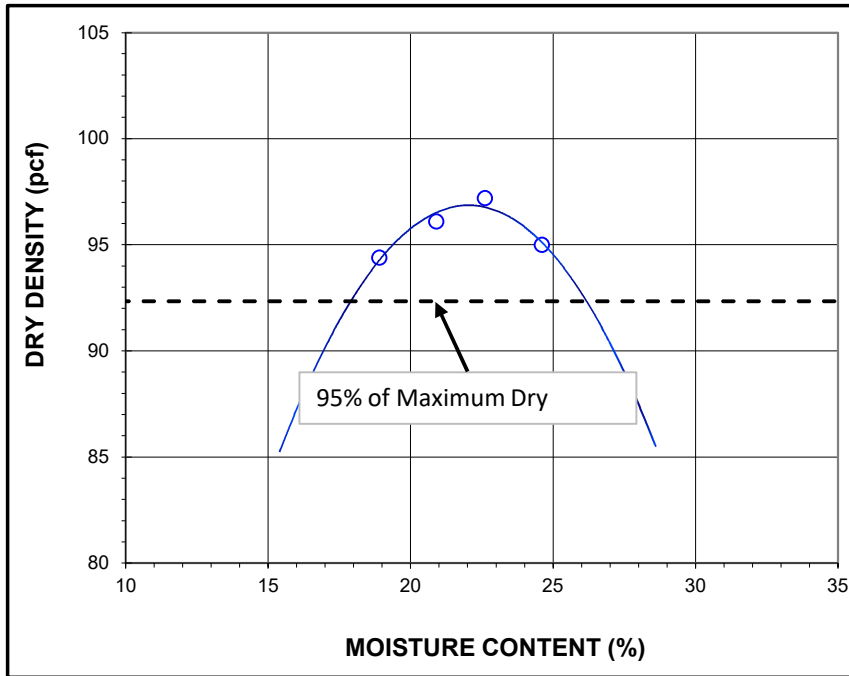
17215 Jones Maltsberger Rd, Suite 101  
 San Antonio, Texas 78247  
 T: 210-888-6100  
 WWW.TTLUSA.COM

**ESPADA TRACT UNITS 4 THRU 9 & 12 THRU 20**

**LOOP 410 AND US-281/SOUTH FLORES ROAD  
 SAN ANTONIO, BEXAR COUNTY, TEXAS**

Drawn By: JMP  
 Checked By: TA  
 Proj No: 00230901641.02  
 File Name

**CBR PLOT**



Sample: **CBR Sample No. 2**  
 Proctor Test Method: Standard Proctor (ASTM D-698)  
 CBR Test Method: California Bearing Ratio (ASTM D-1883)  
 Material: LEAN CLAY WITH SAND (CL), dark brown

CBR Sample Location: 29.3083°, -98.4585°  
 Sample Depth: Between 0 and 5 feet below existing ground surface  
 Optimum Moisture Content: 22.6 %  
 Maximum Dry Unit Weight: 97.2 pcf  
 Atterberg Limits: LL= 47; PL = 19, PI =28



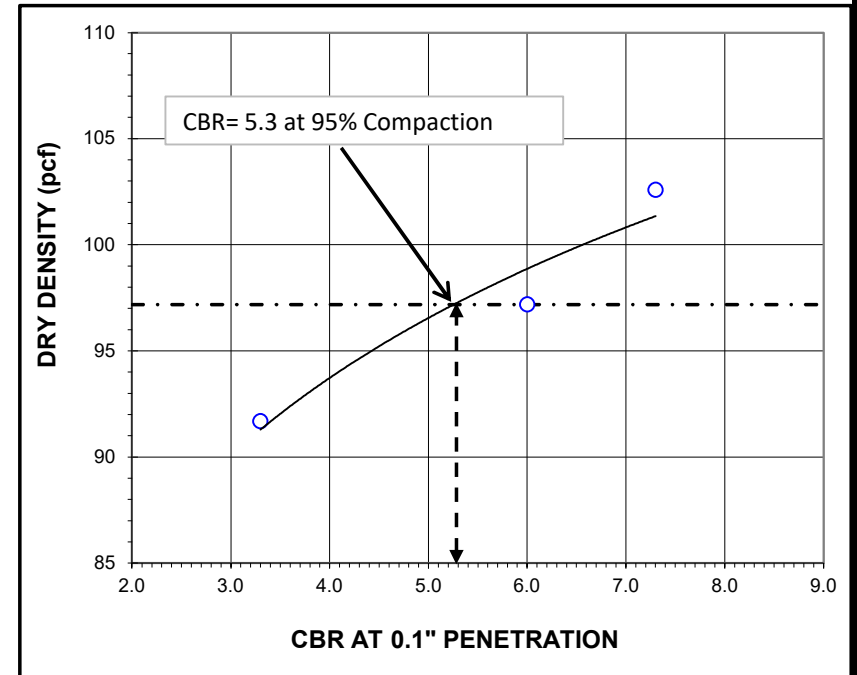
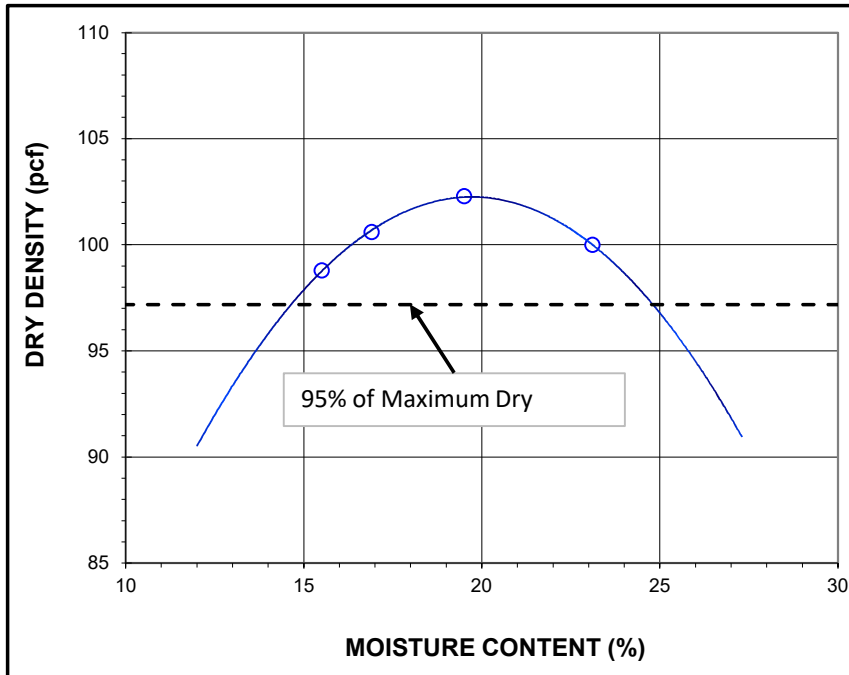
17215 Jones Maltsberger Rd, Suite 101  
 San Antonio, Texas 78247  
 T: 210-888-6100  
 WWW.TTLUSA.COM

**ESPADA TRACT UNITS 4 THRU 9 & 12 THRU 20**

**LOOP 410 AND US-281/SOUTH FLORES ROAD  
 SAN ANTONIO, BEXAR COUNTY, TEXAS**

Drawn By: JMP  
 Checked By: TA  
 Proj No:00230901641.02  
 File Name

**CBR PLOT**



Sample: **CBR Sample No. 3**  
 Proctor Test Method: Standard Proctor (ASTM D-698)  
 CBR Test Method: California Bearing Ratio (ASTM D-1883)  
 Material: LEAN CLAY WITH SAND (CL), brown

CBR Sample Location: 29.3195°, -98.4610°  
 Sample Depth: Between 0 and 5 feet below existing ground surface  
 Optimum Moisture Content: 19.5 %  
 Maximum Dry Unit Weight: 102.3 pcf  
 Atterberg Limits: LL= 39; PL = 14, PI =24



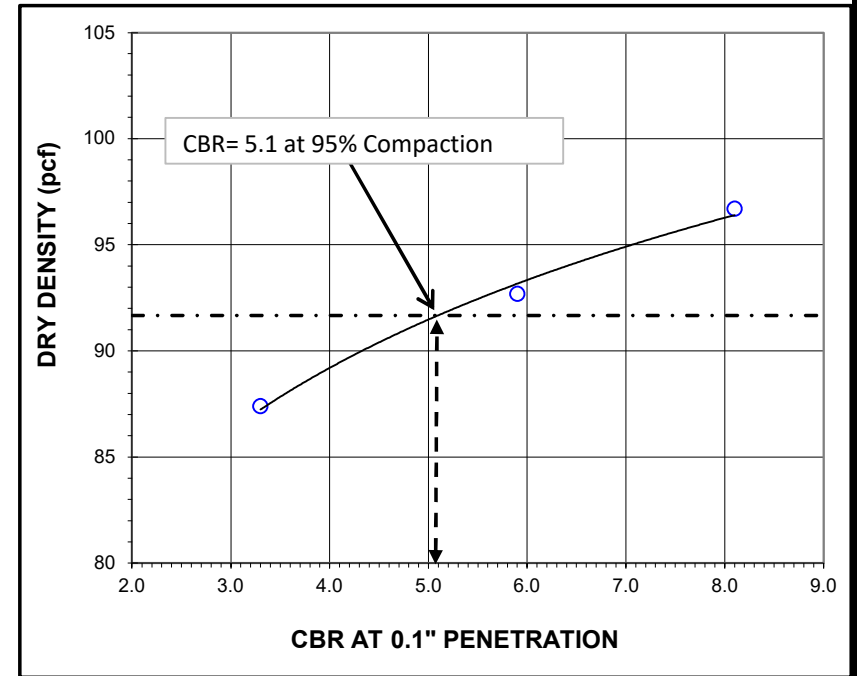
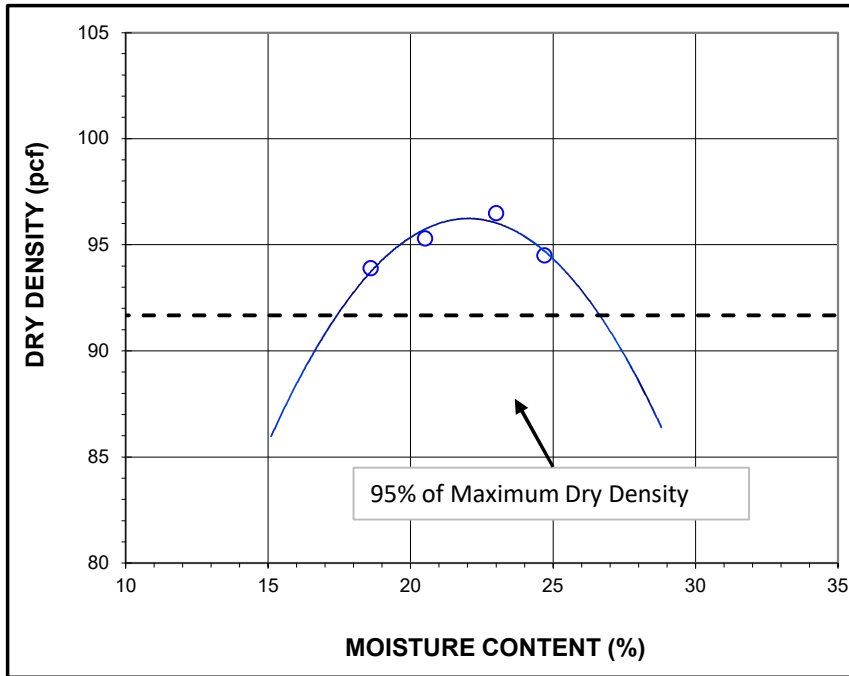
17215 Jones Maltsberger Rd, Suite 101  
 San Antonio, Texas 78247  
 T: 210-888-6100  
 WWW.TTLUSA.COM

### ESPADA TRACT UNITS 4 THRU 9 & 12 THRU 20

LOOP 410 AND US-281/SOUTH FLORES ROAD  
 SAN ANTONIO, BEXAR COUNTY, TEXAS

Drawn By: JMP  
 Checked By: TA  
 Proj No:00230901641.02  
 File Name

**CBR PLOT**



Sample: **CBR Sample No. 4**  
 Proctor Test Method: Standard Proctor (ASTM D-698)  
 CBR Test Method: California Bearing Ratio (ASTM D-1883)  
 Material: LEAN CLAY WITH SAND (CL), dark brown

CBR Sample Location: 29.3172°, -98.4648°  
 Sample Depth: Between 0 and 5 feet below existing ground surface  
 Optimum Moisture Content: 23 %  
 Maximum Dry Unit Weight: 96.5 pcf  
 Atterberg Limits: LL= 47; PL = 20, PI =27



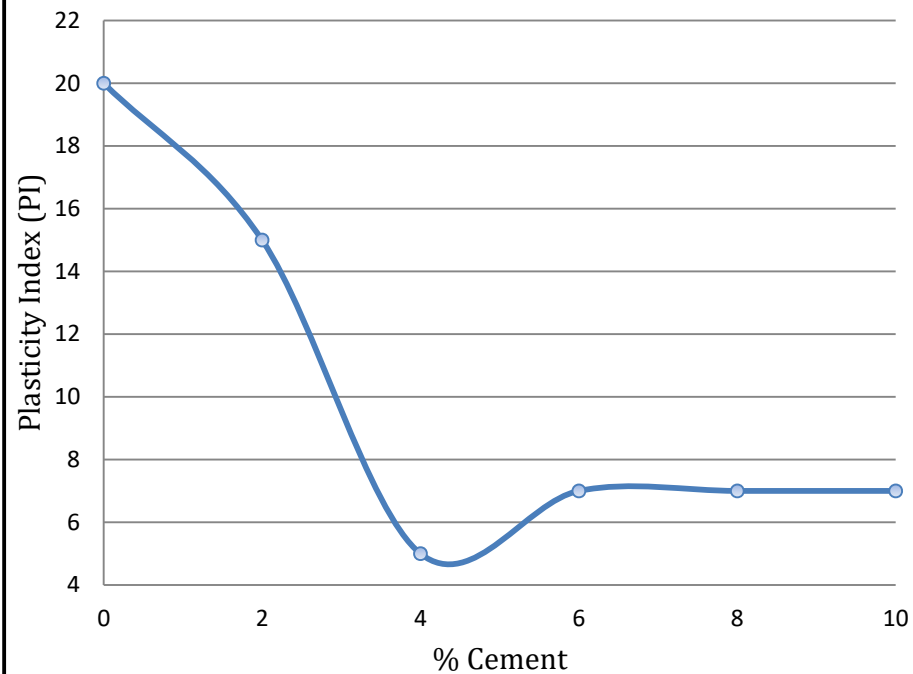
17215 Jones Maltsberger Rd, Suite 101  
 San Antonio, Texas 78247  
 T: 210-888-6100  
 WWW.TTLUSA.COM

**ESPADA TRACT UNITS 4 THRU 9 & 12 THRU 20**

**LOOP 410 AND US-281/SOUTH FLORES ROAD  
 SAN ANTONIO, BEXAR COUNTY, TEXAS**

Drawn By: JMP  
 Checked By: TA  
 Proj No:00230901641.02  
 File Name

**CBR PLOT**



% Cement	Plasticity	pH	LL	PL
0	20	8.53	46	26
2	15	11.41	42	27
4	5	11.64	40	35
6	7	11.80	42	35
8	7	11.91	42	35
10	7	11.96	41	34

Test Location: **CBR Sample No. 1**  
 Material: LEAN CLAY WITH SAND (CL), brown  
 Test Method: Tex-120-E, Soil-Cement Treatment  
 Test Method: Tex-128-E, Determining Soil pH  
 CBR Sample Location: 29.3052°, -98.4583°



17215 Jones Maltsberger Rd, Suite 101  
 San Antonio, Texas 78247  
 T: 210-888-6100  
 WWW.TTLUSA.COM

**ESPADA TRACT UNITS 4 THRU 9 & 12 THRU 20**

LOOP 410 AND US-281/SOUTH FLORES ROAD  
 SAN ANTONIO, BEXAR COUNTY, TEXAS

Drawn By: JMP  
 Checked By: TA  
 Proj No:00230901641.02  
 File Name

**CEMENT SERIES**



## APPENDIX B

### REFERENCE MATERIALS

## EXPLORATION PROCEDURES

### General

Various drill equipment and procedures are used to obtain soil or rock specimens during geotechnical engineering exploration activities. The drill equipment typically consists of fuel powered machinery that is mounted on a flat-bed truck or an all-terrain vehicle. The ground surface conditions at the site generally determine the type of vehicle to use.

Borings can be drilled either dry or wet. The drilling technique depends on the type of subsurface materials (clays, sands, silts, gravels, rock) encountered and whether or not subsurface water is present during the drilling operations. Sometimes a combination of both techniques is implemented.

The dry method can generally be employed when subsurface water or granular soils are not present. The dry method generally consists of advancing the augers without the use of water or drilling fluids. Air can be employed as necessary to remove cuttings from the borehole or cool the drilling bits during some drilling applications. The wet rotary process is generally used when subsurface water, rock or granular soils are present. The wet rotary process utilizes water or drilling fluids to advance the augers, remove cuttings from the borehole, and cool the drilling bits during drilling.

### Sampling

Various sampling devices are available to recover soil or rock specimens during the geotechnical exploration program. The type of sampling apparatus to employ depends on the subsurface materials (clays, sands, silts, gravels, rock) encountered and on their consistency or strength. Most commonly used samplers are Shelby tubes, split-spoons or split-barrels, and NX core barrels. Depending on the subsurface conditions, sampling apparatus such as the Pitcher barrel, Osterberg sampler, Dennison barrel, or California sampler are sometimes used. The procedures for using and sampling subsurface materials with most of these samplers are described in detail by the American Society for Testing and Materials (ASTM). Sampling is generally performed on a two (2) foot continuous interval to a depth of about ten (10) feet, followed by five (5) foot intervals between the depths of about ten (10) to 50 feet, and on ten (10) foot intervals thereafter to the termination depth of the borings. However, sampling intervals may change depending on the project scope and actual subsurface conditions encountered.

If cohesive soils (clays and some silts) are present during drilling, samples are retrieved by using the Shelby tube sampler (ASTM D 1587) or the split-barrel sampler (ASTM D 1586). The Shelby tube is used to recover “virtually” undisturbed soil specimens that can be returned to the laboratory for strength and compressibility testing. The Shelby tube is a three (3) inch nominal diameter, thin-walled tube that is advanced hydraulically into the soil by a single stroke of the drill equipment.

The split-barrel sampler is used when performing the Standard Penetration Test (SPT). The recovered sample is considered to be a “disturbed” specimen due to the SPT procedure. The split-barrel is advanced into the soil by driving the sampler with blows from a 140-pound hammer free falling 30 inches. The SPT procedure is performed to evaluate the strength or competency of the material being sampled. This evaluation is based on the material sampled, depth of the sample, and the number of blows required to obtain full penetration of the split-barrel sampler. This blow count or penetration resistance is referred to as the “N” value.

The split-barrel is typically used when cohesionless soils (sands, silts, gravels) are encountered or when good quality cohesive soils cannot be recovered with the Shelby tube sampler. The SPT procedure can be employed when rock or cemented zones are encountered. However, the split-barrel may not penetrate the rock or cemented zone if the layer is extremely hard, thus resulting in no sample recovery.

When rock or cemented zones are present and depending on the type of project and engineering testing required, rock coring may be implemented to recover specimens of the particular layer. Typically, an NX double tube core barrel (ASTM D 2113) is used.

## **Logging**

During the drilling activities, one of our geologists or engineering technicians is present to make sure that the appropriate sampling techniques are employed and to extrude or remove all materials from the samplers. The samples are then visually classified by our field representative who records the information on a field boring log. Our field representative may perform pocket penetrometer, hand torvane, or field vane tests on the subsurface materials recovered from the Shelby tube samplers. If the SPT procedure is employed, our field representative will record the N values or blow counts that are germane to that particular field test. If rock coring is utilized, our field representative will calculate the percent recovery and Rock Quality Designation (RQD). The test data for all the field tests will be noted on the appropriate field boring log. Upon completion of the logging activities and field testing of the recovered soil or rock samples, representative portions of the specimens were placed in appropriately wrapped and sealed containers to preserve their natural moisture condition and to minimize disturbance during handling and transporting to our laboratory for additional testing.

When subsurface water is observed during the drilling and sampling operations, drilling will be temporarily delayed so the subsurface water level can be monitored for a period of at least 15 to 30 minutes. Depending on the rise of the subsurface water in the borehole and project requirements, subsurface water measurements may be monitored for periods of 24 hours or more. Generally, observation wells or piezometers are installed in the completed boreholes to monitor subsurface water levels for periods longer than 24 hours.

Following completion of drilling, sampling, and subsurface water monitoring, all boreholes are backfilled with soil cuttings from the completed borings unless the client requests or local

ordinance requires special backfilling requirements. If there are not enough soil cuttings available, clean sand will be used to backfill the completed boreholes.

Details concerning the subsurface conditions are provided on each individual boring log presented in Appendix A. The terms and symbols used on each boring log are defined in the Legend Sheet which is also presented in Appendix A.

## **LABORATORY TESTING PROCEDURES**

### **Classification and Index Testing**

The recovered soil samples were classified in the laboratory by a geoprofessional using the USCS as a guide. Samples were tested for the following properties in general accordance with the applicable ASTM standards:

- Moisture content (ASTM D2216)
- Atterberg Limits (ASTM D4318)
- Percent material passing the No. 200 sieve (ASTM D1140)
- Grain Size Analysis (ASTM D6913)
- California Bearing Ratio (ASTM D1883)
- Standard Proctor (ASTM D698)
- Lime Treatment of Clay Soil (TxDOT Item 260)
- Lime Saturation Content by pH (ASTM C977)
- Soluble Sulfates (ASTM C1580)
- Cement Treatment of Clay Soil (TxDOT Item 120)
- Determining Soil pH (TxDOT Item 128)

Results of tests for moisture content, Atterberg Limits, and percent material passing the No. 200 sieve are presented on individual boring logs in Appendix A. The results are also tabulated on the Summary of Laboratory Results sheet in Appendix A.