


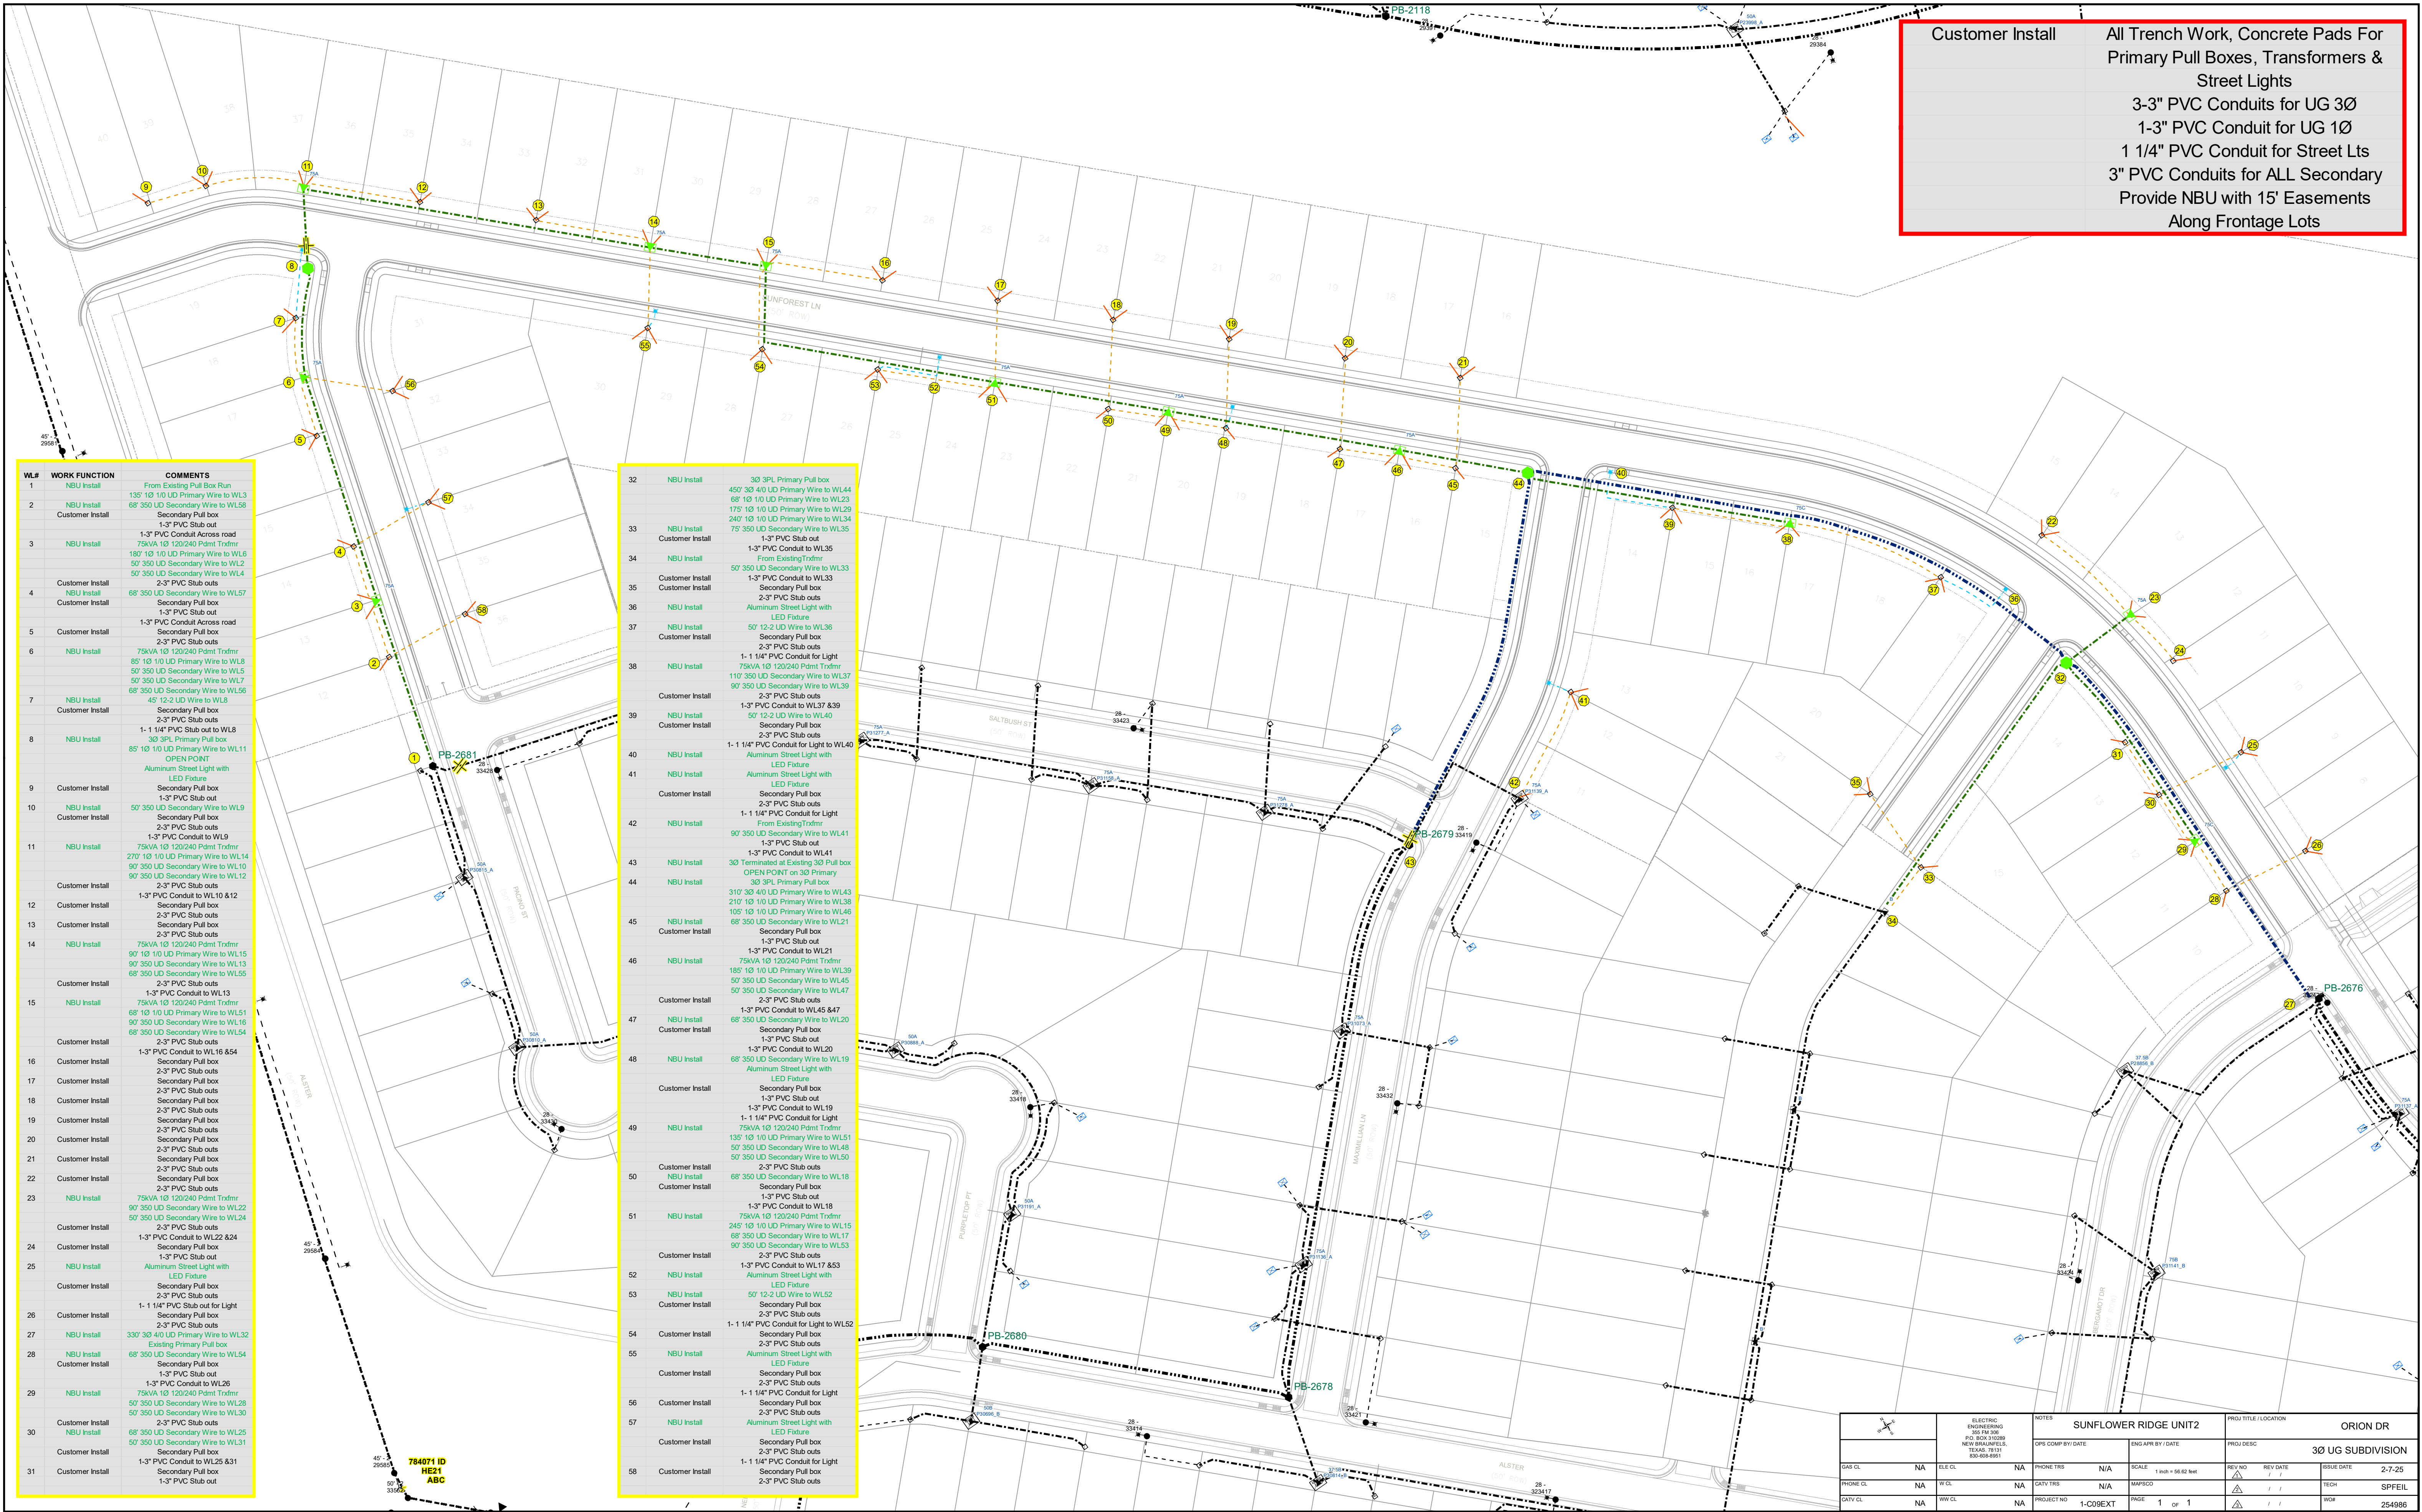

Customer Install	All Trench Work, Concrete Pads For Primary Pull Boxes, Transformers & Street Lights
	3-3" PVC Conduits for UG 3Ø
	1-3" PVC Conduit for UG 1Ø
	1 1/4" PVC Conduit for Street Lts
	3" PVC Conduits for ALL Secondary
	Provide NBU with 15' Easements Along Frontage Lots

WL#	WORK FUNCTION	COMMENTS
1	NBU Install	From Existing Pull Box Run
2	NBU Install	135' 1Ø 1/0 UD Primary Wire to WL3
3	NBU Install	68' 350 UD Secondary Wire to WL58
4	Customer Install	Secondary Pull box
5	NBU Install	1-3" PVC Conduit Across road
6	NBU Install	75kVA 1Ø 120/240 Pdmtr Trdnmr
7	NBU Install	180' 1Ø 1/0 UD Primary Wire to WL6
8	NBU Install	50' 350 UD Secondary Wire to WL2
9	NBU Install	50' 350 UD Secondary Wire to WL4
10	Customer Install	2-3" PVC Stub outs
11	NBU Install	68' 350 UD Secondary Wire to WL57
12	Customer Install	Secondary Pull box
13	Customer Install	1-3" PVC Stub out
14	Customer Install	1-3" PVC Conduit Across road
15	Customer Install	Secondary Pull box
16	NBU Install	2-3" PVC Stub outs
17	NBU Install	75kVA 1Ø 120/240 Pdmtr Trdnmr
18	NBU Install	85' 1Ø 1/0 UD Primary Wire to WL8
19	NBU Install	50' 350 UD Secondary Wire to WL5
20	NBU Install	50' 350 UD Secondary Wire to WL7
21	NBU Install	68' 350 UD Secondary Wire to WL56
22	NBU Install	45' 12-2 UD Wire to WL8
23	Customer Install	Secondary Pull box
24	Customer Install	2-3" PVC Stub outs
25	NBU Install	1-1 1/4" PVC Stub out to WL8
26	NBU Install	3Ø 3PL Primary Pull box
27	NBU Install	85' 1Ø 1/0 UD Primary Wire to WL11
28	NBU Install	OPEN POINT
29	Customer Install	Aluminum Street Light with LED Fixture
30	Customer Install	Secondary Pull box
31	Customer Install	1-3" PVC Stub out
32	NBU Install	50' 350 UD Secondary Wire to WL9
33	Customer Install	Secondary Pull box
34	Customer Install	1-3" PVC Stub outs
35	NBU Install	75kVA 1Ø 120/240 Pdmtr Trdnmr
36	NBU Install	270' 1Ø 1/0 UD Primary Wire to WL14
37	NBU Install	90' 350 UD Secondary Wire to WL10
38	NBU Install	90' 350 UD Secondary Wire to WL12
39	Customer Install	2-3" PVC Stub outs
40	Customer Install	1-3" PVC Conduit to WL10 & 12
41	Customer Install	Secondary Pull box
42	Customer Install	2-3" PVC Stub outs
43	Customer Install	Secondary Pull box
44	NBU Install	75kVA 1Ø 120/240 Pdmtr Trdnmr
45	NBU Install	90' 1Ø 1/0 UD Primary Wire to WL15
46	NBU Install	90' 350 UD Secondary Wire to WL13
47	NBU Install	68' 350 UD Secondary Wire to WL55
48	Customer Install	2-3" PVC Stub outs
49	Customer Install	1-3" PVC Conduit to WL13
50	NBU Install	75kVA 1Ø 120/240 Pdmtr Trdnmr
51	NBU Install	68' 1Ø 1/0 UD Primary Wire to WL51
52	NBU Install	90' 350 UD Secondary Wire to WL16
53	NBU Install	68' 350 UD Secondary Wire to WL54
54	Customer Install	2-3" PVC Stub outs
55	Customer Install	1-3" PVC Conduit to WL16 & 54
56	Customer Install	Secondary Pull box
57	NBU Install	2-3" PVC Stub out
58	NBU Install	1-3" PVC Conduit to WL20
59	NBU Install	68' 350 UD Secondary Wire to WL19
60	Customer Install	Aluminum Street Light with LED Fixture
61	Customer Install	Secondary Pull box
62	Customer Install	1-3" PVC Stub out
63	NBU Install	1-3" PVC Conduit to WL19
64	NBU Install	1-1 1/4" PVC Conduit for Light
65	NBU Install	75kVA 1Ø 120/240 Pdmtr Trdnmr
66	NBU Install	135' 1Ø 1/0 UD Primary Wire to WL51
67	NBU Install	50' 350 UD Secondary Wire to WL48
68	NBU Install	50' 350 UD Secondary Wire to WL50
69	Customer Install	2-3" PVC Stub outs
70	Customer Install	68' 350 UD Secondary Wire to WL18
71	Customer Install	Secondary Pull box
72	NBU Install	1-3" PVC Stub out
73	NBU Install	1-3" PVC Conduit to WL18
74	NBU Install	75kVA 1Ø 120/240 Pdmtr Trdnmr
75	NBU Install	245' 1Ø 1/0 UD Primary Wire to WL15
76	NBU Install	68' 350 UD Secondary Wire to WL17
77	NBU Install	90' 350 UD Secondary Wire to WL53
78	Customer Install	2-3" PVC Stub outs
79	Customer Install	1-3" PVC Conduit to WL17 & 53
80	NBU Install	Aluminum Street Light with LED Fixture
81	Customer Install	Secondary Pull box
82	Customer Install	2-3" PVC Stub outs
83	NBU Install	50' 12-2 UD Wire to WL52
84	Customer Install	Secondary Pull box
85	Customer Install	1-1 1/4" PVC Conduit for Light to WL52
86	NBU Install	2-3" PVC Stub out
87	NBU Install	Aluminum Street Light with LED Fixture
88	Customer Install	Secondary Pull box
89	Customer Install	2-3" PVC Stub outs
90	NBU Install	1-1 1/4" PVC Conduit for Light
91	Customer Install	Secondary Pull box
92	Customer Install	2-3" PVC Stub outs
93	NBU Install	Aluminum Street Light with LED Fixture
94	Customer Install	Secondary Pull box
95	Customer Install	2-3" PVC Stub outs
96	NBU Install	1-1 1/4" PVC Conduit for Light
97	Customer Install	Secondary Pull box
98	Customer Install	2-3" PVC Stub outs

32	NBU Install	3Ø 3PL Primary Pull box
33	NBU Install	450' 3Ø 4/0 UD Primary Wire to WL44
34	NBU Install	68' 1Ø 1/0 UD Primary Wire to WL23
35	NBU Install	175' 1Ø 1/0 UD Primary Wire to WL29
36	NBU Install	240' 1Ø 1/0 UD Primary Wire to WL34
37	NBU Install	75' 350 UD Secondary Wire to WL35
38	NBU Install	1-3" PVC Stub out
39	NBU Install	1-3" PVC Conduit to WL35
40	NBU Install	From Existing Trdnmr
41	NBU Install	50' 350 UD Secondary Wire to WL33
42	NBU Install	1-3" PVC Conduit to WL33
43	NBU Install	Secondary Pull box
44	NBU Install	2-3" PVC Stub outs
45	NBU Install	Aluminum Street Light with LED Fixture
46	NBU Install	50' 12-2 UD Wire to WL36
47	NBU Install	Secondary Pull box
48	NBU Install	2-3" PVC Stub outs
49	NBU Install	1-1 1/4" PVC Conduit for Light
50	NBU Install	75kVA 1Ø 120/240 Pdmtr Trdnmr
51	NBU Install	110' 350 UD Secondary Wire to WL37
52	NBU Install	90' 350 UD Secondary Wire to WL39
53	Customer Install	2-3" PVC Stub outs
54	Customer Install	1-3" PVC Conduit to WL37 & 39
55	Customer Install	50' 12-2 UD Wire to WL40
56	Customer Install	2-3" PVC Stub out
57	Customer Install	1-1 1/4" PVC Conduit for Light to WL40
58	NBU Install	Aluminum Street Light with LED Fixture
59	NBU Install	Aluminum Street Light with LED Fixture
60	Customer Install	Secondary Pull box
61	Customer Install	2-3" PVC Stub outs
62	NBU Install	1-1 1/4" PVC Conduit for Light
63	NBU Install	From Existing Trdnmr
64	NBU Install	90' 350 UD Secondary Wire to WL41
65	NBU Install	1-3" PVC Stub out
66	NBU Install	1-3" PVC Conduit to WL41
67	NBU Install	3Ø Terminated at Existing 3Ø Pull box
68	NBU Install	OPEN POINT on 3Ø Primary
69	NBU Install	3Ø 3PL Primary Pull box
70	NBU Install	310' 3Ø 4/0 UD Primary Wire to WL43
71	NBU Install	210' 1Ø 1/0 UD Primary Wire to WL38
72	NBU Install	195' 1Ø 1/0 UD Primary Wire to WL46
73	NBU Install	68' 350 UD Secondary Wire to WL21
74	Customer Install	Secondary Pull box
75	Customer Install	1-3" PVC Stub out
76	Customer Install	1-3" PVC Conduit to WL21
77	NBU Install	75kVA 1Ø 120/240 Pdmtr Trdnmr
78	NBU Install	185' 1Ø 1/0 UD Primary Wire to WL39
79	NBU Install	50' 350 UD Secondary Wire to WL39
80	NBU Install	50' 350 UD Secondary Wire to WL47
81	Customer Install	2-3" PVC Stub outs
82	Customer Install	1-3" PVC Conduit to WL45 & 47
83	NBU Install	68' 350 UD Secondary Wire to WL20
84	Customer Install	Secondary Pull box
85	Customer Install	1-3" PVC Stub out
86	NBU Install	1-3" PVC Conduit to WL20
87	NBU Install	68' 350 UD Secondary Wire to WL19
88	Customer Install	Aluminum Street Light with LED Fixture
89	Customer Install	Secondary Pull box
90	Customer Install	1-3" PVC Stub out
91	NBU Install	1-3" PVC Conduit to WL19
92	NBU Install	1-1 1/4" PVC Conduit for Light
93	NBU Install	75kVA 1Ø 120/240 Pdmtr Trdnmr
94	NBU Install	135' 1Ø 1/0 UD Primary Wire to WL51
95	NBU Install	50' 350 UD Secondary Wire to WL48
96	NBU Install	50' 350 UD Secondary Wire to WL50
97	Customer Install	2-3" PVC Stub outs
98	Customer Install	68' 350 UD Secondary Wire to WL18
99	Customer Install	Secondary Pull box
100	NBU Install	1-3" PVC Stub out
101	NBU Install	1-3" PVC Conduit to WL18
102	NBU Install	75kVA 1Ø 120/240 Pdmtr Trdnmr
103	NBU Install	245' 1Ø 1/0 UD Primary Wire to WL15
104	NBU Install	68' 350 UD Secondary Wire to WL17
105	NBU Install	90' 350 UD Secondary Wire to WL53
106	Customer Install	2-3" PVC Stub outs
107	Customer Install	1-3" PVC Conduit to WL17 & 53
108	NBU Install	Aluminum Street Light with LED Fixture
109	Customer Install	Secondary Pull box
110	Customer Install	2-3" PVC Stub outs
111	NBU Install	1-1 1/4" PVC Conduit for Light
112	Customer Install	Secondary Pull box
113	Customer Install	2-3" PVC Stub outs
114	NBU Install	Aluminum Street Light with LED Fixture
115	Customer Install	Secondary Pull box
116	Customer Install	2-3" PVC Stub outs
117	NBU Install	1-1 1/4" PVC Conduit for Light
118	Customer Install	Secondary Pull box
119	Customer Install	2-3" PVC Stub outs
120	NBU Install	1-1 1/4" PVC Conduit for Light
121	Customer Install	Secondary Pull box
122	Customer Install	2-3" PVC Stub outs

		ELECTRIC ENGINEERING 305 FM 206 PO BOX 10289 NEW BRAUNFELS, TEXAS 78131 800-608-8961		NOTES		SUNFLOWER RIDGE UNIT2		PROJ TITLE / LOCATION		ORION DR			
GAS CL		ELEC CL		PHONE TRS		SCALE		REV NO		REV DATE		ISSUE DATE	
NA	NA	NA	NA	NA	NA	1 inch = 50.02 feet	1	1	2-7-25				
PHONE CL		W CL		CATV TRS		MAPSCO		TECH		SPFEIL			
NA	NA	NA	NA	NA	NA	1-009EXT	PAGE 1 OF 1	1	1	1	1	254986	