



---

**GEOTECHNICAL ENGINEERING STUDY - PAVEMENTS**

**FOR**

**PRECINCTS 18-2 AND 19-1 - PAVEMENTS  
VERAMENDI MASTER PLANNED DEVELOPMENT  
NEW BRAUNFELS, TEXAS**

---

Project No. ANA24-030-00  
September 27, 2024

Mr. Troy Vater  
Development Manager  
ASA Properties, LLC  
387 West Mill Street  
New Braunfels, Texas 78130



Raba Kistner, Inc.  
1913 Post Road, Suite 645  
New Braunfels, TX 78130  
www.rkci.com

P 830.214.0544  
F 830.214.0627  
F-3257

**RE:     Geotechnical Engineering Study – Pavements  
         Precincts 18-2 and 19-1 - Pavements  
         Veramendi Master Planned Development  
         New Braunfels, Texas**

Dear Mr. Vater:

RABA KISTNER Inc. (RKI) is pleased to submit the report of our Geotechnical Engineering Study for the above-referenced project. This study was performed in accordance with RKI Proposal No. PNA24-048-00, dated July 22, 2024. The purpose of this study was to drill borings along the alignment of the proposed new roadways, to perform laboratory testing to classify and characterize subsurface conditions, and to prepare an engineering report presenting pavement design and construction guidelines.

The following report contains our design recommendations and considerations based on our current understanding of the project information provided to our office. There may be alternatives for value engineering of the pavement systems, and RKI recommends that a meeting be held with the Owner and design team to evaluate these alternatives.

We appreciate the opportunity to be of service to you on this project. Should you have any questions about the information presented in this report, or if we may be of additional assistance with value engineering or on the materials testing-quality control program during construction, please call.

Very truly yours,

**RABA KISTNER, INC.**

A handwritten signature in blue ink, reading "Ryan DeWees".

Ryan DeWees, E.I.T.  
Graduate Engineer

A handwritten signature in blue ink, reading "Ian Perez".

Ian Perez, P.E.  
Vice President



RD/TIP/mmd

Attachments

Copies Submitted:     Above (1) – Email Only

**GEOTECHNICAL ENGINEERING STUDY**

For

**PRECINCTS 18-2 AND 19-1 – PAVEMENTS  
VERAMENDI MASTER PLANNED DEVELOPMENT  
NEW BRAUNFELS, TEXAS**

Prepared for

**ASA PROPERTIES, LLC**  
New Braunfels, Texas

Prepared by

**RABA KISTNER, INC.**  
New Braunfels, Texas

**PROJECT NO. ANA24-030-00**

September 27, 2024

## **TABLE OF CONTENTS**

<b>PROJECT DESCRIPTION .....</b>	<b>1</b>
<b>LIMITATIONS .....</b>	<b>1</b>
<b>BORINGS AND LABORATORY TESTS .....</b>	<b>1</b>
SULFATE TESTING .....	2
<b>GENERAL SITE CONDITIONS .....</b>	<b>3</b>
GEOLOGY .....	3
STRATIGRAPHY .....	3
GROUNDWATER .....	3
SWELL/HEAVE POTENTIAL .....	3
<b>PAVEMENT RECOMMENDATIONS .....</b>	<b>4</b>
CITY OF NEW BRAUNFELS PAVEMENT DESIGN .....	4
SUBGRADE STRENGTH CHARACTERIZATION .....	5
DESIGN PARAMETERS – ASPHALT CONCRETE PAVEMENTS .....	5
STRUCTURAL NUMBER RECOMMENDATIONS .....	6
PAVEMENT DESIGN PARAMETERS – ASPHALT CONCRETE PAVEMENTS .....	6
Performance Period, years .....	6
Roadbed Soil Resilient Modulus, psi .....	7
Serviceability Indices .....	7
Overall Standard Deviation .....	7
Reliability, % .....	7
Design Traffic, 18-kip ESALs .....	7
RECOMMENDED PAVEMENT SECTIONS – ASPHALT CONCRETE PAVEMENTS .....	7
Residential Precincts 18-2 and 19-1 .....	8
DESIGN PARAMETERS – PORTLAND CEMENT CONCRETE PAVEMENTS .....	10
PAVEMENT DESIGN PARAMETERS – PORTLAND CEMENT CONCRETE PAVEMENTS .....	10
Performance Period .....	10
28-day Concrete Modulus of Rupture ( $M_r$ ), psi .....	11
28-day Concrete Elastic Modulus, psi .....	11
Effective Modulus of Subgrade Reaction(k-value), psi/in. ....	11
Serviceability Indices .....	11
Load Transfer Coefficient .....	11
Drainage Coefficient .....	11
Overall Standard Deviation .....	11
Reliability, % .....	12
Design Traffic 18-kip ESAL .....	12
RECOMMENDED PAVEMENT SECTIONS – PORTLAND CEMENT CONCRETE PAVEMENTS .....	12
<b>PAVEMENT CONSTRUCTION CONSIDERATIONS .....</b>	<b>12</b>
SITE PREPARATION .....	12

## **TABLE OF CONTENTS**

SELECT FILL .....	13
ON-SITE CLAY FILL.....	14
TREATMENT OF SUBGRADE .....	14
GEOGRID REINFORCEMENT .....	15
FLEXIBLE BASE COURSE .....	15
PRIME COAT .....	15
TACK COAT.....	15
ASPHALTIC CONCRETE SURFACE AND/OR BINDER COURSES .....	15
PORTLAND CEMENT CONCRETE .....	16
CONCRETE PAVEMENT CONSTRUCTION CONTROL.....	16
CONCRETE PAVEMENT TYPE.....	17
JOINT SPACING AND DETAILS .....	17
SUGGESTED PAVEMENT DETAILS .....	17
MISCELLANEOUS PAVEMENT RELATED CONSIDERATIONS.....	17
Drainage Considerations .....	17
Utilities.....	18
Curb and Gutter .....	18
Longitudinal Cracking .....	18
Pavement Maintenance .....	19
Construction Traffic.....	19
<b>CONSTRUCTION RELATED SERVICES .....</b>	<b>20</b>
CONSTRUCTION MATERIALS TESTING AND OBSERVATION SERVICES.....	20
BUDGETING FOR CONSTRUCTION TESTING.....	20

## **ATTACHMENTS**

The following figures are attached and complete this report:

Boring Location Map.....	Figure 1
Logs of Borings .....	Figures 2 through 7
Key to Terms and Symbols.....	Figure 8
Results of Soil Analyses .....	Figure 9
Moisture-Density Relationship .....	Figure 10
pH-Lime Series Curve .....	Figure 11
Corrected CBR vs. Dry Density .....	Figure 12
Dynamic Cone Penetration Test (DCP) .....	Figure 13
Important Information About Your Geotechnical Engineering Report	

## **PROJECT DESCRIPTION**

To be considered in this study are the internal roadways in Precincts 18-2 and 19-1 of the Veramendi Master Planned Development in New Braunfels, Texas. The proposed roadways are planned to be designed utilizing the City of San Antonio's Pavement Design Guidance Manual with guidance from the City of New Braunfels. The interior roadways are to be designed in general accordance with the City of San Antonio Local Type A Streets (with and without bus traffic).

A previous pavement study (RKI Report No. ANA23-022-00, revised September 22, 2023) was completed for the adjacent precincts 4-1 and 18-1 of the Veramendi Master Planned Development. The report was reviewed and was used in supplement to the recommendations presented in this report.

## **LIMITATIONS**

This engineering report has been prepared in accordance with accepted Geotechnical Engineering practices in the region of south/central Texas and for the use of ASA Properties, LLC (CLIENT) and its representatives for design purposes. This report may not contain sufficient information for purposes of other parties or other uses. This report is not intended for use in determining construction means and methods. The attachments and report text should not be used separately.

The recommendations submitted in this report are based on the data obtained from the 6 borings and 2 bulk samples collected at this site and the information provided to us. This report may not reflect the actual variations of the subsurface conditions across the site. The nature and extent of variations across the site may not become evident until construction commences. The construction process itself may also alter subsurface conditions. If variations appear evident at the time of construction, it may be necessary to reevaluate our recommendations after performing on-site observations and tests to establish the engineering impact of the variations.

The scope of our Geotechnical Engineering Study does not include an environmental assessment of the air, soil, rock, or water conditions either on or adjacent to the site. No environmental opinions are presented in this report.

## **BORINGS AND LABORATORY TESTS**

Subsurface conditions at the site were evaluated by 6 borings drilled at the locations shown on the Boring Location Map, Figure 1. These locations are approximate, and distances were measured using a recreational grade, hand-held, GPS Locator. The borings were drilled using a truck-mounted drilling rig to an approximate depth of 5 ft below the existing ground surface. Our borings were terminated shallow of the planned 10 ft depth due to auger refusal in limestone. During drilling operations, split-spoon samples with Standard Penetration Testing (SPT) were collected.

Each sample was visually classified in the laboratory by a member of our Geotechnical Engineering staff. The geotechnical engineering properties of the subsurface soil strata were evaluated by the natural moisture content, percent passing a No. 200 sieve and Atterberg limits tests.

The results of all laboratory tests are presented in graphical or numerical form on the boring logs illustrated in Figures 2 through 7. A key to classification terms and symbols used on the logs is presented in Figure 8. The results of the laboratory and field testing are also tabulated in Figure 9 for ease of reference.

Standard penetration test results are noted as “blows per ft” on the boring logs and Figure 9, where “blows per ft” refers to the number of blows by a falling hammer required for 1 ft of penetration into the soil/weak rock (N-value). Where hard or dense materials were encountered, the tests were terminated at 50 blows even if one foot of penetration had not been achieved. When all 50 blows fall within the first 6 in. (seating blows), refusal “ref” for 6 in. or less will be noted on the boring logs and on Figure 9.

In addition to the above listed testing and sampling, 2 bulk samples of the predominant subgrade soil were also collected for use in California Bearing Ratio (CBR) testing, pH-Lime series testing, and sulfate content testing. The bulk samples were collected from areas near Borings B-2 and B-5. The results of the CBR testing can be found on the Moisture Density Relationship Curves in Figure 10. The graphs for Dry Density vs. Corrected CBR are presented in Figure 11. The pH-Lime Series Curves can be found in Figure 12.

A summary of the bulk sample testing results are presented in the following table:

Material Type, Location and Depth	Proctor Max Density and Optimum Moisture	Corrected Laboratory CBR	Average Percent Swell (%)	Raw Plasticity Index (PI)	Lime PI with 4% Lime	Sulfate Content (ppm)
Reddish Brown Clay (Boring B-2, 0 - 1 ft)	94.0 pcf, 23.1%	3.1	0.5	28	8	< 100
Dark Brown Clay (Boring B-5, 0 – 2 ft)	94.5 pcf, 22.6%	4.2	0.3	33	8	< 100

Dynamic Cone Penetration (DCP) testing was conducted during our field operations on all borings and the results are presented in Figure 13.

Samples will be retained in our laboratory for 30 days after submittal of this report. Other arrangements may be provided at the request of the Client.

### **SULFATE TESTING**

Sulfate testing was performed on the bulk samples. The results of the sulfate content testing are presented in the *Borings and Laboratory Tests* section of this report.

The purpose of the sulfate testing was to determine the concentration of soluble sulfates in the subgrade soils, in order to investigate the potential for an adverse reaction to lime in sulfate-containing soils. The adverse reaction, referred to as sulfate-induced heave, has been known to cause cohesive subgrade soils to swell in short periods of time, resulting in pavement heaving and possible failure. Sulfates can also affect the durability of concrete when encountered in high concentrations.

On the basis of soil sulfate concentration the soils have a “*Negligible*” potential to cause sulfate induced heave. Reported sulfate concentrations above 3,000 ppm are known to cause sulfate induced heaving when

the soils are mixed with lime. If the option for lime is considered, a quality assurance program should be implemented to assist in reducing the risk of sulfate induced heaving.

## **GENERAL SITE CONDITIONS**

### **GEOLOGY**

A review of the *Geologic Atlas of Texas, San Antonio Sheet*, indicates that this site is naturally underlain with the soils/rock (limestone) of the Edwards Group. Edwards limestone is generally considered hard in induration and typically contains harder zones/seams of chert and dolomite. Edwards limestone also typically contains karstic features in the form of open and/or clay-filled vugs, voids, and/or solution cavities that form as a result of solution movement through fractures in the rock mass. Key geotechnical engineering considerations for development supported on this formation will be the depth to rock, the expansive nature of the overlying clays, the condition of the rock, and the presence/absence of karstic features.

### **STRATIGRAPHY**

The natural subsurface stratigraphy at this site can generally be described as a surficial layer of plastic to highly plastic, dark reddish-brown clay with plasticity indices ranging from 34 to 44 overlying weathered limestone or limestone which extends to at least the boring termination depths. Each stratum presented on the boring logs has been designated by grouping materials that possess similar physical and engineering characteristics. The boring logs should be consulted for more specific stratigraphic information. Unless noted on the boring logs, the lines designating the changes between various strata represent approximate boundaries. The transition between materials may be gradual or may occur between recovered samples. The stratification presented on the boring logs, or described herein, is for use by RKL in its analyses and should not be used as the basis of design or construction cost estimates without realizing there can be variation from that shown or described.

The boring logs and related information depict subsurface conditions only at the specific locations and times where sampling was conducted. The passage of time may result in changes in conditions, interpreted to exist, at or between the locations where sampling was conducted.

### **GROUNDWATER**

Groundwater was not observed in the borings either during or immediately upon completion of the drilling operations. However, it is possible for groundwater to exist beneath this site at shallow depths on a transient basis, particularly following periods of precipitation. Fluctuations in groundwater levels occur due to variation in rainfall and surface water run-off. The construction process itself may also cause variations in the groundwater level.

### **SWELL/HEAVE POTENTIAL**

Subgrade soils that are highly expansive when water is introduced (i.e. highly plastic soils) will heave, causing the pavement to become rough or uneven over time. Pavement roughness is generally defined as an expression of irregularities in the pavement surface that adversely affect the ride quality of a vehicle (and thus the user). Roughness is an important pavement characteristic because it affects not only ride quality



but also vehicle costs, fuel consumption, and maintenance costs. Pavement heave can be reduced through various measures but cannot be totally eliminated without full removal of the problematic soil. Measures available for reducing heave include:

- Soil Treatment with Lime or Other Chemicals
- Removal and Replacement of High PI Soils
- Drains or Barriers to Collect or Inhibit Moisture Infiltration

Soil treatment with lime (or other chemicals) is typically used to reduce the swelling potential of the upper portion of the pavement subgrade containing moderately plastic soils. Lime and water are mixed with the top 8 to 12 inches (or possibly more) of the subgrade and allowed to mellow or cure for a period of time. After mellowing the soil-lime mixture is compacted to form a strong soil matrix that can improve pavement performance and potentially reduce soil heave. However, in highly plastic soils, lime treatment of only the top portion of the expansive subgrade may not provide an acceptable reduction in PVR. For a more substantial reduction in PVR, removal and replacement of the high PI soil may be the only method available to reduce the potential vertical rise of the pavement to an acceptable level. As stated previously, it must be recognized that partial removal of expansive clay soil only reduces the potential (or risk) of the damage swell can cause to a pavement and does not completely eliminate this risk.

In addition, capturing water infiltration via French drains, pavement edge drains, or inhibiting water through the use of vertical moisture barriers would reduce the potential for heave since one important component of the heaving mechanism, water, would be reduced.

It should be noted that the pavement sections derived in the following sections are structurally adequate for the given traffic levels and existing clay subgrade strength, but do not consider the long-term effects of pavement roughness due to heave, which can only be addressed by the measures discussed in this section.

## PAVEMENT RECOMMENDATIONS

### CITY OF NEW BRAUNFELS PAVEMENT DESIGN

The City of New Braunfels has adopted minimum pavement sections for streets classified as a Residential Local Street or a Residential Collector. If the street classifications change to one of these classifications the following minimum pavement sections should be used. Furthermore, RKI should be retained to evaluate our recommendations.

City of New Braunfels Street Classification	Layer Description	Layer Thickness
<b>One and Two Family Residential Local Parking Both Sides</b>	HMA Type D Surface Course	2.0 in.
	Flexible (Granular) Base	12.0 in.
	Treated Subgrade	<u>6.0 in.</u>
	<b>Combined Total</b>	<b>20.0 in.</b>
<b>Residential Collector Parking Both Sides</b>	HMA Type D Surface Course	3.0 in.
	Flexible (Granular) Base	15.0 in.
	Treated Subgrade	<u>6.0 in.</u>
	<b>Combined Total</b>	<b>24.0 in.</b>

### **SUBGRADE STRENGTH CHARACTERIZATION**

We have assumed the pavement subgrade will consist of recompacted on-site clays or, more likely, native, intact limestone or rock millings. The CBR was measured using ASTM D 1883, *Standard Test Method for CBR (California Bearing Ratio) of Laboratory-Compacted Soils* and was determined using the soaked sample methodology. Swell was also measured as part of the CBR procedure. The corrected CBR values and their associated borings are tabulated below:

Sample Location	Average Swell (%)	Laboratory CBR
B-2	0.5	3.1
B-5	0.3	4.2

These values were determined using 3-points compacted at varying efforts to determine the corrected CBR value at 95 percent of the maximum dry density as determined by TxDOT, Tex-114-E. The moisture-density relationship results are presented on Figure 10. Based on these results and our experience with the soils in this area, we have assumed a design CBR value of 3.0 for use in our pavement section analysis for the clay fill subgrade (hereafter referred to as the 'clay subgrade'). If clay soils are imported for the purpose of constructing the road bed then imported materials must be selected that have a CBR value of at least 3.0. If lower quality clay fill materials are utilized, the pavement sections will have to be increased based on the quality (tested CBR value) of the clays imported.

A 'rock subgrade' condition with a CBR of 10.0 may be utilized for the following conditions:

- If select fill material, in accordance with the *Select Fill* section of this report, is utilized as the subgrade fill up to the bottom of the pavement section elevation;
- If native, intact rock is exposed prior to select fill placement (if necessary); or
- If 2 ft or less of surficial on-site clays remain.

For areas that transition between a clay and rock subgrade, we recommend that geogrid be utilized to relieve stress concentrations at the subgrade transitions. The geogrid should be used as a transition for 5 ft or greater on either side of the transition.

### **DESIGN PARAMETERS – ASPHALT CONCRETE PAVEMENTS**

The roadways to be considered in this study are the interior roadways in Precincts 18-2 and 19-1 of the Veramendi Master Planned Development. The proposed roadways were evaluated in accordance with the *City of San Antonio's Design Guidance Manual* regarding Local Type A Streets (with and without bus traffic). Based on information provided by the City of San Antonio, we understand that the following design parameters are required for use in the design of flexible pavements for these types of streets.

Street Classification	Equivalent 18-kip Single Axle Load Applications (ESALs)	Reliability	Serviceability Initial/Terminal	Standard Deviation	Structural Number Minimum/Maximum
Local Type A without Bus Traffic	100,000	70	4.2/2.0	0.45	2.02/3.18
Local Type A with Bus Traffic	1,000,000	70	4.2/2.0	0.45	2.58/4.20

The required structural number is related to the CBR value of the pavement subgrade and the amount of traffic that the pavement will carry over its service life. The CBR provides an estimate of the relative strength of the subgrade and consequently indicates the ability of the pavement section to carry load. This site specific CBR value is utilized in conjunction with the above specified parameters to determine the required Structural Number (SN) for use in the design of the pavement section.

To determine the required design SN value, we utilized a method based on the 1993 edition of the AASHTO "Guide for the Design of Pavement Structures." The "required by design" SN values are presented in the tables of the pavement sections as well as the values subsequently determined in the design of the pavement sections for this site.

### **STRUCTURAL NUMBER RECOMMENDATIONS**

Structural numbers for each street classification and each subgrade condition were calculated using the parameters provided in the table presented in the previous section. The resulting Structural Numbers are presented in the pavement section tables.

### **PAVEMENT DESIGN PARAMETERS – ASPHALT CONCRETE PAVEMENTS**

The following input variables are utilized to design flexible base pavements (commonly referred to as Asphaltic Cement Concrete or Asphalt pavements) when using the procedures detailed in the *1993 AASHTO Guide for Design of Pavement Structures*:

- Performance Period, years
- Roadbed Soil Resilient Modulus, psi
- Serviceability Indices
- Overall Standard Deviation
- Reliability, %
- Design Traffic, 18-kip ESALs

### **Performance Period, years**

The pavement structure was designed for a 20-year performance period which is typical for most flexible pavements.

### **Roadbed Soil Resilient Modulus, psi**

The Resilient Modulus ( $M_R$ ) is the material property used to characterize the support characteristics of the roadbed soils in flexible pavement design. It is a measure of the soil's deformation response to cyclic applications of loads much smaller than a failure load.

To determine the resilient modulus ( $M_R$ ) of the subgrade, we utilized the correlation equation shown below:

$$M_R = 1,500 \times \text{CBR}$$

### **Serviceability Indices**

Initial serviceability is a measure of the pavement's smoothness or rideability immediately after construction. Terminal serviceability is the minimum tolerable serviceability of a pavement. When the serviceability of a pavement reaches its terminal value, rehabilitation is required. See the recommended Initial and Terminal Serviceability Indices on the table presented in the *Design Parameters – Asphalt Concrete Pavements* section of this report.

### **Overall Standard Deviation**

Overall standard deviation accounts for both chance variation in the traffic prediction and normal variation in pavement performance prediction for a given traffic. Higher values represent more variability; thus, the pavement thickness increases with higher overall standard deviations. A value of 0.45 was utilized for the flexible pavement designs presented herein.

### **Reliability, %**

The reliability value represents a "safety factor," with higher reliabilities representing pavement structures with less chance of failure. The AASHTO Guide recommends values ranging from 50 to 99.9%, depending on the functional classification and the location (urban vs. rural) of the roadway. See the recommended Reliability values on the table presented in the *Design Parameters – Asphalt Concrete Pavements* section of this report.

### **Design Traffic, 18-kip ESALs**

The 18-kip ESALs were determined from the traffic data specified in the Unified Development Code for the City of San Antonio. See the recommended values on the table presented in the *Design Parameters – Asphalt Concrete Pavements* section of this report.

## **RECOMMENDED PAVEMENT SECTIONS – ASPHALT CONCRETE PAVEMENTS**

Appendix 10-A of the *City of San Antonio's Design Guidance Manual* states that subgrade soils with a PI greater than 20 must be treated with lime or other proven methods of treatment to reduce the PI of the soil to less than 20. Based on the results of our Atterberg Limits testing performed on the bulk samples and in the upper 5 ft of our borings, the PI of the surficial subgrade clays ranges from 34 to 44. We recommend that pavements on a clay subgrade at this site include a minimum of 6 in. of lime-treated subgrade. We

recommend that the required lime content reduce the PI of the subgrade soil to less than 20 and increases the pH of the soil to 12.4 or greater. If the exposed soil can be characterized as a “rock subgrade”, then the lime treatment may be waived.

If on-site clay fill is utilized for fill grading, it should be placed and compacted as discussed in the *On-Site Clay Fill* section of this report. For areas that require fill and where pavement sections will utilize the clay subgrade recommendations, the final 6 in. of fill should be lime treated (see *Lime Treated Subgrade*). If fill grading is not planned and clays remain in-place, then lime treatment of the stripped clay subgrade should be performed in conjunction with the scarifying, moisture conditioning, and recompaction process described in the *Site Preparation* section of the *Construction Considerations*.

If fill grading is completed utilizing select fill in accordance with the *Select Fill* section of this report, or if native, intact rock is exposed prior to fill placement (if necessary), the lime treated subgrade may be eliminated from the pavement section and the rock subgrade recommendations should be utilized. Per Appendix 10-A of the *City of San Antonio’s Design Guidance Manual*, a rock credit can be given to those pavement sections overlying a rock subgrade. The rock credit provided should be equivalent to a 6 in. structural layer for stabilized subgrade.

For this site, the following options for pavement sections are available for the clay and rock subgrades described herein. Additional options are also available and can be provided upon request.

### **Residential Precincts 18-2 and 19-1**

#### **Clay Subgrade**

Local Type A without Bus Traffic; CBR = 3.0; Required SN = 2.48	Layer Description	Layer Thickness	Recommended SN Coeff.	SN Extension
<b>Flexible Base Option</b>	Asphalt Surface Course, Type D	1.5 in.	0.44	0.66
	Asphalt Binder Course, Type C	2.0 in.	0.44	0.88
	Flexible (Granular) Base	7.0 in.	0.14	0.98
	Treated Subgrade	<u>6.0 in.</u>	0.00	<u>0.00</u>
	<b>Combined Total</b>	<b>16.5 in.</b>		<b>2.52</b>
<b>Full Depth Asphalt Option</b>	Asphalt Surface Course, Type D	2.0 in.	0.44	0.88
	Type B Asphalt Base Course	4.5 in.	0.38	1.71
	Treated Subgrade	<u>6.0 in.</u>	0.00	<u>0.00</u>
	<b>Combined Total</b>	<b>12.5 in.</b>		<b>2.59</b>
<b>Mechanically Stabilized Base Layer Option</b>	Asphalt Surface Course, Type D	1.5 in.	0.44	0.66
	Asphalt Binder Course, Type C	2.0 in.	0.44	0.88
	Mechanically Stabilized Base Layer	6.0 in.	0.17	1.02
	Treated Subgrade	<u>6.0 in.</u>	0.00	<u>0.00</u>
	<b>Combined Total</b>	<b>15.5 in.</b>		<b>2.56</b>

Local Type A with Bus Traffic; CBR = 3.0; Required SN = 3.53	Layer Description	Layer Thickness	Recommended SN Coeff.	SN Extension
<b>Flexible Base Option</b>	Asphalt Surface Course, Type D	2.0 in.	0.44	0.88
	Asphalt Binder Course, Type C	2.5 in.	0.44	1.10
	Flexible (Granular) Base	12.0 in.	0.14	1.68
	Treated Subgrade	<u>6.0 in.</u>	0.00	<u>0.00</u>
	<b>Combined Total</b>	<b>22.5 in.</b>		<b>3.66</b>
<b>Full Depth Asphalt Option</b>	Asphalt Surface Course, Type D	3.0 in.	0.44	1.32
	Type B Asphalt Base Course	6.0 in.	0.38	2.28
	Treated Subgrade	<u>6.0 in.</u>	0.00	<u>0.00</u>
	<b>Combined Total</b>	<b>15.0 in.</b>		<b>3.60</b>
<b>Mechanically Stabilized Base Layer Option</b>	Asphalt Surface Course, Type D	2.0 in.	0.44	0.88
	Asphalt Binder Course, Type C	2.5 in.	0.44	1.10
	Mechanically Stabilized Base Layer	10.0 in.	0.17	1.70
	Treated Subgrade	<u>6.0 in.</u>	0.00	<u>0.00</u>
	<b>Combined Total</b>	<b>20.5 in.</b>		<b>3.68</b>

### Rock Subgrade

Local Type A without Bus Traffic; CBR=10.0; Required SN = 2.02 <sup>(1)</sup>	Layer Description	Layer Thickness	Recommended SN Coeff.	SN Extension
<b>Flexible Base Option</b>	Asphalt Surface Course, Type C or D	2.0 in.	0.44	0.88
	Flexible (Granular) Base	6.0 in.	0.14	0.84
	Rock Credit	<u>0.0 in.</u>	--	<u>0.48</u>
	<b>Combined Total</b>	<b>8.0 in.</b>		<b>2.20</b>

<sup>(1)</sup> The calculated Structural Number (SN) was less than the COSA minimum SN, and the COSA minimum was utilized in design.

Local Type A with Bus Traffic; CBR=10.0; Required SN = 2.58 <sup>(1)</sup>	Layer Description	Layer Thickness	Recommended SN Coeff.	SN Extension
<b>Flexible Base Option</b>	Asphalt Surface Course, Type C or D	2.0 in.	0.44	0.88
	Flexible (Granular) Base	9.0 in.	0.14	1.26
	Rock Credit	<u>0.0 in.</u>	--	<u>0.48</u>
	<b>Combined Total</b>	<b>11.0 in.</b>		<b>2.62</b>
<b>Full Depth Asphalt Option</b>	Asphalt Surface Course, Type C or D	1.5 in.	0.44	0.66
	Type B Asphalt Base Course	4.0 in.	0.38	1.52
	Rock Credit	<u>0.0 in.</u>	0.00	<u>0.48</u>
	<b>Combined Total</b>	<b>5.5 in.</b>		<b>2.66</b>

<sup>(1)</sup> The calculated Structural Number (SN) was less than the COSA minimum SN, and the COSA minimum was utilized in design.

The full depth asphalt option results in a more rigid pavement section and should be carefully considered by the design team before including along the alignments. More rigid pavement sections have a higher likelihood of tensile cracking due to the potential for expansive soils heaving and creating isolated areas of stress concentrations. The lime treated subgrade layer will assist in reducing the potential for expansive soil related movements, but will not eliminate the potential, as discussed previously.

A Mechanically Stabilized Layer (MSL) is a composite layer consisting of flexible (granular) base and a geogrid product. Geogrid provides lateral restraint to the flexible base by confining aggregate particles within the plane of the geogrid, thereby creating a reinforced, or mechanically stabilized layer.

#### **DESIGN PARAMETERS – PORTLAND CEMENT CONCRETE PAVEMENTS**

Based on information provided by the City of San Antonio, we understand that the following design parameters are required for use in the design of rigid pavements for the aforementioned street classifications.

Street Classification	Equivalent 18-kip Single Axle Load Applications (ESALs)	Reliability	Serviceability (Initial/Terminal)	Standard Deviation	Rigid Pavement Slab Thickness (Minimum/Maximum)
Local Type A without Bus Traffic	150,000	70	4.5/2.0	0.35	5.0/6.0
Local Type A with Bus Traffic	1,500,000	70	4.5/2.0	0.35	6.0/8.0

To calculate the required design rigid pavement thickness, we utilized a method based on the 1993 edition of the AASHTO “Guide for the Design of Pavement Structures.”

#### **PAVEMENT DESIGN PARAMETERS – PORTLAND CEMENT CONCRETE PAVEMENTS**

The following input variables are utilized to design rigid pavements (commonly referred to as Portland Cement Concrete or PCC pavements) when using the procedures detailed in the *1993 AASHTO Guide for Design of Pavement Structures*:

- Performance Period
- 28-day Concrete Modulus of Rupture, psi
- 28-day Concrete Elastic Modulus, ( $M_r$ ) psi
- Effective Modulus of Subbase/Subgrade Reaction, (k-value) psi/in.
- Serviceability Indices
- Load Transfer Coefficient
- Drainage Coefficient
- Overall Standard Deviation
- Reliability, %
- Design Traffic, 18-kip ESALs

#### **Performance Period**

The pavement structure was designed for a 30-year performance period which is typical for most rigid pavements.

### **28-day Concrete Modulus of Rupture ( $M_r$ ), psi**

The  $M_r$  of concrete is a measure of the flexural strength of the concrete as determined by breaking concrete beam test specimens. An  $M_r$  of approximately 600 psi at 28 days was used in the analysis and is typical of local concrete production.

### **28-day Concrete Elastic Modulus, psi**

Elastic modulus of concrete is an indication of concrete stiffness and varies depending on the coarse aggregate type used in the concrete. A modulus of 4,000,000 psi is used for this pavement design.

### **Effective Modulus of Subgrade Reaction(k-value), psi/in.**

Concrete slab support is characterized by the modulus of subgrade/subbase reaction, otherwise known as the k-value, with units typically shown as psi/in. Based on the use of subgrade, a k-value of 75 psi/in., was used in the rigid pavement design procedure.

### **Serviceability Indices**

Initial serviceability is a measure of the pavement's smoothness or rideability immediately after construction. Terminal serviceability is the minimum tolerable serviceability of a pavement. When the serviceability of a pavement reaches its terminal value, rehabilitation is required. See the recommended Initial and Terminal Serviceability Indices on the table presented in the *Design Parameters – Portland Cement Concrete Pavements* section of this report.

### **Load Transfer Coefficient**

The load transfer coefficient is used to incorporate the effect of dowels, reinforcing steel, tied shoulders, and tied curb and gutter on reducing the stress in the concrete slab due to traffic loading and therefore causing a reduction in the required concrete slab thickness.

The load transfer coefficient used in this pavement design is 3.7 (Local A without Bus Traffic) and 3.2 (Local A with Bus Traffic) for pavements designed with load transfer devices (i.e. dowels) at control joints or CRCP.

### **Drainage Coefficient**

The drainage coefficient characterizes the quality of drainage of the subbase layers under the concrete slab. Good draining pavement structures do not give water the chance to saturate the subbase and subgrade; thus, pumping is not as likely to occur. A drainage coefficient of 1.01 is utilized for rigid pavement design.

### **Overall Standard Deviation**

Overall standard deviation accounts for both chance variation in the traffic prediction and normal variation in pavement performance prediction for a given traffic. Higher values represent more variability; thus, the pavement thickness increases with higher overall standard deviations. See the recommended Overall



Standard Deviation on the table presented in the *Design Parameters – Portland Cement Concrete Pavements* section of this report.

### **Reliability, %**

The reliability value represents a "safety factor," with higher reliabilities representing pavement structures with less chance of failure. The AASHTO Guide recommends values ranging from 50 to 99.9%, depending on the functional classification and the location (urban vs. rural) of the roadway. See the recommended Reliability on the table presented in the *Design Parameters – Portland Cement Concrete Pavements* section of this report.

### **Design Traffic 18-kip ESAL**

The 18-kip ESALs were determined from the street classifications as discussed previously in the *Design Parameters – Portland Cement Concrete Pavements* section of this report.

## **RECOMMENDED PAVEMENT SECTIONS – PORTLAND CEMENT CONCRETE PAVEMENTS**

The recommended concrete slab thicknesses determined with the inputs discussed above are presented in the table below. We recommend that pavements on a clay subgrade at this site include a minimum of 6 in. of lime-treated subgrade. We recommend that the required lime content reduce the PI of the subgrade soil to less than 20 and increases the pH of the soil to 12.4 or greater. If the exposed soil has a natural PI of less than 20 or is founded on a "rock subgrade", then the lime treatment may be waived.

Portland Cement Concrete Design - Cross Sections	Layer Description	Layer Thickness
Local Type A without Bus Traffic	Concrete <sup>(1)</sup>	5.5 in.
	Treated Subgrade <sup>(2)</sup>	<u>6.0 in.</u>
	<b>Combined Total</b>	<b>11.5 in.</b>
Local Type A with Bus Traffic	Concrete <sup>(1)</sup>	7.5 in.
	Treated Subgrade <sup>(2)</sup>	<u>6.0 in.</u>
	<b>Combined Total</b>	<b>13.5 in.</b>

<sup>(1)</sup> Concrete pavement should consist of Jointed Plain Concrete Pavement with load transfer devices at control joints.

<sup>(2)</sup> These layers may be waived for a rock subgrade condition.

## **PAVEMENT CONSTRUCTION CONSIDERATIONS**

### **SITE PREPARATION**

Preparation for the right-of-way (for streets, sidewalks, utilities, etc.) should be performed in accordance with the 2024 TxDOT Standard Specifications, Item 100 – *Preparing Right of Way*. Exposed subgrades should be thoroughly proofrolled in order to locate any weak, compressible zones. A minimum of 5 passes of a fully loaded dump truck or a similar heavily-loaded piece of construction equipment should be used

for planning purposes. Proofrolling operations should be observed by the Geotechnical Engineer or his representative to document subgrade condition and preparation. Weak or soft areas identified during proofrolling should be removed and replaced with a suitable, compacted backfill.

In areas where the clay subgrade will remain in place, the exposed subgrade should be moisture conditioned. This should be done after completion of the proofrolling operations and just prior to flexible base placement. Moisture conditioning is done by scarifying to a minimum depth of 8 in. and recompacting to a minimum of 95 percent of the maximum density determined from the Texas Department of Transportation Compaction Test (TxDOT, Tex-114-E). The moisture content of the subgrade should be maintained within the range of optimum moisture content to 3 percentage points above optimum until permanently covered.

If subgrade treatment is utilized, upon completion of fill grading using the clay subgrade, the final 6 in. of fill should be treated in accordance with the *Treatment of Subgrade* section of this report. If fill grading is not planned, then treatment of the stripped clay subgrade (see *Treatment of Subgrade* section) should be performed in conjunction with the scarifying, moisture conditioning, and recompaction described previously.

#### **SELECT FILL**

If utilized beneath pavement sections, select fill preferably should be crushed stone or gravel aggregate. We recommend that materials specified for use as select fill meet the 2024 TxDOT Standard Specifications, Item 247 – *Flexible Base*, Type A, Grade 1-2.

Select fill should be placed in loose lifts not exceeding 8 in. in thickness and compacted to at least 100 percent of maximum density as determined by TxDOT, Tex-113-E, Compaction Test. The moisture content of the fill should be maintained within the range of 2 percentage points below to 2 percentage points above the optimum moisture content until final compaction.

If select fill is placed over moisture conditioned clays, the first lift of select fill may be placed at 95 percent of the maximum density as determined by TxDOT, Tex 113-E, Compaction Test.

If excavations extend to significant depths into the limestone formation, consideration can be given to utilizing the excavated limestone as “alternative select fill”. However, processing of the excavated material will be required to reduce the maximum particle size to 4 in. Furthermore, special care will be required during excavation activities to separate organics and any plastic clay seams encountered. Alternative select fill materials shall have a maximum liquid limit not exceeding 40 and a plasticity index between 7 and 20. In addition, if these materials are utilized, grain size analyses and Atterberg Limits must be performed during placement at a rate of one test each per 5,000 cubic yards of material due to the high degree of variability associated with pit-run materials. If on-site materials cannot be processed to meet the required criteria, imported select fill materials should be utilized.

If the above listed alternative materials are being considered for bidding purposes, the materials should be submitted to the Geotechnical Engineer for pre-approval at a minimum of 10 working days or more prior to the bid date. Failure to do so will be the responsibility of the contractor. The contractor will also be responsible for ensuring that the properties of all delivered alternate select fill materials are similar to those

of the pre-approved submittal. It should also be noted that when using alternative fill materials, difficulties may be experienced with respect to moisture control during and subsequent to fill placement, as well as with erosion, particularly when exposed to inclement weather. This may result in sloughing of beam trenches and/or pumping of the fill materials.

#### **ON-SITE CLAY FILL**

As discussed previously, the pavement recommendations presented in this report were prepared assuming that on-site soils will be used to establish the finished grade in proposed pavement areas. Where applicable and as necessary, we recommend that on-site soils be placed in loose lifts not exceeding 8 in. in thickness and compacted to at least 95 percent of the maximum density as determined by TxDOT, Tex-114-E or ASTM D698. The moisture content of the fill should be maintained to be at least equal to the optimum water content, but not exceed 3 percentage points above the optimum water content until permanently covered. Fill materials shall be free of roots and other organic or degradable material. We recommend that the maximum particle size not exceed 3 in. or one half the compacted lift thickness, whichever is smaller.

#### **TREATMENT OF SUBGRADE**

Lime or cement treatment of the subgrade soils, if utilized, should be in accordance with the 2024 TxDOT Standard Specifications, Item 260 or Item 275, respectively. A sufficient quantity of hydrated lime or cement should be mixed with the subgrade soils to reduce the soil plasticity index to 20 or less. The results of the pH-Lime Series testing show that a 4 percent lime or cement mixture by soil dry unit weight will meet the above plasticity and pH recommendations. An additional 1 percent should be added for dry placement to account for loss. **For construction purposes, we recommend that the optimum lime or cement content of the subgrade soils be determined by laboratory testing with representative samples of the subgrade materials being used for this project.**

Treated subgrade soils should be compacted to a minimum of 95 percent of the maximum density at a moisture content within the range of optimum moisture content to 3 percentage points above the optimum moisture content as determined by Tex-113-E.

The moisture content of finished cement-treated subgrade soils, if any, should be maintained for a period of 24–48 hr. During this time, but no sooner than 24 hours, roll the finished course using a vibratory roller to induce microcracking. The vibratory roller must be in accordance with 2024 TxDOT Standard Specifications, Item 210, with a static weight equal to or more than 12 tons, and the vibratory drum must be no less than 20 in. wide. The roller must travel at a speed of 2 mph, vibrating at maximum amplitude, and make two–four passes with 100% coverage excluding the outside 1 ft. of the surface crown, unless otherwise directed by the Engineer. Additional passes may be required to achieve the desired crack pattern as directed. Notify the Engineer 24 hours before the microcracking begins. Cement treated subgrade soils may not produce a cracking pattern during initial vibratory rolling and additional passes of the vibratory roller should be completed at the engineer's discretion.

We recommend that during site grading operations, additional laboratory testing be performed to determine the concentration of soluble sulfates in the subgrade soils. If the sulfate contents increase to

3,000 ppm or more, the sulfate in the soil may react with calcium-based stabilizers potentially causing sulfate-induced heave and the use of lime or cement should be reconsidered.

### **GEOGRID REINFORCEMENT**

The geogrid reinforcement should be selected and placed in accordance with 2024 TxDOT Standard Specifications, Item 250, using a Type II TxDOT approved geogrid that conforms to DMS 6240. The geogrid should be placed at the bottom of the flexible (granular) base section in all flexible pavement cases. An alternative to the above geogrid should not be considered without approval from RKL. **In our opinion, incorporating geogrid into the flexible pavement sections will enhance overall pavement performance and reduce the potential for cracking and maintenance in asphalt pavements.**

### **FLEXIBLE BASE COURSE**

The flexible base course should be crushed limestone conforming to the 2024 TxDOT Standard Specifications, Item 247 – *Flexible Base*, Type A, Grades 1-2. The base course should be placed in lifts with a maximum compacted thickness of 8 in. (10 inches loose) and compacted to a minimum of 95 percent of the maximum density determined by Tex-113-E at a moisture content within the range of 2 percentage points below to 2 percentage points above the optimum moisture content as determined by Tex-113-E.

### **PRIME COAT**

A prime coat should be placed on top of the flexible base course (if used) and should be a MC-30, AE-P, EAP&T, or PCE conforming to the TxDOT Standard Specifications 2024, Item 310– *Prime Coat* or Item 314 – *Emulsified Asphalt Treatment* as well as TxDOT Item 300 – *Asphalts, Oils and Emulsions*. Prime coat application rates are typically between 0.1 to 0.3 gal/yd<sup>2</sup> and are generally dependent upon the absorption rate of the granular base and other environmental conditions at the time of placement. The prime coat layer should be placed on the prepared flexible base as soon as possible. This will facilitate plugging the capillary voids in the flexible base surface to reduce migration of moisture and providing a water resistant surface. The asphalt layer should be placed as soon as possible after the prime coat has been properly set/cured.

### **TACK COAT**

A tack coat should be placed between asphaltic concrete base and/or surface lifts and should be SS-1H, CSS-1H, EAP&T, or a PG binder with a minimum high-temperature grade of PG 58 conforming to TxDOT Standard Specification 2024, Item 341, para 2.5 – *Tack Coat*.

### **ASPHALTIC CONCRETE SURFACE AND/OR BINDER<sup>1</sup> COURSES**

The asphaltic concrete surface and/or binder courses should conform to the 2024 TxDOT Standard Specifications, Item 341 – *Dense Graded Hot-Mix Asphalt* or Item 341 Paragraph 2.6.2 *Warm Mix Asphalt (WMA)*, Types C or D for the surface and binder, and Type B for the base, if the full depth asphalt is selected for construction. Recycled asphalt pavement (RAP) should be limited to 20 percent of the total weight of the mix for Types C and D mixes and 30 percent for Type B mixes. Higher percentages of RAP may be

---

<sup>1</sup> A binder course is defined as the hot mixed asphalt concrete (HMAC) layer placed directly beneath the ACP surface or wearing course but is not an asphalt treated base layer.

permissible depending on the material source. If higher percentages of RAP are desired, contact RKI for consideration. Asphalt cement grades should conform to the table shown below, which conforms to the requirements of Item 341.

Street Classifications	Minimum PG Asphalt Cement Grade		
	Surface Courses	Binder & Level Up Courses	Base Courses
Local Type A with Bus Traffic	PG 70-22	PG 64-22	PG 64-22
Local Type A without Bus Traffic	PG 64-22		

The asphaltic concrete should be compacted on the roadway to contain from 3 to 8 percent air voids computed using the maximum theoretical specific gravity (Rice) of the mixture determined according to Test Method Tex-227-F. Pavement specimens, which shall be either cores or sections of asphaltic pavement, will be tested according to Test Method Tex-207-F. The nuclear-density gauge or other methods which correlate satisfactorily with results obtained from project roadway specimens may be used when approved by the Engineer. Unless otherwise shown on the plans, the Contractor shall be responsible for obtaining the required roadway specimens at their expense and in a manner and at locations selected by the Engineer.

It is recommended that the asphalt concrete pavement be placed with a paving machine only and not with a motor grader unless prior approval is granted by the Engineer for special circumstances. The asphalt layer should preferably be placed as soon as possible after the flexible base has been accepted and the prime coat has been placed. This will further protect the flexible base and subgrade from undue moisture fluctuation due to precipitation or sheet flow from rain events.

#### **PORTLAND CEMENT CONCRETE**

The Portland cement concrete should be in accordance with Class P concrete of the 2024 TxDOT Standard Specifications for Construction and Maintenance of Highways, Streets and Bridges, Item 421, Hydraulic Cement Concrete. Requirements include concrete designed to meet a minimum average compressive strength of 3,200 psi at 7-days or a minimum average compressive strength of 4,000 psi at 28-days in accordance with TxDOT standard laboratory test procedure Tex-448-A or Tex-418-A. Liquid membrane-forming curing compound should be applied as soon as practical after broom finishing the concrete surface. The curing compound will help reduce the loss of water from the concrete. The reduction in the rapid loss in water will help reduce shrinkage cracking of the concrete.

#### **CONCRETE PAVEMENT CONSTRUCTION CONTROL**

Construction of Portland Cement Concrete Pavements should be controlled by the 2024 TxDOT Standard Specifications, Item 360 – *Concrete Pavement*. The surface of all concrete pavements should be textured or tined. Texturing using carpet dragging or tining should be in accordance with Item 360, Sections 3.5.1 and 3.5.2. Other texturing techniques may be utilized as described in ACI 330.1-03, Section 3, Subparagraph 9.

### **CONCRETE PAVEMENT TYPE**

Jointed Plain Concrete Pavement (which is referred to by TxDOT as Concrete Pavement Contraction Design or CPCD) is suggested for roadways with crosswalks, adjacent parking, or sidewalks and is recommended as the pavement type for this city street.

### **JOINT SPACING AND DETAILS**

Construction joint spacing should not exceed 15 ft in either the longitudinal or transverse direction. The depth of sawcut should be a minimum of 1/4 of the slab depth if utilizing a conventional saw or 1 in. when using an early entry saw (early entry sawing is recommended). The width of the joint will be a function of the sealant chosen to seal the joint. It is recommended that a joint seal be utilized to minimize the introduction of incompressible material into the joint.

It is recommended that dowel bars be used to provide load transfer and reduce differential movement (or faulting) across transverse joints. Dowels should be smooth #9 bars (Grade 60 steel) spaced 12 in. on center with an embedment length of at least 8 in.

Tie bars should be used to tie longitudinal joints within the pavement lanes and at the shoulder. Tie bars should be deformed #4 bars at a minimum (Grade 60 steel) spaced 36 in. on center with a minimum length of 30 in.

Isolation joints must be used around fixed structures including light standard foundations and drainage inlets to offset the effects of differential horizontal and vertical movements. Premolded joint fillers should be used around the fixed structures prior to placing the concrete pavement to prevent bonding of the slab to the structure and should extend through the depth of the slab but slightly recessed from the pavement surface to provide room for the joint sealant.

### **SUGGESTED PAVEMENT DETAILS**

Suggested details that can be utilized for construction are:

- TxDOT CPCD-24, Concrete Pavement Details, Contraction Design, T-6 to 12 inches; and
- TxDOT JS-14, Concrete Paving Details, Joint Seals.

### **MISCELLANEOUS PAVEMENT RELATED CONSIDERATIONS**

#### **Drainage Considerations**

As with any soil-supported structure, the satisfactory performance of a pavement system is contingent on the provision of adequate surface and subsurface drainage. Insufficient drainage which allows saturation of the pavement subgrade and/or the supporting granular pavement materials will greatly reduce the performance and service life of the pavement systems.

Surface and subsurface drainage considerations crucial to the performance of pavements at this site include (but are not limited to) the following:

- Any known natural or man-made subsurface seepage at the site which may occur at sufficiently shallow depths as to influence moisture contents within the subgrade should be intercepted by drainage ditches or below grade French drains.
- Final site grading should eliminate isolated depressions adjacent to curbs, which may allow surface water to pond and infiltrate into the underlying soils. Curbs should be installed to a sufficient depth to reduce infiltration of water beneath the curbs and into the pavement base materials.
- Pavement surfaces should be maintained to help minimize surface ponding and to provide rapid sealing of any developing cracks. These measures will help reduce infiltration of surface water downward through the pavement section.

### **Utilities**

Our experience indicates that significant settlement of backfill can occur in utility trenches, particularly when trenches are deep, when backfill materials are placed in thick lifts with insufficient compaction, and when water can access and infiltrate the trench backfill materials. The potential for water to access the backfill is increased where water can infiltrate flexible base materials due to insufficient penetration of curbs, and at sites where geological features can influence water migration into utility trenches (such as fractures within a rock mass or at contacts between rock and clay formations). It is our belief that another factor which can significantly impact settlement is the migration of fines within the backfill into the open voids in the underlying free-draining bedding material.

To reduce the potential for settlement in utility trenches, we recommend that consideration be given to the following:

- All backfill materials should be placed and compacted in controlled lifts appropriate for the type of backfill and the type of compaction equipment being utilized and all backfilling procedures should be tested and documented.
- Consideration should be given to wrapping free-draining bedding gravels with a geotextile fabric (similar to Mirafi 140N) to reduce the infiltration and loss of fines from backfill material into the interstitial voids in bedding materials.

### **Curb and Gutter**

It is good practice to construct curbs such that the depth of the curb extends through the entire depth of the granular base material to act as a protective barrier against the infiltration of water into the granular base. Pavements that do not have this protective barrier to moisture tend to develop longitudinal cracks 1 to 2 ft from the edge of the pavement. Once these cracks develop, further degradation and weakening of the underlying granular base may occur due to water seepage through the cracks.

### **Longitudinal Cracking**

It should be understood that asphalt pavement sections in highly expansive soil environments, such as those encountered at this site, can develop longitudinal cracking along unprotected pavement edges. In the semi-arid climate of south central Texas this condition typically occurs along the unprotected edges of pavements where moisture fluctuation is allowed to occur over the lifetime of the pavements.



Pavements that do not have a protective barrier to reduce moisture fluctuation of the highly expansive clay subgrade between the exposed pavement edge and that beneath the pavement section tend to develop longitudinal cracks 1 to 4 ft from the edge of the pavement. Once these cracks develop, further degradation and weakening of the underlying granular base may occur due to water seepage through the cracks. The occurrence of these cracks can be more prevalent in the absence of lateral restraint and steep embankments. This problem can best be addressed by providing either a horizontal or vertical moisture barrier at the unprotected pavement edge.

A horizontal barrier is commonly in the form of a paved shoulder extending 8 feet or greater beyond the edge of the pavement. Other methods of shoulder treatment, such as using geofabrics beyond the edge of the roadway, are sometimes used in an effort to help reduce longitudinal cracking. Although this alternative does not eliminate the longitudinal cracking phenomenon, the location of the cracking is transferred to the shoulder rather than within the traffic lane.

Vertical barriers installed along the unprotected edges of roadway pavements are also effective in preventing non-uniform drying and shrinkage of the subgrade clays. These barriers are typically in the form of a vertical moisture barrier/membrane extending 6 feet or greater below the top of the subgrade at the pavement edge. Both types of barriers must be sealed at the edge of the pavement to prevent a crack that would facilitate the drying of the subgrade clays.

At a minimum, we recommend that the curbs are constructed such that the depth of the curb extends through the entire depth of the granular base material and into the subgrade to act as a protective barrier against the infiltration of water into the granular base.

In most cases, a longitudinal crack does not immediately compromise the structural integrity of the pavement system. However, if left unattended, infiltration of surface water runoff into the crack will result in isolated saturation of the underlying base. This will result in pumping of the flexible base, which could lead to rutting, cracking, and pot-holes. For this reason, we recommend that the owner of the facility immediately seal the cracks and develop a periodic sealing program.

### **Pavement Maintenance**

Regular pavement maintenance is critical in maintaining pavement performance over a period of several years. All cracks that develop in asphalt pavements should be regularly sealed. Areas of moderate to severe fatigue cracking (also known as alligator cracking) should be sawcut and removed. The underlying base should be checked for contamination or loss of support and any insufficiencies fixed or removed and the entire area patched. All cracks that develop in concrete pavements should be routed and sealed regularly. Joints in concrete pavements should be maintained to reduce the influx of incompressible materials that restrain joint movement and cause spalling and/or cracking. Other typical TxDOT or City of San Antonio/New Braunfels maintenance techniques should be followed as required.

### **Construction Traffic**

Construction traffic on prepared subgrade, granular base or asphalt treated base (black base) should be restricted as much as possible until the protective asphalt surface pavement is applied. Significant damage to the underlying layers resulting in weakening may occur if heavily loaded vehicles are allowed to use these areas.



## CONSTRUCTION RELATED SERVICES

### CONSTRUCTION MATERIALS TESTING AND OBSERVATION SERVICES

As presented in the attachment to this report, *Important Information About Your Geotechnical Engineering Report*, subsurface conditions can vary across a project site. The conditions described in this report are based on interpolations derived from a limited number of data points. Variations will be encountered during construction, and only the geotechnical design engineer will be able to determine if these conditions are different than those assumed for design.

Construction problems resulting from variations or anomalies in subsurface conditions are among the most prevalent on construction projects and often lead to delays, changes, cost overruns, and disputes. These variations and anomalies can best be addressed if the geotechnical engineer of record, RKI is retained to perform construction observation and testing services during the construction of the project. This is because:

- RKI has an intimate understanding of the geotechnical engineering report's findings and recommendations. RKI understands how the report should be interpreted and can provide such interpretations on site, on the client's behalf.
- RKI knows what subsurface conditions are anticipated at the site.
- RKI is familiar with the goals of the owner and project design professionals, having worked with them in the development of the geotechnical workscope. This enables RKI to suggest remedial measures (when needed) which help meet the owner's and the design teams' requirements.
- RKI has a vested interest in client satisfaction, and thus assigns qualified personnel whose principal concern is client satisfaction. This concern is exhibited by the manner in which contractors' work is tested, evaluated and reported, and in selection of alternative approaches when such may become necessary.
- RKI cannot be held accountable for problems which result due to misinterpretation of our findings or recommendations when we are not on hand to provide the interpretation which is required.


### BUDGETING FOR CONSTRUCTION TESTING

Appropriate budgets need to be developed for the required construction testing and observation activities. At the appropriate time before construction, we advise that RKI and the project designers meet and jointly develop the testing budgets, as well as review the testing specifications as it pertains to this project.

Once the construction testing budget and scope of work are finalized, we encourage a preconstruction meeting with the selected contractor to review the scope of work to make sure it is consistent with the construction means and methods proposed by the contractor. RKI looks forward to the opportunity to provide continued support on this project, and would welcome the opportunity to meet with the Project Team to develop both a scope and budget for these services.

\* \* \* \* \*

## **ATTACHMENTS**

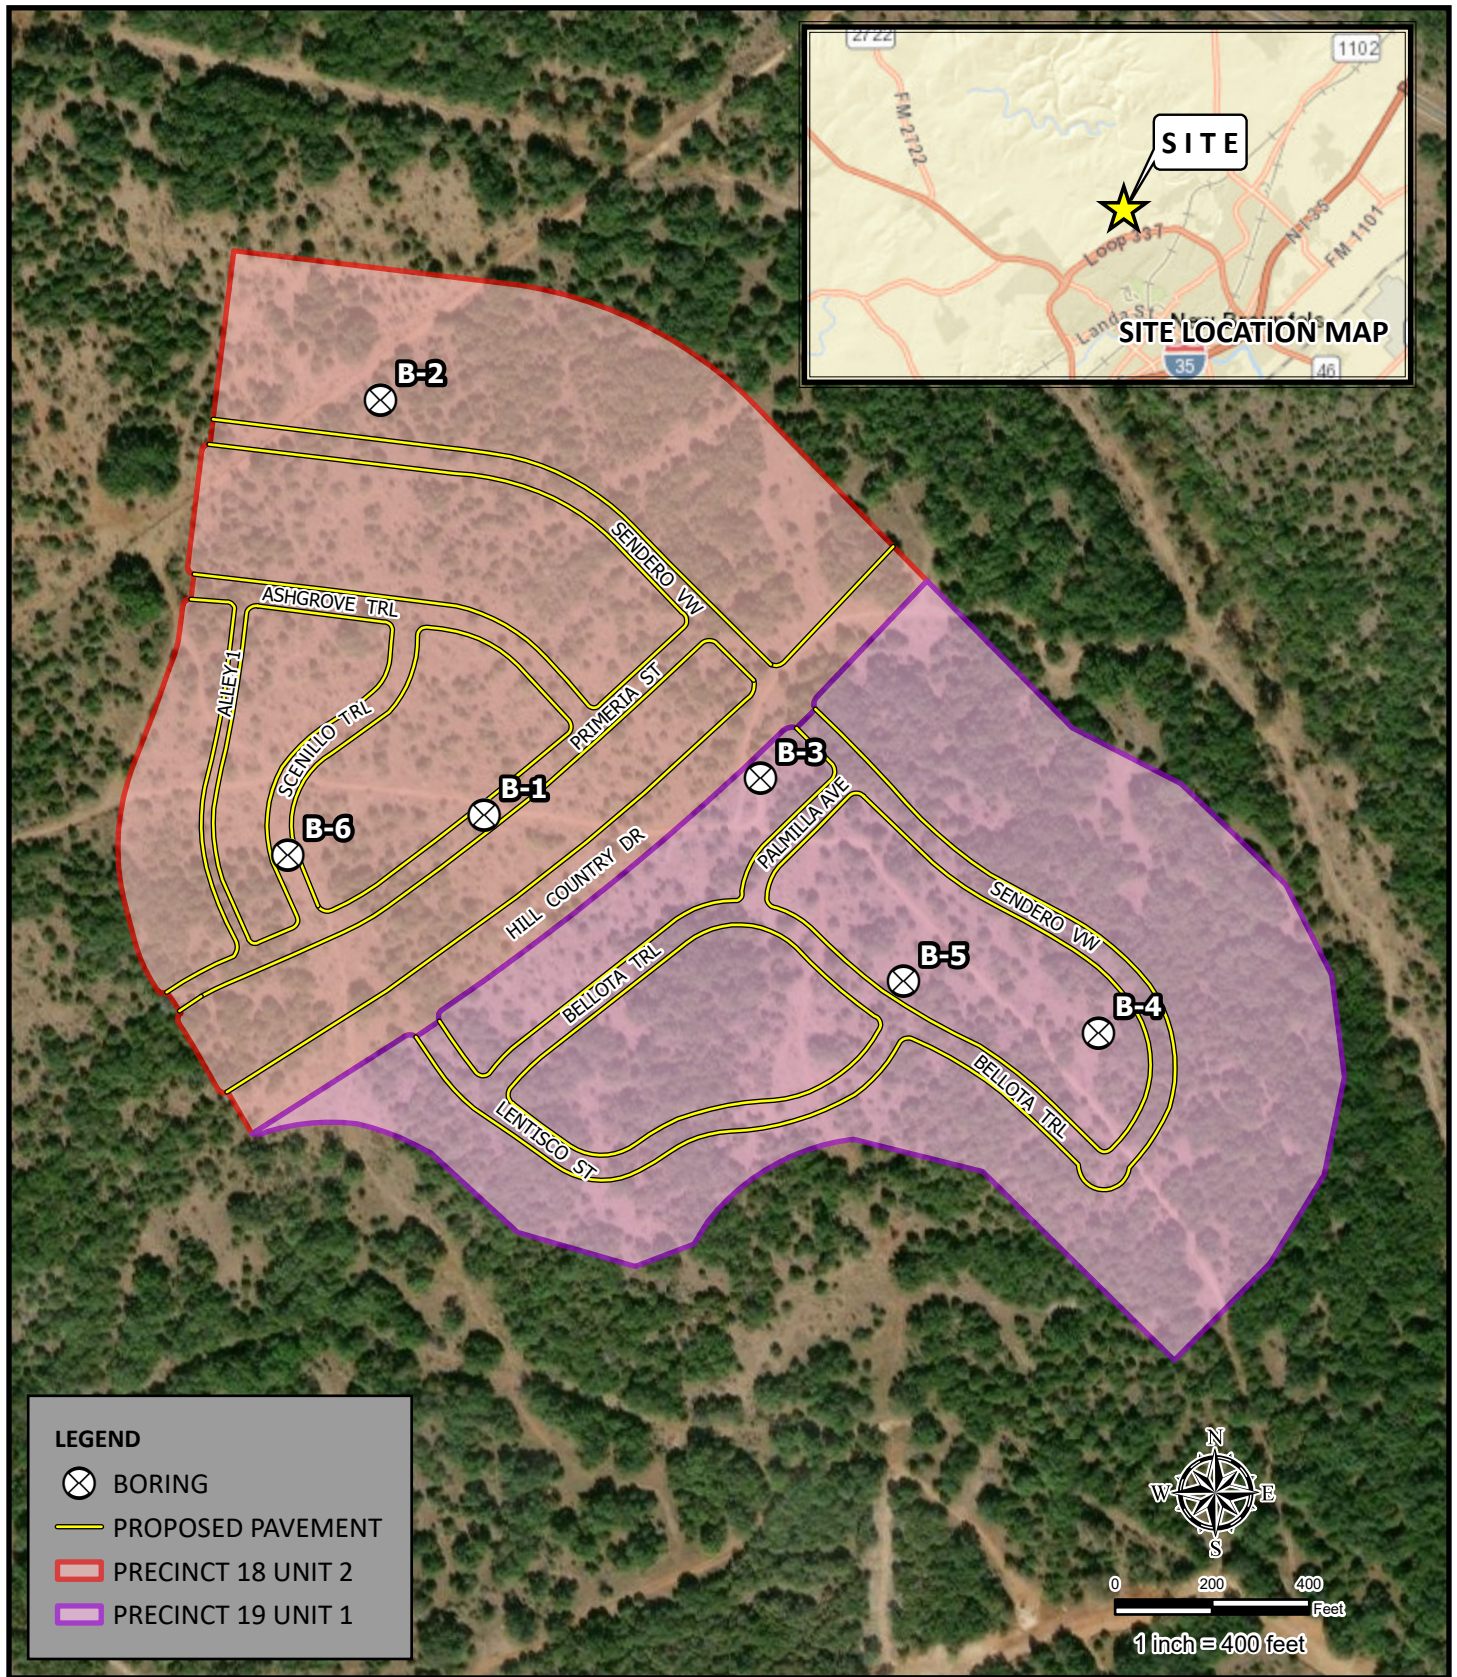


1913 Post Road, Suite 645  
New Braunfels, Texas 78130  
(830)214-0544 TEL  
(830)214-0627 FAX  
[www.rkci.com](http://www.rkci.com)  
TBPE Firm Number 3257

World Street Map: Esri, HERE, Garmin, NGA, USGS, NPS  
World Imagery: Maxar

## BORING LOCATION MAP

Precincts 18-2 and 19-1 – Pavements  
Veramendi Master Planned Development  
New Braunfels, Texas



PROJECT No.: ANA23-030-00

ISSUE DATE:	8/20/2024
DRAWN BY:	BM
CHECKED BY:	SS
REVIEWED BY:	TIP

## FIGURE

1



**LOG OF BORING NO. B-1**  
 Precincts 18-2 and 19-1 - Pavements  
 Veramendi Master Planned Development  
 New Braunfels, Texas



**DRILLING METHOD:** Straight Flight Auger

**LOCATION:** N 29.73721; W 98.13974

DEPTH, FT	SYMBOL	SAMPLES	DESCRIPTION OF MATERIAL	BLOWS PER FT	UNIT DRY WEIGHT, pcf	SHEAR STRENGTH, TONS/FT <sup>2</sup>												PLASTICITY INDEX	% -200
						<div><div><div>●</div><div>◆</div><div>⊗</div><div>△</div><div>□</div></div><div>0.51.01.52.02.53.03.54.0</div></div>													
						<div><div>PLASTIC LIMIT</div><div>WATER CONTENT</div><div>LIQUID LIMIT</div></div> <div><div>×</div><div>●</div><div>×</div></div> <div>1020304050607080</div>													
			LEAN CLAY, Hard, Dark Reddish Brown	48		●	×										34		
			LIMESTONE, Weathered, Hard, Tan																
			LIMESTONE, Hard, Tan																
				ref/1"		●													
				ref/1"		●													
5			Boring Terminated	ref/1"															

NOTE: THESE LOGS SHOULD NOT BE USED SEPARATELY FROM THE PROJECT REPORT






<b>DEPTH DRILLED:</b> 4.6 ft	<b>DEPTH TO WATER:</b> Dry	<b>PROJ. No.:</b> ANA24-030-00
<b>DATE DRILLED:</b> 8/26/2024	<b>DATE MEASURED:</b> 8/26/2024	<b>FIGURE:</b> 2

**LOG OF BORING NO. B-2**  
 Precincts 18-2 and 19-1 - Pavements  
 Veramendi Master Planned Development  
 New Braunfels, Texas



**DRILLING METHOD:** Straight Flight Auger

**LOCATION:** N 29.73957; W 98.14039

DEPTH, FT	SYMBOL	SAMPLES	DESCRIPTION OF MATERIAL	BLOWS PER FT	UNIT DRY WEIGHT, pcf	SHEAR STRENGTH, TONS/FT <sup>2</sup>												PLASTICITY INDEX	% -200
						0.5 1.0 1.5 2.0 2.5 3.0 3.5 4.0													
						PLASTIC LIMIT				WATER CONTENT				LIQUID LIMIT					
						10	20	30	40	50	60	70	80						
			FAT CLAY, Hard, Dark Reddish Brown, with limestone fragments	34			●								39				
		 	LIMESTONE, Hard, Tan	ref/1"			●												
5			Boring Terminated	ref/1"			●												
10																			
15																			
DEPTH DRILLED: 4.6 ft			DEPTH TO WATER: Dry			PROJ. No.:			ANA24-030-00										
DATE DRILLED: 8/26/2024			DATE MEASURED: 8/26/2024			FIGURE:			3										

NOTE: THESE LOGS SHOULD NOT BE USED SEPARATELY FROM THE PROJECT REPORT

**LOG OF BORING NO. B-3**  
 Precincts 18-2 and 19-1 - Pavements  
 Veramendi Master Planned Development  
 New Braunfels, Texas



**DRILLING METHOD:** Straight Flight Auger

**LOCATION:** N 29.73740; W 98.13794

DEPTH, FT	SYMBOL	SAMPLES	DESCRIPTION OF MATERIAL	BLOWS PER FT	UNIT DRY WEIGHT, pcf	SHEAR STRENGTH, TONS/FT <sup>2</sup>												PLASTICITY INDEX	% -200
						0.5 1.0 1.5 2.0 2.5 3.0 3.5 4.0													
						PLASTIC LIMIT				WATER CONTENT				LIQUID LIMIT					
						10 20 30 40 50 60 70 80													
			FAT CLAY, Very Stiff to Hard, Dark Reddish Brown, with limestone fragments	27		●	×	-----	-----	×							36		
				50/7"				●									80		
			LIMESTONE, Hard, Tan			●													
5			Boring Terminated	ref/1"															
										</									






NOTE: THESE LOGS SHOULD NOT BE USED SEPARATELY FROM THE PROJECT REPORT

**LOG OF BORING NO. B-4**  
 Precincts 18-2 and 19-1 - Pavements  
 Veramendi Master Planned Development  
 New Braunfels, Texas



**DRILLING METHOD:** Straight Flight Auger

**LOCATION:** N 29.73595; W 98.13575

DEPTH, FT	SYMBOL	SAMPLES	DESCRIPTION OF MATERIAL	BLOWS PER FT	UNIT DRY WEIGHT, pcf	SHEAR STRENGTH, TONS/FT <sup>2</sup>												PLASTICITY INDEX	% -200
						<div><div><div>●</div><div>◆</div><div>⊗</div><div>△</div><div>□</div></div><div>0.51.01.52.02.53.03.54.0</div></div>													
						<div><div>PLASTIC LIMIT</div><div>WATER CONTENT</div><div>LIQUID LIMIT</div></div> <div><div>×</div><div>●</div><div>×</div></div> <div>1020304050607080</div>													
			FAT CLAY, Hard, Dark Reddish Brown	50/3"		●	×					×					35		
			LIMESTONE, Hard, Tan	ref/1"		●													
5			Boring Terminated	ref/1"		●													
10																			
15																			
DEPTH DRILLED: 4.6 ft			DEPTH TO WATER: Dry			PROJ. No.: ANA24-030-00													
DATE DRILLED: 8/26/2024			DATE MEASURED: 8/26/2024			FIGURE: 5													

NOTE: THESE LOGS SHOULD NOT BE USED SEPARATELY FROM THE PROJECT REPORT



<b>DEPTH DRILLED:</b> 4.6 ft	<b>DEPTH TO WATER:</b> Dry	<b>PROJ. No.:</b> ANA24-030-00
<b>DATE DRILLED:</b> 8/26/2024	<b>DATE MEASURED:</b> 8/26/2024	<b>FIGURE:</b> 5

**LOG OF BORING NO. B-5**  
 Precincts 18-2 and 19-1 - Pavements  
 Veramendi Master Planned Development  
 New Braunfels, Texas



**DRILLING METHOD:** Straight Flight Auger

**LOCATION:** N 29.73624; W 98.13702

DEPTH, FT	SYMBOL	SAMPLES	DESCRIPTION OF MATERIAL	BLOWS PER FT	UNIT DRY WEIGHT, pcf	SHEAR STRENGTH, TONS/FT <sup>2</sup>												PLASTICITY INDEX	% -200																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
						<div><div><div>●</div><div>◆</div><div>⊗</div><div>△</div><div>□</div></div><div>0.51.01.52.02.53.03.54.0</div></div>																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
						<div><div>PLASTIC LIMIT</div><div>WATER CONTENT</div><div>LIQUID LIMIT</div></div> <div><div>×</div><div>●</div><div>×</div></div> <div>1020304050607080</div>																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
			FAT CLAY, Very Stiff, Dark Reddish Brown, with limestone fragments	25																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										

NOTE: THESE LOGS SHOULD NOT BE USED SEPARATELY FROM THE PROJECT REPORT



# LOG OF BORING NO. B-6

Precincts 18-2 and 19-1 - Pavements  
Veramendi Master Planned Development  
New Braunfels, Texas



**DRILLING METHOD:** Straight Flight Auger

**LOCATION:** N 29.73699; W 98.14101


DEPTH, FT	SYMBOL	SAMPLES	DESCRIPTION OF MATERIAL	BLOWS PER FT	UNIT DRY WEIGHT, pcf	SHEAR STRENGTH, TONS/FT <sup>2</sup>												PLASTICITY INDEX	% -200
						0.5 1.0 1.5 2.0 2.5 3.0 3.5 4.0													
						PLASTIC LIMIT				WATER CONTENT				LIQUID LIMIT					
						10 20 30 40 50 60 70 80													
			FAT CLAY, Hard, Dark Reddish Brown	50/11"		●											36		
			LIMESTONE, Hard, Tan	ref/2"		●													
5			Boring Terminated	ref/1"		●													
10																			
15																			
DEPTH DRILLED: 4.6 ft			DEPTH TO WATER: Dry			PROJ. No.: ANA24-030-00													
DATE DRILLED: 8/26/2024			DATE MEASURED: 8/26/2024			FIGURE: 7													

NOTE: THESE LOGS SHOULD NOT BE USED SEPARATELY FROM THE PROJECT REPORT


# KEY TO TERMS AND SYMBOLS

## MATERIAL TYPES


### SOIL TERMS

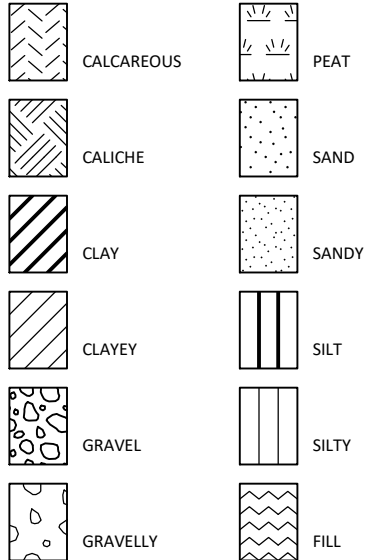


### ROCK TERMS

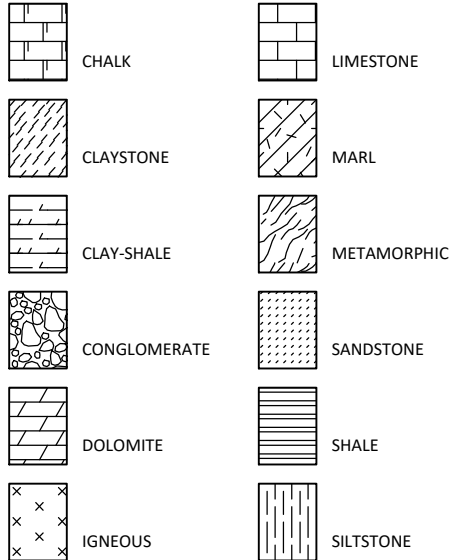


### OTHER

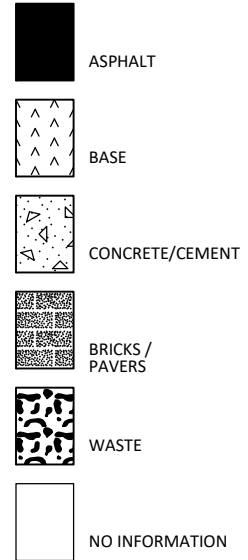


## WELL CONSTRUCTION AND PLUGGING MATERIALS

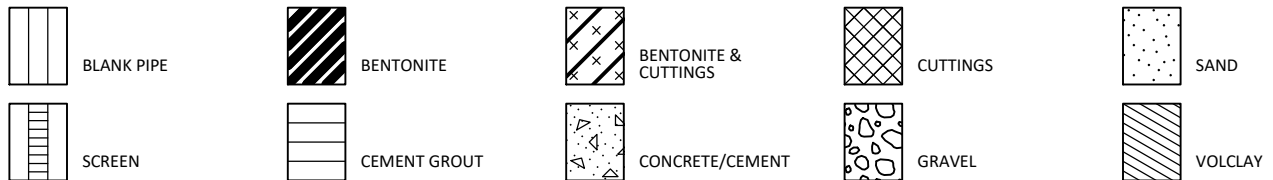

## SAMPLE TYPES

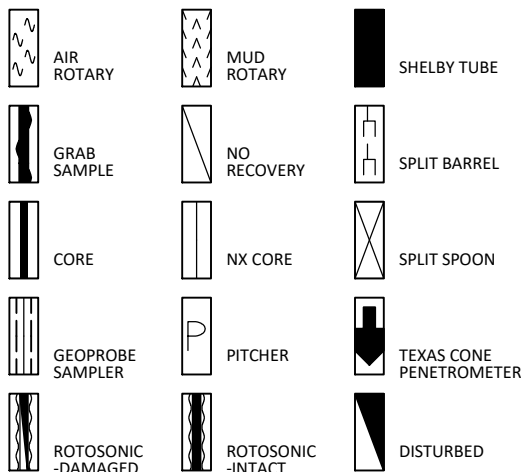

## STRENGTH TEST TYPES

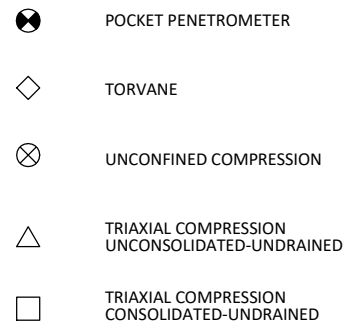

NOTE: VALUES SYMBOLIZED ON BORING LOGS REPRESENT SHEAR STRENGTHS UNLESS OTHERWISE NOTED

PROJECT NO. ANA24-030-00

## KEY TO TERMS AND SYMBOLS (CONT'D)

### TERMINOLOGY

Terms used in this report to describe soils with regard to their consistency or conditions are in general accordance with the discussion presented in Article 45 of SOILS MECHANICS IN ENGINEERING PRACTICE, Terzaghi and Peck, John Wiley & Sons, Inc., 1967, using the most reliable information available from the field and laboratory investigations. Terms used for describing soils according to their texture or grain size distribution are in accordance with the UNIFIED SOIL CLASSIFICATION SYSTEM, as described in American Society for Testing and Materials D2487-06 and D2488-00, Volume 04.08, Soil and Rock; Dimension Stone; Geosynthetics; 2005.

The depths shown on the boring logs are not exact, and have been estimated to the nearest half-foot. Depth measurements may be presented in a manner that implies greater precision in depth measurement, i.e 6.71 meters. The reader should understand and interpret this information only within the stated half-foot tolerance on depth measurements.

#### RELATIVE DENSITY

#### COHESIVE STRENGTH

#### PLASTICITY

<u>Penetration Resistance Blows per ft</u>	<u>Relative Density</u>	<u>Resistance Blows per ft</u>	<u>Consistency</u>	<u>Cohesion TSF</u>	<u>Plasticity Index</u>	<u>Degree of Plasticity</u>
0 - 4	Very Loose	0 - 2	Very Soft	0 - 0.125	0 - 5	None
4 - 10	Loose	2 - 4	Soft	0.125 - 0.25	5 - 10	Low
10 - 30	Medium Dense	4 - 8	Firm	0.25 - 0.5	10 - 20	Moderate
30 - 50	Dense	8 - 15	Stiff	0.5 - 1.0	20 - 40	Plastic
> 50	Very Dense	15 - 30	Very Stiff	1.0 - 2.0	> 40	Highly Plastic
		> 30	Hard	> 2.0		

### ABBREVIATIONS

B = Benzene	Qam, Qas, Qal = Quaternary Alluvium	Kef = Eagle Ford Shale
T = Toluene	Qat = Low Terrace Deposits	Kbu = Buda Limestone
E = Ethylbenzene	Qbc = Beaumont Formation	Kdr = Del Rio Clay
X = Total Xylenes	Qt = Fluvial Terrace Deposits	Kft = Fort Terrett Member
BTEX = Total BTEX	Qao = Seymour Formation	Kgt = Georgetown Formation
TPH = Total Petroleum Hydrocarbons	Qle = Leona Formation	Kep = Person Formation
ND = Not Detected	Q-Tu = Uvalde Gravel	Kek = Kainer Formation
NA = Not Analyzed	Ewi = Wilcox Formation	Kes = Escondido Formation
NR = Not Recorded/No Recovery	Emi = Midway Group	Kew = Walnut Formation
OVA = Organic Vapor Analyzer	Mc = Catahoula Formation	Kgr = Glen Rose Formation
ppm = Parts Per Million	EI = Laredo Formation	Kgru = Upper Glen Rose Formation
	Kknm = Navarro Group and Marlbrook Marl	Kgrl = Lower Glen Rose Formation
	Kpg = Pecan Gap Chalk	Kh = Hensell Sand
	Kau = Austin Chalk	

PROJECT NO. ANA24-030-00

**RABAKISTNER**

## KEY TO TERMS AND SYMBOLS (CONT'D)

### TERMINOLOGY

#### SOIL STRUCTURE

Slickensided	Having planes of weakness that appear slick and glossy.
Fissured	Containing shrinkage or relief cracks, often filled with fine sand or silt; usually more or less vertical.
Pocket	Inclusion of material of different texture that is smaller than the diameter of the sample.
Parting	Inclusion less than 1/8 inch thick extending through the sample.
Seam	Inclusion 1/8 inch to 3 inches thick extending through the sample.
Layer	Inclusion greater than 3 inches thick extending through the sample.
Laminated	Soil sample composed of alternating partings or seams of different soil type.
Interlayered	Soil sample composed of alternating layers of different soil type.
Intermixed	Soil sample composed of pockets of different soil type and layered or laminated structure is not evident.
Calcareous	Having appreciable quantities of carbonate.
Carbonate	Having more than 50% carbonate content.

#### SAMPLING METHODS

##### RELATIVELY UNDISTURBED SAMPLING

Cohesive soil samples are to be collected using three-inch thin-walled tubes in general accordance with the Standard Practice for Thin-Walled Tube Sampling of Soils (ASTM D1587) and granular soil samples are to be collected using two-inch split-barrel samplers in general accordance with the Standard Method for Penetration Test and Split-Barrel Sampling of Soils (ASTM D1586). Cohesive soil samples may be extruded on-site when appropriate handling and storage techniques maintain sample integrity and moisture content.

##### STANDARD PENETRATION TEST (SPT)

A 2-in.-OD, 1-3/8-in.-ID split spoon sampler is driven 1.5 ft into undisturbed soil with a 140-pound hammer free falling 30 in. After the sampler is seated 6 in. into undisturbed soil, the number of blows required to drive the sampler the last 12 in. is the Standard Penetration Resistance or "N" value, which is recorded as blows per foot as described below.

##### SPLIT-BARREL SAMPLER DRIVING RECORD

Blows Per Foot	Description
25 .....	25 blows drove sampler 12 inches, after initial 6 inches of seating.
50/7" .....	50 blows drove sampler 7 inches, after initial 6 inches of seating.
Ref/3" .....	50 blows drove sampler 3 inches during initial 6-inch seating interval.

NOTE: To avoid damage to sampling tools, driving is limited to 50 blows during or after seating interval.

# RESULTS OF SOIL SAMPLE ANALYSES

PROJECT NAME: Precincts 18-2 and 19-1 - Pavements  
Veramendi Master Planned Development  
New Braunfels, Texas

FILE NAME: ANA24-030-00 VERAMENDI P18-2, P19-1.GPJ

9/19/2024

Boring No.	Sample Depth (ft)	Blows per ft	Water Content (%)	Liquid Limit	Plastic Limit	Plasticity Index	USCS	Dry Unit Weight (pcf)	% -200 Sieve	Shear Strength (tsf)	Strength Test
B-1	0.0 to 1.5	48									
	0.0 to 0.5		7	48	14	34	CL				
	2.0 to 2.5		2								
	2.5 to 2.6	ref/1"									
	4.0 to 4.5		1								
B-2	4.5 to 4.6	ref/1"									
	0.0 to 1.5	34	16	55	16	39	CH				
	2.0 to 2.5		6								
	2.5 to 2.6	ref/1"									
	4.0 to 4.5		4								
B-3	4.5 to 4.6	ref/1"									
	0.0 to 1.5	27	9	53	17	36	CH				
	2.5 to 3.6	50/7"	21						80		
	4.0 to 4.5		3								
B-4	4.5 to 4.6	ref/1"									
	0.0 to 0.8	50/3"									
	0.0 to 0.5		5	54	19	35	CH				
	2.0 to 2.5		2								
	2.5 to 2.6	ref/1"									
B-5	4.0 to 4.5		1								
	4.5 to 4.6	ref/1"									
	0.0 to 1.5	25	21	63	19	44	CH				
	2.0 to 2.5		4								
	2.5 to 2.6	ref/1"									
B-6	4.0 to 4.5		3								
	4.5 to 4.6	ref/1"									
	0.0 to 1.4	50/11"									
	0.0 to 1.0		13	51	15	36	CH				
	2.0 to 2.5		5								
	2.5 to 2.7	ref/2"									
	4.0 to 4.5		1								
	4.5 to 4.6	ref/1"									

PP = Pocket Penetrometer TV = Torvane UC = Unconfined Compression FV = Field Vane UU = Unconsolidated Undrained Triaxial

CU = Consolidated Undrained Triaxial


PROJECT NO. ANA24-030-00

**RABAKISTNER**

FIGURE 9


**MOISTURE DENSITY RELATIONSHIP CURVE - TEX-114-E**

**Precincts 18-2 an 19-1 - Pavements, Veramendi Master Planned Development  
New Braunfels, Texas, B-2 Sample, Dark Reddish Brown Clay**

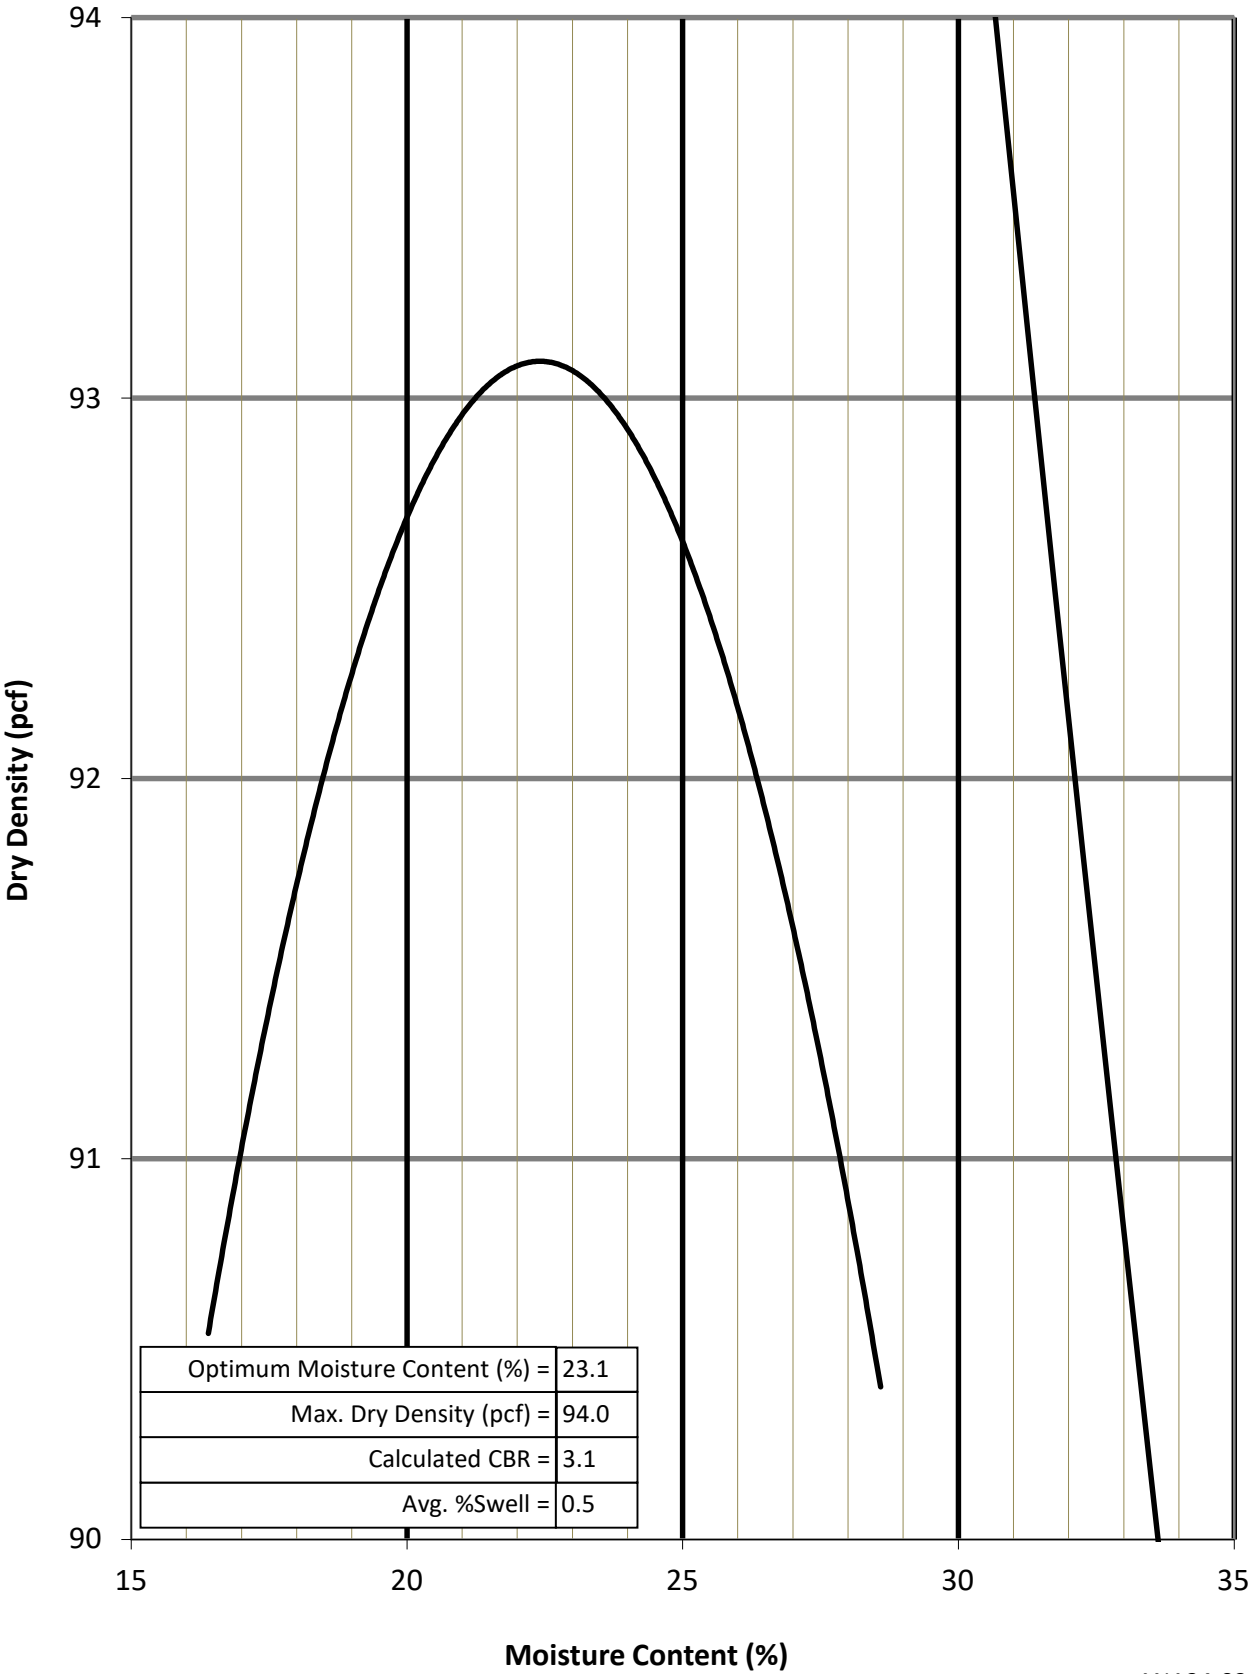


**MOISTURE DENSITY RELATIONSHIP CURVE - TEX-114-E**

**Precincts 18-2 an 19-1 - Pavements, Veramendi Master Planned Development  
New Braunfels, Texas, B-5 Sample, Dark Reddish Brown Clay**

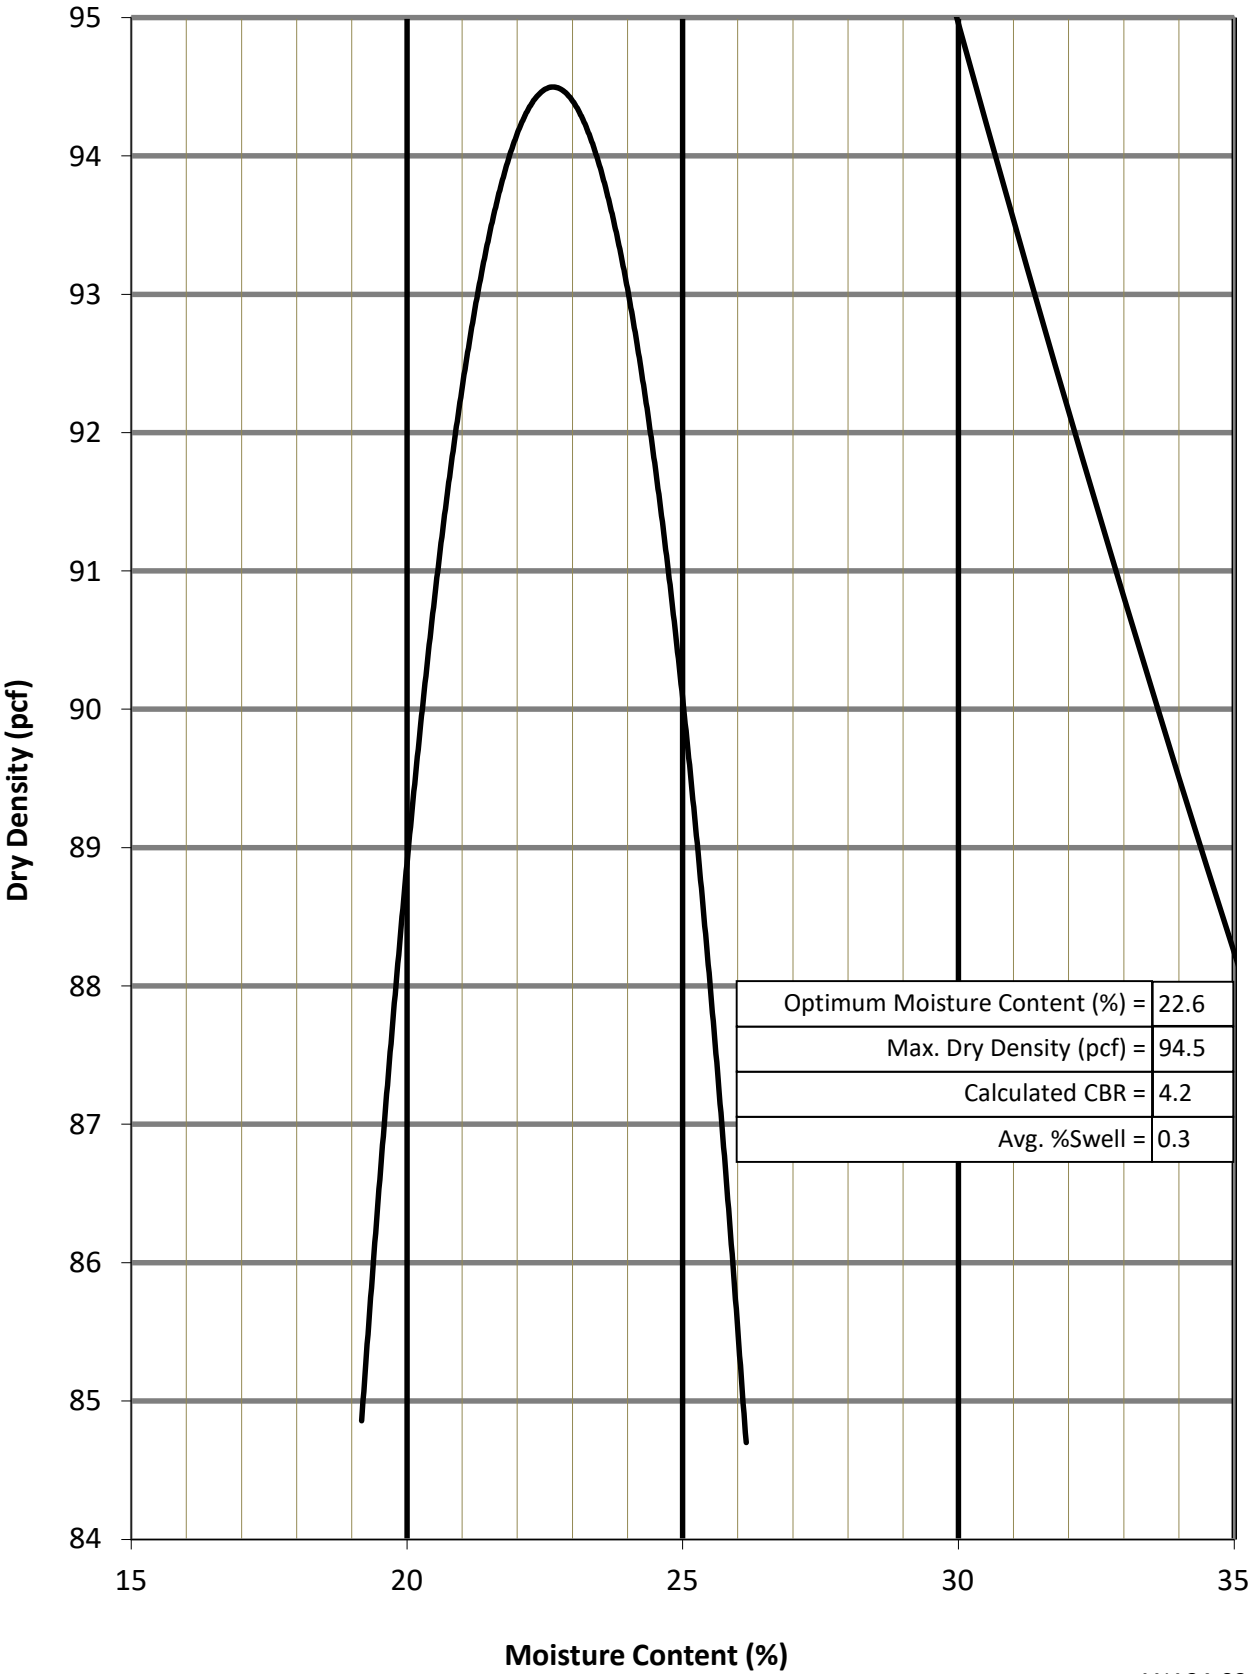


**Dry Density vs. Corrected CBR**  
**Precincts 18-2 and 19-1 - Pavements, Veramendi Master Planned Development**  
**New Braunfels, Texas, B-2 Sample, Dark Reddish Brown Clay**

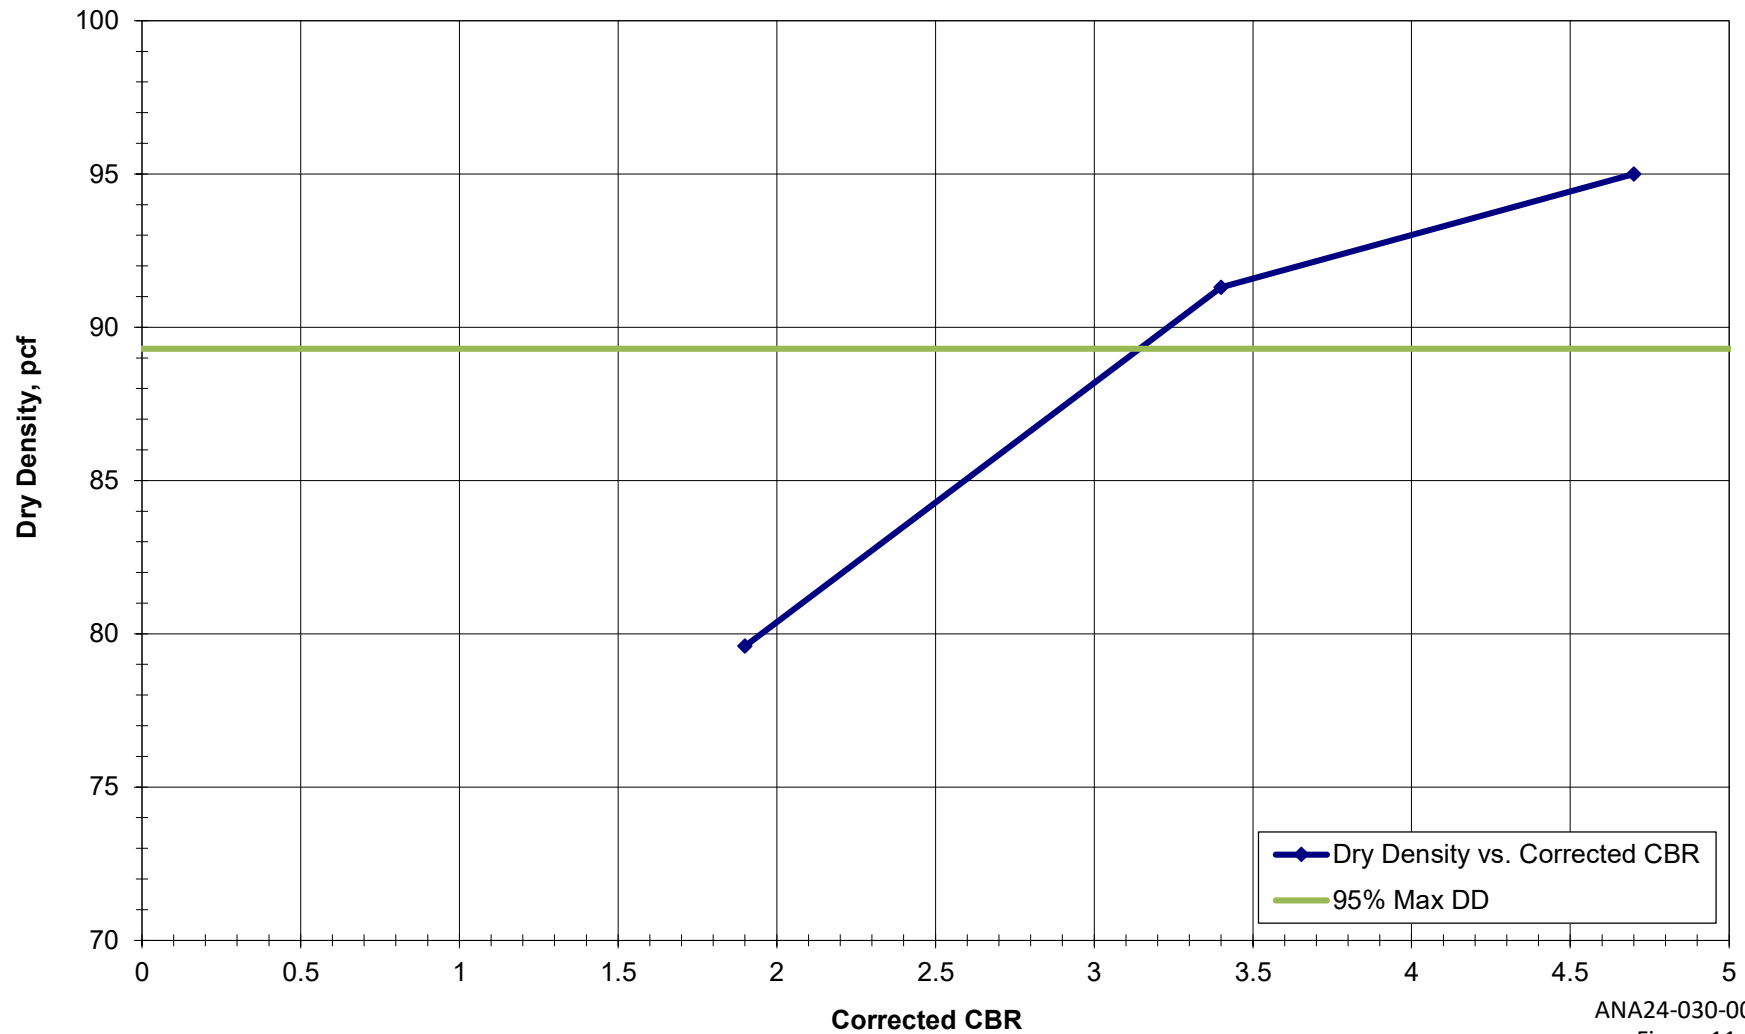




**Dry Density vs. Corrected CBR**  
**Precincts 18-2 and 19-1 - Pavements, Veramendi Master Planned Development**  
**New Braunfels, Texas, B-5 Sample, Dark Reddish Brown Clay**

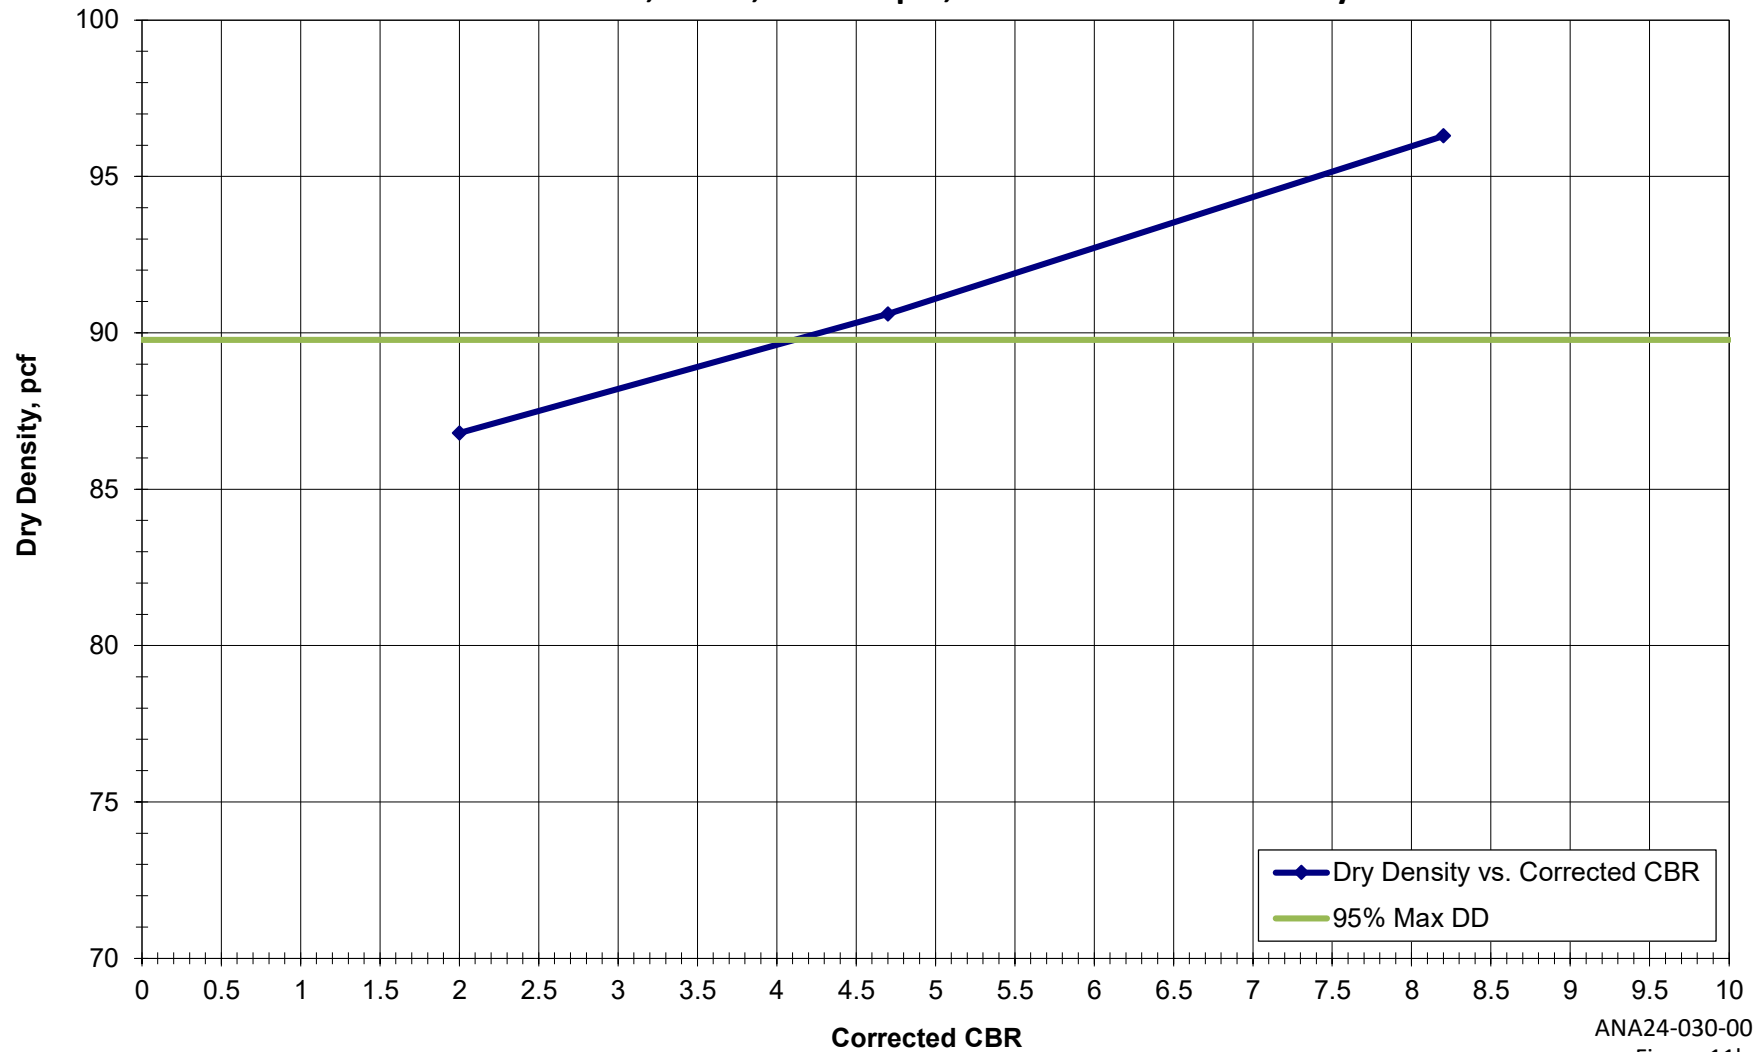


## pH-LIME SERIES CURVE

Precincts 18-2 an 19-1 - Pavements, Veramendi Master Planned Development  
New Braunfels, Texas, B-2 Sample, Dark Reddish Brown Clay

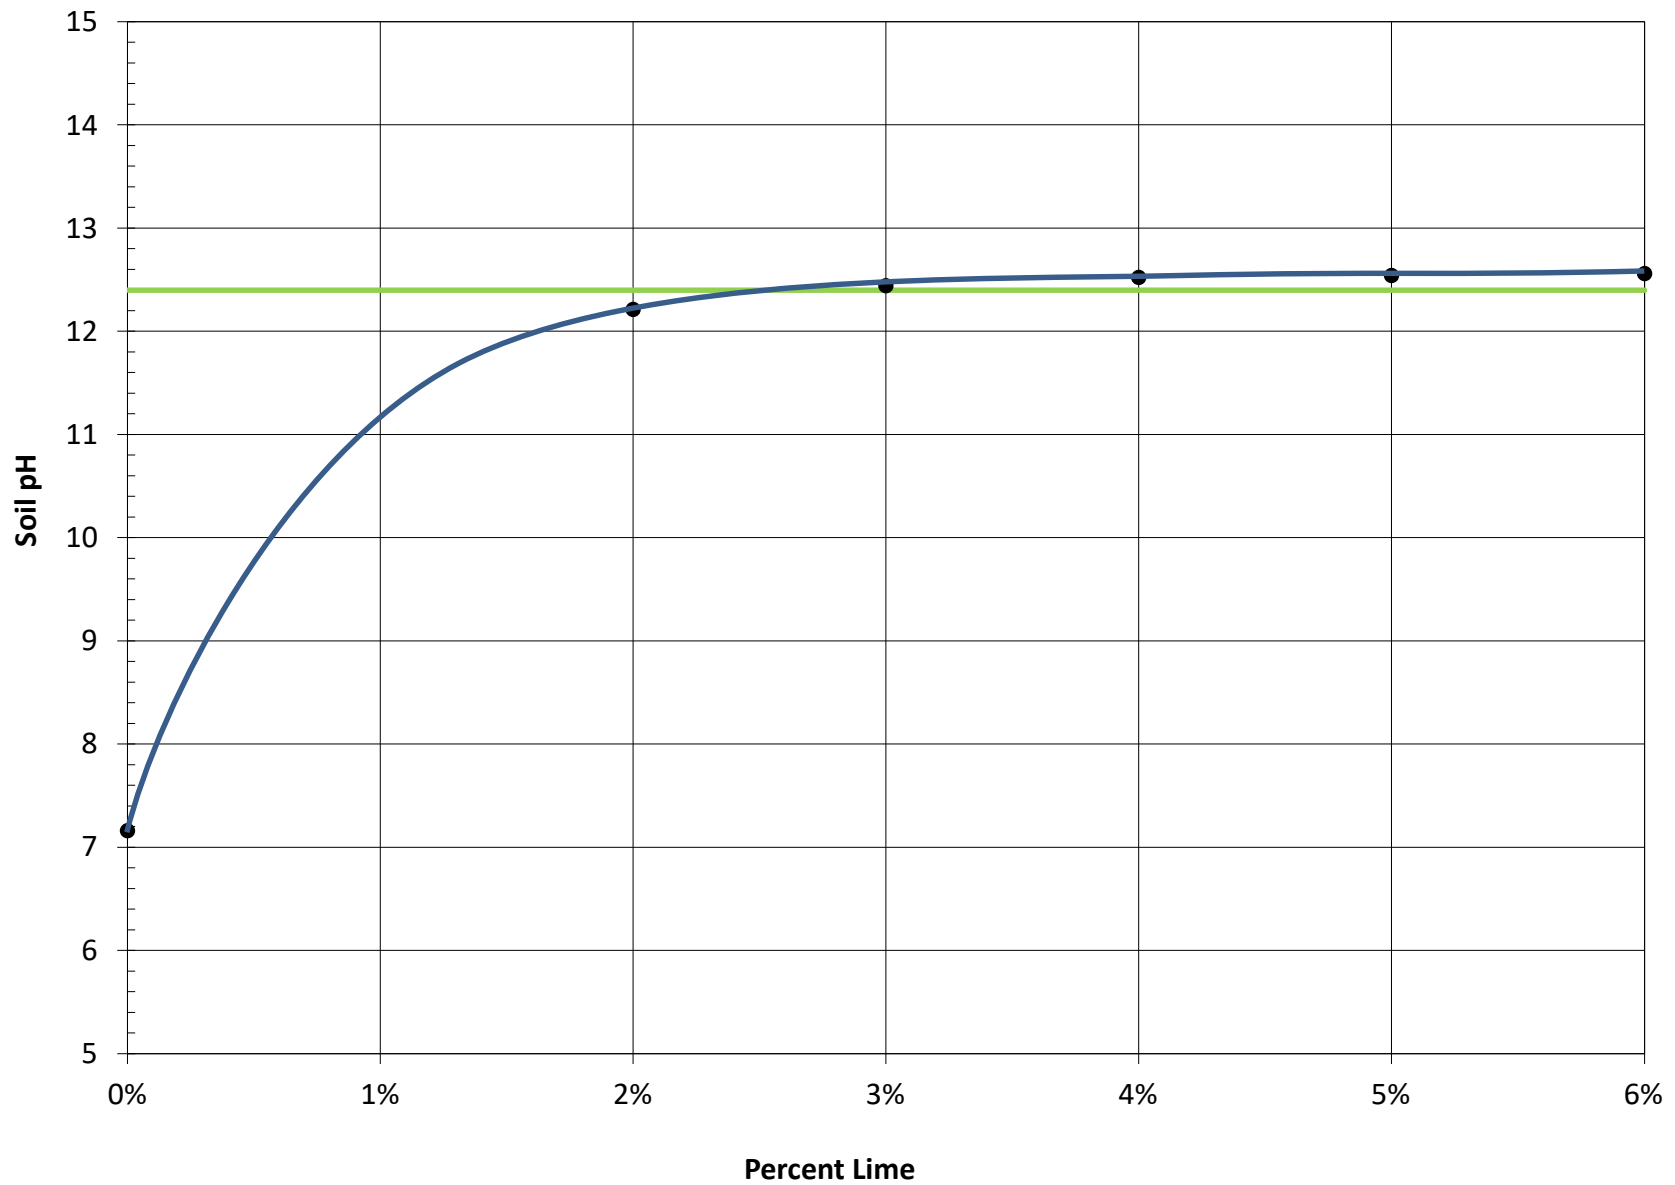

**pH-LIME SERIES CURVE**  
**Precincts 18-2 an 19-1 - Pavements, Veramendi Master Planned Development**  
**New Braunfels, Texas, B-5 Sample, Dark Reddish Brown Clay**

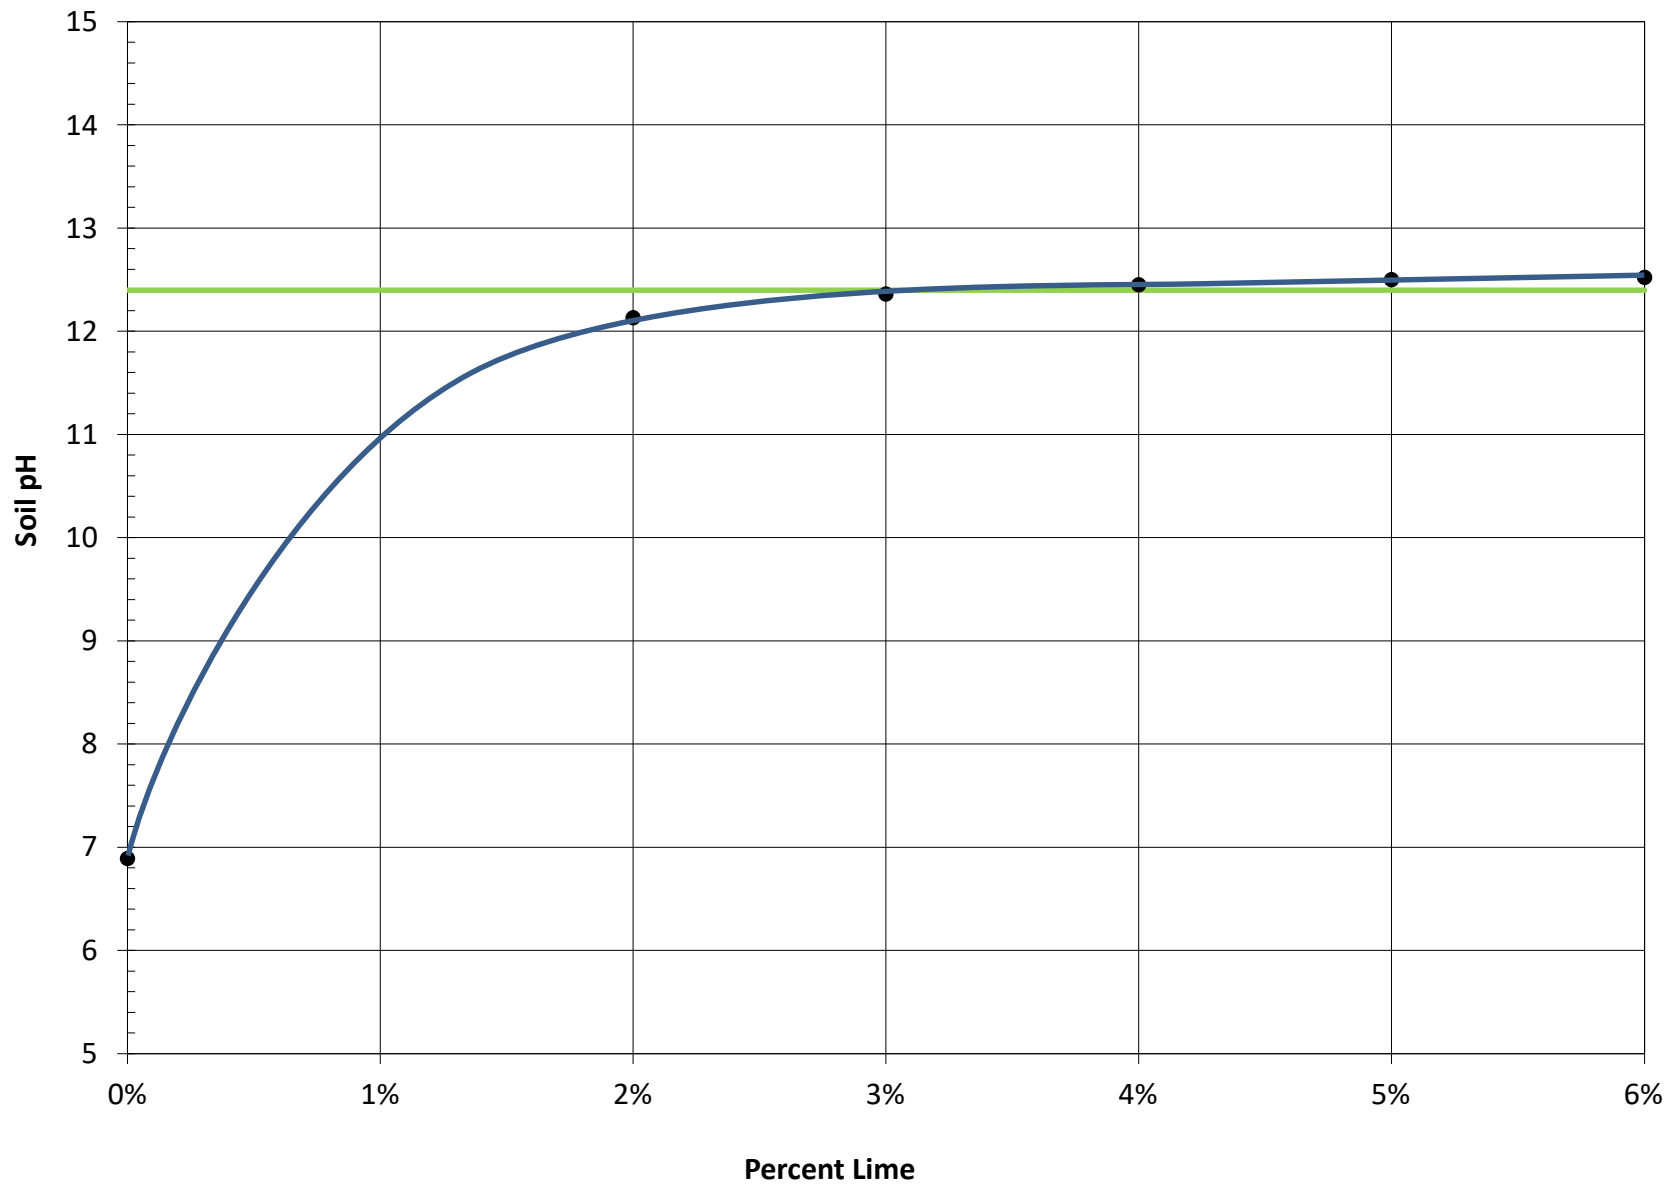

Test Date: August 26, 2024

## DCP TEST DATA

**B-1**

Precincts 18-2 and 19-1 - Pavements, Veramendi Master Planned Development  
New Braunfels, Texas

[illegible]

NOTES: Hammer 17.6 lbs = 1 Hammer 10.1 lbs = 2

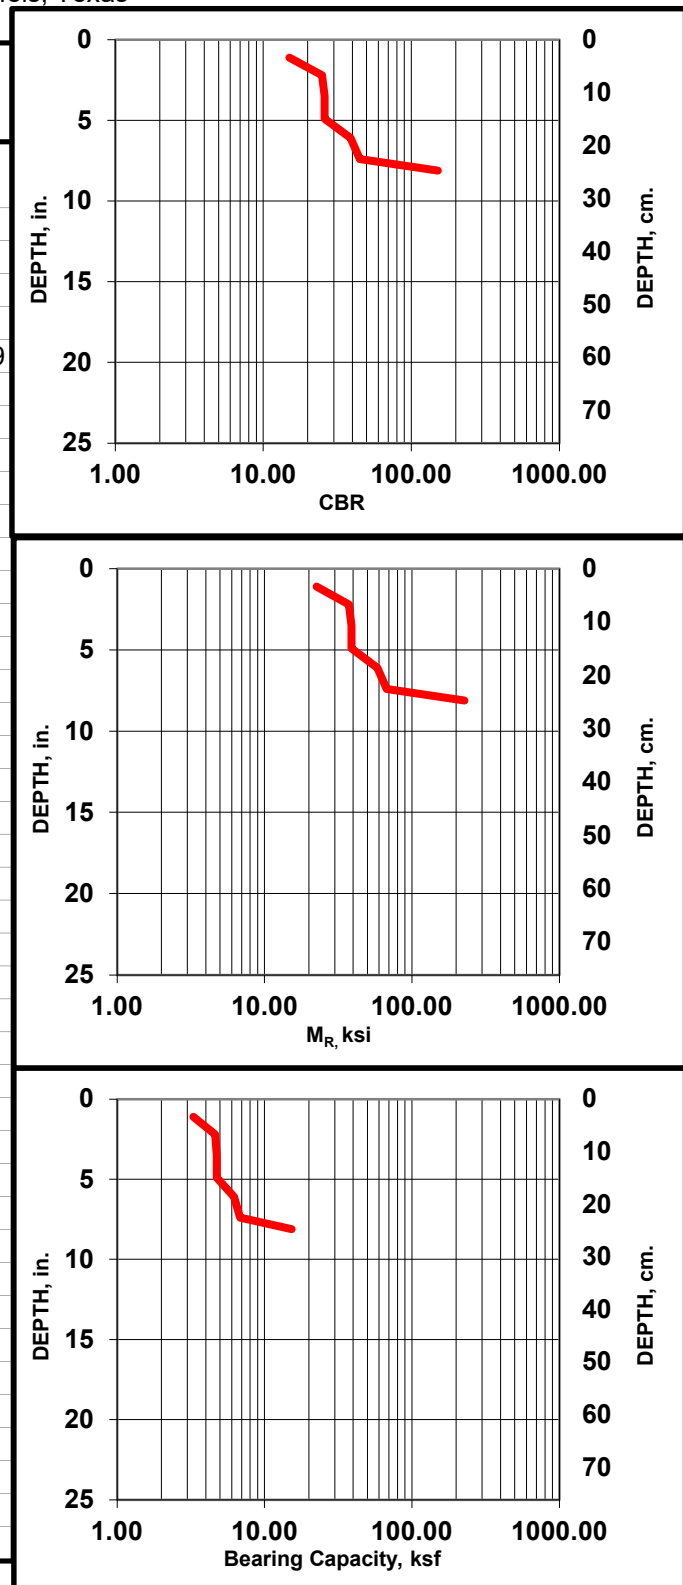


Figure 13a

Test Date: August 26, 2024

## DCP TEST DATA

**B-2**

Precincts 18-2 and 19-1 - Pavements, Veramendi Master Planned Development  
New Braunfels, Texas

[illegible]

NOTES: Hammer 17.6 lbs = 1 Hammer 10.1 lbs = 2

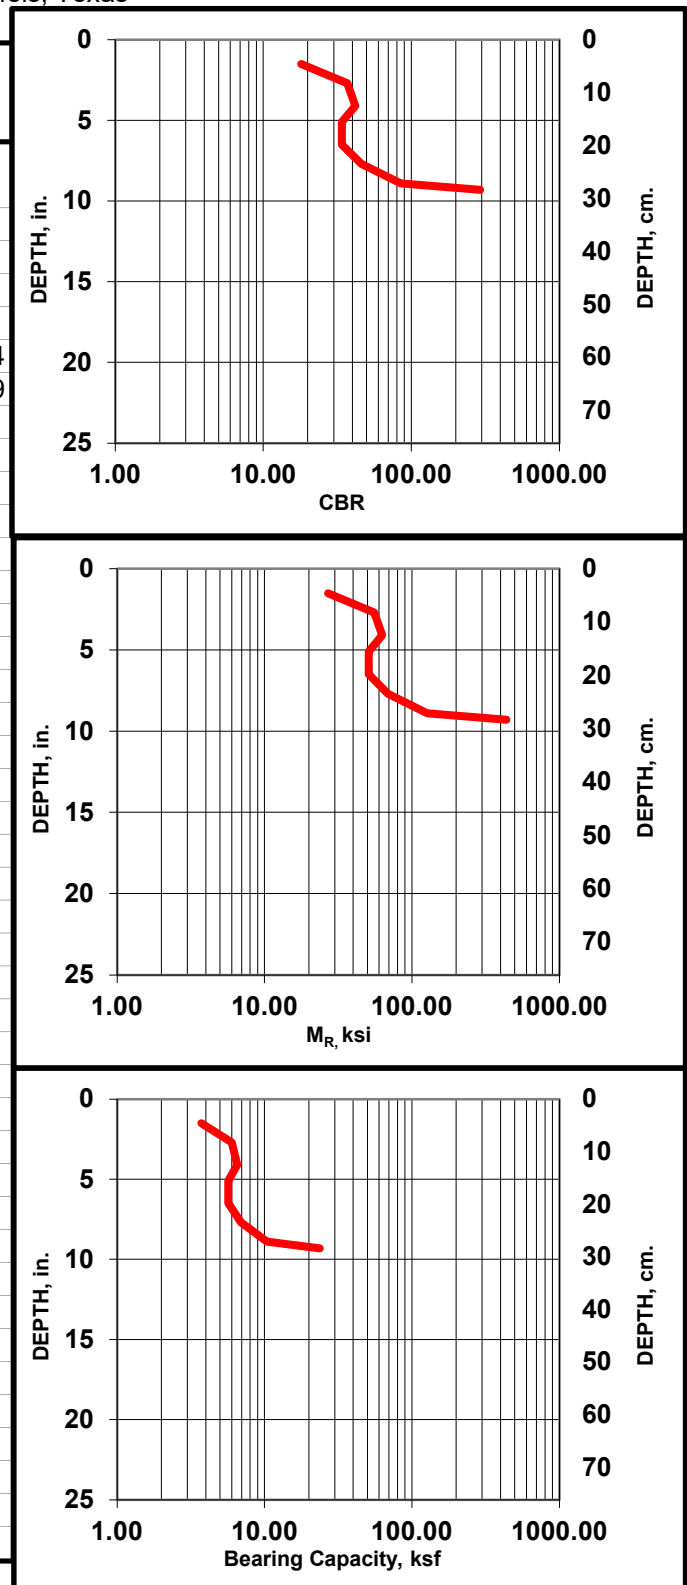


Figure 13b

Test Date: August 26, 2024

## DCP TEST DATA

**B-3**

Precincts 18-2 and 19-1 - Pavements, Veramendi Master Planned Development  
New Braunfels, Texas

[illegible]

NOTES: Hammer 17.6 lbs = 1 Hammer 10.1 lbs = 2

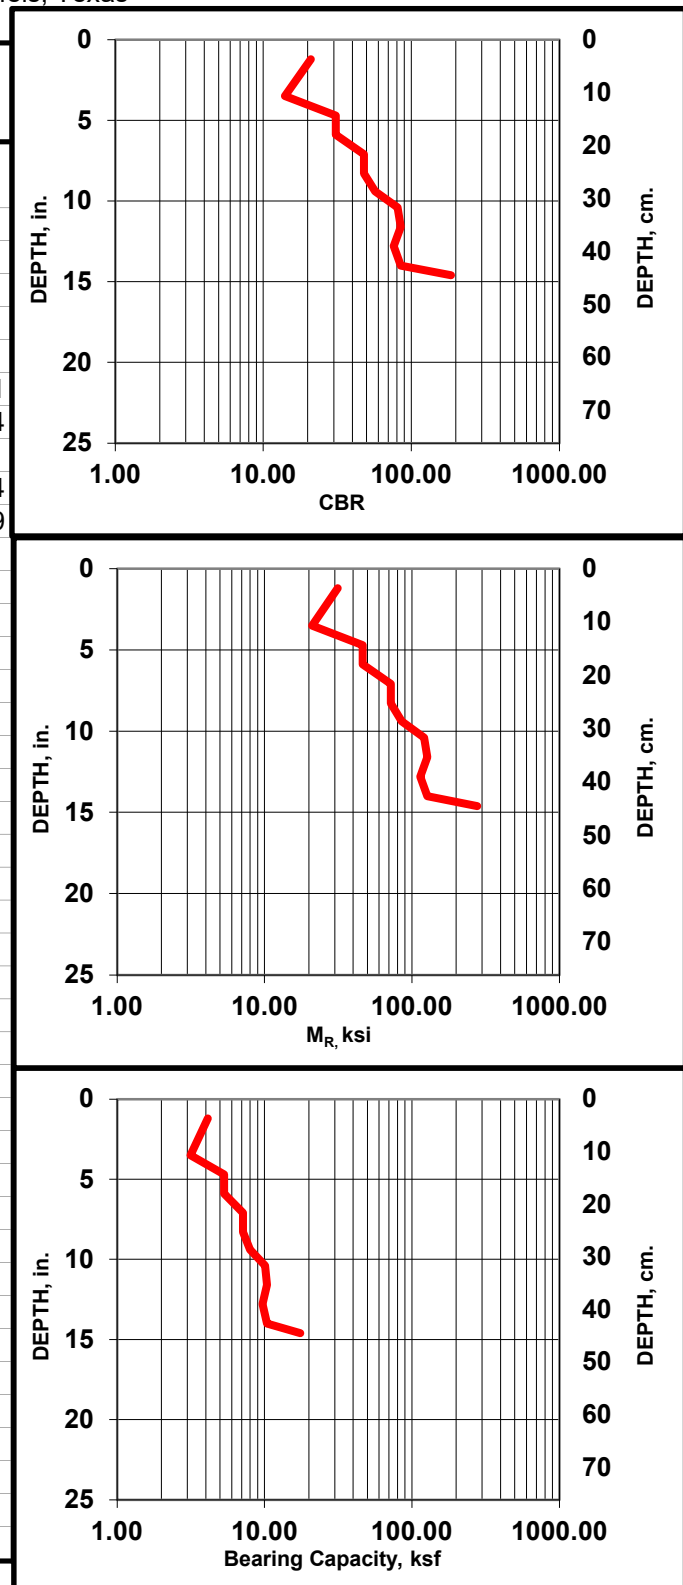


Figure 13c

Test Date: August 26, 2024

## DCP TEST DATA

**B-4**

Precincts 18-2 and 19-1 - Pavements, Veramendi Master Planned Development  
New Braunfels, Texas

[illegible]

NOTES: Hammer 17.6 lbs = 1 Hammer 10.1 lbs = 2

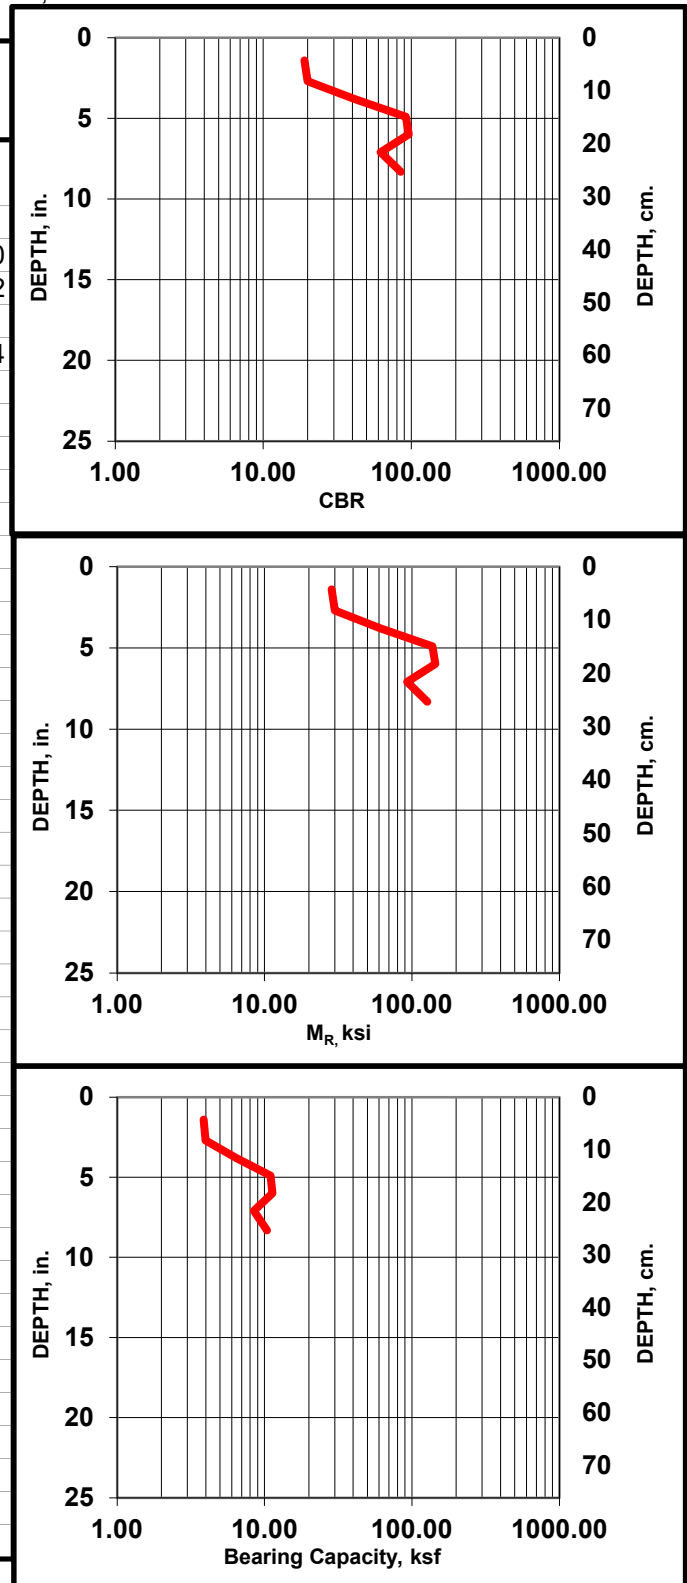


Figure 13d

Test Date: August 26, 2024

## DCP TEST DATA

**B-5**

Precincts 18-2 and 19-1 - Pavements, Veramendi Master Planned Development  
New Braunfels, Texas

[illegible]

NOTES: Hammer 17.6 lbs = 1 Hammer 10.1 lbs = 2

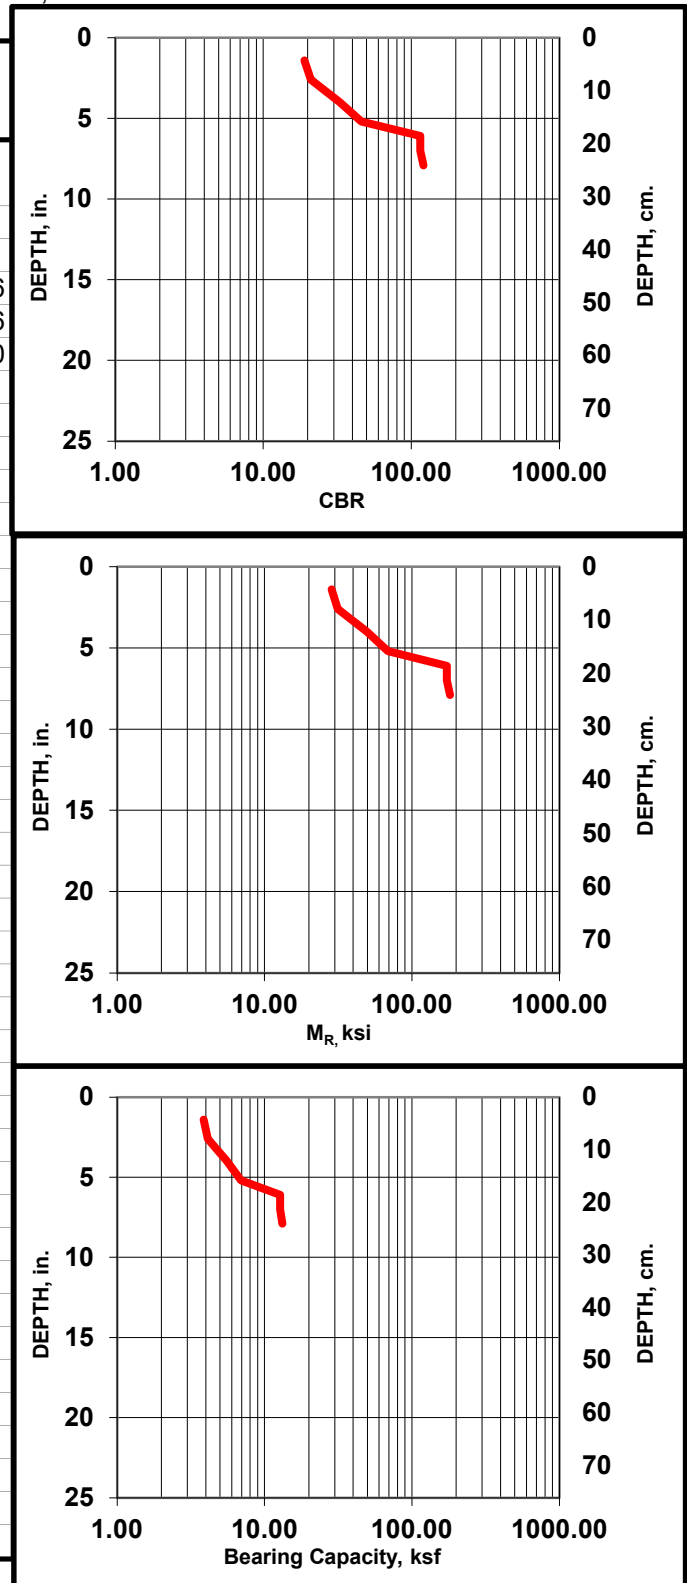


Figure 13e



Test Date: August 26, 2024



**B-6**

Precincts 18-2 and 19-1 - Pavements, Veramendi Master Planned Development  
New Braunfels, Texas

[illegible]

NOTES: Hammer 17.6 lbs = 1 Hammer 10.1 lbs = 2

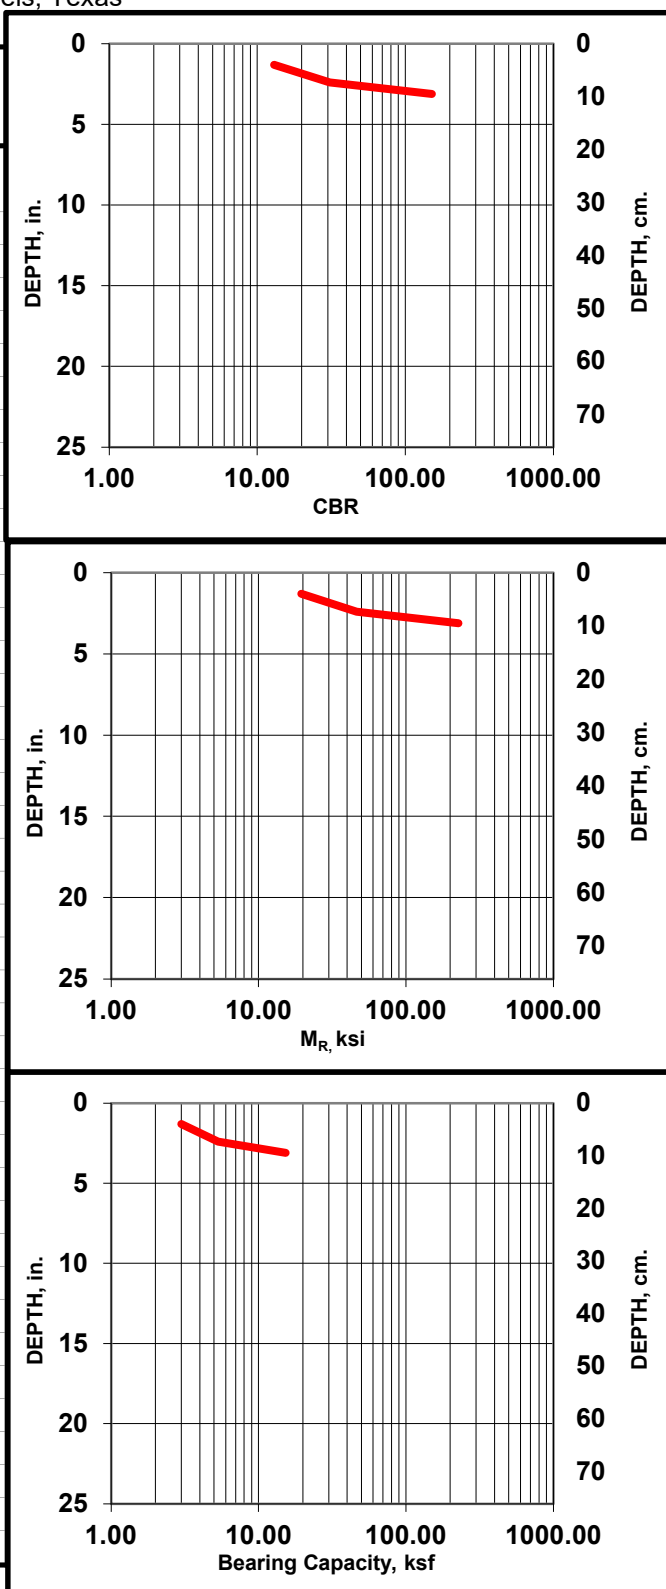


Figure 13f

# Important Information about This Geotechnical-Engineering Report

Subsurface problems are a principal cause of construction delays, cost overruns, claims, and disputes.

While you cannot eliminate all such risks, you can manage them. The following information is provided to help.

## Geotechnical Services Are Performed for Specific Purposes, Persons, and Projects

Geotechnical engineers structure their services to meet the specific needs of their clients. A geotechnical-engineering study conducted for a civil engineer may not fulfill the needs of a constructor — a construction contractor — or even another civil engineer. Because each geotechnical-engineering study is unique, each geotechnical-engineering report is unique, prepared *solely* for the client. No one except you should rely on this geotechnical-engineering report without first conferring with the geotechnical engineer who prepared it. *And no one — not even you — should apply this report for any purpose or project except the one originally contemplated.*

## Read the Full Report

Serious problems have occurred because those relying on a geotechnical-engineering report did not read it all. Do not rely on an executive summary. Do not read selected elements only.

## Geotechnical Engineers Base Each Report on a Unique Set of Project-Specific Factors

Geotechnical engineers consider many unique, project-specific factors when establishing the scope of a study. Typical factors include: the client's goals, objectives, and risk-management preferences; the general nature of the structure involved, its size, and configuration; the location of the structure on the site; and other planned or existing site improvements, such as access roads, parking lots, and underground utilities. Unless the geotechnical engineer who conducted the study specifically indicates otherwise, do not rely on a geotechnical-engineering report that was:

- not prepared for you;
- not prepared for your project;
- not prepared for the specific site explored; or
- completed before important project changes were made.

Typical changes that can erode the reliability of an existing geotechnical-engineering report include those that affect:

- the function of the proposed structure, as when it's changed from a parking garage to an office building, or from a light-industrial plant to a refrigerated warehouse;
- the elevation, configuration, location, orientation, or weight of the proposed structure;
- the composition of the design team; or
- project ownership.

As a general rule, *always* inform your geotechnical engineer of project changes—even minor ones—and request an

assessment of their impact. *Geotechnical engineers cannot accept responsibility or liability for problems that occur because their reports do not consider developments of which they were not informed.*

## Subsurface Conditions Can Change

A geotechnical-engineering report is based on conditions that existed at the time the geotechnical engineer performed the study. *Do not rely on a geotechnical-engineering report whose adequacy may have been affected by:* the passage of time; man-made events, such as construction on or adjacent to the site; or natural events, such as floods, droughts, earthquakes, or groundwater fluctuations. *Contact the geotechnical engineer before applying this report to determine if it is still reliable.* A minor amount of additional testing or analysis could prevent major problems.

## Most Geotechnical Findings Are Professional Opinions

Site exploration identifies subsurface conditions only at those points where subsurface tests are conducted or samples are taken. Geotechnical engineers review field and laboratory data and then apply their professional judgment to render an opinion about subsurface conditions throughout the site. Actual subsurface conditions may differ — sometimes significantly — from those indicated in your report. Retaining the geotechnical engineer who developed your report to provide geotechnical-construction observation is the most effective method of managing the risks associated with unanticipated conditions.

## A Report's Recommendations Are Not Final

Do not overrely on the confirmation-dependent recommendations included in your report. *Confirmation-dependent recommendations are not final*, because geotechnical engineers develop them principally from judgment and opinion. Geotechnical engineers can finalize their recommendations *only* by observing actual subsurface conditions revealed during construction. *The geotechnical engineer who developed your report cannot assume responsibility or liability for the report's confirmation-dependent recommendations if that engineer does not perform the geotechnical-construction observation required to confirm the recommendations' applicability.*

## A Geotechnical-Engineering Report Is Subject to Misinterpretation

Other design-team members' misinterpretation of geotechnical-engineering reports has resulted in costly

problems. Confront that risk by having your geotechnical engineer confer with appropriate members of the design team after submitting the report. Also retain your geotechnical engineer to review pertinent elements of the design team's plans and specifications. Constructors can also misinterpret a geotechnical-engineering report. Confront that risk by having your geotechnical engineer participate in prebid and preconstruction conferences, and by providing geotechnical construction observation.

### Do Not Redraw the Engineer's Logs

Geotechnical engineers prepare final boring and testing logs based upon their interpretation of field logs and laboratory data. To prevent errors or omissions, the logs included in a geotechnical-engineering report should *never* be redrawn for inclusion in architectural or other design drawings. Only photographic or electronic reproduction is acceptable, *but recognize that separating logs from the report can elevate risk.*

### Give Constructors a Complete Report and Guidance

Some owners and design professionals mistakenly believe they can make constructors liable for unanticipated subsurface conditions by limiting what they provide for bid preparation. To help prevent costly problems, give constructors the complete geotechnical-engineering report, *but* preface it with a clearly written letter of transmittal. In that letter, advise constructors that the report was not prepared for purposes of bid development and that the report's accuracy is limited; encourage them to confer with the geotechnical engineer who prepared the report (a modest fee may be required) and/or to conduct additional study to obtain the specific types of information they need or prefer. A prebid conference can also be valuable. *Be sure constructors have sufficient time* to perform additional study. Only then might you be in a position to give constructors the best information available to you, while requiring them to at least share some of the financial responsibilities stemming from unanticipated conditions.

### Read Responsibility Provisions Closely

Some clients, design professionals, and constructors fail to recognize that geotechnical engineering is far less exact than other engineering disciplines. This lack of understanding has created unrealistic expectations that have led to disappointments, claims, and disputes. To help reduce the risk of such outcomes, geotechnical engineers commonly include a variety of explanatory provisions in their reports. Sometimes labeled "limitations," many of these provisions indicate where geotechnical engineers' responsibilities begin and end, to help

others recognize their own responsibilities and risks. *Read these provisions closely.* Ask questions. Your geotechnical engineer should respond fully and frankly.

### Environmental Concerns Are Not Covered

The equipment, techniques, and personnel used to perform an *environmental* study differ significantly from those used to perform a *geotechnical* study. For that reason, a geotechnical-engineering report does not usually relate any environmental findings, conclusions, or recommendations; e.g., about the likelihood of encountering underground storage tanks or regulated contaminants. *Unanticipated environmental problems have led to numerous project failures.* If you have not yet obtained your own environmental information, ask your geotechnical consultant for risk-management guidance. *Do not rely on an environmental report prepared for someone else.*

### Obtain Professional Assistance To Deal with Mold

Diverse strategies can be applied during building design, construction, operation, and maintenance to prevent significant amounts of mold from growing on indoor surfaces. To be effective, all such strategies should be devised for the *express purpose* of mold prevention, integrated into a comprehensive plan, and executed with diligent oversight by a professional mold-prevention consultant. Because just a small amount of water or moisture can lead to the development of severe mold infestations, many mold- prevention strategies focus on keeping building surfaces dry. While groundwater, water infiltration, and similar issues may have been addressed as part of the geotechnical- engineering study whose findings are conveyed in this report, the geotechnical engineer in charge of this project is not a mold prevention consultant; *none of the services performed in connection with the geotechnical engineer's study were designed or conducted for the purpose of mold prevention. Proper implementation of the recommendations conveyed in this report will not of itself be sufficient to prevent mold from growing in or on the structure involved.*

### Rely, on Your GBC-Member Geotechnical Engineer for Additional Assistance

Membership in the Geotechnical Business Council of the Geoprofessional Business Association exposes geotechnical engineers to a wide array of risk-confrontation techniques that can be of genuine benefit for everyone involved with a construction project. Confer with you GBC-Member geotechnical engineer for more information.



8811 Colesville Road/Suite G106, Silver Spring, MD 20910

Telephone: 301/565-2733 Facsimile: 301/589-2017

e-mail: [info@geoprofessional.org](mailto:info@geoprofessional.org) [www.geoprofessional.org](http://www.geoprofessional.org)

Copyright 2015 by Geoprofessional Business Association (GBA). Duplication, reproduction, or copying of this document, or its contents, in whole or in part, by any means whatsoever, is strictly prohibited, except with GBA's specific written permission. Excerpting, quoting, or otherwise extracting wording from this document is permitted only with the express written permission of GBA, and only for purposes of scholarly research or book review. Only members of GBA may use this document as a complement to or as an element of a geotechnical-engineering report. Any other firm, individual, or other entity that so uses this document without being a GBA member could be committing negligent or intentional (fraudulent) misrepresentation.

**ENGINEERING • ENVIRONMENTAL • INFRASTRUCTURE • PROJECT CONTROL**

[www.rkci.com](http://www.rkci.com)