Preserve at Culebra, Unit 10 Stormwater Pollution Prevention Plan For large construction activities

Developed For

KB Home Lone Star, Inc. 4800 Fredericksburg Rd, San Antonio, TX 78229

July 28, 2025

Developed By

Compliance Resources, Inc.
P.O. Box 2628
Georgetown, Texas 78627
512.930.7733
www.complianceresourcesinc.com



TABLE OF CONTENTS

1. Introduction

Regulatory Requirements for Construction Stormwater

Site Size

Notice of Intent

SWPPP and Permit Amendment

Notice of Termination

Transfer of Day-to-Day Operational Control

Signage Requirements

Edwards Aquifer Requirements

Tribal, Local, and State Requirements

Retention of Records

2. Site Description

Site Description

Soil Types

100-Year Floodplain

Receiving Waters and Description of Drainage System

Impaired Water Body

Total Maximum Daily Load (TMDL)

Critical Environmental Features

Endangered or Threatened Species

3. Site Scope, SWPPP Responsibility, and Construction Activity Logs

Site Scope

SWPPP Responsibility

Construction Activity Logs

4. Maps

Master Plan Map

Local Map

Topographic Map

Property Boundary Map

Demolition Plan (if applicable) Erosion and Sediment Control Plan

Proposed Stabilization Map

BMP Tracking Map

5. Best Management Practices

Erosion and Sediment Control Requirements Applicable to All Sites

Concrete Truck Wash Out Requirements

Potential Pollutant Sources

Non-Stormwater Discharges

BMP Responsibility and Implementation

BMP Specifications

6. Dewatering

Dewatering Details

Dewatering Evaluation

7. Spill Prevention and Response

Spill Response Protocol

8. Inspection Requirements

Inspection Frequency

Inspection Report Requirements

Inspection and Entry

Qualified Personnel SWPPP Writer Qualifications Inspector Qualifications Sample Inspection Form

9. Regulatory Correspondence

Regulatory Inspections

10. Amendments

Appendix A – SWPPP Signed Documents

Construction Site Notice (CSN)
Permit Certificate, NOI, NOC, NOT and MS4 notifications
Delegation Letter for Signatories to Reports
SWPPP Certification
Edwards Aquifer Regional Office notification (if applicable)

Appendix B - Edwards Aquifer Protection Plan

Appendix C - Inspection Reports

Appendix D – Site Maps

Appendix E – Dewatering Evaluations

Appendix F - Transfer of Day-to-Day Operational Control

1. Introduction

Regulatory Requirements for Construction Stormwater

Section 26.040 of the Texas Water Code and Section 402 of the Clean Water Act require that at least one stormwater pollution prevention plan (SWPPP) shall be developed for each construction project or site covered by the permit.

The SWPPP shall be completed prior to a submittal of the Notice of Intent and shall provide for compliance with the terms and schedule of the SWPPP beginning with the initiation of construction activities.

The SWPPP shall be available, upon request, to the Director, a State, Tribal, or local agency approving sediment and erosion control plans, grading plans, or stormwater management plans; local government officials; or the operator of a municipal separate storm sewer system receiving discharges from the site.

Site Size

<u>Small construction activities</u> are construction activities disturbing at least 1 acre, but less than 5 acres and are not part of a larger common plan of development or sale that cumulatively disturbs 5 or more acres.

<u>Large construction activities</u> are construction activities disturbing 5 or more acres, or less than 5 acres if part of a larger common plan of development or sale that cumulatively disturbs five or more acres.

Notice of Intent

The NOI must be submitted to TCEQ through the State of Texas Environmental Electronic Reporting System (STEERS) prior to the start of construction (an email confirmation receipt must be received from TCEQ before starting construction). The NOI must be signed by a duly authorized representative and retained on site where the stormwater discharge is generated. All authorization numbers will be posted onsite.

A copy of the 'signed and certified' Notice(s) of Intent (NOI) must be supplied to the operator of the Municipal Separate Storm Sewer System (MS4) if discharges enter an MS4 at least two (2) days prior to commencement of construction activities.

This site discharges to the following MS4(s): Bexar County

Applications and notifications are located in Appendix A.

Operator Name	Operator Scope	Operator Type
KB Home Lone Star, Inc.	Developer	Primary
GENERAL CONTRACTOR TO BE DETERMINED	General Contractor	Primary

SWPPP and **Permit Amendment**

The permittee must revise or update the SWP3, including the site map, within seven (7) days of when any of the following occurs:

- a change in design, construction, operation, or maintenance that has a significant effect on the discharge of pollutants and that has not been previously addressed in the SWP3;
- changing site conditions based on updated plans and specifications, new operators, new areas of responsibility, and changes in BMPs; or
- results of inspections or investigations by construction site personnel authorized by the permittee, operators of a municipal separate storm sewer system receiving the discharge, authorized TCEQ personnel, or a federal, state or local agency approving sediment and erosion plans indicate the SWP3 is proving ineffective in eliminating or significantly minimizing pollutants in discharges authorized under this general permit.

Permittees must submit a Notice of Change (NOC) to TCEQ through the State of Texas Environmental Electronic Reporting System (STEERS) within 14 days to the executive director upon the discovery of a change in information or an omission, inaccuracies or submittal of incorrect information on the Notice of Intent. A copy of the Notice of Change must also be submitted to the operator of the MS4 receiving the discharge from the site.

Changes to Authorization Log

Operator Name	Authorization Number	Operator Scope	Summary of Changes
KB Home Lone Star, Inc.	TXR1559DR	Developer	-Changing project name to Preserve at Culebra -Changing acreage from 240.76 acres to 261.46

This site discharges to the following MS4(s): Bexar County

Applications and notifications are located in Appendix A.

Notice of Termination

Permittees must submit a completed Notice of Termination (NOT) to TCEQ through the State of Texas Environmental Electronic Reporting System (STEERS) (must be signed by a duly authorized representative) upon meeting any of the following conditions:

- Final stabilization has been achieved on all portions of the site that are the responsibility of the operator (a uniform perennial vegetative cover with a density of 70% of the native background vegetative cover for the area on all unpaved areas and areas not covered by permanent structures, or equivalent permanent stabilization measures have been employed)
- A transfer of operational control has occurred
- The operator has obtained alternative authorization under an individual or general TPDES permit

Submit a copy of the Notice of Termination (NOT) to the operator of any MS4 receiving the discharge within 30 days of submitting the NOT.

This site discharges to the following MS4(s): Bexar County

Applications and notifications are located in Appendix A.

Transfer of Day-to-Day Operational Control

Information related to transferring operational control is located in Appendix F.

Signage Requirements

Notices required to be posted near the entrance of the site include:

• TXR150000 Large Construction Site Notice (CSN) for Primary Operators with permit number

In areas where safety is a concern, the Construction Site Notice must be posted in a local public building or publicly accessible location near the construction site.

Edwards Aquifer Requirements

30 Texas Administrative Code (TAC) Chapter 213 is known as the Edwards Aquifer Rules and requirements for construction activities over the Edwards Aquifer Recharge Zone, Contributing Zone, and Contributing Zone within the Transition Zone.

No person may commence the construction of any regulated activity until an Edwards Aquifer protection plan or modifications to the plan as required by §213.5 of this title (relating to Required Edwards Aquifer Protection Plans, Notification, and Exemptions) or exception under §213.9 of this title (relating to Exceptions) has been filed with the appropriate regional office, and the application has been reviewed and approved by the executive director.

This site is located outside the Edwards Aquifer Recharge and Contributing Zones. A WPAP, CZP, or SCS is not required.

Tribal, Local, and State Requirements

This SWPPP is designed to comply with local and state requirements as follows.

As this site is not located in an area where separate tribal requirements may apply, no additional stormwater management controls are required to minimize the effects of stormwater runoff to affected areas.

Enforcement Authority:

• Bexar County Regulations for Storm Water Pollution Prevention: https://www.bexar.org/1567/Contractors

The Texas Commission on Environmental Quality (TCEQ) TPDES General Permit TXR150000 regulations pursuant to Section 26.040 of the Texas Water Code and Section 402 of the Clean Water Act. The TCEQ TPDES General Permit TXR150000 can be found here:

https://www.tceq.texas.gov/downloads/permitting/stormwater/general/construction/2023-cgp-txr1 50000.pdf

Retention of Records

The permittee must retain the following records for a minimum period of three (3) years from the date that a NOT is submitted as required in Part II.F.1. and 2. of this permit. For activities in which a NOT is not required, records shall be retained for a minimum period of three (3) years from the date that the operator terminates coverage under Section II.F.3. of this permit. Records include:

- A. a copy of the SWP3;
- B. all reports and actions required by this permit, including a copy of the TCEQ construction site notice;
- C. all data used to complete the NOI, if an NOI is required for coverage under this general permit; and
- D. all records of submittal of forms submitted to the operator of any MS4 receiving the discharge and to the secondary operator of a large construction site, if applicable.

2. Site Description

Site Description

The site is located southwest of the intersection of Culebra Road and Blacktail Crest in the City of San Antonio, Bexar County, Texas 78253.

Latitude and longitude: 29.507753, -98.795199

Block of Construction	Total Acres
Unit 10	10.3

Operator	Block of Construction	Scope of Work	Disturbed Acres
KB Home Lone Star, Inc.	Unit 10	Developer	10.3
GENERAL CONTRACTOR TO BE DETERMINED	Unit 10	Land Development	10.3

Soil type(s)

Abbreviation	Soil Description
HtA	Branyon clay, 0-1% slopes, is found on stream terraces. This soil is moderately drained with a high runoff class and has no frequency of flooding or ponding.
HtB	Branyon Clay, 1-3% slopes, is found on stream terraces. This soil is moderately well drained with a very high runoff class and has no frequency of flooding or ponding.

100-Year Floodplain

No portions of the site are within the 100-year floodplain.

Receiving Waters and Description of Drainage System

<u>Post-construction runoff discharges into a tributary of Medio Creek.</u> Some runon is received from adjacent properties during typical storm events.

Construction stormwater runoff will discharge from the site by the sequential system(s) listed below:

- Drainage channels are followed by ponds/outlet protection to facilitate storm water treatment prior to offsite discharge.
- No sequential systems are planned for portions of the site due to sheet flow.

• No sequential systems are planned for portions of the site due to the storm drain inlets flowing into the underground storm sewer system.

Impaired Water Body

The Texas Integrated Report describes the status of the state's waters, as required by Sections 305(b) and 303(d) of the federal Clean Water Act. It summarizes the condition of the state's surface waters, including concerns for public health, fitness for use by aquatic species and other wildlife, and specific pollutants and their possible sources.

Segmented Water Body	Impaired
Segment ID#1912A-Upper Medio Creek	No

Link to the Texas Integrated Report of Surface Water Quality: https://www.tceq.texas.gov/waterquality/assessment/22twqi/22txir

Link to the 2022 Texas Integrated Report – Index of Water Quality Impairments: https://www.tceq.texas.gov/downloads/water-quality/assessment/integrated-report-2022/2022-imp-index.pdf

Total Maximum Daily Load (TMDL)

A TMDL is a scientifically-derived target that tells us the greatest amount of a particular substance that we can add to a waterway and still keep it healthy. The TMDL gives us a measurable way to target our efforts to protect and improve the quality of our streams, lakes, and bays.

Segment Water Body	Existing TMDL and Implementation Plan (I-Plan)	I-Plan Link
Segment ID#1912A-Upper Medio Creek	No	N/A

Link to the Total Maximum Daily Load Program: https://www.tceg.texas.gov/waterquality/tmdl

Critical Environmental Features

There are no critical environmental features on-site or within close proximity to the site.

Endangered or Threatened Species

No information was provided to Compliance Resources, Inc. regarding endangered or threatened species on-site or within close proximity to the site.

County	Category	Name	Status
Bexar County	Amphibians	Cascade Caverns salamander	Threatened
Bexar County	Amphibians	Texas salamander	Threatened
Bexar County	Birds	white-faced ibis	Threatened
Bexar County	Birds	wood stork	Threatened
Bexar County	Birds	piping plover	Threatened
Bexar County	Birds	whooping crane	Endangered
Bexar County	Birds	golden-cheeked warbler	Endangered
Bexar County	Fish	widemouth blindcat	Threatened
Bexar County	Fish	toothless blindcat	Threatened
Bexar County	Mammals	black bear	Threatened
Bexar County	Mammals	white-nosed coati	Threatened
Bexar County	Mollusks	false spike	Threatened
Bexar County	Reptiles	Cagle's map turtle	Threatened
Bexar County	Reptiles	Texas tortoise	Threatened
Bexar County	Reptiles	Texas horned lizard	Threatened

3. Site Scope, SWPPP Responsibility, and Construction Activity Logs

Site Scope

The scope of the project includes:

- The construction of all site infrastructure including roadways and associated utilities.
- The construction of single-family residential lots and open space/drainage easement lots.

The major soil disturbing events are:

- clearing and grubbing
- rough cut grading
- excavation
- regrading
- final grading

SWPPP Responsibility

KB Home Lone Star, Inc. shall be responsible for the development of a Stormwater Pollution Prevention Plan.

The Developer shall be responsible for, and retain controls over any changes to site plans and the design of erosion and sedimentation controls. The Developer or its designee shall perform any additions, deletions, or changes in design of control measures. The General Contractor shall be fully responsible for daily implementation, inspection, and maintenance of the erosion and sedimentation measures or controls.

Through the identified inspection report process, the contractor shall notify the appropriate KB Home Lone Star, Inc. representative of any amendments to the SWPPP and/or control measures.

Each operator shall be fully responsible for actions of Subcontractors for which they direct on site activities.

GENERAL SEQUENCE FOR CONSTRUCTION ACTIVITIES (UNIT 10 - LD)		
CONSTRUCTION ACTIVITY	DATE ACTIVITY BEGAN	
CONSTRUCTION START DATE:		
Install temporary erosion and sedimentation controls.		
Begin clearing and grubbing.		
Rough grade streets.		
Install utilities.		
Complete block grading.		
Lay first course of base material.		
Install curb and gutter.		
Lay final course of base material.		
Lay asphalt.		
Restore construction spoils and staging area to natural grade.		
Complete permanent erosion controls and restoration of site vegetation (i.e. landscaping where applicable).		
Remove/dispose of temporary erosion controls.		
Complete final site clean up.		

STABILIZATION ACTIVITIES (UNIT 10 - LD)	DATE ACTIVITY BEGAN
CONSTRUCTION ACTIVITIES CEASE ON PORTION/ALL OF SITE (UNIT 10 - LD)	DATE ACTIVITY CEASED
	DATE ACTIVITY CEASED

4. Maps

Master Plan Map

(Information related to the master plan map was not made available to Compliance Resources, Inc.)


Local Map







Property Boundary Map




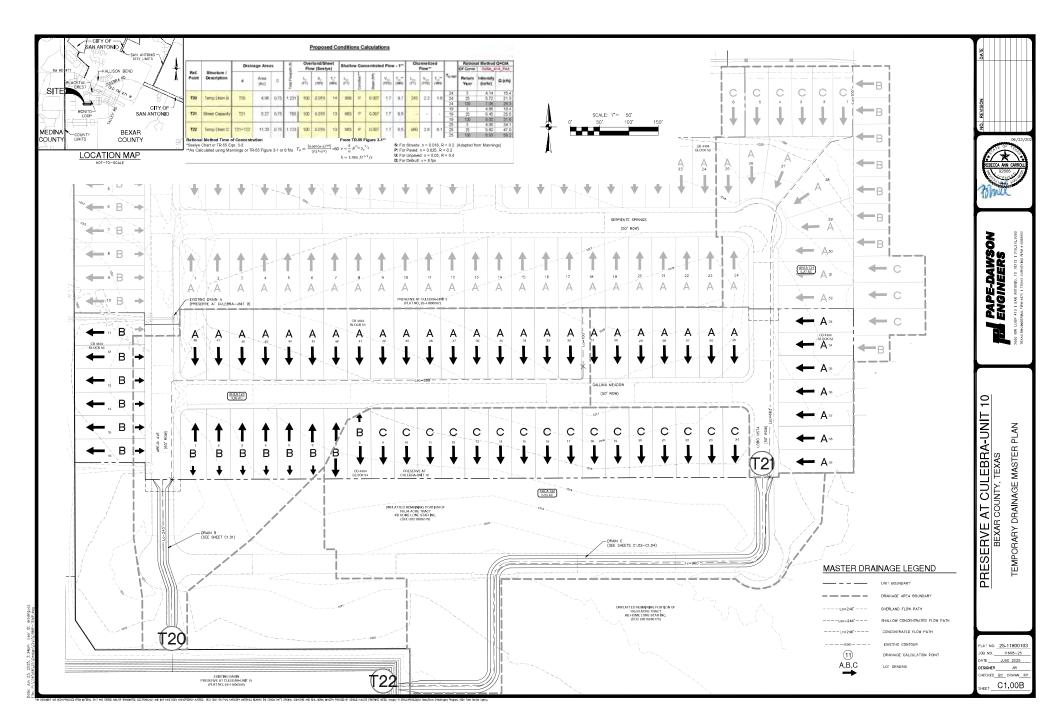

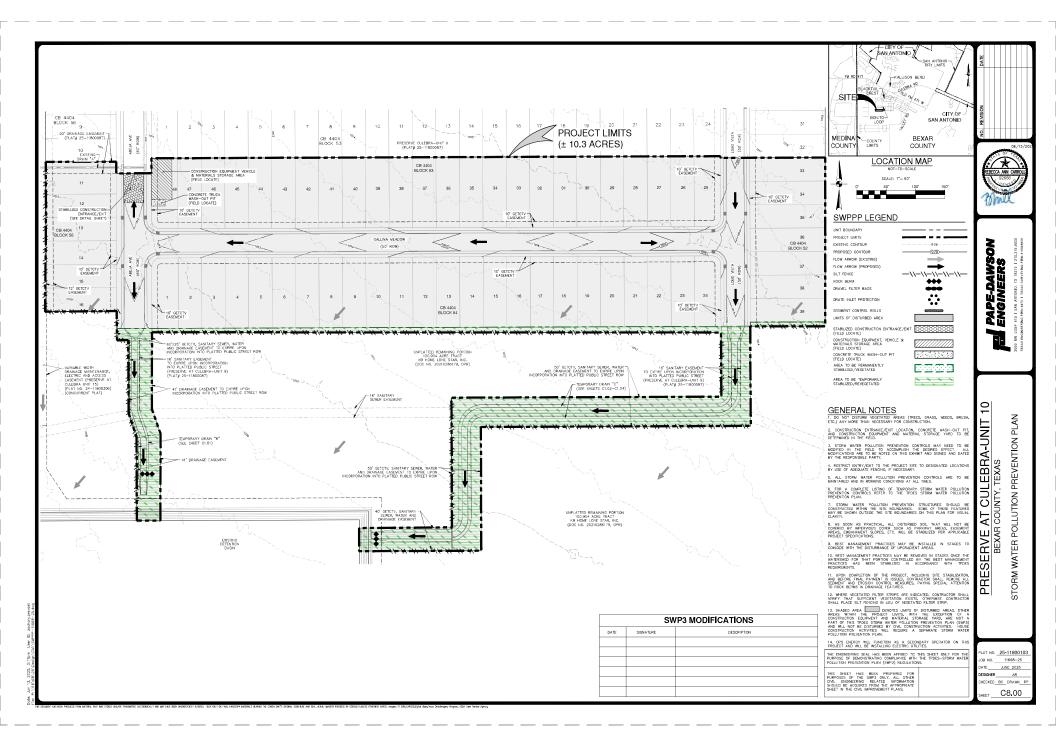

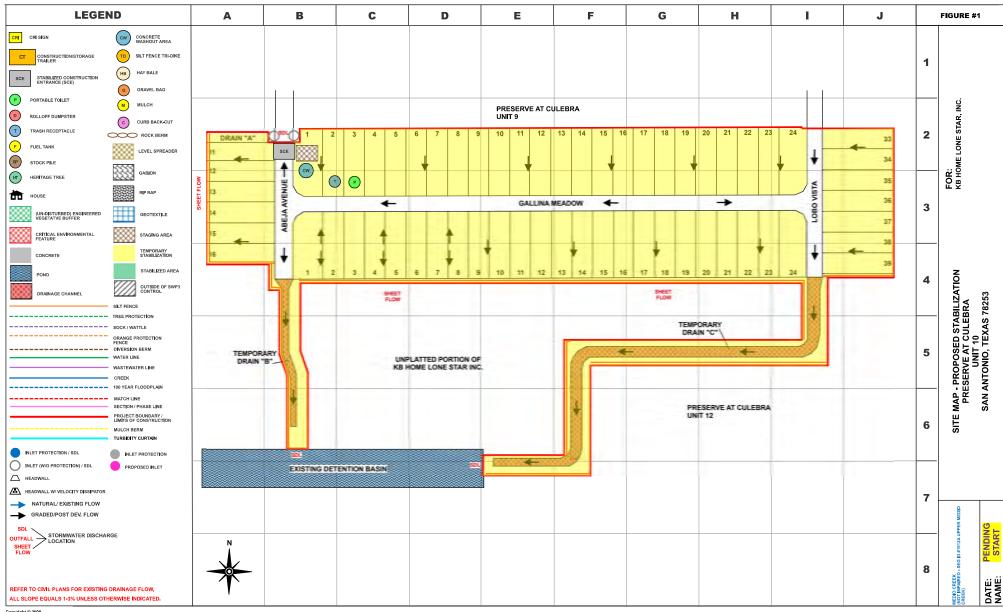

Copyright © 2000 COMPLIANCE RESOURCES, INC.

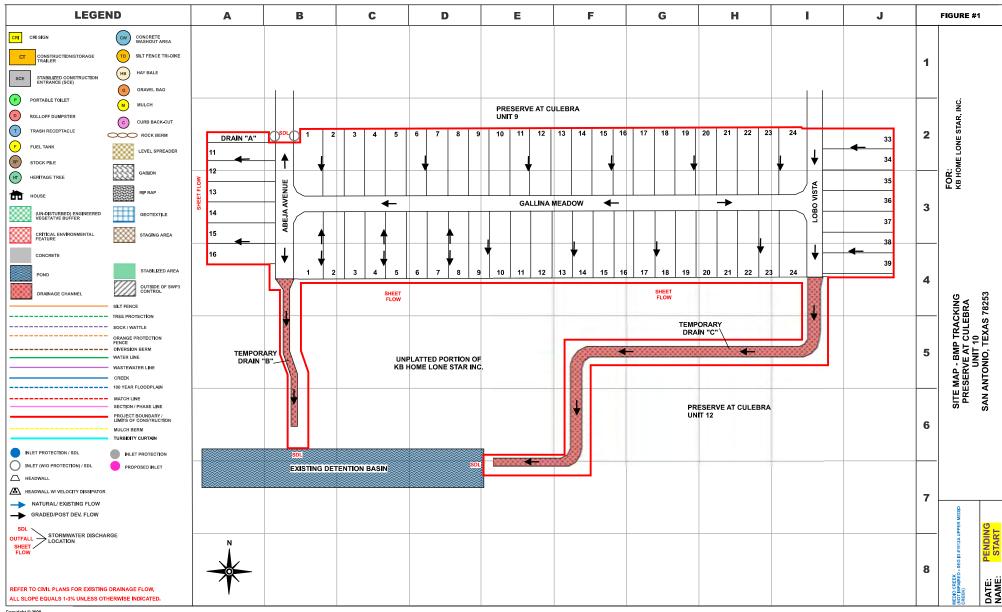

Copyright © 2000 COMPLIANCE RESOURCES, INC.

5. Best Management Practices

Erosion and Sediment Control Requirements Applicable to All Sites

Except as provided in 40 CFR §§ 125.30-125.32, any discharge regulated under this general permit, with the exception of sites that obtained waivers based on low rainfall erosivity, must achieve, at a minimum, the following effluent limitations representing the degree of effluent reduction attainable by application of the best practicable control technology currently available (BPT). The BPT are also required by and must satisfy the Effluent Limitations Guideline (ELG) permitting requirement for application of 40 CFR § 450.24 New Source Performance Standards (NSPS), 40 CFR § 450.22 Best Available Technology Economically Achievable (BAT), and 40 CFR § 450.23 Best Conventional Pollutant Control Technology (BCT).

- 1. Erosion and sediment controls: Design, install, and maintain effective erosion controls and sediment controls to minimize the discharge of pollutants. At a minimum, such controls must be designed, installed, and maintained to:
 - 1. Control stormwater volume and velocity within the site to minimize soil erosion in order to minimize pollutant discharges;
 - 2. Control stormwater discharges, including both peak flow rates and total stormwater volume, to minimize channel and streambank erosion and scour in the immediate vicinity of discharge point(s);
 - 3. Minimize the amount of soil exposed during construction activity;
 - 4. Minimize the disturbance of steep slopes;
 - 5. Minimize sediment discharges from the site. The design, installation, and maintenance of erosion and sediment controls must address factors such as the amount, frequency, intensity and duration of precipitation, the nature of resulting stormwater runoff, and soil characteristics, including the range of soil particle sizes expected to be present on the site;
 - 6. Provide and maintain appropriate natural buffers around surface water in the state. Direct stormwater to vegetated areas and maximize stormwater infiltration to reduce pollutant discharges, unless infeasible. If providing buffers is infeasible, the permittee shall document the reason that natural buffers are infeasible and shall implement additional erosion and sediment controls to reduce sediment load;
 - 7. Preserve native topsoil at the site, unless the intended function of a specific area of the site dictates that the topsoil be disturbed or removed, or it is infeasible; and
 - 8. Minimize soil compaction. In areas of the construction site where final vegetative stabilization will occur or where infiltration practices will be installed, either:
 - a. Restrict vehicle and equipment use to avoid soil compaction; or
 - b. Prior to seeding or planting areas of exposed soil that have been compacted, use techniques that condition the soils to support vegetation growth, if necessary and feasible;

Minimizing soil compaction is not required where the intended function of a specific area of the site dictates that it be compacted.

- 9. TCEQ does not consider stormwater control features (e.g. stormwater conveyance channels, storm drain inlets, sediment basins) to constitute "surface water" for the purposes of triggering the buffer requirement in Part III.G.1.(f) above.
- 2. Soil stabilization. Stabilization of disturbed areas must, at a minimum, be initiated immediately whenever any clearing, grading, excavating, or other earth disturbing activities have

permanently ceased on any portion of the site, or temporarily ceased on any portion of the site and will not resume for a period exceeding 14 calendar days. In the context of this requirement, "immediately" means as soon as practicable, but no later than the end of the next work day, following the day when the earth disturbing activities have temporarily or permanently ceased. Temporary stabilization must be completed no more than 14 calendar days after initiation of soil stabilization measures, and final stabilization must be achieved prior to termination of permit coverage. In arid, semi-arid, and drought-stricken areas where initiating vegetative stabilization measure immediately is infeasible, alternative non-vegetative stabilization measures must be employed as soon as practicable. Refer to Part III.F.2.(b) for complete erosion control and stabilization practice requirements. In limited circumstances, stabilization may not be required if the intended function of a specific area of the site necessitates that it remain disturbed.

- 3. Dewatering. Discharges from dewatering activities, including discharges from dewatering of trenches and excavations, are prohibited, unless managed by appropriate controls to address sediment and prevent erosion. Operators must perform an inspection of the dewatering controls once per day while the dewatering discharge occurs as described in Part III.F.7. of this general permit.
- 4. Pollution prevention measures. Design, install, implement, and maintain effective pollution prevention measures to minimize the discharge of pollutants. At a minimum, such measures must be designed, installed, implemented, and maintained to:
 - 1. Minimize the discharge of pollutants from equipment and vehicle washing, wheel wash water, and other wash waters. Wash waters must be treated in a sediment basin or alternative control that provides equivalent or better treatment prior to discharge;
 - 2. Minimize the exposure of building materials, building products, construction wastes, trash, landscape materials, fertilizers, pesticides, herbicides, detergents, sanitary waste, and other materials present on the site to precipitation and to stormwater;
 - 3. Minimize the exposure of waste materials by closing waste container lids at the end of the workday and during storm events. For waste containers that do not have lids, where the container itself is not sufficiently secure enough to prevent the discharge of pollutants absent a cover and could leak, the permittee must provide either a cover (e.g., a tarp, plastic sheeting, temporary roof) to minimize exposure of wastes to precipitation, stormwater, and wind, or a similarly effective means designed to minimize the discharge of pollutants (e.g., secondary containment);
 - 4. Minimize exposure of wastes by implementing good housekeeping measures. Wastes must be cleaned up and disposed of in designated waste containers on days of operation at the site. Wastes must be cleaned up immediately if containers overflow;
 - 5. Minimize the discharge of pollutants from spills and leaks and implement chemical spill and leak prevention and response procedures. Where a leak, spill, or other release containing a hazardous substance or oil in an amount equal to or in excess of a reportable quantity established under either 40 CFR Part 110, 40 CFR Part 117, or 40 CFR Part 302 occurs during a 24-hour period, you must notify the National Response Center (NRC) at (800) 424-8802 in accordance with the requirements of 40 CFR Part 110, 40 CFR Part 117, and 40 CFR Part 302 as soon as you have knowledge of the release. You must also, within seven (7) calendar days of knowledge of the release, provide a description of the release, the circumstances leading to the release, and the date of the release; and
 - 6. Minimize exposure of sanitary waste by positioning portable toilets so that they are secure and will not be tipped or knocked over, and so that they are located away from surface water in the state and stormwater inlets or conveyances.

- 5. Prohibited discharges. The following discharges are prohibited:
 - 1. Wastewater from wash out of concrete, unless managed by an appropriate control;
 - 2. Wastewater from wash out and cleanout of stucco, paint, form release oils, curing compounds and other construction materials;
 - 3. Fuels, oils, or other pollutants used in vehicle and equipment operation and maintenance;
 - 4. Soaps or solvents used in vehicle and equipment washing; and
 - 5. Toxic or hazardous substances from a spill or other release.
- 6. Surface outlets. When discharging from basins and impoundments, utilize outlet structures that withdraw water from the surface, unless infeasible. If infeasible, the permittee must provide documentation in the SWP3 to support the determination, including the specific conditions or time periods when this exception will apply.

Concrete Truck Wash Out Requirements

This general permit authorizes the land disposal of wash out from concrete trucks at construction sites regulated under this general permit, provided the following requirements are met. Any discharge of concrete production wastewater to surface water in the state must be authorized under a separate TCEQ general permit or individual permit.

- A. Discharge of concrete truck wash out water to surface water in the state, including discharge to storm sewers, is prohibited by this general permit.
- B. Concrete truck wash out water shall be disposed in areas at the construction site where structural controls have been established to prevent discharge to surface water in the state, or to areas that have a minimal slope that allow infiltration and filtering of wash out water to prevent discharge to surface water in the state. Structural controls may consist of temporary berms, temporary shallow pits, temporary storage tanks with slow rate release, or other reasonable measures to prevent runoff from the construction site.
- C. Wash out of concrete trucks during rainfall events shall be minimized. The discharge of concrete truck wash out water is prohibited at all times, and the operator shall insure that its BMPs are sufficient to prevent the discharge of concrete truck wash out as the result of rainfall or stormwater runoff.
- D. The disposal of wash out water from concrete trucks, made under authorization of this general permit must not cause or contribute to groundwater contamination.
- E. If a SWP3 is required to be implemented, the SWP3 shall include concrete wash out areas on the associated site map.

Potential Pollutant Sources

Potential pollution sources associated with the site include the following:

- Soil disturbing activities such as clearing of vegetation, grading/excavation of the lot in preparation for construction, and landscaping. These activities typically expose soil and sediment particles to precipitation which can then move (erode) the pollutants downhill, potentially into stormwater conveyances and receiving waters.
- **Equipment storage** such as earth-moving equipment, delivery vehicles, power tools, etc. Much of this equipment contains petroleum-based fuels or lubricants, which when exposed to precipitation can discharge with the stormwater runoff.
- **Paving** asphalt paving activities during road construction can result in the discharge of hydrocarbons with stormwater runoff.
- **Concrete truck washout** runoff from the cleanouts of concrete trucks can result in sediment, debris, and excessively high pH discharge with stormwater runoff.
- **Vehicle and equipment maintenance** such as fueling, lubrication, and repair. If conducted on site, accidental spills or improper disposal of automotive fluids or petroleum products can significantly impact stormwater runoff and receiving waters.
- Material storage such as storage of concrete and concrete products, metal reinforcing materials such as rebar and welded wire fabric, lumber, plastic (PVC), metal pipe and fittings, rock, gravel, sand, soil, petroleum products like lubricants, fuel, oil-based paints and paint thinners, miscellaneous chemicals or products including latex paint, joint compound, adhesives, fertilizers, etc. Some materials may contain hazardous or toxic ingredients which can pollute surface waters or make source water unsafe for consumption. Other materials may contain ingredients which are non-toxic but can still impact stormwater conveyances by silting or clogging them, causing flooding, or using up needed oxygen for aquatic life to survive in the receiving waters.
- Waste generation, storage and disposal such as excess fill material, soil contaminated by spilled petroleum, leftover chemicals, cement, miscellaneous trash and debris, and human wastes. All these materials can negatively impact the runoff leaving the construction site as described above.

Control of these potential pollution sources, thereby preventing contamination of stormwater runoff is the goal of this plan and will be described in detail in this section of the SWPPP.

Potential Pollutant Sources Onsite: Aromatic Hydrocarbon

Toluene

Hi Solids Polvester

Methyl Amyl Ketone Acrylic Sealant 2-Butoxy-Ethyl Acetate Toluene Normal Butyl Alcohol

Aromatic Hydrocarbon 150 1-Methoxy-2-Propanol Acetate

Xylol

Aromatic 100 Solvent Diethylene Glycol N-Butyl Ether

Toluol

Oxo-Hexyl Acetate

Aluminum Alloys

See attachment

Quick Dry Floor Sweep

Hydrotreated Petroleum Distillates

Acetone

Silicone Sealant

Silicone Polymer Polydimethylsiloxane

Silica

Ethyltriciacetoxsilane

Acetoxysilanse with oligomers

Titanium Dioxide

Carbon

Adhesive-Sealant

Dimethyl Siloxane OH Terminated

Methyltriacetoxy Silane Titanium Dioxide

Ethyltriciacetoxsilane

Polydimethylsiloxane

Acrylic Seam Sealer

Acrylic Resin/Toluene Solution

Toluene Silicon Dioxide

Isopropyl Alcohol

Acrylic Bedding Sealant

Acrylic Resin/Toluene Solution

Toluene

Silicon Dioxide

Blue X Institutional Strength Cleaner

2-Butoxyethanol

Ammonium Hydroxide

Sweep Ez

Dupont Oil Red B Liquid

High Performance Glazing Tape Sealant

Carbon

General Purpose Glazing Sealant

Silicone Polymer Polydimethylsiloxane

Silica Silane

Oximino Silane

Transmission Fluid

Light Paraffinic Petroleum Heavy Paraffinic Petroleum Light Napthenic Petroleum

Metacrylic Acid

Motor Oil

Alkenysuccinimide Dispersant Heavy Paraffinic Petroleum

Soluble Oil D

Sodium Petroleum Sulfonate Heavy Paraffinic Petroleum

Lumber

Glass

Fiberglass Insulation

Dry-wall material

Oil and Water Based Paint

Concrete

Steel (Steel rebar)

Petroleum Based Automotive Fuel

Diesel Fuel

Formaldehyde (used in Portable Toilet facilities)

Sand

Note: also refer to on-site copies of any MSDS

information.

Non-Stormwater Discharges

The following non-stormwater discharges from sites authorized under this general permit are also eligible for authorization under this general permit:

- Discharges from emergency firefighting activities (emergency firefighting activities do not include washing of trucks, run-off water from training activities, test water from fire suppression systems, or similar activities);
- Uncontaminated fire hydrant flushings (excluding discharges of hyperchlorinated water, unless the water is first dechlorinated and discharges are not expected to adversely affect aquatic life), which include flushings from systems that utilize potable water, surface water, or groundwater that does not contain additional pollutants (uncontaminated fire hydrant flushings do not include systems utilizing reclaimed wastewater as a source water); water from the routine external washing of vehicles, the external portion of buildings or structures, and pavement, where solvents, detergents, and soaps are not used, where spills or leaks of toxic or hazardous materials have not occurred (unless spilled materials have been removed; and if local state, or federal regulations are applicable, the materials are removed according to those regulations), and where the purpose is to remove mud, dirt, or dust;
- Uncontaminated water used to control dust;
- Potable water sources including waterline flushings, but excluding discharges of hyperchlorinated water, unless the water is first dechlorinated and discharges are not expected to adversely affect aquatic life;
- Uncontaminated air conditioning condensate;
- Uncontaminated groundwater or spring water, including foundation or footing drains where flows are not contaminated with industrial materials such as solvents;
- Lawn watering and similar irrigation drainage.

To prevent unauthorized non-stormwater discharges, all such discharges will be directed to sedimentation and erosion control structures prior to discharge. Attempts will be made to minimize such discharges to prevent contact with stormwater runoff.

BMP Responsibility and Implementation

Non-structural and structural control measures and stabilization practices that will be implemented to prevent or control potential pollutants in stormwater discharges are summarized in the tables below. Each major activity will identify the appropriate control measure, general timing, (specific timing will be addressed in an attached construction schedule) and the responsible permittee for controlling the discharge.

Non-Structural Controls and Maintenance	Permittee Responsible	Schedule		
Soil Disturbing Activities	Soil Disturbing Activities			
Areas are not to be disturbed until it is necessary for construction to proceed. Disturbed areas are to be covered and stabilized as soon as possible.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028		
Erosion and Sediment Controls				
Erosion/sediment controls will be designed to retain sediment on site to the extent practicable with consideration for site topography, soil type, and rainfall.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028		
Erosion/sediment controls will be designed and used to reduce the offsite transport of suspended sediments and other pollutants if dewatering activities are necessary.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028		

Structural Controls and Maintenance	Permittee Responsible	Schedule	
Erosion and Sediment Controls (continued)			
Erosion/sediment control measures will be in place prior to commencement of construction activities including clearing and grading. Disturbed areas will be restored as soon as practicable during construction. Temporary erosion and sedimentation controls will be removed only after all disturbed areas have been restored.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028	
Erosion/sediment controls such as silt fences, rock berms, outlet protection, and drainage channels are inspected weekly to ensure their effectiveness. Erosion and sediment control inspections are documented to ensure site compliance.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028	
Erosion/sediment controls are promptly maintained (as soon as practicable after damage is discovered, and prior to the next rain event, but no later than seven days after the inspections) to ensure maximum sediment removal from stormwater runoff.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028	
If sediment escapes the site, accumulations will be removed at a frequency to minimize negative effects and prior to the next rain event, if feasible.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028	
Sediment removed from erosion controls will be reused on site to minimize waste generation.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028	
Sediment deposited onto public right-of-way will be regularly removed to prevent sediment discharge from off site tracking during storm events, and reused on site whenever possible to prevent excess waste generation.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028	
Accumulated sediment will be removed when the depth reaches six inches (or 50% of the design capacity of site controls).	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028	
Dust control will be provided by water trucks in such a manner that runoff does not occur.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028	

Non-Structural Controls and Maintenance	Permittee Responsible	Schedule
Erosion and Sediment Controls (continued)		
Disturbed areas including the construction storage and staging area and spoils disposal site where construction activity ceases for at least 14 days will be initiated immediately. Stabilization measures that provide a protective cover will be initiated immediately in portions of the site where construction activities have permanently ceased.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	No temporary cessation of site construction is anticipated, but if so, July 2025 - July 2028
Mulching for temporary or final stabilization shall be accomplished by using shredded wood mulch. To avoid waste generation, trees cut down on site will be recycled into mulch for stabilization.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028
Seeding for temporary or final stabilization shall be accomplished by broadcast seeding, sodding, or hydromulch application.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028
Irrigation for temporary or final stabilization will be achieved by sprinkling in a manner that will not erode the topsoil but will sufficiently soak the soil to a depth of six inches. The irrigation may occur at 10-day intervals during the first two months. Rainfall occurrences of 0.5 inch or more should postpone the watering schedule for one week.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028

Non-Structural Controls and Maintenance	Permittee Responsible	Schedule
Material Storage, Handling, and Disposal		
Construction materials will be stored in the construction staging and materials storage area. An attempt will be made to store materials inside or under cover as practicable to minimize contact of stormwater with potential pollutants and prevent water damage to materials.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028
Excess spoils will be temporarily stored away from drainage channels/creeks and ponds, preferably out of floodplains to prevent offsite discharge.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028
An effort will be made to store only enough products required to do the job to minimize waste generation and potential contact with stormwater.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028
Lubricants will not routinely be stored on site, except the small amount needed for a specific process or piece of equipment.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028
Materials will be used according to the manufacturer's recommendation for proper use and disposal.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028
Chemicals will be stored in their original containers (unless they are not resealable), with the labels intact for proper identification.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028
Material Safety Data Sheets and original labels for products used or stored at the site will be retained as they contain important storage, handling, and disposal information.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028
During landscaping, fertilizers and pesticides will not be applied just before or during a storm event. Such landscape chemicals will be applied in the minimum amount recommended by the manufacturer. Fertilizers will be worked into the soil to minimize contact with stormwater.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028

If disposal is necessary for excess product, the manufacturer's recommendations or local or state regulations for proper disposal will be followed.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028
---	---	--------------------------

Non-Structural Controls and Maintenance	Permittee Responsible	Schedule
Waste Storage, Handling, and Disposal		
Portable toilet facilities serviced by a licensed disposal company are available on the site to ensure proper disposal of wastes.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	Weekly
Non-stormwater discharges such as from concrete truck wash outs, surplus concrete or drum water will be limited to the designated concrete washout areas. Designated concrete washout areas are recommended to be: • at least 15 feet from the curb • excavated below grade for pit area • lined with a poly-liner • have a large stabilized entrance • have sufficient perimeter BMP's They will be maintained as needed to contain concrete rinse water and minimize offsite discharges and to prevent potential discharge to stormwater runoff. Upon construction completion, the designated concrete washout areas will be cleaned up in accordance with applicable regulations.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028
Waste generation will be minimized by purchasing only the amount of material estimated as necessary for the application, and where practicable, using all of a product prior to disposal of the container.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028
The site will be routinely patrolled for regular trash and debris collection. Once collected, the waste will be stored as described below.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028
Waste materials will be collected and stored in metal dumpsters meeting state and local waste management requirements. When full, the dumpsters will be emptied and the trash hauled to an approved offsite dump. No construction waste materials will be buried on site.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028
Non-hazardous, latex paint wastes (i.e. wash water) will be disposed of in accordance with applicable regulations.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028
Potentially hazardous and/or liquid wastes generated on site will be stored under cover, in leak proof containers to await proper disposal	KB Home Lone Star, Inc.	July 2025 -

Copyright © 2000 Compliance Resources, Inc. 1-888-CRI-SW3P

by licensed disposal companies. GENERAL CONTRACTOR TO BE DETERMINED	GENERAL CONTRACTOR TO BE DETERMINED July 2028
--	--

Non-Structural Controls and Maintenance	Permittee Responsible	Schedule
Spill Prevention and Response		
Spill cleanup materials will be stored on site in the material storage area, and may include: brooms, dustpans, mops, rags, gloves, goggles, sawdust or other absorbent material, plastic/metal trash containers specifically for this purpose.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028
Site personnel will be made aware of spill clean up procedures and location of spill cleanup materials.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028
Spills will be cleaned up upon discovery following the procedure outlined in Section V.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028
Storage of vehicles and equipment on site will be limited to minimize potential for leaks or spills to contaminated stormwater runoff.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028
Where possible, vehicles and equipment will be stored over an impervious surface, away from stormwater conveyances, to facilitate clean up of potential leaks or spills and prevent contact with stormwater.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028
Vehicles and equipment used on site will be monitored and maintained to prevent leaks from occurring.	KB Home Lone Star, Inc. GENERAL CONTRACTOR TO BE DETERMINED	July 2025 - July 2028

BMP Specifications

Interim Structural Controls	Schedule of Implementation	Location	Reason
Silt fence	Prior to and throughout site development	Refer to the civil plans and site maps	Silt fence will be constructed at the downstream edge of disturbed areas where there will be shallow sheet flow to slow the flow of stormwater runoff and promote sediment deposition.
Socks / wattles	N/A	N/A	Socks/wattles will not be used due to the use of alternative stormwater treatment devices.
Stabilized Construction Entrance/Exit	Prior to and throughout site development	Refer to the civil plans and site maps	Construction entrances/exits consisting of 3"-5" dump rock will be placed on the site to minimize off site tracking of sediment by vehicles.
Designated concrete washout	Throughout site development	Refer to the civil plans and site maps	A designated concrete washout will be used to prevent discharge of washout material into the storm drains or water bodies.
Earth dikes (diversion berms)	N/A	N/A	Earthen dikes (diversion berms) will not be used due to the use of alternative stormwater treatment devices.
Sediment Traps	N/A	N/A	Sediment traps will not be used due to the considerable maintenance necessary to remove accumulated sediment and prevent street flooding both during and after construction.
Check Dams	Throughout site development	Refer to the civil plans and site maps	Rock berms will be installed to slow the flow of stormwater runoff and to promote sediment deposition.
Storm drain inlet protection (existing inlets)	Prior to soil disturbing activities in areas that would drain to curbs or	Installed as needed at any inlet onsite and within close proximity to the site - refer to the	Inlet protection will be installed to prevent sediment entry into the storm sewer system. This protection should be monitored and

	storm drain inlets	civil plans and site maps	removed during flash flooding / flooding that could cause harm to the public or property.
Storm drain inlet protection (proposed inlets)	N/A	N/A	Inlet protection will not be used due to the use of alternative stormwater treatment devices.
Temporary basins	N/A	N/A	No temporary basins were required for the site due to the proposed site conditions and controls.

Permanent Structural Controls

Measures that will be installed during construction process to control pollutants in stormwater discharges that will occur after construction operations have been completed.

Stormwater Management Measures	Schedule of Implementation	Location	Reason
Drainage Swales	Throughout site development	Refer to the civil plans and site maps	Proposed drainage easements/channels will be used to convey stormwater runoff into the storm sewer system or offsite thereby slowing the flow of stormwater runoff and promoting sediment deposition.
devices/rip rap development civil plans and/or rip rap w		Velocity/energy dissipation devices and/or rip rap will be used to prevent erosion around the stormwater outfalls/outlets.	
Level Spreaders	N/A	N/A	Level spreaders will not be used due to the use of alternative stormwater treatment devices.
Gabions	N/A	N/A	Gabions will not be used due to the use of alternative stormwater treatment devices.
Stormwater Detention Structures	Prior to site development	Refer to the civil plans and site maps	A permanent detention basin will be used to slow the flow of stormwater runoff, causing sediment deposition prior to off site discharge.
Stormwater Retention Structures	N/A	N/A	No permanent retention basins were required for the site due to the proposed site conditions and controls.
Stormwater Bio-Infiltration Structures	N/A	N/A	No permanent bio-infiltration basins were required for the site due to the proposed site conditions and controls.

A sedimentation basin will not be constructed with this project due to storm water discharging into an existing detention basin south of the site.

Interim Stabilization Practices	Schedule of Implementation	Location	Reason
Temporary vegetation / mulching	Throughout site development	Various areas throughout the site	Stabilization of disturbed areas must, at a minimum, be initiated immediately whenever any clearing, grading, excavating, or other earth disturbing activities have temporarily ceased on any portion of the site and will not resume for a period exceeding 14 calendar days.
Rolled erosion control products (geotextiles)	Throughout site development	As needed at various locations throughout the site	Rolled erosion control products (geotextiles) will be used as an interim practice to prevent topsoil loss and erosion.
Protection of trees	N/A	N/A	No interim tree protection will be necessary for this site.

Permanent Stabilization Practices	Schedule of Implementation	Location	Reason
Permanent vegetation / mulching	During site landscaping	At various landscaped areas throughout the site	Permanent vegetation (hydromulching or sod stabilization) / mulching will be used to quickly establish vegetative cover to prevent erosion. Additional considerations were infiltration and improvement of storm water quality.
Vegetative buffer strips	N/A	N/A	No permanent vegetative buffer strips are planned for this site.
Preservation of mature vegetation	N/A	N/A	As little, if any, desirable mature vegetation exists on site; no preservation of mature vegetation is expected.

1.4.18 Concrete Washout Areas

The purpose of concrete washout areas is to prevent or reduce the discharge of pollutants to stormwater from concrete waste by conducting washout offsite, performing onsite washout in a designated area, and training employees and subcontractors.

The following steps will help reduce stormwater pollution from concrete wastes:

- Incorporate requirements for concrete waste management into material supplier and subcontractor agreements.
- Avoid mixing excess amounts of fresh concrete.
- Perform washout of concrete trucks in designated areas only.
- Do not wash out concrete trucks into storm drains, open ditches, streets, or streams.
- Do not allow excess concrete to be dumped onsite, except in designated areas.

For onsite washout:

- Locate washout area at least 50 feet from sensitive features, storm drains, open ditches, or water bodies. Do not allow runoff from this area by constructing a temporary pit or bermed area large enough for liquid and solid waste.
- Wash out wastes into the temporary pit where the concrete can set, be broken up, and then disposed properly.

Below grade concrete washout facilities are typical. These consist of a lined excavation sufficiently large to hold expected volume of washout material. Above grade facilities are used if excavation is not practical. Temporary concrete washout facility (type above grade) should be constructed as shown on the details at the end of this section, with sufficient quantity and volume to contain all liquid and concrete waste generated by washout operations. Plastic lining material should be a minimum of 10 mil in polyethylene sheeting and should be free of holes, tears, or other defects that compromise the impermeability of the material.

When temporary concrete washout facilities are no longer required for the work, the hardened concrete should be removed and disposed of. Materials used to construct temporary concrete washout facilities should be removed from the site of the work and disposed of. Holes, depressions or other ground disturbance caused by the removal of the temporary concrete washout facilities should be backfilled and repaired.



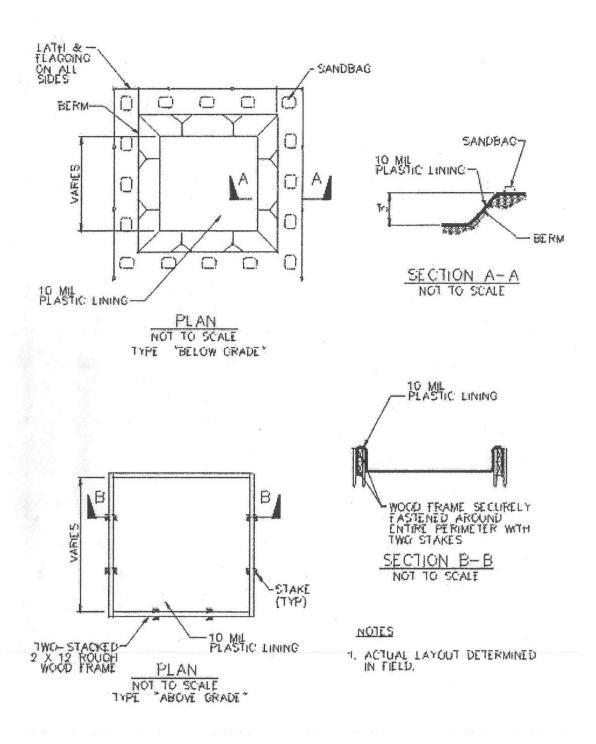


Figure 1-43 Schematics of Concrete Washout Areas



PORTABLE CONCRETE WASHOUT CONTAINER

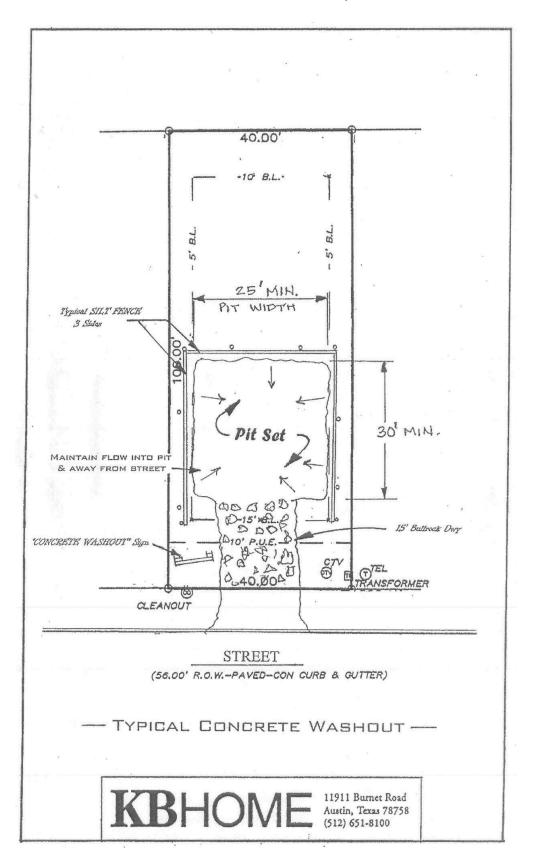

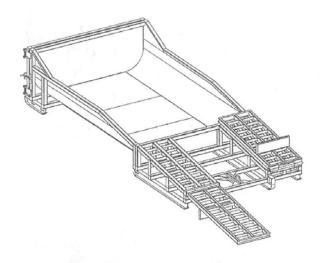

PO Box 2604 Carmichael, CA. 95609 Phone: 1.877.292.7468 Fax: 1.916.244.0403 info@concretewashout.com www.concretewashout.com Patent Pending

DESCRIPTION

A portable, self-contained and watertight container affixed with ramps that controls, captures and contains caustic concrete wastewater and washout material.

PURPOSE & OBJECTIVE

Allows trade personnel to easily washout concrete trucks, pumps and other equipment associated with cement on site and allows easy off site recycling of the same concrete materials and wastewater.

APPLICATION

Construction projects where concrete, stucco, mortar, grout and cement are used as a construction material or where cementitious wastewater is created.

MAINTENANCE

Inspect and clean out when 3/4 full, not allowing the container to overflow.

Inspect wastewater level and request a vacuum if needed.

Inspect subcontractors to ensure that proper housekeeping measures are employed when washing out equipment.

SPECIFICATIONS

The container must be portable and temporary, watertight, equipped with ramps and have a holding capacity to accept washout from approximately 350 yards of poured concrete. A vacuum service must accompany washout container and be used by site superintendent as needed. A rampless container may be used in conjunction with a ramped container or by itself if a concrete pump is not needed. The washwater must be disposed of or treated and recycled in an evironmentally safe maanner and in accordance with federal, state or local regulatory guidelines.

TARGETED POLLUTANTS

Caustic wastewater (high pH level near 12 units)

Suspended solids

Assorted Metals; Chromium VI, Nickel, Sulfate, Potassium, Magnesium and Calcium Compounds

3. THE GEOTEXTILE FABRIC SHOULD BE DESIGNED SPECIFICALLY FOR USE AS A SOL FILTRATION MEDIA WITH AN APPROMMATE WEIGHT OF 6 OZ/YD', A MULLEN BURST RATING OF TAQ LB/ μ N', AND AN EQUIVALENT OPENING SIZE GREATER THAN A NUMBER 50 SIEVE.

INSTALLATION

1. AVOID CURVES ON PUBLIC ROADS AND STEEP SLOPES. FEMOVE VECETATION AND OTHER OBJECTIONABLE MATERIAL, FROM THE FOUNDATION AREA. GRADE CROWN FOUNDATION FOR POSITIVE DRAINAGE.

2. THE MINIMUM WOTH OF THE ENTRANCE/EXIT SHOULD BE 12 FEET OR THE FULL WIDTH OF EXIT ROADWAY, WHICHEVER IS GREATER. 3. THE CONSTRUCTION ENTRANCE SHOULD BE AT LEAST 50 FEET LONG.

4. I'M SLOPE TOWNO THE ROAD DICEIDS 25 CONSTRUCT A ROCK.

4. I'M SLOPE TOWNO THE ROAD DICEIDS 25 CONSTRUCT A ROCK.

5. I'M SLOPE TOWNO THE ROAD DICEIDS 25 CONSTRUCT A ROCK.

6. I'M SLOPE TOWNO THE ROAD THE PROPERTY AND THE DISTANCE OF THE PROPERTY AND THE PROPE

5. PLACE GEOTEXTILE FABRIC AND GRADE FOUNDATION TO IMPROVE STABILITY, ESPECIALLY WHERE WET CONDITIONS ARE ANTICIPATED.

5. ALL SEDIMENT SHOULD BE PREVENTED FROM ENTERING ANY ESPECIALLY WHERE WET CONDITIONS ARE ANTICIPATED. PLACE STONE TO DIMENSIONS AND GRADE SHOWN ON PLANS. LEAVE SURFACE SMOOTH AND SLOPE FOR DRAINAGE.

7. DIVERT ALL SURFACE RUNOFF AND DRAINAGE FROM THE STONE PAD TO A SEDIMENT TRAP OR BASIN.

ISOMETRIC PLAN VIEW

ROCK BERMS


ROCK BERMS
THE PREPARE OF A BOX BERM IS TO SERVE AS A CHECK DAM IN AREAS
OF CONCENTRATE LIGHT TO STREETE SEMBETH-LABOR MUNCH, CERTIFIC STREETE SEMBETH-LABOR MUNCH, CERTIFIC STREETE SEMBETH AS A CHECK BY A CHEC

INSPECTION AND MAINTENANCE GUIDELINES INSPECTION SHOULD BE MADE WEEKLY AND AFTER EACH RAINFALL BY THE RESPONSIBLE PARTY. FOR INSTALLATIONS IN STREAMBEDS, ADDITIONAL DAILY INSPECTIONS SHOULD BE MADE.

3. REPAIR ANY LOOSE WRE SHEATHING.

4. THE BERM SHOULD BE RESHAPED AS NEEDED DURING INSPECTION. 5. THE BERM SHOULD BE REPLACED WHEN THE STRUCTURE CEASES TO FUNCTION AS INTENDED DUE TO SILT ACCUMULATION AMONG THE ROCKS, WASHOUT, CONSTRUCTION TRAFFIC DAMAGE, ETC.

6. THE ROCK BERM SHOULD BE LEFT IN PLACE UNTIL ALL UPSTREAM AREAS ARE STABILIZED AND ACCUMULATED SILT REMOVED.



INSTALLATION

2. BERM SHOULD HAVE A TOP WIDTH OF 2 FEET MINIMUM WITH SIDE SLOPES BEING 2:1 (H:V) OR FLATTER. 3. PLACE THE ROCK ALONG THE SHEATHING AS SHOWN IN THE DIAGRAM TO A HEIGHT NOT LESS THAN $18^{\prime\prime},$


4. WRAP THE WIRE SHEATHING AROUND THE ROCK AND SECURE WITH TE WIRE SO THAT THE ENDS OF THE SHEATHING OVERLAP AT LEAST 2 INCHES, AND THE BERM RETAINS ITS SHAPE WHEN WALKED UPON. 5. BERM SHOULD BE BUILT ALONG THE CONTOUR AT ZERO PERCENT GRADE OR AS NEAR AS POSSIBLE.

COMMON TROUBLE POINTS

1. INSUFFICIENT BERM HEIGHT OR LENGTH (RUNOFF QUICKLY ESCAPES OVER THE TOP OR AROUND THE SIDES OF BERM).

2. BERM NOT INSTALLED PERPENDICULAR TO FLOW LINE (RUNOFF ESCAPING APOLING ONE SIDE)

ROCK BERM DETAIL



ISOMETRIC PLAN VIEW

IN CRITICAL AREAS, SECURE SOD WITH NETTING, USE STAPLES.

ROOT ZONE SOIL AND ROOTS.
SHOULD BE 1/2"-3/4" THICK, WITH
DENSE ROOT MAT FOR STRENSTH.

STABILIZED CONSTRUCTION ENTRANCE/EXIT DETAIL

APPEARANCE OF GOOD SOD 1. ROLL SCD IMMEDIATELY TO ACHIEVE FIRM CONTACT WITH THE SOUL.

2. WATER TO A DEPTH OF 4° AS NEEDED, WATER WELL AS SOON AS THE SOD IS LAID.

3. MOW WHEN THE SOD IS ESTABLISHED - IN 2-3 WEEKS, SET THE MOWER HIGH (2^*-3^*) .

S00 SHOULD BE MACHINE CUT AT A UNIFORM SOIL THICKNESS OF 3/4" INCH (± 1/4" INCH) AT THE TIME OF CUTTING, THIS THICKNESS SHOULD EXCLUDE SHOOT GROWTH AND THATCH.

LAY SOD IN A STAGGERED PATTERN. BUTT THE STRIPS TIGHTLY AGAINST FACH OTHER. DO NOT LEAVE SPACES AND DO NOT OVERLAP. A SHARPENED MASON'S TROWEL IS A HANDY TOOL FOR TUCKING DOWN THE ENDS AND TRIMMING PIECES.

SITE PREPARATION

1. PRIOR TO SOIL PREPARATION, AREAS TO BE SCODED SHOULD BE BROUGHT TO FINAL GRADE IN ACCORDANCE WITH THE APPROVED PLAN.

3. FERTILIZE ACCORDING TO SOIL TESTS. FERTILIZER NEEDS CAN DETERMINED BY A SOIL TESTING LABORATORY OF RODONAL RECOMMENDATION OF SOIL OF SOIL DE WORKER INTO THE SOIL TO A DEPTH OF 3 NORSE WITH A 1 SPRINGTOOTH MARROW OR CHIEF SUITABLE EQUIPMENT. ON SCIPILID SOIL OF SOIL DE ON THE CONTO

INSTALLATION IN CHANNELS

1. SOD STRPS IN WATERWAYS SHOULD BE LAID PERPENDICULAR TO THE
DEFECTION OF FLOW. CASE SHOULD BE TAKEN TO BUTT ENDS OF STRIPS
TIGHTLY (SEE FIGURE ABOVE).

GENERAL INSTALLATION (VA. DEPT. OF

CONSERVATION, 1992)

1. SOD SHOULD NOT BE CUT OR LAID IN EXCESSIVELY WET OR DRY WEATHER SOD ALSO SHOULD NOT BE LAID ON SOIL SURFACES THAT ARE FROZEN.

SOD INSTALLATION

SECTION "A-A" OF A CONSTRUCTION ENTRANCE/EXIT

COMMON TROUBLE POINTS

1. INADEQUATE RUNDEF CONTROL-SEDIMENT WASHES ONTO PUBLIC ROAD.

2. STONE TOO SMALL OR GEOTEXTILE FABRIC ABSENT, RESULTS IN MUDDY CONDITION AS STONE IS PRESSED INTO SOIL.

 PAD NOT FLARED SUFFICIENTLY AT ROAD SURFACE, RESULTS IN MUD BEING TRACKED ON TO ROAD AND POSSIBLE DAMAGE TO ROAD. UNSTABLE FOUNDATION - USE GEOTEXTILE FABRIC UNDER PAD AND/OR IMPROVE FOUNDATION DRAINAGE.

INSPECTION AND MAINTENANCE GUIDELINES

THE PRIBARIE SHOULD BE MARTARID BY A CONDITION, WHICH WILL

HAVE AND A CONDITION OF THE SHOULD BE ADMITTANCE OF THE SHOULD BE ADMITTANCE OF THE SHOULD BE ADMITTANCE OF THE SHOULD BE

ALL SEDIMENT SPILLED, DROPPED, WASHED OR TRACKED ONTO PUBLIC RIGHTS-OF-WAY SHOULD BE REMOVED IMMEDIATELY BY CONTRACTOR.

WHEN NECESSARY, WHEELS SHOULD BE CLEANED TO REMOVE SEDIMENT PRIOR TO ENTRANCE ONTO PUBLIC RIGHT-OF-WAY.

5, AS SODDING OF CLEARLY DEFINED AREAS IS COMPLETED, SOO SHOULD BROLLED OR TAMPED TO PROVIDE FIRM CONTACT BETWEEN ROOTS AND SOIL. AFTER ROLLING, SOD SHOULD BE IRRIGATED TO A DEPTH SUFFICIENT THAT THE UNDERSIDE OF THE SOD PAD AND THE SOIL 4 INCHES BELOW THE SOD IS THOROUGHLY WET.

INSPECTION AND MAINTENANCE GUIDELINES

1. SOD SHOULD BE INSPECTED WEEKLY AND AFTER EACH RAIN EVENT
LOCATE AND REPAIR ANY DAMAGE.

2. DAMAGE FROM STORMS OR NORMAL CONSTRUCTION ACTIVITIES SUCH AS TIRE RUTS OR DISTURBANCE OF SWALE STABILIZATION SHOULD BE REPAIRED AS SOON AS PRACTICAL.

IMATECHIALS

1. SLIT FINE MATERIAL SHOULD BE POLYPROPYLENE, POLYETHYLENE, OR POLYMANDE WOVEN OR NONWOWN FABRIC. THE FABRIC SHOULD BE 36 INCHES, WITH A MINIMUM UNIT WEIGHT OF 4.5 OZ/PO, MULLEN BURST STRENGTH EXCEEDING 100 LB/NZ, ULTRAMOLET STRENGT EXCEEDING 70%, AND MINIMUM PAPERTY CEPTING 52CF O'LLS. SEVE NUMBER 10.

I. STELL POIS, WHICH SUPPORT THE SLT FENCE, SHOULD BE INSTALLED ON A SLICHT ANGLE TOWARD THE ANTICHPACE PURPORE. POSTS MUST BE EMBEDGED A MARMAL OF 1-POOT DEEP AND SPACED NOT MORE THAN 8 FEET ON CENTER WHERE WATER CONCENTRATES, THE MAXIMUM SPACING MOULD BE 6-FEST.

INSTALLID, SIL FINICES ARE NOT LIKELY TO BE EPPETURE.

ME PURPOSE OF A SIL FIDIOL IS IN DIFFERENCE AND DETAILS WATER-SON USED DIAMETER AND DETAILS WATER-SON USED DIAMETER.

OUTD DIAMED THE FIRSTO OF CONSTRUCTION MEAN THE FERMITTE OF A DESCRIPTION WATER TO DETAIL WATER TO A DESCRIPTION OF WATER IN A SHAWEL, OR COMMENTED AT A DESCRIPTION OF WATER IN A SHAWEL, OR COMMENTED AT THE WATER SIGN AS PLACIME A ROCK BRIND IN THE REASON OF CONSTRUCTION OF THE PROPERTY OF THE WATER SIGN AS PLACIME A ROCK BRIND IN THE REASON OF CONSTRUCTION OF THE PROPERTY OF THE WATER SIGN AS PLACIME A ROCK BRIND IN THE REASON OF CONSTRUCTION OF THE WATER SIGN AS PLACIME A ROCK BRIND IN THE REASON OF CONSTRUCTION OF THE WATER SIGN AS PLACIME A ROCK BRIND IN THE REASON OF CONSTRUCTION OF THE WATER SIGN AS PLACIME A ROCK BRIND IN THE REASON OF CONSTRUCTION OF THE WATER SIGN AS PLACIME AS PLACIME A ROCK BRIND IN THE REASON OF CONSTRUCTION OF THE WATER SIGN AS PLACIME AS PLACIME

SET FENONS INTEN THE STE MAY BE TRANSPAREY MOVED DURING THE DAY TO ALLOW CONSTRUCTION ACTIVITY PROVIDED IT IS REPLACED AND PROPERLY MONORORD TO THE GROUND AT THE EAST OF THE ADVISET FENONS ON THE PERMETER OF THE SITE OR ARQUIND DRAWLAGE WAYS SHOULD NOT BE MOVED AT ANY TIME.

2. LAY OUT FENCING DOWN-SLOPE OF DISTURBED AREA, FOLLOWING THE CONTOUR AS CLOSELY AS POSSIBLE. THE FENCE SHOULD BE SITED SO THAT THE MAXIMUM DRANNAGE AREA IS X ACRE/TOO FEET OF FENCE.

3. THE TIES OF THE SLIFTENCE SHOULD BE TRENGED IN WITH A SHARE OF WERNAMICAL INFORMER, SO THAT HE DOWN SLOPE FREE OF THE FRIEND IS FALLY MAD FERFENDING LARRY TO THE LINE OF M. WHERE FRIEND CANNOT BE FREE CHANGE IN THE TRENGED IN IC.C., PAUMENT OR ROCK GUTCHOOP, WEIGHT FRANCE FLAW WITH 3 NOHES OF PEA GRAVEL ON UPHILL SIDE TO PREVENT FLOW FROM SEPTION UNDER FRIENCE.

5. SLT FENCE SHOULD BE SECURELY FASTENED TO EACH STEEL SUPPORT POST OR TO WOVEN WIRE, WHICH IS IN TURN ATTACHED TO THE STEEL FENCE POST. THERE SHOULD BE A 3-FOOT OVERLAP, SECURELY FASTENED WHERE ENDS OF FASTE MEET.

SILT FENCE SHOULD BE REMOVED WHEN THE SITE IS COMPLETELY STABILIZED SO AS NOT TO BLOCK OR IMPEDE STORM FLOW OR DRAINAGE.

COMMON TROUBLE POINTS

1. FENCE NOT INSTALLED ALONG THE CONTOUR CAUSING WATER CONCENTRATE AND FLOW OVER THE FENCE.

INSPECTION AND MAINTENANCE GUIDELINES
1. INSPECT ALL FENONG WEEKLY, AND AFTER RAINFALL.

3. REPLACE TORN FABRIC OR INSTALL A SECOND LINE OF FENCING PARALLEL TO THE TORN SECTION.

4. REPLACE OR REPAIR SECTIONS ORUSHED OR COLLAPSED IN THE COURSE OF CONSTRUCTION LATURY? FLA SECTION OF FENCE IS DESTRUCTIVE PROVIDE EQUAL. PROTECTION, BUT WILL NOT OSTRUCT VEHICLES. A TRANSCULAR FILTRE DIKE MAY BE PREFERABLE TO A SILT FENCE AT COMMON VEHICLE SECTION.

5. WHEN CONSTRUCTION IS COMPLETE, THE SEDIMENT SHOULD BE DISPOSED OF IN A MANNER THAT WILL NOT CAUSE ADDITIONAL SILTATION AND THE PRIOR LOCATION OF THE SILT FENCE SHOULD BE REVEGETATED. THE FENCE

SILT FENCE DETAIL

2. FABRIC NOT SEATED SECURELY TO GROUND (RUNOFF PASSING UNDER FENCE).

3. FENCE NOT INSTALLED PERPENDICULAR TO FLOW LINE (RUNOFF ESCAPING AROUND SDES). 4. FENCE TREATING TOO LARGE AN AREA, OR EXCESSIVE CHANNEL FLOW (RUNOFF OVERTOPS OR COLLAPSES FENCE).

2. REMOVE SEDIMENT WHEN BUILDUP REACHES 6 INCHES.


CURB -PLAN VIEW -CURB INLET SEE GRAVEL FILTER_, SECTION "A-A"

GENERAL NOTES

INSPECTION AND MAINTENANCE GUIDELINES
1. INSPECTION SHOULD BE MADE WEEKLY AND AFTER EACH RAINFALL RI
OR REPLACEMENT SHOULD BE MADE PROMPTLY AS NEEDED BY
CONTRACTOR.

REMOVE SEDIMENT WHEN BUILDUP REACHES A DEPTH OF 3 INCHES. REMOVED SEDIMENT SHOULD BE DEPOSITED IN A SUITABLE AREA AND IN SUCH A MANNER THAT IT WILL NOT EXCOLE. CHECK PLACEMENT OF DEVICE TO PREVENT GAPS BETWEEN DEVICE AND CURB.

BAGGED GRAVEL CURB INLET PROTECTION DETAIL



SAND BAGS (TYP.)-_SAND BAGS (TYP.) SECTION "A-A"

GENERAL NOTES

1. DETAIL ABOVE ILLUSTRATES MINIMUM DIMENSIONS, PIT CAN BE INCREASED IN SIZE DEPENDING ON EXPECTED FREQUENCY OF USE. WASHOUT PIT SHALL BE LOCATED IN AN AREA EASILY ACCESSIBLE TO CONSTRUCTION TRAFFIC.

 WASHOUT PIT SHALL NOT BE LOCATED IN AREAS SUBJECT TO INUNDATION FROM STORM WATER RUNOFF. LOCATE WASHOUT AREA AT LEAST 50 FEET FROM SENSITIVE FEATURES, STORM DRAINS, OPEN DITCHES OR WATER BODIES. TEMPORARY CONCRETE WASHOUT FACILITY SHOULD BE CONSTRUCTED WITH SUFFICIENT CUANTITY AND VOLUME TO CONTAIN ALL LIQUID AND CONCRETE WASTE GENERATED BY WASHOUT OPERATIONS.


MATERIALS

PLASTIC LINING MATERIAL SHOULD BE A MINIMUM OF 10 MIL IN POLYETHYLENE SHEETING AND SHOULD BE FREE OF HOLES, TEARS, OR OTHER DEFECTS THAT COMPROMISE THE IMPERMEABILITY OF THE MATERIAL. MAINTENANCE

MATERIALS USED TO CONSTRUCT TEMPORARY CONCRETE WASHOUT FACILITIES SHOULD BE REMOVED FROM THE SITE OF THE WORK AND DISPOSED

HOLES, DEPRESSIONS OR OTHER GROUND DISTURBANCES CAUSED BY THE REMOVAL OF THE TEMPORARY CONCRETE WASHOUT FACILITIES SHOULD BE BACKFILLED AND REPAIRED.


CONCRETE TRUCK WASHOUT PIT DETAIL



HOUSE PAD DRIVE WAY LOT TYPE-C

LEGEND SILT FENCE DRAINAGE FLO


TYPICAL HOUSE LOT LAYOUTS



NOTES:

1. THE FILTER BAG MATERIAL SHALL BE MADE OF PO POLYETHYLENE OR POLYAMIDE WOVEN FABRIC, MIN. U CUNCES/SY, HAVE A MULLEN BURST STRENGTH EXCE ULTRAMOLET STABILITY EXCEEDING 70%.

3. SAND SHALL NOT BE USED TO FILL THE FILTER BAGS. GRAVEL FILTER BAG DETAIL



CONSTRUCTION STAGING AREA NOT-TO-SCALE

THE ENGINEERING SEAL HAS BEEN AFFIXED TO THIS SHEET ONLY F THE PURPOSE OF DEMONSTRATING COMPLIANCE WITH THE TPDES-STO WATER POLLUTION PREVENTION PLAN (SWP3) REGULATIONS.

THIS SHEET HAS BEEN PREPARED FOR PURPOSES OF THE SWP3 CNLY. ALL OTHER CIVIL ENGINEERING RELATED INFORMATION SHOULD BE ACQUIRED FROM THE APPROPRIATE SHEET IN THE CIVIL IMPROVEMENT PLANS.

RA-UNIT TEXAS B Ш CUL COUNTY, A PESERVE A

PAPE-DAWSON ENGINEERS

TAILS

DET

PREVENTION

WATER POLLUTION

AT NO. 25-11800103 OB NO. 11668-25 ATE JUNE 2025

CHECKED BC DRAWN RE

C8.10

SOD INSTALLATION DETAIL

6. Dewatering

Dewatering Details

Discharges from dewatering activities, including discharges from dewatering of trenches and excavations, are prohibited, unless managed by appropriate controls to address sediment and prevent erosion. Operators must perform an inspection of the dewatering controls once per day while the dewatering discharge occurs as described in Part III.F.7. of this general permit.

Inspection of Dewatering Controls Pursuant to Part IV.C. of this General Permit

- (a) personnel provided by the permittee must inspect dewatering controls at a minimum of once per day on the days where dewatering discharges occur. Personnel conducting these inspections must be knowledgeable of this general permit, the construction activities at the site, and the SWP3 for the site. Personnel conducting these inspections are not required to have signatory authority for inspection reports under 30 TAC § 305.128 (relating to Signatories to Reports). (b) Requirements for Inspections
 - i. a report summarizing the scope of any inspection must be completed within 24-hours following the inspection. The report must also include, at a minimum, the following:
 - (A) date of the inspection;
 - (B) name(s) and title(s) of personnel making the inspection;
 - (C) approximate times that the dewatering discharge began and ended on the day of inspection;
 - (D) estimates of the rate (in gallons per day) of discharge on the day of inspection;
 - (E) whether or not any indications of pollutant discharge were observed at the point of discharge (e.g., foam, oil sheen, noticeable odor, floating solids, suspended sediments, or other obvious indicators of stormwater pollution);
 - (F) major observations, including: the locations of where erosion and discharges of sediment or other pollutants from the site have occurred; locations of BMPs that need to be maintained; locations of BMPs that failed to operate as designed or proved inadequate for a particular location; and locations where additional BMPs are needed.
 - ii. actions taken as a result of inspections, including the date(s) of actions taken, must be described within, and retained as a part of, the SWP3. Reports must identify any incidents of non-compliance. Where a report does not identify any incidents of non-compliance, the report must contain a certification that the facility or site is in compliance with the SWP3 and this permit. The report must be retained as part of the SWP3 and signed by the person and in the manner required by 30 TAC § 305.128 (relating to Signatories to Reports).
 - iii. the names and qualifications of personnel making the inspections for the permittee may be documented once in the SWP3 rather than being included in each report.

DEWATERING EVALUATION FORM

This to		ering Evaluation the Texas Construction General Permit TX	R150000 2023.	
Site Name:				Date of Evaluation:
Approximate Start & End Time of Dewi	storing on the Day of Evalu	ation Start Time End Time		Continuous?
Estimated Rate of Discharge (gallons /	day):			
Location of Dewalering Operations:				
Personnel Name and Position Title	Ion Title Contact Information			
Qualifications of Personnel	otion Conned Downli TVD45	2000 the search refer established at the size	and the COMPO Co. His	atta.
Tam knowledgeade of the Texas Constitu	COUNT CONTROL PORTINE AR 150	0000, the construction activities at the site, a	and the Syyra for this	Site.
solids, suspended sediments, or other ob	vious indicators of stormwate	of discharge (e.g., foam, oil sheen, noticeab r pollution)? ed limits of disturbance due to dewatering a	10.00	Yes / No / N/A
Has a visible amount of sadiment been di	scharged into receiving water	rs, including welfands due to dewatering ac	tivity?	Yes / No / N/A
Are any BMPs used in the dewatering act	tivity not in effective operating	condition?		Yes / No / N/A
Are any additional BMPs necessary for the dewatering activity? Yes /				Yes / No / N/A
Are any BMPs inadequate and alternative	BMPs necessary for the dev	vatering activities?		Yes / No / N/A
Compilance Statement There were no incidents of noncompilance	s noted during this devotering	g evaluation. The dewatering activity is in o	omnliance with the SI	APPP and the
Texas Construction General Permit.		g orange on the source of the second of the	omprantos mar aro es	
Corrective Action Log			Alle I La	
Deficency	Action Taken	Da	te of Observation	Date Action Taken
4				
PERSONNEL CERTIFICATION				A Decision of the last
assure that qualified personnel properly g those persons directly responsible for gat	ather and evaluate the inform hering the information, the inf	s were prepared under my direction or supe lettor submitted. Based on my inquiry of the formation submitted is, to the best of my land mation, including the possibility of fine and	person or persons wo owledge and belief, tr	the manage the system, one, accurate, and complete
Personnel Name & Title		Signature of Personnel		
SIGNATORY CERTIFICATION in accord	ance with required by 30 TAC	§ 305.128 (relating to Signatories to Repor	ts)	
I certify under the penalty of law that this assure that qualified personnel properly g those persons directly responsible for gat	document and all attachment ather and evaluate the inform hering the information, the inf	s were prepared under my direction or super lation submitted. Sased on my inquiry of the formation submitted is, to the best of my low mation, including the possibility of fine and	ervision in accordance a person or persons w owledge and belief, tr	the manage the system, of ue, accurate, and complete
Signatory Name & Title		Signature of Signatory		

7. Spill Prevention and Response

Spill Response Protocol

Spills will be prevented utilizing Best Management Practices previously described beginning in Section IV such as proper material storage, handling, and disposal practices. However, despite such efforts, a spill may occur on site. If a spill occurs, the following procedures will be utilized.

- **Stop the spill, if possible.** This can include shutting off power to a pump, righting an overturned container, or plugging a hole in a damaged container.
- Contain the spill, safely. Spill containment can be accomplished using a variety of materials and methods such as the use of absorbents (i.e. sawdust, Oil Dri, rags, soil, polypropylene pads or booms, etc.) to dike the area around the spill, or placing a leaking container inside one which is not leaking. Spill containment should only be attempted if it is safe to do so. Proper safety equipment such as gloves and eye protection should be used as directed on the Material Safety Data Sheet for the spilled material.
- Report the spill, if necessary. Certain quantities of hazardous or toxic materials such as pesticides, paint thinners, gasoline, etc. are required by Federal Law to be reported to the National Response Center (NRC) at 1-800-424-8802 as soon as you have knowledge of the spill. Since most of the quantities which require reporting to the NRC are larger than that found on a typical construction site, spill reporting to the State or Local authorities is more likely. When in doubt, report the spill.

Texas Commission on Environmental Quality (TCEQ) 1-800-832-8224

- Clean the spill up, properly. Spill clean up should be performed in accordance with applicable regulations or according to the manufacturer's recommendations on the Material Safety Data Sheet. In most cases, proper spill clean up is to use a dry method such as absorbing the spill and containerize for disposal via a licensed disposal company. For non-hazardous and non-toxic materials this may be through your solid waste disposal service with prior approval.
- Fill in table on next page.

The SWPPP must be modified within 14 days of a release to provide a description of the spill, the circumstances leading to the spill, and the date of the spill. Spill clean-up materials, methods, and additional Best Management Practices addressing spill prevention should also be included.

Spill Date	Material Spilled	~ amount of spill (in gallons)	Circumstance of Spill (what caused the spill)	Corrective Action	Correction Date & sign-off

8. Inspection Requirements

Inspection Frequency

At least once <u>every seven (7) days</u> the SWPPP provides for a thorough inspection of disturbed areas of the construction site that have not been finally stabilized.

If the inspection frequency changes, the reason for the change and the dates that the change is effective will be listed below.

Alte	Alternate Inspection Schedule:		Date range of alternate inspection schedule.	
Every 7 days (weekly)	Every 7 days (weekly) and after rainfall events in excess of 0.5"	Monthly	Beginning Date-Ending Date	Reason for changing inspection schedule:

Inspection Report Requirements

Inspection Reports will contain:

- A report summarizing the scope of any inspection must be completed within 24-hours following the inspection. The report must also include the date(s) of the inspection and major observations relating to the implementation of the SWP3. Major observations in the report must include: the locations of where erosion and discharges of sediment or other pollutants from the site have occurred; locations of BMPs that need to be maintained; locations of BMPs that failed to operate as designed or proved inadequate for a particular location; and locations where additional BMPs are needed.
- Actions taken as a result of inspections, including the date(s) of actions taken, must be described within, and retained as a part of, the SWP3. Reports must identify any incidents of non-compliance. Where a report does not identify any incidents of non-compliance, the report must contain a certification that the facility or site is in compliance with the

SWP3 and this permit. The report must be retained as part of the SWP3 and signed by the person and in the manner required by 30 TAC § 305.128 (relating to Signatories to Reports).

• The names and qualifications of personnel making the inspections for the permittee may be documented once in the SWP3 rather than being included in each report.

The SWP3 must be modified based on the results of inspections, as necessary, to better control pollutants in runoff. Revisions to the SWP3 must be completed within seven (7) calendar days following the inspection. If existing BMPs are modified or if additional BMPs are necessary, an implementation schedule must be described in the SWP3 and wherever possible those changes implemented before the next storm event. If implementation before the next anticipated storm event is impracticable, these changes must be implemented as soon as practicable. If necessary, modify your site map to reflect changes to your stormwater controls that are no longer accurately reflected on the current site map.

Inspection and Entry

The permittee shall allow the Director or authorized representative of EPA, the State/Tribal, or municipal separate storm sewer authorized representative, upon the presentation of credentials and other documents as may be required by law to enter upon the permittee's premises where a regulated facility is located or conducted, have access to and copy any records that must be kept, and inspect any facility or equipment.

Qualified Personnel

Disturbed areas and areas used for storage of materials that are exposed to precipitation shall be inspected for evidence of, or the potential for, pollutants entering the drainage system. This site inspection will be performed by qualified personnel familiar with the site and with the authority to ensure necessary maintenance of controls. Documentation of the inspection and actions taken is provided on forms shown in Appendix B.

Qualified personnel performing inspections are familiar with the BMPs, have knowledge to determine when a failed control is inadequate and needs to be replaced, have access to the construction schedule, have knowledge of stabilization, and have authority to make changes to the SWPPP.

KB Home Lone Star, Inc. has elected to have Compliance Resources, Inc. staff perform the required inspections.

Storm Water Pollution Prevention Plan Writer Qualifications for Compliance Resources, Inc.

Joshua Garcia, CESSWI - IT (with CRI since August 2024)

- Bachelor of Arts (BA) in Environmental Studies from Brown University, Providence, Rhode Island
- Coursework in environmental policy, environmental remediation, environmental management, environmental economics, waste management, ecology, urban studies, conservation, climate science, microbiology, sustainability, and chemistry
- Conducted an independent ethnographic research study on the sources of water-related public health risk in Morocco, Nepal, and Ecuador that included interviews with environmental experts and visits to wastewater treatment facilities and contaminated sites
- Experience in water quality testing and sample collection through an environmental laboratory working on environmental remediation at the University of Barcelona as a laboratory assistant
- Experience in soil testing and land use planning as a logistics coordinator at the Brown Student Garden
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector
- Qualified Construction Storm Water Pollution Prevention Plan Writer (since June 2025)
- CESSWI IT #12937 Certified Erosion, Sediment and Storm Water Inspector In Training (December 2024)

Kassie Gnospelius, CESSWI (with CRI since September 2006)

- Bachelor of Science (BS) in Bioenvironmental Science from Texas A&M University, College Station, Texas
- Coursework in soil and crop science, bioremediation, and bioenvironmental science
- Internship with Texas A&M University Geochemical and Environmental Research Group, working as a lab technician testing various tissue and water - samples for hazardous contaminants
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector
- Field Supervisor / Team Leader (May 2013 April 2017)
- Houston Area Manager (May 2017 current)
- Qualified Construction Storm Water Pollution Prevention Plan Writer (since March 2025)
- CESSWI #0774 Certified Erosion, Sediment and Storm Water Inspector (March 2010)

Kassie Ledum, CPESC - IT, CESSWI (with CRI since July 2019)

- Bachelor of Science (BS) in Environmental Science with a minor in Biology from Texas A&M University at Corpus Christi, Corpus Christi, Texas
- Coursework in environmental regulations and policy, ecology, field biology, waste management, issues in environmental science, marine ecology, environmental geology, and Geographic Information Systems (GIS)
- HAZWOPER and Oil Spill Management Certified
- Experience in conducting field work and analyzing data
- Water Quality experience in collecting/ testing samples and reporting/analyzing data
- Experience in environmental education including the promotion of environmental conservation and implementation of program initiatives SEEDS (Strategies for Ecology, Education, Diversity, and Sustainability)
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector
- Qualified Construction Storm Water Pollution Prevention Plan Writer (since July 2021)
- Senior Construction Storm Water Pollution Prevention Plan Writer (October 2022 current)
- CESSWI IT #5702 Certified Erosion, Sediment and Storm Water Inspector In Training (January 2020)
- CESSWI #5702 Certified Erosion, Sediment and Storm Water Inspector (November 2020)
- CPESC IT #12181 Certified Professional in Erosion and Sediment Control In Training (October 2022)

Amber Scheler, CPESC (with CRI since January 2005)

- Coursework in Computer-Aided Design at Temple College, Temple, Texas
- Applicable coursework in computer-aided design, AutoCAD, drafting, and environmental science
- Experience as an Administrative/Research Assistant for surveying company (2 years) and an SWP3 Writer since January 2005
- Sediment & Erosion Control Master Class: Evaluating Erosion, Sediment, & Sedimentation (six week course; April May 2012)
- Attended a CESSWI review course (part 1) in October 2013
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Construction Storm Water Pollution Prevention Plan Writer (since June 2005)
- Storm Water Pollution Prevention Plan Supervisor / Team Leader (January 2007 December 2017)
- Storm Water Pollution Prevention Plan Assistant Manager (January 2018 November 2018)
- Storm Water Pollution Prevention Plan Manager (December 2018 current)
- StormwaterONE Certification Qualified Preparer of Storm Water Pollution Prevention Plans #4475000 Texas (October 2017 - October 2019)
- StormwaterONE Certification Qualified Compliance Inspector of Storm Water #4475000 Texas (October 2017 October 2019)

Copyright © 2000 Compliance Resources, Inc. 1-888-CRI-SW3P

- CPESC IT #9219 Certified Professional in Erosion and Sediment Control In Training (October 2018)
- CPESC #9219 Certified Professional in Erosion and Sediment Control (December 2018)

Misti Shafer-Webb, CPESC, CESSWI (with CRI since September 2002)

- Bachelor of Science (BS) in Environmental Design from Texas A&M University, College Station, Texas
- Bachelor of Science (BS) in Construction Science from Texas A&M University, College Station, Texas
- Coursework in project management, soil science, environmental science, construction materials and methods, AutoCAD, drafting, surveying, concrete and steel structural engineering, and environmental design
- Internship with DPR Construction in their OSHA/Safety department
- Two years of experience in the homebuilding construction industry including permitting and project coordinating for David Weekley Homes in Austin, Texas and Houston, Texas
- Attended various trainings / conferences through Environmental Protection Agency (EPA), Texas Commission on Environmental Quality (TCEQ), Edwards Aquifer Protection Program (EAPP), International Erosion Control Association (IECA), South Central International Erosion Control Association (SCIECA), StormCon, Capital Area Erosion Control Network (CAECN), Home Builders Association (HBA), and the Austin Contractors and Engineers Association (ACEA)
- National Association of Women in Construction (Austin Chapter #7) Parliamentarian 2024-2025, Immediate Past-President 2022-2023, President 2021-2022, President-Elect 2020-2021, Director 2019-2020, Director 2018-2019, Vice President 2017-2018, and Director 2016-2017
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector
- Office Manager (December 2002 August 2003)
- Qualified Construction Storm Water Pollution Prevention Plan Writer (since July 2003)
- Storm Water Pollution Prevention Plan Manager (September 2003 November 2018)
- Austin Area Manager (June 2004 May 2006; March 2009 December 2011)
- President and Owner (July 2018 current)
- CPESC #5381 Certified Professional in Erosion and Sediment Control (August 2009)
- CESSWI #0698 Certified Erosion, Sediment and Storm Water Inspector (August 2009)

Inspector Qualifications for Compliance Resources, Inc.

Nell Barbour (with CRI since April 2025)

- Bachelor of Science (BS) in Agriculture and Extension Education from Pennsylvania State University, University Park, Pennsylvania
- Coursework in biology, environmental science, animal science, plant science, soil science, entomology, and Agriculture Mechanics (carpentry, welding, plumbing, electrical wiring, small gas engines)
- Certified by Pennsylvania PK-12 Agriculture Educator
- First-aid, CPR, and wilderness survival certifications
- West Nile Virus Technician with Lycoming County Conservation District (Pennsylvania) 2019-2021
- Experience in public pesticide applications 2019-2021
- Experience in conservation, field work, research, education, Geographic Information Systems (GIS), and data collection and analysis
- Completed coursework and worked with The Pennsylvania School for Excellence in Agriculture Science (PSEAS) installing Riparian Buffers
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector

Bryton Calder, CESSWI - IT (with CRI since August 2024)

- Bachelor of Arts (BS) in Environmental Studies with a concentration in Urban Sustainability from New College of Florida, Sarasota, Florida
- Coursework in biology, ecology, environmental governance, sustainability, sociology, urbanism, food systems and distribution, and sustainable agriculture
- Experience conducting fieldwork with emphasis on sample collection, site monitoring, and biological and ecological systems
- Experience with Geographic Information Systems (GIS) and data collection and management
- Published scientific work within the field of herpetology, conducted through research involving biological and ecological sample collection
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector
- CESSWI IT #12904 Certified Erosion, Sediment and Storm Water Inspector In Training (October 2024)

Christopher Calvillo, CESSWI (with CRI since July 2021)

- Bachelor of Science (BS) in Environmental Science from The University of the Incarnate Word, San Antonio, Texas
- Coursework in soil conservation, biology, ecology, environmental geology, and water quality

- Experience in customer service as a Park Ranger, assisting with education of the public as well as enforcement of city ordinances
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector
- CESSWI IT #6033 Certified Erosion, Sediment and Storm Water Inspector In Training (November 2021)
- CESSWI #6033 Certified Erosion, Sediment and Storm Water Inspector (August 2022)

Justin Croon, CESSWI (with CRI since September 2006)

- Bachelor of Science (BS) in Political Science from Texas A&M University, College Station, Texas
- Coursework in geography and geology
- Experienced in customer service and office administration
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector
- CESSWI #1903 Certified Erosion, Sediment and Storm Water Inspector (August 2011)

Kyle Edwards (with CRI since June 2025)

- Bachelor of Science in Biology from Portland State University, Portland, Oregon.
- Coursework in biology, biochemistry, conservation, climate science, microbiology, sustainability, and chemistry.
- Conducted field work that included surveys with environmental experts and visits to wildlife areas regarding habitat preservation for beaver populations.
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector

Sierra Elizondo, CESSWI - IT (with CRI since July 2024)

- Bachelor of Science (BS) in Biology with a minor in Chemistry from Texas Tech University at Waco, Waco, Texas
- Bachelor of Science (BS) in Wildlife Biology with a minor in Geology from Texas State University, San Marcos, Texas
- Coursework in field ecology, parasitology, technical writing, invertebrate zoology, chemistry, mammalogy, tropical marine biology, structural geology, geomorphology, earth materials, sedimentation and stratigraphy, ecology, raptor ecology, wetland plant ecology management, wildlife management and techniques wildlife management, ecology of rarity, and statistic behavioral science
- Work alongside the Mammal Department at the Cameron Park Zoo as a Summer Intern helping keepers in animal husbandry and enrichment planning in the hoofstock, primates, elephant, rhinos, bears, and large cat areas
- Volunteer alongside Friends of McKinney Falls State Park once a month to clean trash
- Experience in research, conservation, field work, hand tools, and data collection and analysis
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector
- CESSWI IT #12882 Certified Erosion, Sediment and Storm Water Inspector In Training (September 2024)

Justin England (with CRI since June 2025)

- Coursework towards a Bachelors of Science (BS) in Interdisciplinary Engineering from Texas A&M, College Station, Texas
- Coursework in civil engineering, Calculus, Physics, Chemistry, Engineering Fundamentals
- Experience in the construction and maintenance of private ponds
- Helped maintain a local certified wildlife refuge
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector

Joshua Garcia, CESSWI - IT (with CRI since August 2024)

- Bachelor of Arts (BA) in Environmental Studies from Brown University, Providence, Rhode Island
- Coursework in environmental policy, environmental remediation, environmental management, environmental economics, waste management, ecology, urban studies, conservation, climate science, microbiology, sustainability, and chemistry
- Conducted an independent ethnographic research study on the sources of water-related public health risk in Morocco, Nepal, and Ecuador that included interviews with environmental experts and visits to wastewater treatment facilities and contaminated sites
- Experience in water quality testing and sample collection through an environmental laboratory working on environmental remediation at the University of Barcelona as a laboratory assistant
- Experience in soil testing and land use planning as a logistics coordinator at the Brown Student Garden
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector
- Oualified Construction Storm Water Pollution Prevention Plan Writer (since June 2025)
- CESSWI IT #12937 Certified Erosion, Sediment and Storm Water Inspector In Training (December 2024)

Jackson Giminiani, CESSWI (with CRI since September 2021)

- Bachelors of Science (BS) in Wildlife and Fisheries Science from Texas A&M University, College Station, Texas
- Coursework in ecology, environmental monitoring, techniques of wildlife management, principles of fisheries management, and fish and wildlife laws and administration
- Experience in educating the public about water conservation and habitat restoration for endangered species specifically at the headwaters of the San Marcos River
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector
- Field Supervisor / Team Leader (January 2023 December 2024)
- Operations Manager (January 2025 current)
- CESSWI IT #6058 Certified Erosion, Sediment and Storm Water Inspector In Training (December 2021)
- CESSWI #6058 Certified Erosion, Sediment and Storm Water Inspector (October 2022)

Kassie Gnospelius, CESSWI (with CRI since September 2006)

- Bachelor of Science (BS) in Bioenvironmental Science from Texas A&M University, College Station, Texas
- Coursework in soil and crop science, bioremediation, and bioenvironmental science
- Internship with Texas A&M University Geochemical and Environmental Research Group, working as a lab technician testing various tissue and water - samples for hazardous contaminants
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector
- Field Supervisor / Team Leader (May 2013 April 2017)
- Houston Area Manager (May 2017 current)
- Qualified Construction Storm Water Pollution Prevention Plan Writer (since March 2025)
- CESSWI #0774 Certified Erosion, Sediment and Storm Water Inspector (March 2010)

Patrick Hodgkiss, CESSWI (with CRI since August 2017)

- Coursework towards a Bachelor of Science (BS) in Environmental Management from Columbia Southern University, Orange Beach, Alabama
- Coursework in environmental law, environmental assessment, air quality, hazardous, waste management, technical writing, pollution prevention, toxicology, waste management, and environmental issues
- Proficient in the application, execution, supervision, and management of all aspects of Military Munitions Response Actions including Site Visits, Remediation Investigations and Removal Actions
- Over 12,681 hours of environmental remediation experience at 22 project locations throughout the United States to include experience in implementing Storm Water Pollution Prevention Plans, Soil Sampling Plans, and Water Monitoring Activities
- Three years of experience as a quality control specialist in the Unexploded Ordinance industry requiring collaboration with clients and regulatory specialists to develop practical compliance requirements
- ACEA Regulatory Committee member since Spring 2019
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector
- Austin Area Manager (August 2017 June 2019)
- Corporate Trainer (December 2018 current)
- Director of Business Development (July 2019 June 2021)
- Chief Operations Officer (July 2021 current)
- CESSWI #5228 Certified Erosion, Sediment and Storm Water Inspector (April 2018)

Hayle Johnson, CESSWI - IT (with CRI since July 2024)

- Bachelor of Science (BS) in Geography with a minor in Environmental Science from Sam Houston State University, Huntsville, Texas
- Coursework in environmental science, sustainability and environment, conservation of natural resources, environmental
 and cultural geography, weather and climate, computer cartography, general botany, physical and environmental geology,
 soil science, general ecology, hydrology and water resources, field studies, and Geographic Information Systems (GIS)
- Worked under the National Parks Service at the San Antonio Missions State Park with Texas Conservation Corps conserving and preserving the historical acequia
- Worked at Bastrop State Park with Texas Conservation Corps on a trail construction project and an amphibian reptile
 exclusionary fence to preserve the Houston toad
- Volunteered at Head Waters Sanctuary to remove invasive grasses and plants
- Volunteered with Bexar Branches Project Canopy to plant 500 trees with children across five elementary schools in Bexar County
- First Aid and CPR training certified
- Experience in conservation, field work, hand tools, research, education, GIS, data collection and analysis
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector
- ČESSWI IT #12876 Certified Erosion, Sediment and Storm Water Inspector In Training (September 2024)

Ashleigh Kirby, CESSWI (with CRI since June 2023)

- Bachelor of Science (BS) in Environmental Science from The University of Texas at San Antonio, San Antonio, Texas
- Coursework in ecology, watershed processes, natural resources and policy administration, environmental law, botany, geology, plant identification, global changes, soils, environmental statistics, and Geographic Information Systems (GIS)
- Fieldwork experience in performing ecological surveys, vegetation identification and sampling
- Experience in environmental education, customer service and quality assurance
- Knowledge of Microsoft office applications, Google applications, JMP, Java, and Geographic Information Systems (GIS)
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector
- CESSWI IT #12053 Certified Erosion, Sediment and Storm Water Inspector In Training (December 2023)
- CESSWI #12053 Certified Erosion, Sediment and Storm Water Inspector (July 2024)

Elijah LaChapelle, CESSWI - IT (with CRI since October 2024)

- Bachelor of Science in Wildlife Biology from Texas State University, San Marcos, Texas
- Coursework in biology, wildlife management, food and society, conservation of biological resources, techniques in wildlife management, and plant ecology
- Experience conducting fieldwork to create a management plan
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector
- CESSWI IT #12923 Certified Erosion, Sediment and Storm Water Inspector In Training (November 2024)

Christopher Lord, CESSWI (with CRI since March 2014)

- Bachelor of Science (BS) in Geology from The University of Houston, Houston, Texas
- Associate of Arts (AA) in Geology from San Jacinto College, Houston, Texas
- Coursework in geography, petrology, stratigraphy, mineralogy, environmental geology, environmental biology, physical geology, meteorology, and Geographic Information Systems (GIS)
- Seven years of laboratory experience in geology and chemistry
- Experience in residential and industrial plumbing construction
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector
- Field Supervisor / Team Leader (March 2019 current)
- CESSWI IT #4243 Certified Erosion, Sediment and Storm Water Inspector In Training (November 2014)
- CESSWI #4243 Certified Erosion, Sediment and Storm Water Inspector (August 2016)

Luke Nelson, CESSWI - IT (with CRI since July 2024)

- Bachelor of Science (BS) in Geography with a minor in Geospatial Science from Sam Houston State University, Huntsville, Texas
- Coursework in computer cartography, remote sensing, hydrology and water resources, field studies, environmental and
 cultural geography, weather and climate, economic geography, conservation of natural resources, tourism geography, plant
 science, cultural geography field studies, and Geographic Information Systems (GIS)
- Completed a field project that included gathering data points, lines and polygons on handheld GPS devices and analyzing that data in ArcGIS Pro illustrating potential erosion hazard zones and potential mitigation strategies along the cart path at the Panorama Village Golf Course in Panorama Village, Texas
- Created a health outcome map in ArcGIS Pro showing the link between low income and poor health outcomes such as mental health and cancer rates using U.S. Census Data
- Created a prospective Market Analysis for a new Rural King feed store location in Boonville, Missouri based on income
 and farm production data gathered from the USDA database
- Volunteered at the Sustain Huntsville Garden
- Engaged in habitat restoration projects in Punta Islita, Costa Rica at the Macaw Recovery Network's wild macaw reserve building nesting boxes and enrichment devices as well as engaged in habitat cleanup that had become polluted with debris and trash
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector
- CESSWI IT #12977 Certified Erosion, Sediment and Storm Water Inspector In Training (February 2025)

Gretchen Reutzel, CPESC, CESSWI (with CRI since November 2005)

- Bachelor of Science (BS) in Environmental Science and Resource Management from Texas State University, San Marcos, Texas
- Coursework in environmental science, natural resource protection, aquatic biology, land planning, and watershed management
- Environmental Education Coordinator at Texas State University (8 years)
- Watershed Manager at the Upper Guadalupe River Authority (2 years)
- San Antonio Area Informal Education Association (SAIEA) Board Member

Copyright © 2000 Compliance Resources, Inc. 1-888-CRI-SW3P

- Developed and published environmental curriculum distributed to local museums, river authorities, and universities
- Worked with federal, state and local regulations agencies to develop watershed and water quality programs to manage Central Texas rivers and the Edwards Aquifer
- Successfully completed the San Antonio Water System (SAWS) Texas Pollutant Discharge Elimination Systems (TPDES)
 Inspector Workshop
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector
- Field Supervisor / Team Leader (November 2006 September 2013)
- San Antonio Field Assistant Manager (October 2013 May 2014)
- San Antonio Area Manager (June 2014 March 2024)
- Director of Business Development (April 2024 current)
- CESSWI #0689 Certified Erosion, Sediment and Storm Water Inspector (August 2009)
- CPESC #6480 Certified Professional in Erosion and Sediment Control (July 2011)

Scott Rippeth, CESSWI (with CRI since June 2023)

- Bachelor of Science (BS) in Environmental Science from The University of Texas at San Antonio, San Antonio, Texas
- Coursework in watershed processes, restoration ecology, soil science, environmental remediation, natural resource policy, environmental law, and Geographic Information Systems (GIS)
- Conducted an undergraduate independent study of the management of water quality through storm water regulation and low impact development projects to address total daily maximum load (TMDL) on impaired sections of the San Antonio River
- Experience in sample collection and water quality testing through Texas Stream Team as a Standard Core Water Quality Citizen Scientist and a Riparian Evaluation Citizen Scientist
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector
- CESSWI IT #11928 Certified Erosion, Sediment and Storm Water Inspector In Training (November 2023)
- CESSWI #11928 Certified Erosion, Sediment and Storm Water Inspector (June 2024)

Sol Saenz-Arreola (with CRI since April 2025)

- Bachelor of Science (BS) in Ecology and Evolutionary Biology from The University of Texas at El Paso (UTEP), El Paso, Texas
- Coursework in environmental field methods, vertebrate zoology, animal behavior, entomology, botany, ecology, and plant
 ecology
- Completed independent research project surveying native bee biodiversity in a restored wetland through STEMGrow bridge program between El Paso Community College and UTEP
- Completed an independent research project comparing native bee biodiversity across an urban rural gradient in El Paso,
 Texas through the Louis Stokes Alliance for Minority Participation (LSAMP) fellowship in collaboration with UTEP
- Participated in a research project assessing social influence on food choices of the Jamaican fruit-eating bat, Artibeus
 jamaicensis through the LSAMP fellowship in collaboration with UTEP and the Smithsonian Tropical Research Institute in
 Panama
- Bee Biodiversity Research Group and Visual and Behavioral Ecology Lab volunteer: conducted routine floral and
 pollinator surveys, specimen collection, preparation and identification, developed standard pest management protocols, and
 participated in ongoing experiments
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector

Misti Shafer-Webb, CPESC, CESSWI (with CRI since September 2002)

- Bachelor of Science (BS) in Environmental Design from Texas A&M University, College Station, Texas
- Bachelor of Science (BS) in Construction Science from Texas A&M University, College Station, Texas
- Coursework in project management, soil science, environmental science, construction materials and methods, AutoCAD, drafting, surveying, concrete and steel structural engineering, and environmental design
- Internship with DPR Construction in their OSHA/Safety department
- Two years of experience in the homebuilding construction industry including permitting and project coordinating for David Weekley Homes in Austin, Texas and Houston, Texas
- Attended various trainings / conferences through Environmental Protection Agency (EPA), Texas Commission on Environmental Quality (TCEQ), Edwards Aquifer Protection Program (EAPP), International Erosion Control Association (IECA), South Central International Erosion Control Association (SCIECA), StormCon, Capital Area Erosion Control Network (CAECN), Home Builders Association (HBA), and the Austin Contractors and Engineers Association (ACEA)
- National Association of Women in Construction (Austin Chapter #7) Parliamentarian 2024-2025, Immediate Past-President 2022-2023, President 2021-2022, President-Elect 2020-2021, Director 2019-2020, Director 2018-2019, Vice President 2017-2018, and Director 2016-2017
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector
- Office Manager (December 2002 August 2003)

- Qualified Construction Storm Water Pollution Prevention Plan Writer (since July 2003)
- Storm Water Pollution Prevention Plan Manager (September 2003 November 2018)
- Austin Area Manager (June 2004 May 2006; March 2009 December 2011)
- Owner and Chief Executive Officer (July 2018 current)
- CPESC #5381 Certified Professional in Erosion and Sediment Control (August 2009)
- CESSWI #0698 Certified Erosion, Sediment and Storm Water Inspector (August 2009)

Eric Silva, CESSWI (with CRI since May 2022)

- Bachelors of Science (BS) in Biology from Texas A&M University at Kingsville/San Antonio, San Antonio, Texas
- Coursework in ecology, invertebrate zoology, bacteriology, and biostatistics
- Experience in customer service
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector
- Field Supervisor / Team Leader (January 2025 current)
- CESSWI IT #7466 Certified Erosion, Sediment and Storm Water Inspector In Training (July 2022)
- CESSWI #7466 Certified Erosion, Sediment and Storm Water Inspector (June 2023)

Kenneth Sung-Cuadrado (with CRI since April 2025)

- Bachelors of Science (BS) in Environmental Science from The University of Connecticut, Storrs, Connecticut
- Coursework in stream and general ecology, wetlands biology and conservation, natural resources planning and management, and climate and resource municipal policy
- Experience in managing permits and home improvements in different municipalities
- Participated in an independent research project at The University of Connecticut on mitigating run off and impermeable surfaces
- Performed lab work in a bio/chemistry-physics cancer research lab at Yale University
- Lead IT technician for The University of Connecticut Libraries
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified Inspector

Hannah Welker, CESSWI (with CRI since March 2017)

- Associate of Art (AA) in Liberal Arts from Northwest Vista College, San Antonio, Texas
- Experience in customer service, auditing, and office administration
- 2.5 years of experience in SWPPP project management
- Working knowledge of applicable regulations (Federal, State, local), endangered species, and Edwards Aquifer issues
- Successfully completed an internal training course on Best Management Practices and Texas Pollutant Discharge Elimination System (TPDES) requirements for construction activities
- Qualified SWP3 Auditor
- Qualified Inspector
- Field Supervisor / Team Leader (March 2021 current)
- CESSWI IT #5729 Certified Erosion, Sediment and Storm Water Inspector In Training (April 2020)
- CESSWI #5729 Certified Erosion, Sediment and Storm Water Inspector (August 2020)

Storm Water Site Inspection Report

KB Sequence Inspection Form Sample:

] Division

[] Division [] Site				Insp	ection D	ate:		
inspector:			Phone	· #:		Last Ins	pection Date:	1
Inspection Type:	(circle one)	Regular	Rain Event	Final				
Wealher:	(circle one)	Dry	Rain	Snow	Icy			
			panying Respons cuments on KB Se				an ("SWP") o	r be sure l
Dulfalls, Entrance	es and Streets					es a estada		in the same
A. Outfalls: Excess	s sediment or o	ther pollutants	controlled per SWP	from leaving	the Site?	Y	N	NA
3. Vehicle Trackin	g: Installed and	maintained pe	SWP?			Y	N	NIA
C. Streets: Excess	soil kept off st	reets?				Υ	N	NA
Slorm Water Con	lrois							en en en
D. Erosion and Se	diment Control	s: Installed and	maintained per SW	(P7		Y	N	N/A
E. Soil Stabilizatio	n; Implemented	d and maintaine	d per SWP?			Υ	N	N/A
. Stock Piles: Pro	operly located a	nd stabilized pe	er SWP?			Y	N	NA
ion-Slorm Water	Controls							
3. Concrete, Stud	co, Paint (etc.)	Washouts: Loc	ated, installed and	maintained pe	r SWP?	Y	N	N/A
			h, debris, hazardou		nd			
			age areas) properly	_		Y	N	NA
			ed and maintained?			Y	N	N/A
llorm Waler Plan	and Related I	ocuments						
 Is the Site and I contact informat 			nce Representative current?	("SSWCR" an	d "DSWCR")	Υ	N	NA
C. If required, is th						Υ	N	NA
Is the SWP ava	ilable on Site o	rits location po	sted as required?			Y	N	NA
I. Does the SWP	match current	Site conditions?				Υ	N	NA
Are BMPs (equi	ired by the SWI	P appropriate fo	or existing Site cond	litions?		Y	N	NIA
			s evaluating compl					
	mit (NPDES on	ly) since the las	t Site Inspection, h		been	Υ	N	N/A
. Was the Site In		t from the last 5	3ite Inspection (1) s	igned by the 5	SWCF	v	M	N/A
and (2) verified	n a ann as redn	aca by the App	result			, wheel , i so	40	PALIFI
Last Revis	red 11/30/12						Pag	e 1 of 3

		Division Site		lnspection Da	
lave all	Responsive Actions	from prior Site Inspections been tim	ely addressed?	Y	N N/A
		ere not addressed or are not yet corns identified during this inspection,			ring page.)
	E at America	Uncompleted Reponsi	ve Actions From	n Prior Inspections	
	Responsive Action Number	Deficiency (Action Item)	Location	Date of Inspection	Explanation
				2	
and '	Title of Inspector		Signature of I	nspector	Date
le a c L	erlification in this s	pace when required by the Applic	able Permil, usin	g lhe certification langu	age required by that
		torm Water Compliance Represen pleted Site Inspection Report beld		e performed the inspect	ion, that Representat
an lan		And the state of t	Signature	- 1 (1997), the size	Date

KBHO	DME
] Division
] Site

Storm Water Site Inspection Report

Inspection Date: _____

Responsive Action Log

(for Action Items found during this Inspection)

Ref≠	Deficiency (Action Item)	Location	Addressed By	Date	Notes
	to the second se		9.4		
					\$
	39				
	- 667				
					e A
	l II				
				18	
				_	
		a la company			
- 7			-		<u> </u>
	7				
dditional C	comments:				

Last Revised 11/30/12

Page 3 of 3

9. Regulatory Correspondence

REGULATORY CORRESPONDENCE LOG			
Date:	Brief Description		

10. Amendments

SWPPP AMENDMENT LOG			
Amendment Date:	Description of Changes		

Appendix A - SWPPP Signed Documents

CSN, Permit Certificate, NOI, NOC, NOT, Delegation Letter for Signatories to Reports, SWPPP Certification, Edwards Aquifer Regional Office notification (if applicable)



TCEQ Large Construction Site Notice

Primary Operator

Large construction sites disturb more than five acres or are part of a larger common plan of development that disturbs more than five acres. Primary operators of large construction sites will fill out this notice. Primary operators will then post this notice at the construction site in a location where it is safely and readily available for viewing by the general public and local, state, and federal authorities. Additional information about the TCEQ Construction Stormwater General Permit may be found on TCEQ's webpage on <u>Assistance Tools for Construction Stormwater General Permits.</u>

Note: You must also develop a Stormwater Pollution Prevention Plan prior to the commencement of construction.

Site-Specific TPDES Authorization Number: TXR1559DR

Primary Operator Name: KB Home Lone Star, Inc.

Contact Name and Phone Number: Ricardo Rodriguez, 210-301-2899

Project Description:

Physical Location/Description: Preserve at Culebra

SOUTHWEST OF THE INTERSECTION OF FM 471 CULEBRA ROAD AND KALLISON BEND, SAN ANTONIO,

TX 78253

Estimated Start Date: 11/2020

Projected End Date or Date Disturbed Soils Will Be Stabilized: 10/2027

Location of Stormwater Pollution Prevention Plan (SWP3):

<u>Compliance Resources, Inc. 1103 Williams Drive, Bldg. 2 Georgetown, TX 78628 (Maintained Electronically)</u>



TEXAS COMMISSION ON ENVIRONMENTAL QUALITY Texas Pollutant Discharge Elimination System Stormwater Construction General Permit

The Notice of Intent (NOI) for the facility listed below was received on May 23, 2023. The intent to discharge stormwater associated with construction activity under the terms and conditions imposed by the Texas Pollutant Discharge Elimination System (TPDES) stormwater Construction General Permit TXR150000 is acknowledged. Your facility's unique TPDES CGP stormwater authorization number is:

TXR1559DR

Coverage Effective: November 09, 2020

The TCEQ's stormwater CGP requires certain stormwater pollution prevention and control measures, possible monitoring and reporting, and periodic inspections. Among the conditions and requirements of this permit, you must have prepared and implemented a stormwater pollution prevention plan (SWP3) that is tailored to your construction site. As a facility authorized to discharge under the stormwater CGP, all terms and conditions must be complied with to maintain coverage and avoid possible penalties.

Project/Site Information:

RN111130233

Preserve At Culebra Amenity Center And Units 1 2 3 4 5 And 6 Southwest of The Intersection of FM 471 Culebra Road And Kallison Bend

San Antonio, TX 78253

Bexar County

Operator:

CN603249053 Kb Home Lone Star Inc. 4800 Fredericksburg Rd San Antonio, TX 78229

FRUE. Chanaller

This CGP and all authorizations expire on March 5, 2028, unless otherwise amended. If you have any questions related to processing of your application, you may contact the Stormwater Processing Center by email at SWPERMIT@tceq.texas.gov or by telephone at (512) 239-3700. For technical issues, you may contact the stormwater technical staff by email at SWGP@tceq.texas.gov or by telephone at (512) 239-4671. Also, you may obtain information on the TCEQ web site at https://www.tceq.texas.gov/goto/wq-dpa. A copy of this document should be kept with your SWP3.

Issued Date: May 23, 2023 FOR THE COMMISSION

Texas Commission on Environmental Quality

Construction Notice of Intent Renewal TXR1559DR

Site Information (Regulated Entity)

What is the name of the site to be authorized?	PRESERVE AT CULEBRAAMENITY CENTER AND UNITS 1 2 3 4 5 AND 6
Does the site have a physical address?	No
Physical Address	
Because there is no physical address, describe how to locate this site:	SOUTHWEST OF THE INTERSECTION OF FM 471 CULEBRA ROAD AND KALLISON BEND
City	SAN ANTONIO
State	TX
ZIP	78253
County	BEXAR
Latitude (N) (##.#####)	29.515157
Longitude (W) (-###.#####)	-98.78981
Primary SIC Code	6552
Secondary SIC Code	1521
Primary NAICS Code	
Secondary NAICS Code	
Regulated Entity Site Information	
What is the Regulated Entity's Number (RN)?	RN111130233
What is the name of the Regulated Entity (RE)?	PRESERVE AT CULEBRA UNIT 1
Does the RE site have a physical address?	No
Physical Address	
Because there is no physical address, describe how to locate this site:	SOUTHWEST OF THE INTERSECTION OF FM 471 CULEBRA ROAD AND KALLISON BEND
City	SAN ANTONIO
State	TX
ZIP	78253
County	BEXAR
Latitude (N) (##.#####)	29.515157
Longitude (W) (-###.#####)	-98.78981
Facility NAICS Code	
What is the primary business of this entity?	LAND DEVELOPER HOMEBUILDER

Customer (Applicant) Information

How is this applicant associated with this site?	Operator
What is the applicant's Customer Number (CN)?	CN603249053
Type of Customer	Corporation
Full legal name of the applicant:	
Legal Name	KB Home Lone Star Inc.
Texas SOS Filing Number	800836731
Federal Tax ID	
State Franchise Tax ID	12604657143
State Sales Tax ID	

Local Tax ID	
DUNS Number	
Number of Employees	501+
Independently Owned and Operated?	Yes
I certify that the full legal name of the entity applying for this permit has been provided and is legally authorized to do business in Texas.	Yes
Responsible Authority Contact	
Organization Name	KB Home Lone Star Inc.
Prefix	
First	Ricardo
Middle	
Last	Rodriguez
Suffix	
Credentials	
Title	Sr. Construction Manager
Responsible Authority Mailing Address	
Enter new address or copy one from list:	
Address Type	Domestic
Mailing Address (include Suite or Bldg. here, if applicable)	4800 FREDERICKSBURG RD
Routing (such as Mail Code, Dept., or Attn:)	
City	SAN ANTONIO
State	TX
ZIP	78229
Phone (###-###-###)	2103012885
Extension	
Alternate Phone (###-####)	
Fax (###-###-###)	
E-mail	ryrodriguez@kbhome.com

Application Contact

Person TCEQ should contact for questions about this application:	
Same as another contact?	
Organization Name	COMPLIANCE RESOURCES INC
Prefix	
First	AMBER
Middle	
Last	SCHELER
Suffix	
Credentials	
Title	SWP3 MANAGER
Enter new address or copy one from list:	
Mailing Address	
Address Type	Domestic
Mailing Address (include Suite or Bldg. here, if applicable)	PO BOX 2628
Routing (such as Mail Code, Dept., or Attn:)	
City	GEORGETOWN
State	TX
ZIP	78627
Phone (###-###)	5129307733

Extension	
Alternate Phone (###-####)	
Fax (###-###)	
E-mail	ASCHELER@COMPLIANCERESOURCE SINC.COM

CNOI-R General Characteristics

1 Is the project or site located on Indian Country Lands?	No
2 Is the project or site associated to a facility that is licensed for the storage of high-level radioactive waste by the United States Nuclear Regulatory Commission under 10 CFR Part 72?	No
3 Is your construction activity associated with an oil and gas exploration, production, processing, or treatment, or transmission facility?	No
4 What is the Primary Standard Industrial Classification (SIC) Code that best describes the construction activity being conducted at the site?	6552
5 If applicable, what is the Secondary SIC Code(s)?	1521
6 What is the total number of acres that the construction project or site will disturb under the control of the primary operator?	115.36
7 What is the construction project or site type?	Single-family residential
8 Is the project part of a larger common plan of development or sale?	Yes
9 What is the estimated start date of the project?	11/10/2020
10 What is the estimated end date of the project?	04/25/2025
11 Will concrete truck washout be performed at the site?	Yes
12 What is the name of the first water body(s) to receive the stormwater runoff or potential runoff from the site?	CULEBRA CREEK,MEDIO CREEK
13 What is the segment number(s) of the classified water body(s) that the discharge will eventually reach?	1906 1912
14 Is the discharge into a Municipal Separate Storm Sewer System (MS4)?	Yes
14.1 What is the name of the MS4 Operator?	BEXAR COUNTY AND TXDOT
15 Is the discharge or potential discharge within the Recharge Zone, Contributing Zone, or Contributing Zone within the Transition Zone of the Edwards Aquifer, as defined in 30 TAC Chapter 213?	No
16 I certify that a stormwater pollution prevention plan (SWP3) has been developed, will be implemented prior to construction, and to the best of my knowledge and belief is compliant with any applicable local sediment and erosion control plans, as required in the general permit TXR150000. Note: For multiple operators who prepare a shared SWP3, the confirmation of an operator may be limited to its obligations under the SWP3 provided all obligations are confirmed by at least one operator.	Yes
17 I certify that I have obtained a copy and understand the terms and conditions of the Construction General Permit (TXR150000).	Yes
18 I understand that a Notice of Termination (NOT) must be submitted when this authorization is no longer needed.	Yes

Certification

I certify that I am authorized under 30 Texas Administrative Code Subchapter 305.44 to sign this document and can provide documentation in proof of such authorization upon request.

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

- 1. I am Ricardo Rodriguez JR, the owner of the STEERS account ER090382.
- 2. I have the authority to sign this data on behalf of the applicant named above.
- 3. I have personally examined the foregoing and am familiar with its content and the content of any attachments, and based upon my personal knowledge and/or inquiry of any individual responsible for information contained herein, that this information is true, accurate, and complete.

- 4. I further certify that I have not violated any term in my TCEQ STEERS participation agreement and that I have no reason to believe that the confidentiality or use of my password has been compromised at any time.
- 5. I understand that use of my password constitutes an electronic signature legally equivalent to my written signature.
- 6. I also understand that the attestations of fact contained herein pertain to the implementation, oversight and enforcement of a state and/or federal environmental program and must be true and complete to the best of my knowledge.
- 7. I am aware that criminal penalties may be imposed for statements or omissions that I know or have reason to believe are untrue or misleading.
- 8. I am knowingly and intentionally signing Construction Notice of Intent Renewal TXR1559DR.
- 9. My signature indicates that I am in agreement with the information on this form, and authorize its submittal to the TCEQ.

OPERATOR Signature: Ricardo Rodriguez JR OPERATOR

Customer Number: CN603249053

Legal Name: KB Home Lone Star Inc.

Account Number: ER090382
Signature IP Address: 12.215.155.126
Signature Date: 2023-05-05

Signature Hash: A7E361792E9DB28D82BFC083987D4EE82C8BDA23A6D8A38D7A2DDD1F0C3B006D

Form Hash Code at time of 0392DFC37218B7382DAE61886E796308EC00C4A1FD8F16D1BC7585838BECA2A0

Signature:

Fee Payment

Transaction by:	The application fee payment transaction was made by ER090382/Ricardo Rodriguez JR
Paid by:	The application fee was paid by JASON TOWNSLEY
Fee Amount:	\$225.00
Paid Date:	The application fee was paid on 2023-05-23
Transaction/Voucher number:	The transaction number is 582EA000551410 and the voucher number is 642960

Submission

Reference Number:	The application reference number is 549474
Submitted by:	The application was submitted by ER090382/Ricardo Rodriguez JR
Submitted Timestamp:	The application was submitted on 2023-05-23 at 11:59:02 CDT
Submitted From:	The application was submitted from IP address 12.215.155.126
Confirmation Number:	The confirmation number is 468015
Steers Version:	The STEERS version is 6.64
Permit Number:	The permit number is TXR1559DR

Additional Information

Application Creator: This account was created by Rita Olguin

From: Documents at CRI

To: SWQ@bexar.org, zaid.subhi@bexar.org

Date: Tue May 30 2023 17:01:02 GMT-0600 (Mountain Daylight

Time)

Subject: TPDES MS4 Notification [KB Home Lone Star, Inc. (San

Antonio) - TXR1559DR] 5/30/2023

MS4 - TPDES Notification

To whom it may concern,

As required by the TCEQ General Permit Number TXR150000 for discharges of storm water runoff from construction sites, attached is a copy of the signed application for storm water discharges associated with construction activity.

Operator - Authorization: **KB Home Lone Star, Inc.** (San Antonio) - TXR1559DR

Project:

Application Type: Notice of Intent / Renewal (2023)

Application Action: 2023 Renewal

Application Date: 5/23/2023

Thank you,

[Automated message] **Compliance Resources**, Inc.

512-930-7733 Office 888-CRI-SW3P Toll Free 512-801-8144 Mobile

documents@complianceresourcesinc.com

www.complianceresourcesinc.com

MAILING ADDRESS: P.O. BOX 2628, GEORGETOWN, TX 78627 PHYSICAL ADDRESS: 1103 WILLIAMS DRIVE, BUILDING 2, GEORGETOWN, TX 78628

Providing Accurate, Complete, and Timely customer service that your company can rely on.

Please consider the environment before printing.

Powered by AppSheet

Attachments:

• 7fc50508.File.202721.pdf



Christopher Gold <cgold@complianceresourcesinc.com>

KB Homes San Antonio Preserve at Culebra Amenity Center and Units 1, 2, 3, 4, 5, and 6 PERMIT & RNOI 052323

1 message

Rita Olguin <rolguin@complianceresourcesinc.com>

Wed, Aug 2, 2023 at 11:26 AM

To: Kyle Honnerlaw < Kyle. Honnerlaw@txdot.gov>

Cc: Christopher Gold <cgold@complianceresourcesinc.com>, Rita Olguin <rolguin@complianceresourcesinc.com>

Thank you,

Rita Olguin

Compliance Resources, Inc.

P.O. Box 2628

Georgetown, Texas 78627

512-930-7733 Office 888-CRI-SW3P Toll Free 512-864-7629 Fax rolguin@complianceresourcesinc.com

www.complianceresourcesinc.com

Providing Accurate, Complete, and Timely customer service that your company can rely on.



Please consider the environment before printing.



KB Homes San Antonio Preserve at Culebra Amenity Center and Units 1, 2, 3, 4, 5, and 6 PERMIT & RNOI 052323.pdf 165K

Jon Niermann, Chairman
Emily Lindley, Commissioner
Bobby Janecka, Commissioner
Erin E. Chancellor, Interim Executive Director



TEXAS COMMISSION ON ENVIRONMENTAL QUALITY

Protecting Texas by Reducing and Preventing Pollution

May 23, 2023

Re: Confirmation of the Submission of the Construction Delegation of Signatories to Report

Dear Permittee,

This is an acknowledgement that you have successfully completed the application of Construction Delegation of Signatories to Report.

ER Account Number: ER090382

Application Reference Number: 549530

Delegation Application Contact: Ricardo Rodriguez

TPDES Permit(s) Number: TXR15464N, TXR1511HF, TXR15466N, TXR15494D, TXR15465N, TXR15353L, TXR15185K, TXR1522HM, TXR1545HO, TXR1580HX, TXR15217U, TXR15814T, TXR1579HD, TXR15516V, TXR1569IK, TXR1559DR, TXR1539FO, TXR1536BM, TXR1578HD, TXR1566CQ, TXR1560DR, TXR1568IK, TXR1542AP, TXR1592EL, TXR15979W

Please be aware that TCEQ staff may contact your designated contact for any additional information.

If you have any questions, you may contact the Stormwater Processing Center by email at SWPERMIT@tceq.texas.gov or by telephone at (512) 239-3700.

Sincerely, Stormwater Program Water Quality Division

Texas Commission on Environmental Quality

Delegation of Signatories - CGP multiple

Section 1# Site Information	
Site Info#: 1	
Authorization Number, Site Name, Regulated Entity Number, Regulated Entity Name, Physical Location	TXR15464N UECKER TRACT RN109164244 UECKER TRACT SOUTHEAST OF THE INTERSECTION OF FM 1863 AND WILEY ROAD, BULVERDE, TX, 78163
Site Info#: 2	
Authorization Number, Site Name, Regulated Entity Number, Regulated Entity Name, Physical Location	TXR1511HF TMM SOMERSET UNIT 1 UNIT 2 GRADING & STOCKPILE RN111373361 TMM SOMERSET UNIT 1 UNIT 2 GRADING & STOCKPILE EAST OF THE INTERSECTION OF SOMERSET ROAD AND WATSON ROAD, SAN ANTONIO, TX, 78073
Site Info#: 3	TVD45 400NUOVEDI OOV AT MEDIO
Authorization Number, Site Name, Regulated Entity Number, Regulated Entity Name, Physical Location	TXR15466N OVERLOOK AT MEDIO CREEK UNITS 1 6 AND 7 RN108362484 OVERLOOK AT MEDIO CREEK UNITS 1 2 3 4 AND 5 SOUTHWEST OF THE INTERSECTION OF MARBACH ROAD AND MARBACH OAKS, SAN ANTONIO, TX, 78245
Site Info#: 4	
Authorization Number, Site Name, Regulated Entity Number, Regulated Entity Name, Physical Location	TXR15494D FISCHER TRACT UNITS 1A AND 1B RN109734483 FISCHER TRACT UNITS 1AAND 1B NORTHEAST OF THE INTERSECTION OF EVANS ROAD AND CIBOLO VISTA, SAN ANTONIO, TX, 78261
Site Info#: 5	
Authorization Number, Site Name, Regulated Entity Number, Regulated Entity Name, Physical Location	TXR15465N TEXAS RESEARCH PARK UNITS 1 1AAND 3 RN109163048 TEXAS RESEARCH PARK UNITS 1 1AAND 3 SOUTH AND SOUTHWEST OF THE INTERSECTION OF LAMBDA DRIVE AND OMICRON DRIVE, SAN ANTONIO, TX, 78245
Site Info#: 6	
Authorization Number, Site Name, Regulated Entity Number, Regulated Entity Name, Physical Location	TXR15353L CHAMPIONS LANDING RN110370269 CHAMPIONS LANDING SOUTHWEST OF THE INTERSECTION OF MARBACH ROAD AND CAGNON ROAD, SAN ANTONIO, TX, 78245
Site Info#: 7	
Authorization Number, Site Name, Regulated Entity Number, Regulated Entity Name, Physical Location	TXR15185K PALO ALTO RN110299971 PALO ALTO UNITS 1A 1B AND 2 SOUTHWEST OF THE INTERSECTION OF SH 16 PALO ALTO

ROAD AND MISSION GATE, SAN

ANTONIO, TX, 78224

Site Info#: 8

Authorization Number, Site Name, Regulated Entity Number, Regulated Entity TXR1522HM|BORALIS TRACT UNIT 1 PHASE 1 AND WESTAKA SPANISH Name, Physical Location TRAILS|RN111389573|BORALIS TRACT UNIT 1 PHASE 1|SOUTHWEST OF THE INTERSECTION OF IH-410 AND SINCLAIR ROAD, SAN ANTONIO, TX, 78222 Site Info#: 9 Authorization Number, Site Name, Regulated Entity Number, Regulated Entity TXR1545HO|THE VILLAS AT Name, Physical Location PRESIDIO|RN111396743|THE VILLAS AT PRESIDIOISOUTH OF THE INTERSECTION OF VANCE JACKSON ROAD AND PRESIDIO PARKWAY, SAN **ANTONIO, TX, 78249** Site Info#: 10 Authorization Number, Site Name, Regulated Entity Number, Regulated Entity TXR1580HX|CORDOVA CROSSING UNIT Name, Physical Location 2|RN111417663|CORDOVA CROSSING UNIT 2ISOUTHEAST OF THE INTERSECTION OF HIGHWAY 46 AND CORDOVA ROAD, SEGUIN, TX, 78155 Site Info#: 11 Authorization Number, Site Name, Regulated Entity Number, Regulated Entity TXR15217U|DEER CREST UNITS 1 2 3 4 Name, Physical Location AND 5|RN110609658|DEER CREST UNIT 1 AND UNITS 2 AND 3 GRADING|SOUTH OF THE INTERSECTION OF STATE HIGHWAY 46 AND COUNTY ROAD 128 WELTNER ROAD, NEW BRAUNFELS, TX, Site Info#: 12 Authorization Number, Site Name, Regulated Entity Number, Regulated Entity TXR15814T|ESCONDIDO NORTH UNITS 4 7 AND 8 RN110592441 ESCONDIDO Name, Physical Location NORTH UNIT 4 & 7 NORTHWEST OF THE INTERSECTION OF BINZ-ENGLEMAN ROAD AND TEXAS PALM DRIVE, SAN **ANTONIO, TX, 78259** Site Info#: 13 Authorization Number, Site Name, Regulated Entity Number, Regulated Entity TXR1579HD|HARLANDALE Name, Physical Location SUBDIVISION UNIT 1|RN111369914|HARLANDALE SUBDIVISION UNIT 1 NORTHEAST OF THE INTERSECTION OF LOOP 410 ACCESS ROAD AND WALHALLA AVENUE, SAN ANTONIO, TX, 78221 Site Info#: 14 Authorization Number, Site Name, Regulated Entity Number, Regulated Entity TXR15516V|KNOX RIDGE PHASE 1 Name, Physical Location UNITS 1 2 AND 3 RN110687415 KNOX RIDGE PHASE 1 UNIT 1 NORTHWEST OF THE INTERSECTION OF LOOP 1604 AND INTERSTATE HIGHWAY 10, CONVERSE, TX, 78109 Site Info#: 15 Authorization Number, Site Name, Regulated Entity Number, Regulated Entity TXR1569IK|MISSION DEL LAGO UNIT Name, Physical Location 11D|RN111459483|MISSION DEL LAGO UNIT 11D|SOUTHEAST OF THE INTERSECTION OF CLUBHOUSE BLVD. AND ASHWORTH BLVD., SAN ANTONIO, TX, 78221 Site Info#: 16 Authorization Number, Site Name, Regulated Entity Number, Regulated Entity TXR1559DR|PRESERVE AT CULEBRA AMENITY CENTER AND UNITS 1 2 3 4 5 Name, Physical Location AND 6|RN111130233|PRESERVE AT

CULEBRAUNIT 1|SOUTHWEST OF THE

INTERSECTION OF FM 471 CULEBRA ROAD AND KALLISON BEND, SAN ANTONIO, TX, 78253

Site Info#: 17

Authorization Number, Site Name, Regulated Entity Number, Regulated Entity Name, Physical Location

TXR1539FO|SADDLE CREEK RANCH SUBDIVISION UNIT 7|RN111270526|SADDLE CREEK RANCH SUBDIVISION UNIT 7|NORTHEAST OF THE INTERSECTION OF COY LANE AND SADDLE TRAIL, CIBOLO, TX, 78108

Site Info#: 18

Authorization Number, Site Name, Regulated Entity Number, Regulated Entity Name, Physical Location

TXR1536BM|SHORELINE PARK PHASES 1 2 3 4 AND 6|RN110970217|SHORELINE PARK PHASE 1|WEST OF THE INTERSECTION OF RANGER CREEK ROAD AND OAK ACRES LANE, BOERNE, TX, 78006

Site Info#: 19

Authorization Number, Site Name, Regulated Entity Number, Regulated Entity Name, Physical Location

TXR1578HD|SOUTH POINT SUBDIVISION UNIT 1 AND MASS GRADING|RN111369906|SOUTH POINT SUBDIVISION UNIT 1 AND MASS GRADING|SOUTHEAST OF THE INTERSECTION OF LEGEND POND AND KLEIN MEADOWS, NEW BRAUNFELS, TX, 78130

Site Info#: 20

Authorization Number, Site Name, Regulated Entity Number, Regulated Entity Name, Physical Location

TXR1566CQ|SOUTHTON COVE UNITS 1 2 2B AND 3 AND OFF-SITE SANITARY SEWER|RN111069357|SOUTHTON COVE UNIT 1 AND OFF-SITE SANITARY SEWER|SOUTHEAST OF THE INTERSECTION OF INTERSTATE HIGHWAY 37 AND SOUTHTON ROAD, SAN ANTONIO, TX, 78223

Site Info#: 21

Authorization Number, Site Name, Regulated Entity Number, Regulated Entity Name, Physical Location

TXR1560DR|TERRA BUONA|RN111130241|TERRA BUONA UNITS 1 & 2 & OFFSITE SANITARY SEWER|NORTH OF THE INTERSECTION OF US HIGHWAY 90 AND GROSENBACHER ROAD, SAN ANTONIO, TX, 78245

Site Info#: 22

Authorization Number, Site Name, Regulated Entity Number, Regulated Entity Name, Physical Location

TXR1568IK|THE COVE AT WESTOVER HILLS|RN111459475|THE COVE AT WESTOVER HILLS|NORTH OF THE INTERSECTION OF MILITARY DRIVE WEST AND BOBCAT PASS, SAN ANTONIO, TX, 78251

Site Info#: 23

Authorization Number, Site Name, Regulated Entity Number, Regulated Entity Name, Physical Location

TXR1542AP|THE PARKLANDS UNITS 1 AND 2|RN110886280|THE PARKLANDS UNIT 1|EAST OF THE INTERSECTION OF ECKHARDT ROAD CR 376C AND FROBOESE LANE, SCHERTZ, TX, 78108

Site Info#: 24

Authorization Number, Site Name, Regulated Entity Number, Regulated Entity Name, Physical Location

TXR1592EL|WILLOW VIEW UNITS 1 2 AND 3|RN111188421|WILLOW VIEW UNIT 1|NORTH OF THE INTERSECTION OF

	BOENIG DRIVE AND GRAYTOWN ROAD, CONVERSE, TX, 78109
Site Info#: 25	
Authorization Number, Site Name, Regulated Entity Number, Regulated Entity Name, Physical Location	TXR15979W WOODSIDE FARMS UNITS 1 2 AND 3 AND FM 20 IMPROVEMENTS RN110759800 WOODSI DE FARMS UNITS 1 AND 2 AND FM 20 IMPROVEMENTS NORTHEAST OF THE INTERSECTION OF HIGHWAY 123 AND FM 20, SEGUIN, TX, 78155
Customer (Applicant) Information	
How is this applicant associated with this site?	Operator
What is the applicant's Customer Number (CN)?	CN603249053
Type of Customer	Corporation
Full legal name of the applicant:	
Legal Name	KB Home Lone Star Inc.
Texas SOS Filing Number	800836731
Federal Tax ID	
State Franchise Tax ID	12604657143
State Sales Tax ID	
Local Tax ID	
DUNS Number	
Number of Employees	501+
Independently Owned and Operated?	Yes
Section 1# Delegated Information Delegation#: 1	
1 Position	Project Manager
2 Name	.,
3 I certify that the person/title above is a duly authorized representative described in 30 TAC 305.128.	Yes
Delegation#: 2	
1 Position	Construction Manager
2 Name	
3 I certify that the person/title above is a duly authorized representative described in 30 TAC 305.128.	Yes
Delegation#: 3	
1 Position	Site Superintendent
2 Name	
3 I certify that the person/title above is a duly authorized representative described in 30 TAC 305.128.	Yes
Certification	
1 I understand that this authorization does not extend to the signing of a Notice of Intent, Notice of Change, or Notice of Termination for obtaining coverage under a stormwater general permit.	Yes

Delegation Application Contact

Person TCEQ should contact for questions about this application:

1 Organization Name	
2 Prefix	
3 First	Ricardo
4 Middle	
5 Last	Rodriguez
6 Suffix	
7 Credentials	
8 Title	Sr. Construction Manager
Mailing Address	
9 Address Type	Domestic
9.1 Mailing Address (include Suite or Bldg. here, if applicable)	4800 Fredericksburg Road
9.2 Routing (such as Mail Code, Dept., or Attn:)	
9.3 City	San Antonio
9.4 State	TX
9.5 ZIP	78229
10 Phone (###-###-###)	2103012899
11 Extension	
12 Alternate Phone (###-###-###)	
13 Fax (###-####)	
14 Email	ryrodriguez@kbhome.com

Certification

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

I certify that I am authorized under 30 Texas Administrative Code 305.44 to sign this document and can provide documentation in proof of such authorization upon request.

- 1. I am Ricardo Rodriguez JR, the owner of the STEERS account ER090382.
- 2. I have the authority to sign this data on behalf of the applicant named above.
- 3. I have personally examined the foregoing and am familiar with its content and the content of any attachments, and based upon my personal knowledge and/or inquiry of any individual responsible for information contained herein, that this information is true, accurate, and complete.
- 4. I further certify that I have not violated any term in my TCEQ STEERS participation agreement and that I have no reason to believe that the confidentiality or use of my password has been compromised at any time.
- 5. I understand that use of my password constitutes an electronic signature legally equivalent to my written signature.
- 6. I also understand that the attestations of fact contained herein pertain to the implementation, oversight and enforcement of a state and/or federal environmental program and must be true and complete to the best of my knowledge.
- 7. I am aware that criminal penalties may be imposed for statements or omissions that I know or have reason to believe are untrue or misleading.
- 8. I am knowingly and intentionally signing Delegation of Signatories CGP multiple.
- 9. My signature indicates that I am in agreement with the information on this form, and authorize its submittal to the TCEQ.

OPERATOR Signature: Ricardo Rodriguez JR OPERATOR

Customer Number: CN603249053

Legal Name: KB Home Lone Star Inc.

 Account Number:
 ER090382

 Signature IP Address:
 12.215.155.126

 Signature Date:
 2023-05-23

Signature Hash: A7E361792E9DB28D82BFC083987D4EE82C8BDA23A6D8A38D7A2DDD1F0C3B006D

255961F7390040549BD4327CAE2385A20B182E520E6AE76E5098A4070B54D0FE

Form Hash Code at time of

Signature:

Reference Number:	The application reference number is 549530
Submitted by:	The application was submitted by ER090382/Ricardo Rodriguez JR
Submitted Timestamp:	The application was submitted on 2023-05-23 at 12:21:10 CDT
Submitted From:	The application was submitted from IP address 12.215.155.126
Confirmation Number:	The confirmation number is 468036
Steers Version:	The STEERS version is 6 64

Additional Information

Application Creator: This account was created by Rita Olguin

SWPPP Certification - Authority Signature

"I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."

Authority Representative Name and Title:	
Ricardo Rodriguez	
Sr. Construction Manager	
KB Home Lone Star, Inc.	
Signature	Date



TCEQ Large Construction Site Notice

Primary Operator

Large construction sites disturb more than five acres or are part of a larger common plan of development that disturbs more than five acres. Primary operators of large construction sites will fill out this notice. Primary operators will then post this notice at the construction site in a location where it is safely and readily available for viewing by the general public and local, state, and federal authorities. Additional information about the TCEQ Construction Stormwater General Permit may be found on TCEQ's webpage on <u>Assistance Tools for Construction Stormwater General Permits.</u>

Note: You must also develop a Stormwater Pollution Prevention Plan prior to the commencement of construction.

Site-Specific TPDES Authorization Number: TXR15Pending

Primary Operator Name: GENERAL CONTRACTOR TO BE DETERMINED

Contact Name and Phone Number:

Contact:

Project Description:

Physical Location/Description: <u>Preserve at Culebra, Unit 10</u>

southwest of the intersection of Culebra Road and Blacktail Crest, San Antonio, TX 78253

Estimated Start Date: <u>07/2025</u>

Projected End Date or Date Disturbed Soils Will Be Stabilized: 07/2028

Location of Stormwater Pollution Prevention Plan (SWP3):

<u>Compliance Resources, Inc. 1103 Williams Drive, Bldg. 2 Georgetown, TX 78628 (Maintained Electronically)</u>

SWPPP Certification - Authority Signature

"I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."

Authority Representative Name and Title:		
Corporate Authority Name:		
Corporate Title:		
GENERAL CONTRACTOR TO BE DETERMINED	ı	
Signature	Date	

Appendix B - Edwards Aquifer Protection Plan

N/A

Appendix C - Inspection Reports

Appendix D - Site Maps

Appendix E - Dewatering Evaluations

Appendix F - Transfer of Day-to-Day Operational Control

The new primary operator must submit a Notice of Intent at least ten (10) days prior to the transfer of operational control.

Documentation of notifying the new primary operator of their authorization responsibility is located in this appendix.

Name of new primary operator assuming day-to-day operational control	Authorization Number	Operator Scope