

Contractor: V. K. KNOWLTON PAVING

Salesperson: PaulVarga

Delivery Date: N/A

Item Code	Description	Ref	Qty	Weight
7040004	MH Boot - PSX ND 11-06 - Nylo Drive		3	0
7040008	MH Boot - PSX ND 11-08 Nylo Drive		2	0
7045011	48" Dia. Gasket-Non-Lubed (HK: 822467)		4	0
1015050	Sanitary Manhole Invert 48"		1	1809
7011022	ERGO 30 DI CAM SAWS SS LO ASY 4.5	I	1	293
1012413	Grade Ring 34``x2``	H	1	0
1012413	Grade Ring 34``x2``	G	1	0
1012413	Grade Ring 34``x2``	F	1	0
1015082	48 Dia x 24 Cone w/35`` OP CONC (Q7R Joint)	E	1	2390
1015020	48 Dia x 12 Riser (Q7R Joint)	D	1	1215
1015033	48 Dia x 36 Riser (Q7R Joint)	C	1	2557
1015022	48 Dia x 36 Riser MS (Q7R Joint) SPECIALS ONL	B	1	2458
1014001	48 Dia x 18`` Yield Base (6F) MS	A	1	2681
Structure Total				11594

Structure ID: MH B1

Station: 3+94.14

Type: Sanitary

Size: 48`` Dia SAWS Sanitary MH

Rim: 556.5'

Lowest Invert: 545.08'

Design Height: 11'-5"


Overall Height: 12'-1/2"

Slack: 2"

Steps: D0/0

INTERNAL DROP

4 PM 4/22

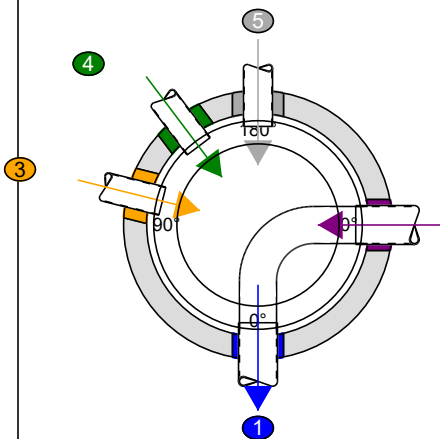

#	Elev	Angle	Ext (cw)	Hole	Pipe	Upt	Connector
1	545.08	0	0	11	8 PVC SDR 26/3	0	MH Boot - PSX ND 11-08 Nylo Driv
2	545.21	270	136.5	11	8 PVC SDR 26/3	1.5	MH Boot - PSX ND 11-08 Nylo Driv
3	547.35	104	52.578	11	6 PVC SDR 26/3	8	MH Boot - PSX ND 11-06 - Nylo Dri
4	547.35	143	72.294	11	6 PVC SDR 26/3	8	MH Boot - PSX ND 11-06 - Nylo Dri
5	547.35	180	91	11	6 PVC SDR 26/3	8	MH Boot - PSX ND 11-06 - Nylo Dri

② Shop Note: Concrete strength of 2,000 psi minimum must be obtained for stripping/lifting structure

